

	 <p>MS ISO/IEC 17025 TESTING SAMM No. 0825</p>
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / IC TEST REPORT(3 of 4) Report Revision : Rev. B</p>
<p>Date/s Tested : 17-JUL-2017 - 25-AUG-2017 Report Issue Date : 30-NOV-2017 Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd Requestor : ROLANDO HERNANDEZ Product Type : Portable Model Number : H91TGD9PW7AN Frequency Band : VHF,UHF,7/800 Low / Max RF Output Power : 1 Watts / 2.99 Watts Applicant Name : Motorola Solutions Malaysia Sdn Bhd Applicant Address : Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia FCC Registrations : 772092 IC Registrations : 109AK FCC Test Firm Registration : 461337</p> <p>The equipment was tested accordance to the requirement listed below:</p> <p>(LMR) FCC 47 CFR Part 90 PASS IC RSS- Gen / 119</p> 	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:</p> <p>_____</p> <p>Song Zhi Wei Test Personnel</p>	<p>Approved By:</p> <p>_____</p> <p>Vincent Foong Responsible Engineer</p>

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	5
4.0 Equipment List.....	6
5.0 Test Condition.....	8
5.1. Transmitter Test Conditions	8
6.0 Transmitter Test Parameters	9
6.1. RF Output Power	9
6.1.1. Test Setup.....	9
6.1.2. Test Result	10
6.2. Frequency Stability	11
6.2.1. Test Setup.....	11
6.2.2. Test Result	11
6.2.3. Test Limit.....	11
6.3. Audio Frequency Response	12
6.3.1. Test Setup.....	12
6.3.2. Test Result	12
6.3.3. Test Limit.....	12
6.4. Audio Low Pass Filter Response	13
6.4.1. Test Setup.....	13
6.4.2. Test Result	13
6.4.3. Test Limit.....	14
6.5. Modulation Limiting	15
6.5.1. Test Setup.....	15
6.5.2. Test Result	15
6.5.3. Test Limit.....	15
6.6. Occupied Bandwidth.....	16
6.6.1. Test Setup (Analog)	16
6.6.2. Test Result (Analog).....	16
6.6.3. Test Setup (Digital).....	17
6.6.4. Test Result (Digital).....	18
6.6.5. Test Limit.....	18
Band Edge Conducted Spurious Emission (Part 22)	18
6.6.6. Test Setup (Analog)	19
6.6.7. Test Result (Analog).....	20
6.6.8. Test Setup (Digital).....	21
6.6.9. Test Result (Digital).....	22
6.6.10. Test Limit.....	22
6.7. Transient Frequency Behavior	23
6.7.1. Test Setup.....	23
6.7.2. Test Result	24
6.7.3. Test Limit.....	24

6.8. Adjacent Channel Power..... 25
 6.8.1. Test Setup (Analog) 25
 6.8.2. Test Result 26
 6.8.3. Test Setup (Digital)..... 28
 6.8.4. Test Result 29
 6.8.5. Test Limit..... 37
 6.9. Conducted Spurious Emission 39
 6.9.1. Test Setup..... 39
 6.9.2. Test Result (Analog) 40
 6.9.3. Test Result (Digital)..... 46
 6.9.4. Test Limit..... 58
 6.10. Radiated Spurious Emission 59
 6.10.1. Test Setup..... 59
 6.10.2. Test Result (Analog)..... 60
 6.10.3. Test Result (Digital)..... 69
 6.10.4. Test Limit..... 87
 6.11. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)..... 88
 6.11.1. Test Setup..... 88
 6.11.2. Test Result 88
 6.11.3. Test Limit..... 89
 6.12. AC Power Line Conducted Spur Emissions 90
 6.12.1. Test Setup..... 90
 6.12.2. Test Result 90
 6.12.3. Test Limit..... 91

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	03-OCT-2017	Song Zhi Wei
Rev. B	Removed Not Applicable Parts. Add Result for Section 6.11.	30-NOV-2017	Song Zhi Wei

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI/TIA/-603-D
ANSI C63.4.2014
TIA-102 CCAA-A
TIA-102 CAAB-D
TIA-102 CAAA-D
ANSI C63.26-2015

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	IC General Rules Part	Test Item	Result
90.210	RSS-Gen, RSS-119	RF Power Output	Pass
-	-	Frequency Stability	NA
-	-	Audio Frequency Response	NA
-	-	Audio Low Pass Filter Response	NA
-	-	Modulation limiting	NA
-	-	Occupied Bandwidth	NA
-	-	Band Edge Conducted Spurious Emission	NA
-	-	Transient Frequency Behavior	NA
90.543	-	Adjacent Channel Power	Pass
90.210, 90.541(b)	RSS-Gen, RSS-119	Conducted Spurious Emissions	Pass
90.210	RSS-Gen, RSS-119	Radiated Spurious Emission	Pass
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA
90.541(d), 90.543(f)	-	Effective Radiated Power (ERP)	Pass
-	-	AC Power Line Conducted Spurious Emission	NA

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

FCC Transient ATE #1: (SW Version: FCC Transient ATE_R 1.1.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6032A	2818A03549	11-May-17	11-May-18
POWER SENSOR	E4412A	MY41498918	9-May-17	9-May-18
POWER METER	E4416A	MY45101016	11-Jan-17	11-Jan-18
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY52300223	9-May-17	9-May-18
STEP ATTENUATOR/110dB	8496G	MY52300176	9-May-17	9-May-18
OSCILLOSCOPE	MSO8064A	MY48240107	25-May-17	25-May-18
AUDIO ANALYZER	8903B	3729A17409	2-May-17	2-May-18
AUDIO ANALYZER	8903B	3011A08952	2-May-17	2-May-18
MODULATION ANALYZER	8901B	3019A02766	4-Mar-17	4-Mar-18
SIGNAL GENERATOR	8657A	3323A05725	2-May-17	2-May-18
SPECTRUM ANALYZER	E4440A	MY46185415	24-May-17	24-May-19
SWITCH CONTROL UNIT	-	-	CNR	CNR

Conducted Spurious Emission ATE # 1: (SW Version: Conducted Spur ATE_rev 1.23.0)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
SPECTRUM ANALYZER	E4440A	US45303111	16-Feb-17	16-Feb-18
POWER SUPPLY	6032A	MY41002067	5-May-17	5-May-18
HIGH PASS FILTER SWITCH BOX	-	CS001	7-Apr-17	7-Apr-18
MICROWAVE GENERATOR	SMP 02	830682/015	19-Oct-16	19-Oct-17
MODULATION ANALYZER	8901B	3438A05278	3-Mar-17	3-Mar-18

Radiated Emission Station: (SW Version: EMC_FCC_IC_BT_RE_V 1.5.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	566	4-Sep-16	4-Sep-17
DRG HORN FREQ.	SAS-571	720	2-Mar-17	2-Mar-19
POWER SUPPLY	6674A	3126A00133	12-Nov-15	12-Nov-17
MICROWAVE SIGNAL GENERATOR	SMP04	100127	19-Jul-17	18-Jul-18
EMI TEST RECEIVER	ESIB26	100336	13-Jul-17	12-Jul-18
SIGNAL ANALYZER	FSV40	101103	18-Jul-17	17-Jul-18
5m Semi-anechoic Chamber	S800-HX	J2308	CNR	CNR
BILOG ANTENNA	CBL6112B	2950	23-Feb-16	23-Feb-18
BILOG ANTENNA	CBL6112B	2964	3-Feb-17	3-Feb-18
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	14-Oct-16	14-Oct-17
DATA LOGGER	SDL500	A.016776	18-Mar-17	18-Mar-18
LOOP ANTENNA	6502	208416	27-Jul-17	27-Jul-18
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	CNR	CNR
PREAMPLIFIER	PAM-0118P	361	CNR	CNR

CNR → Calibration Not Required

5.0 Test Condition

5.1. Transmitter Test Conditions

Test Item, (Channel Spacing)	Temperature (°C)	Voltage Supply (V)	Power (W)	Modulation	Test Frequency (MHz)
RF Output Power	25°C	Nominal	Low / Max	Analog	764.0125,768.0125,769.0125,769.0875, 774.8875,775.9875,798.0125,799.0875, 804.9125,805.9875
Frequency Stability	-30°C ~ 60°C	80% ~ 120% of Nominal Volt	Max	NA	NA
Audio Frequency Response (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Audio Low Pass Filter Response (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Modulation limiting (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	NA
Band Edge Conducted Spurious Emission (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Transient Frequency Behavior (<i>UHF & VHF Band</i>) (12.5kHz / 25kHz)	25°C	Nominal	Max	NA	NA
Adjacent Channel Power (<i>700MHz Band</i>) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog, Digital	769.0875,774.8875, 799.0875,804.9125
Conducted Spurious Emissions (12.5kHz / 20kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	764.0125,769.0125,769.0875,774.8875, 799.0875,804.9125
Radiated Spurious Emission (12.5kHz / 25kHz)	25°C	Nominal	Low / Max	Analog, Digital	764.0125,769.0125,769.0875,774.8875, 799.0875,804.9125,
GNSS (<i>700MHz Band</i>) (EIRP for 1559-1610MHz) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	799.0875,804.9125
Effective Radiated Power (ERP) (<i>700MHz & 900MHz Band</i>) (12.5kHz / 25kHz)	25°C	Nominal	Max	Analog	769.0125,769.0875, 799.0125,804.9125
AC Power Line Conducted Spurious Emissions* (12.5kHz)	25°C	Nominal	Max	NA	NA


* – ONLY tested if portables can be operated during charging OR mobiles can be used in desktop operation connected to a power supply

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1 RF Output Power

6.1.1 Test Setup

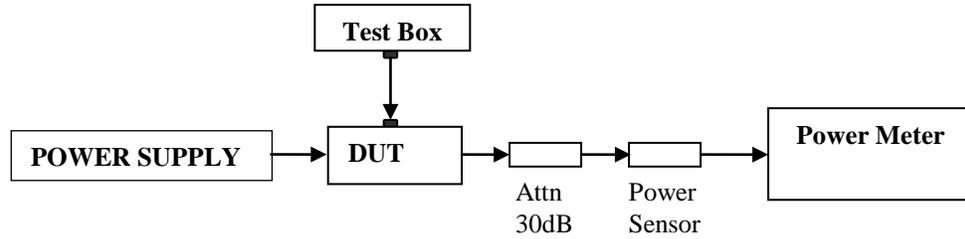


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remarks
Voltage (V)	7.5V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
764.0125	0.99	1.27	2.96	1.91	Not For FCC Review
768.0125	0.99	1.26	2.96	1.88	Not For FCC Review
769.0125	0.99	1.26	1.99	1.61	
769.0875	0.99	1.25	2.89	1.74	
774.8875	0.99	1.18	2.96	1.75	
775.9875	0.99	1.12	2.96	1.76	Not For FCC Review
798.0125	1.01	1.22	2.95	1.71	Not For FCC Review
799.0875	1.01	1.18	2.96	1.74	
804.9125	1.01	1.12	2.94	1.75	
805.9875	1.01	1.17	2.94	1.77	Not For FCC Review

6.2. Frequency Stability

6.2.1. Test Setup

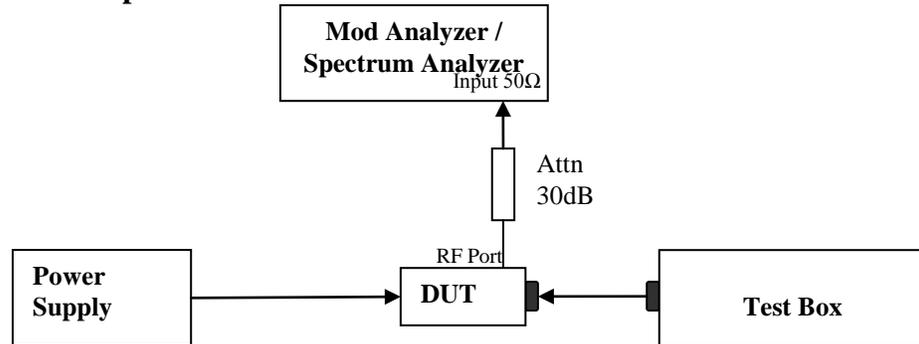

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions: Different Temperature & Supply Voltage input.
 - Temperature: Vary voltage per test condition in Clause 5.1
 - Supply Voltage: Vary temperature per test condition in Clause 5.1
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result


Not Applicable

6.2.3. Test Limit

As per manufacturer declared spec +/- #. #ppm

6.3. Audio Frequency Response


6.3.1. Test Setup

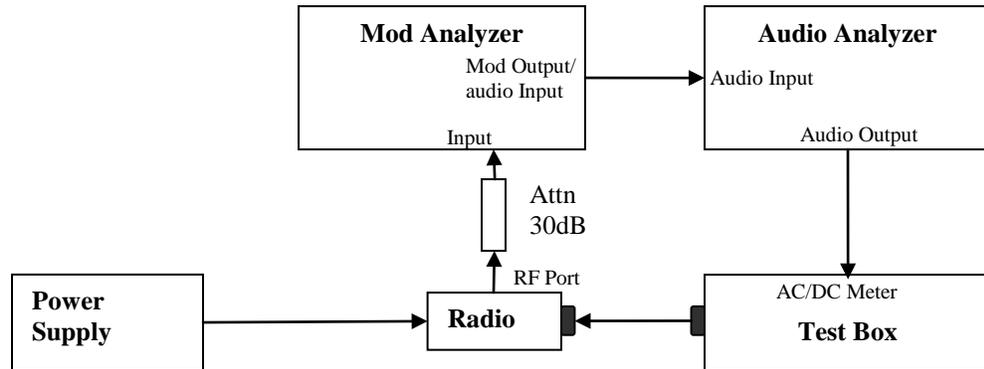

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the maximum deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result Not Applicable

6.3.3. Test Limit

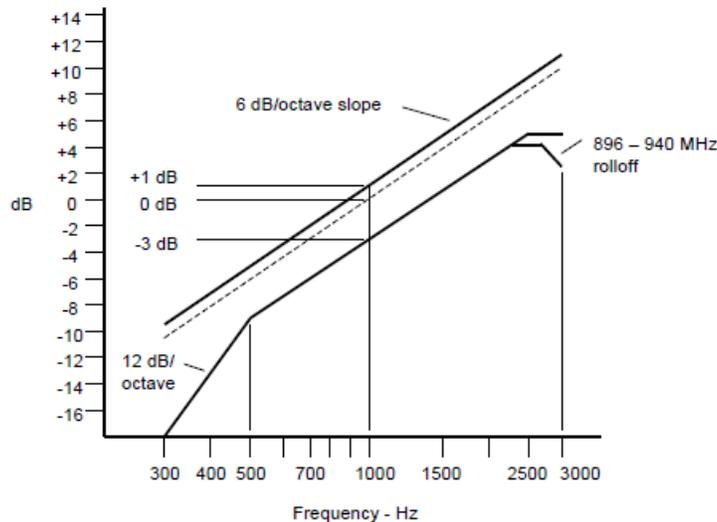


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response


6.4.1. Test Setup

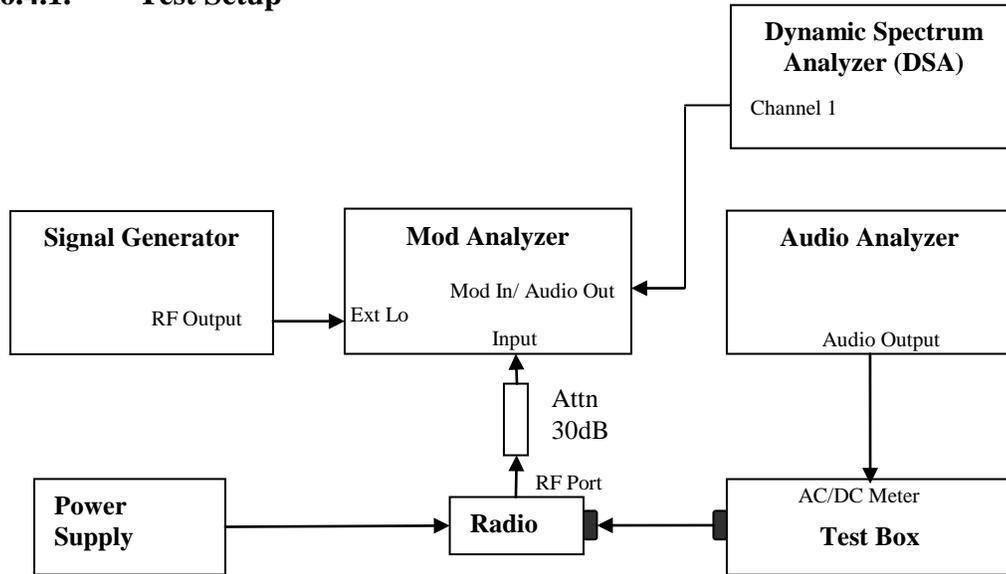

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result **Not Applicable**

6.4.3. Test Limit

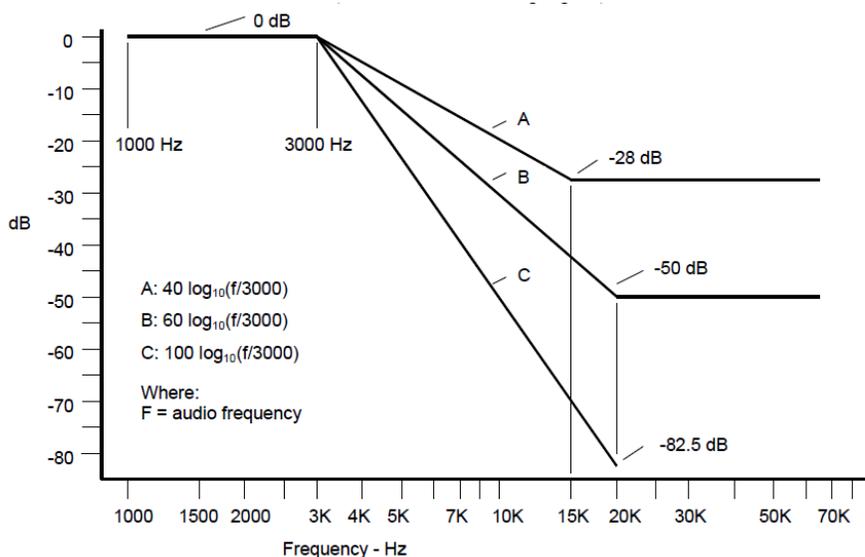

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

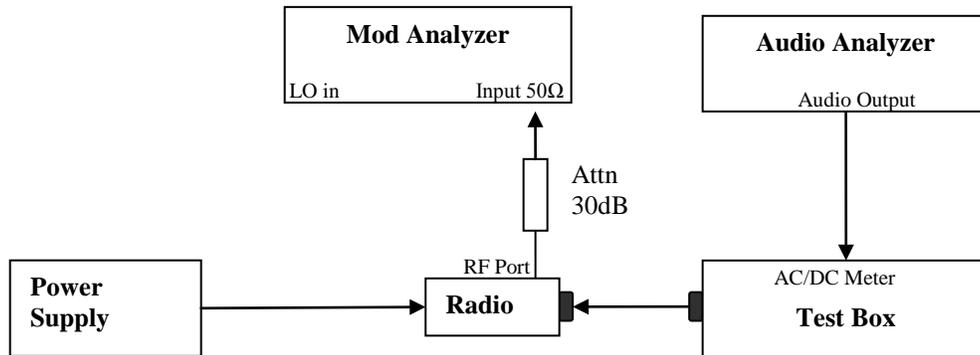


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result **Not Applicable**

6.5.3. Test Limit Modulation shall not exceed 100 percent if amplitude modulation is employed.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

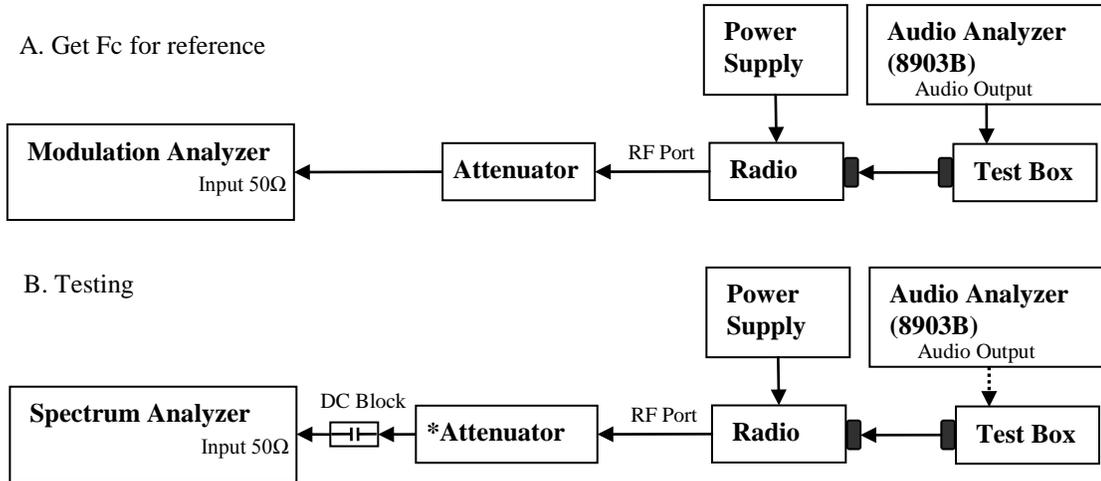


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

Not Applicable

6.6.3. Test Setup (Digital)

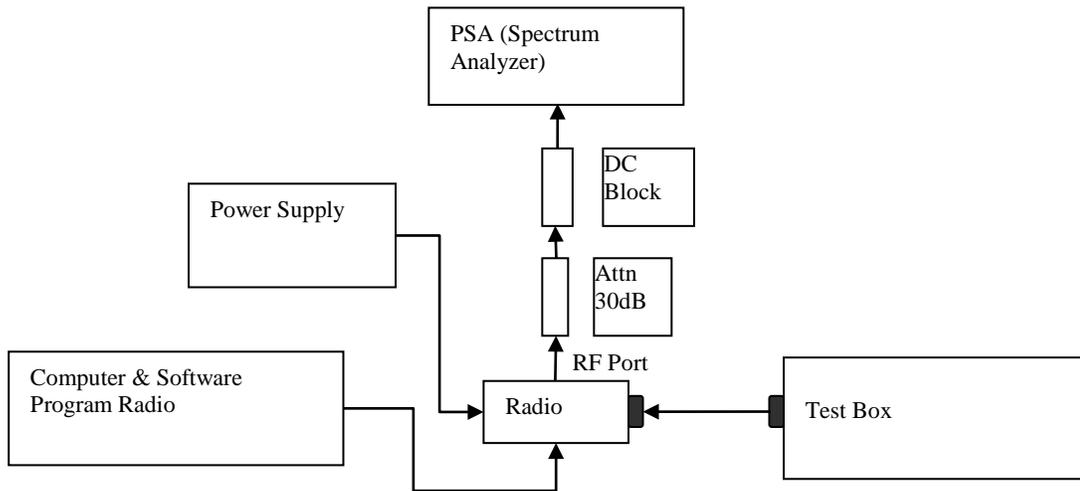

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Bandwidth Measurement.
- 4) Key in the Fc and RBW (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span to 100 KHz and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.


6.6.4. Test Result (Digital)
Not Applicable

6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Band Edge Conducted Spurious Emission (Part 22)


6.6.6. Test Setup (Analog)

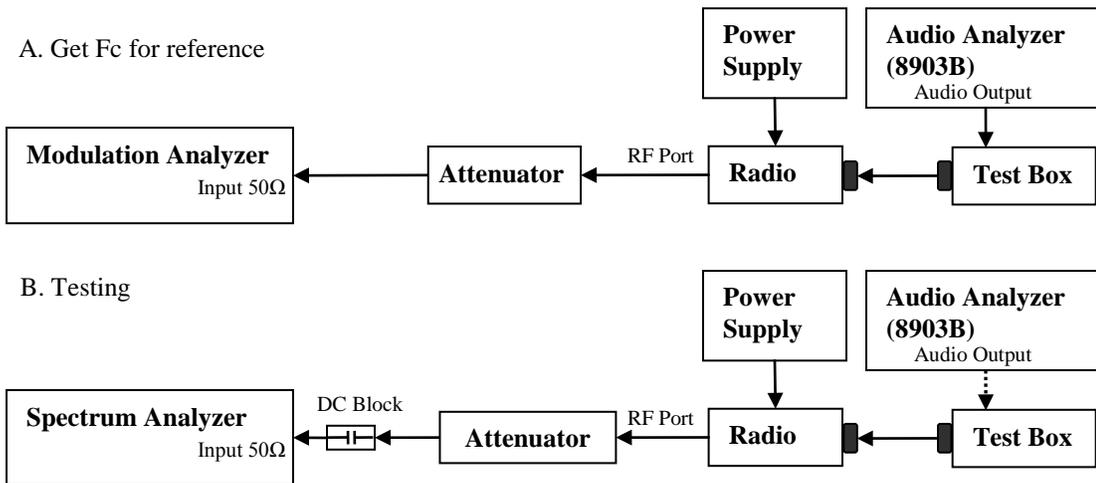

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Path loss for the measurement included.
- 4) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 5) Key in the Fc and RBW= 100Hz.
- 6) Transmit the DUT and record the occupied Bandwidth frequencies.
- 7) Preset the spectrum analyzer for band edge measurement.
- 8) The band edges of lowest and highest channels were measured.
- 9) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 10) Save the screen shot as modulated signal.
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

6.6.7. Test Result (Analog)
Not Applicable

6.6.8. Test Setup (Digital)

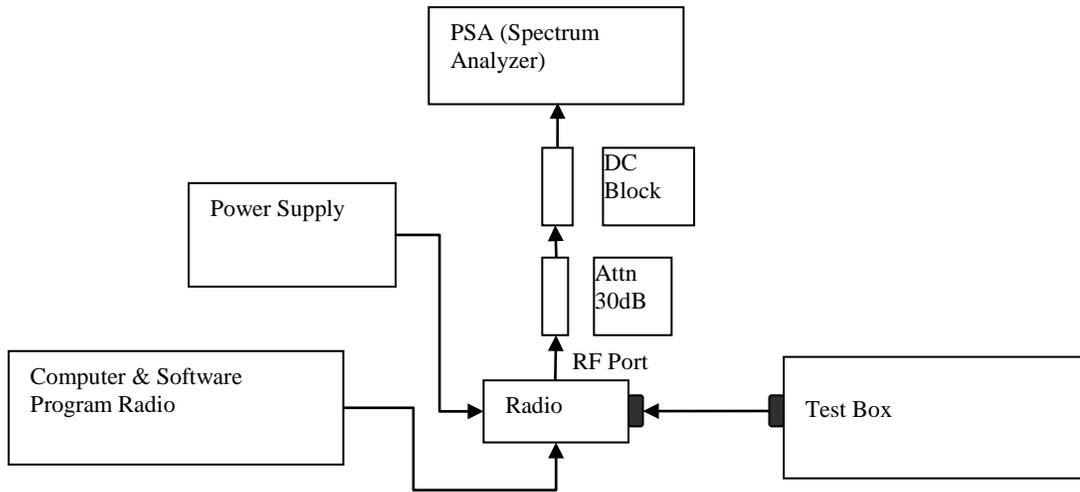

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK**, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and RBW= 100Hz.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) The band edges of lowest and highest channels were measured.
- 8) The center frequency of spectrum is the band edge frequency, span is 60 kHz and RBW is at least 1% of Emission Bandwidth.
- 9) Save the screen shot.

**Note:

- For Digital Modulation for 12.5 kHz Voice (F1E) and 12.5 kHz Data (F1D) would be the same. Therefore only measurements with F1E modulation shown below.


6.6.9. Test Result (Digital)
Not Applicable

6.6.10. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.7. Transient Frequency Behavior

6.7.1. Test Setup

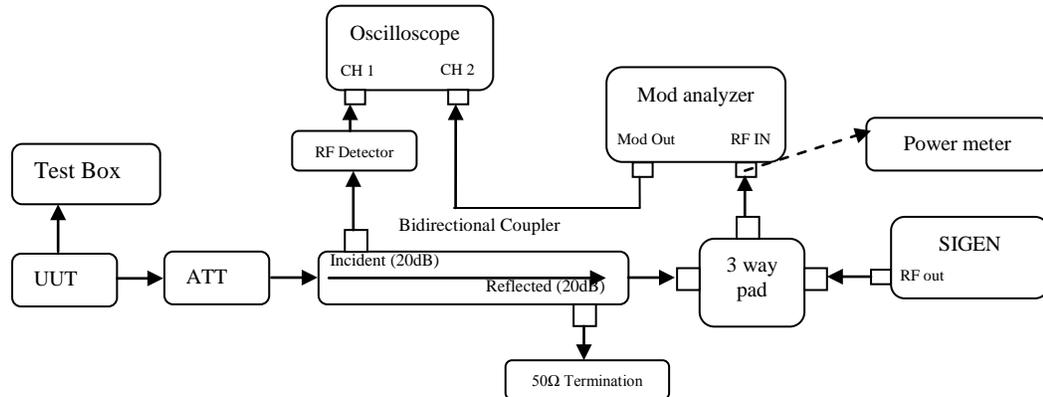

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Siggen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when UUT is keying up.
- 6) Note the power level on power meter and dekey the UUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz. Adjust the vertical amplitude control of the oscilloscope to display the 1000 Hz at $\square 4$ divisions vertically centered on the display.
- 10) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 11) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.7.2. Test Result
Not Applicable

6.7.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ _{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.8. Adjacent Channel Power

6.8.1. Test Setup (Analog)

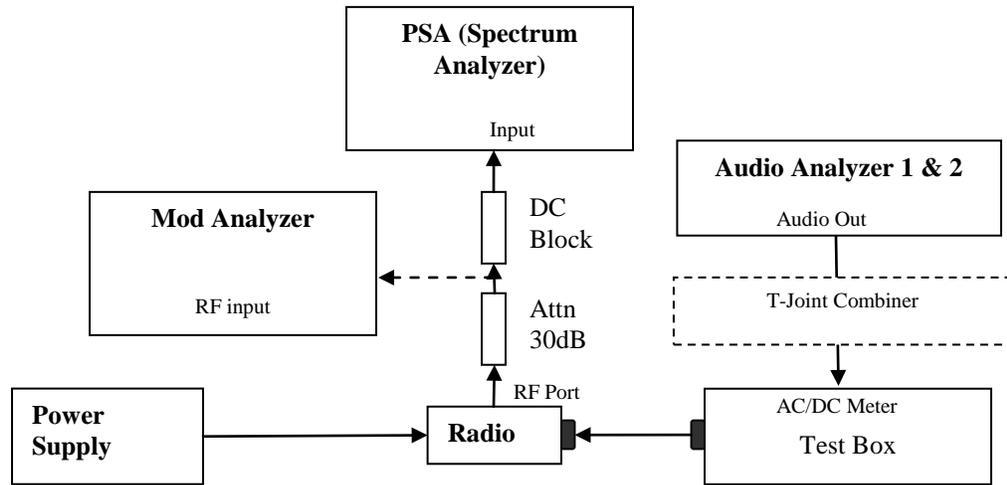

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 4) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 5) Turn both audio analyzers ON and up 10dB amplitude level.
- 6) Connect the output to PSA and set to assigned center frequency.
- 7) Set Span, RBW and VBW as shown in FCC rules part 90.543.
- 8) Transmit the radio and record the ACP value in dBc.

6.8.2. Test Result


Mode	Analog			
Frequency, MHz	769.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.772	-48.815	-40
15.625	6.25	-76.475	-76.268	-60
21.875	6.25	-77.860	-77.712	-60
37.500	25	-72.993	-73.129	-65
62.500	25	-75.006	-74.974	-65
87.500	25	-77.275	-77.579	-65
150.000	100	-75.351	-75.287	-65
250.000	100	-80.239	-80.303	-65
350.000	100	-82.763	-82.998	-65
400k	30	-88.661	-88.732	-75
12M	30	-89.446	-90.067	-75

Mode	Analog			
Frequency, MHz	774.8875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.652	-48.590	-40
15.625	6.25	-76.496	-76.282	-60
21.875	6.25	-77.973	-77.592	-60
37.500	25	-73.142	-72.913	-65
62.500	25	-74.897	-75.214	-65
87.500	25	-77.900	-77.650	-65
150.000	100	-75.711	-75.530	-65
250.000	100	-80.445	-80.358	-65
350.000	100	-82.753	-83.012	-65
400k	30	-88.257	-88.485	-75
12M	30	-89.857	-89.712	-75

Mode	Analog			
Frequency, MHz	799.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.613	-48.468	-40
15.625	6.25	-76.297	-76.044	-60
21.875	6.25	-76.690	-77.496	-60
37.500	25	-72.842	-72.702	-65
62.500	25	-75.113	-75.134	-65
87.500	25	-77.745	-77.458	-65
150.000	100	-75.463	-75.372	-65
250.000	100	-80.118	-80.244	-65
350.000	100	-82.516	-82.623	-65
400k	30	-88.581	-88.222	-75
12M	30	-88.927	-88.794	-75

Mode	Analog			
Frequency, MHz	804.9125 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.749	-48.535	-40
15.625	6.25	-75.600	-75.350	-60
21.875	6.25	-77.133	-76.824	-60
37.500	25	-72.798	-73.021	-65
62.500	25	-75.030	-74.930	-65
87.500	25	-77.331	-77.558	-65
150.000	100	-75.201	-75.242	-65
250.000	100	-79.843	-80.046	-65
350.000	100	-82.444	-82.495	-65
400k	30	-87.929	-88.133	-75
12M	30	-89.022	-88.175	-75

6.8.3. Test Setup (Digital)

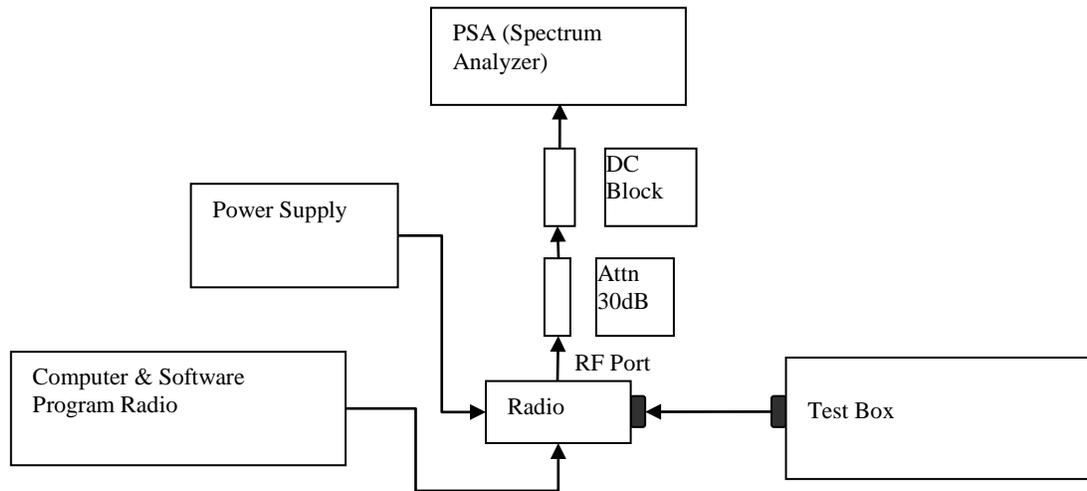

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM, CQPSK or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Prepare setup as per picture.
- 4) Turn on the ACP Measurement – Press Measure, ACP.
- 5) Set Span, RBW and VBW as shown in FCC rules part 90.543.
- 6) Transmit the radio and record the ACP value in dBc.

6.8.4. Test Result

Mode	Digital Data			
Frequency, MHz	769.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-47.960	-46.870	-40
15.625	6.25	-77.014	-76.282	-60
21.875	6.25	-77.848	-77.370	-60
37.500	25	-73.237	-72.948	-65
62.500	25	-74.899	-74.724	-65
87.500	25	-77.250	-77.152	-65
150.000	100	-75.245	-75.253	-65
250.000	100	-80.134	-80.303	-65
350.000	100	-82.942	-82.982	-65
400k	30	-88.947	-88.749	-75
12M	30	-89.845	-90.061	-75

Mode	Digital Data			
Frequency, MHz	774.8875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-46.960	-47.130	-40
15.625	6.25	-76.636	-76.794	-60
21.875	6.25	-77.513	-77.524	-60
37.500	25	-72.766	-73.363	-65
62.500	25	-74.874	-75.153	-65
87.500	25	-77.457	-77.688	-65
150.000	100	-75.401	-75.387	-65
250.000	100	-80.159	-80.318	-65
350.000	100	-82.663	-82.510	-65
400k	30	-88.890	-88.530	-75
12M	30	-90.047	-89.636	-75

Mode	Digital Data			
Frequency, MHz	799.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.130	-47.740	-40
15.625	6.25	-76.324	-76.078	-60
21.875	6.25	-77.119	-77.002	-60
37.500	25	-72.857	-72.828	-65
62.500	25	-74.984	-75.169	-65
87.500	25	-77.522	-77.710	-65
150.000	100	-75.381	-75.546	-65
250.000	100	-80.184	-80.181	-65
350.000	100	-82.577	-82.685	-65
400k	30	-87.722	-88.632	-75
12M	30	-89.195	-89.279	-75

Mode	Digital Data			
Frequency, MHz	804.9125 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-46.480	-46.720	-40
15.625	6.25	-75.219	-75.714	-60
21.875	6.25	-77.105	-76.886	-60
37.500	25	-73.026	-72.803	-65
62.500	25	-75.023	-74.921	-65
87.500	25	-77.316	-77.259	-65
150.000	100	-75.339	-75.560	-65
250.000	100	-79.933	-79.796	-65
350.000	100	-82.338	-82.546	-65
400k	30	-88.023	-88.092	-75
12M	30	-89.091	-88.525	-75

Mode	Digital Voice			
Frequency, MHz	769.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.422	-50.493	-40
15.625	6.25	-76.316	-76.644	-60
21.875	6.25	-77.316	-76.808	-60
37.500	25	-73.005	-72.983	-65
62.500	25	-75.073	-75.067	-65
87.500	25	-77.348	-77.094	-65
150.000	100	-75.401	-75.525	-65
250.000	100	-80.289	-80.247	-65
350.000	100	-82.619	-82.807	-65
400k	30	-88.572	-88.300	-75
12M	30	-89.158	-89.547	-75

Mode	Digital Voice			
Frequency, MHz	774.8875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.190	-49.090	-40
15.625	6.25	-76.887	-75.390	-60
21.875	6.25	-77.496	-76.988	-60
37.500	25	-72.997	-72.833	-65
62.500	25	-75.084	-75.264	-65
87.500	25	-77.666	-77.626	-65
150.000	100	-75.385	-75.472	-65
250.000	100	-80.242	-80.219	-65
350.000	100	-82.559	-82.577	-65
400k	30	-88.843	-88.814	-75
12M	30	-89.699	-89.528	-75

Mode	Digital Voice			
Frequency, MHz	799.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-52.672	-50.670	-40
15.625	6.25	-75.653	-76.123	-60
21.875	6.25	-76.386	-76.495	-60
37.500	25	-72.777	-72.777	-65
62.500	25	-75.112	-75.012	-65
87.500	25	-77.211	-77.550	-65
150.000	100	-75.335	-75.420	-65
250.000	100	-80.146	-80.043	-65
350.000	100	-82.571	-82.630	-65
400k	30	-88.255	-87.974	-75
12M	30	-89.000	-89.127	-75

Mode	Digital Voice			
Frequency, MHz	804.9125 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-49.511	-50.006	-40
15.625	6.25	-75.071	-75.647	-60
21.875	6.25	-76.797	-76.550	-60
37.500	25	-72.834	-72.828	-65
62.500	25	-74.920	-74.718	-65
87.500	25	-77.296	-77.421	-65
150.000	100	-75.248	-75.150	-65
250.000	100	-79.803	-79.935	-65
350.000	100	-82.359	-82.365	-65
400k	30	-88.184	-87.998	-75
12M	30	-88.636	-88.509	-75

Mode	Phase II			
Frequency, MHz	769.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-50.810	-50.390	-40
15.625	6.25	-79.537	-77.352	-60
21.875	6.25	-79.205	-87.322	-60
37.500	25	-76.101	-76.252	-65
62.500	25	-77.791	-78.100	-65
87.500	25	-80.053	-80.446	-65
150.000	100	-78.039	-78.142	-65
250.000	100	-82.220	-82.237	-65
350.000	100	-84.339	-84.220	-65
400k	30	-89.929	-89.578	-75
12M	30	-89.874	-89.825	-75

Mode	Phase II			
Frequency, MHz	774.8875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.640	-48.750	-40
15.625	6.25	-79.021	-78.101	-60
21.875	6.25	-83.493	-83.515	-60
37.500	25	-76.202	-76.401	-65
62.500	25	-77.815	-77.716	-65
87.500	25	-80.339	-80.137	-65
150.000	100	-78.002	-78.195	-65
250.000	100	-82.279	-82.242	-65
350.000	100	-84.229	-84.156	-65
400k	30	-89.720	-89.807	-75
12M	30	-89.727	-89.550	-75

Mode	Phase II			
Frequency, MHz	799.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-52.730	-50.130	-40
15.625	6.25	-80.141	-77.715	-60
21.875	6.25	-85.076	-82.350	-60
37.500	25	-75.714	-75.876	-65
62.500	25	-78.108	-77.620	-65
87.500	25	-80.502	-80.383	-65
150.000	100	-78.195	-77.820	-65
250.000	100	-82.022	-82.197	-65
350.000	100	-84.063	-83.863	-65
400k	30	-89.987	-89.262	-75
12M	30	-89.798	-89.237	-75

Mode	Phase II			
Frequency, MHz	804.9125 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-50.210	-48.090	-40
15.625	6.25	-76.310	-76.844	-60
21.875	6.25	-83.263	-84.550	-60
37.500	25	-75.578	-75.523	-65
62.500	25	-77.709	-77.906	-65
87.500	25	-79.654	-80.421	-65
150.000	100	-77.609	-77.811	-65
250.000	100	-81.847	-82.086	-65
350.000	100	-83.733	-83.736	-65
400k	30	-89.152	-89.078	-75
12M	30	-89.151	-89.510	-75

Mode	Encryption Mode			
Frequency, MHz	769.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.650	-44.380	-40
15.625	6.25	-76.540	-76.060	-60
21.875	6.25	-74.870	-77.090	-60
37.500	25	-73.340	-73.260	-65
62.500	25	-74.810	-74.360	-65
87.500	25	-76.930	-77.420	-65
150.000	100	-75.160	-75.080	-65
250.000	100	-79.690	-79.910	-65
350.000	100	-80.420	-80.300	-65
400k	30	-88.930	-88.740	-75
12M	30	-90.040	-89.970	-75

Mode	Encryption Mode			
Frequency, MHz	774.8875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.260	-45.310	-40
15.625	6.25	-76.810	-75.640	-60
21.875	6.25	-75.280	-75.470	-60
37.500	25	-72.640	-73.260	-65
62.500	25	-76.860	-75.580	-65
87.500	25	-77.840	-77.890	-65
150.000	100	-74.700	-74.750	-65
250.000	100	-79.460	-79.660	-65
350.000	100	-82.670	-82.620	-65
400k	30	-89.050	-88.800	-75
12M	30	-91.030	-90.900	-75

Mode	Encryption Mode			
Frequency, MHz	799.0875 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-45.090	-44.320	-40
15.625	6.25	-75.490	-74.530	-60
21.875	6.25	-76.380	-76.580	-60
37.500	25	-72.610	-72.680	-65
62.500	25	-76.630	-75.590	-65
87.500	25	-78.220	-78.310	-65
150.000	100	-75.430	-75.040	-65
250.000	100	-80.750	-81.350	-65
350.000	100	-82.190	-81.800	-65
400k	30	-88.700	-88.220	-75
12M	30	-89.590	-89.850	-75

Mode	Encryption Mode			
Frequency, MHz	804.9125 MHz			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.620	-45.520	-40
15.625	6.25	-76.220	-76.150	-60
21.875	6.25	-78.440	-77.660	-60
37.500	25	-73.520	-72.750	-65
62.500	25	-75.160	-75.000	-65
87.500	25	-78.060	-79.960	-65
150.000	100	-75.870	-75.180	-65
250.000	100	-80.420	-80.720	-65
350.000	100	-84.400	-83.990	-65
400k	30	-88.040	-88.230	-75
12M	30	-89.290	-89.710	-75

6.8.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	-85

6.9. Conducted Spurious Emission


6.9.1. Test Setup

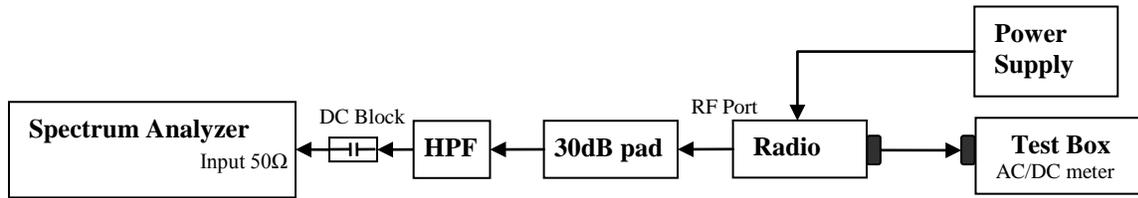

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Adjust the PSA RBW = 100kHz for spur emission below 1GHz, and 1MHz for spur emission above 1GHz.
- 4) Set the Ref offset from the pathloss offset calibration file.
- 5) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - (a) The lowest radio frequency to $F_c - \text{Test BW}$
 - (b) $F_c + \text{Test BW}$ to $\text{Freq} < 2F_c$.
- 6) Record the levels of spurious emissions and dekey the UUT.
- 7) Turn On HPF path and Key up the UUT.
- 8) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$.
- 9) The levels recorded are the absolute levels of conducted spurious emissions in dBm.


6.9.2. Test Result (Analog)

Analog: 764.0125 MHz, 12.5 kHz Channel Spacing, Max Power (Not for FCC Review)

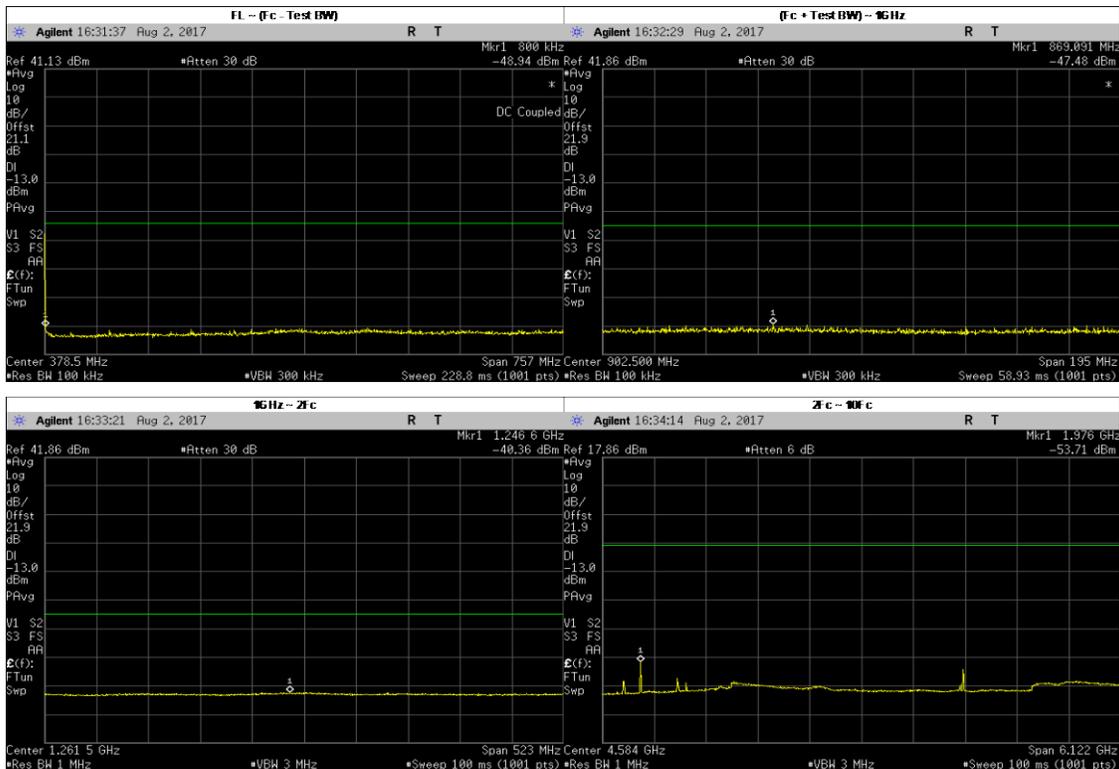


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	0.7652	-48.9400	-13	PASS
(Fc + Test BW) ~ 1GHz	869.0909	-47.4800	-13	PASS
1GHz ~ 2Fc	1246.6210	-40.3600	-13	PASS
2Fc ~ 10Fc	1975.6080	-53.7000	-13	PASS
	2409.8430	-59.4500	-13	PASS
	5779.7500	-56.4100	-13	PASS
	1528.0250	-65.0591	-13	PASS
	2292.0370	-64.3143	-13	PASS
	3056.0500	-61.1335	-13	PASS
	3820.0620	-62.8231	-13	PASS
	4584.0750	-63.7725	-13	PASS
	5348.0870	-63.6786	-13	PASS
	6112.1000	-63.6271	-13	PASS
6876.1130	-61.3581	-13	PASS	
7640.1250	-61.1300	-13	PASS	

**Analog: 769.0125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90**

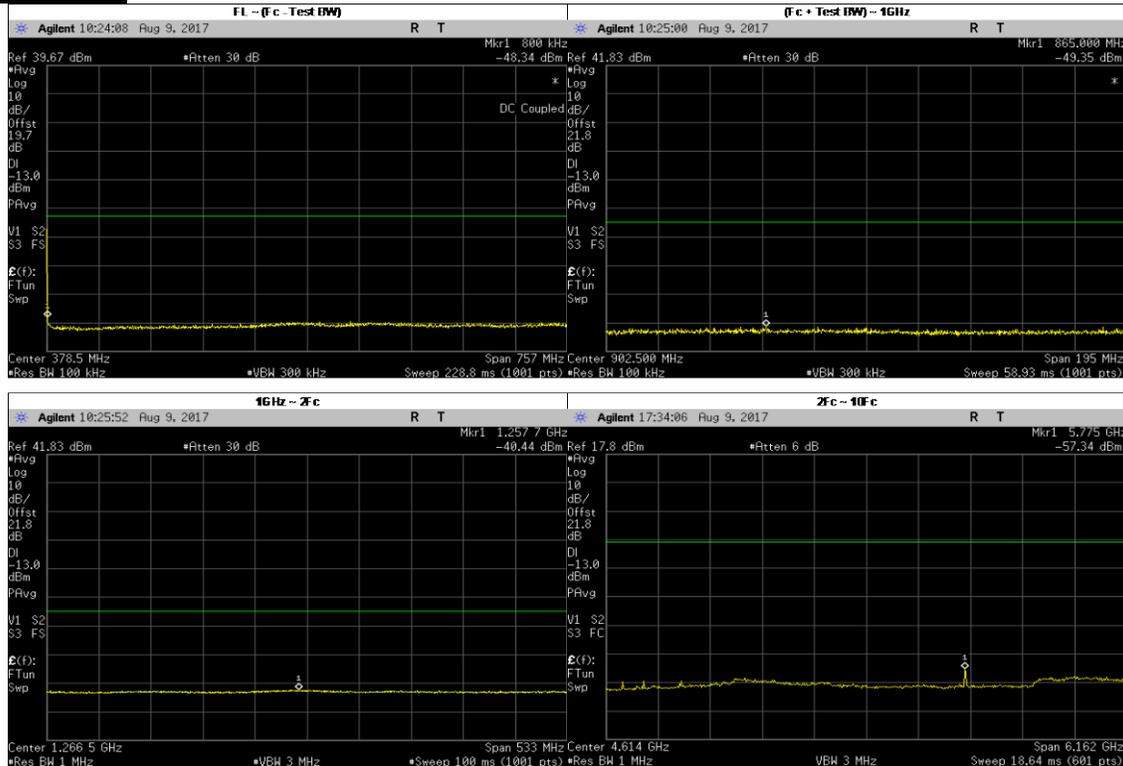


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	0.8000	-48.3400	-13	PASS
(Fc + Test BW) ~ 1GHz	865.0000	-49.3500	-13	PASS
1GHz ~ 2Fc	1257.7300	-40.4400	-13	PASS
2Fc ~ 10Fc	5775.0010	-57.3400	-13	PASS
	1538.0300	-64.7800	-13	PASS
	2307.0400	-63.8210	-13	PASS
	3076.0500	-61.2760	-13	PASS
	3845.0600	-62.7040	-13	PASS
	4614.0700	-63.8180	-13	PASS
	5383.0900	-63.5510	-13	PASS
	6152.1000	-63.4840	-13	PASS
	6921.1100	-61.3290	-13	PASS
	7690.1250	-60.4880	-13	PASS

**Analog: 769.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

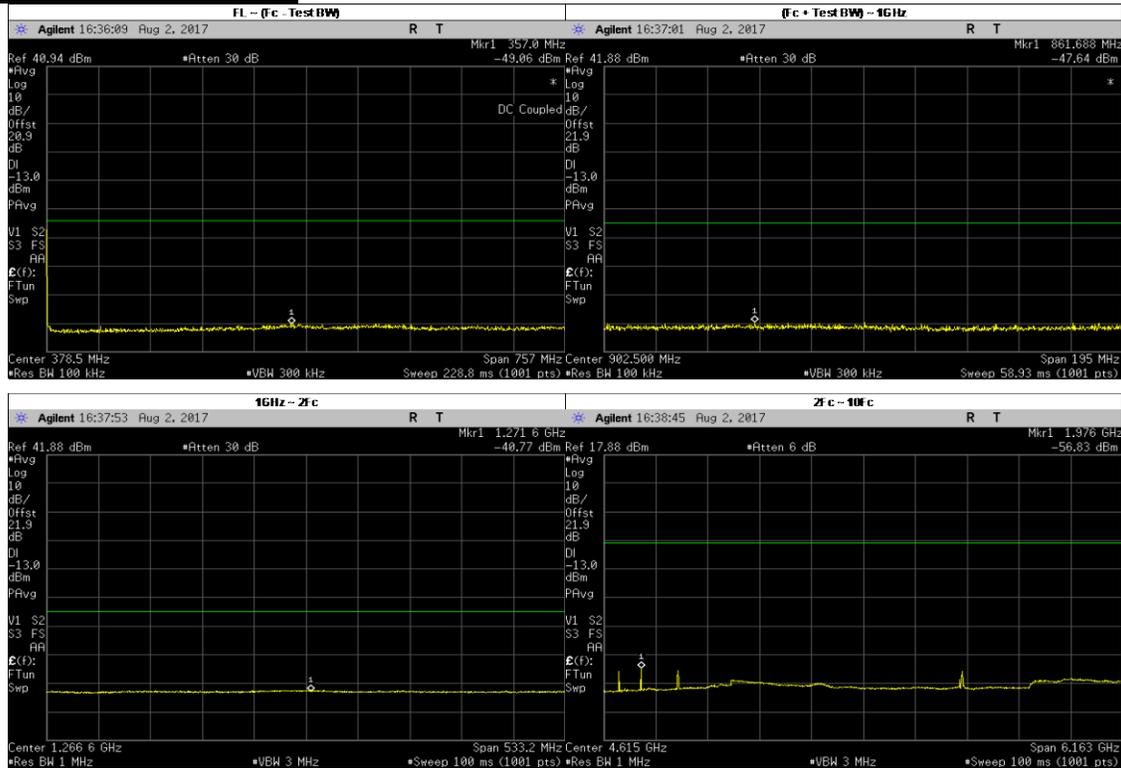


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	356.9518	-49.0600	-13	PASS
(Fc + Test BW) ~ 1GHz	861.6883	-47.6400	-13	PASS
1GHz ~ 2Fc	1271.6480	-40.4800	-13	PASS
2Fc ~ 10Fc	1976.4460	-56.8300	-13	PASS
	5787.3460	-57.7200	-13	PASS
	1538.1750	-64.5347	-13	PASS
	2307.2620	-64.3038	-13	PASS
	3076.3500	-61.1141	-13	PASS
	3845.4370	-63.0441	-13	PASS
	4614.5250	-63.7970	-13	PASS
	5383.6130	-63.6042	-13	PASS
	6152.7000	-63.5872	-13	PASS
	6921.7880	-61.3816	-13	PASS
7690.8750	-60.9200	-13	PASS	

**Analog: 774.8875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

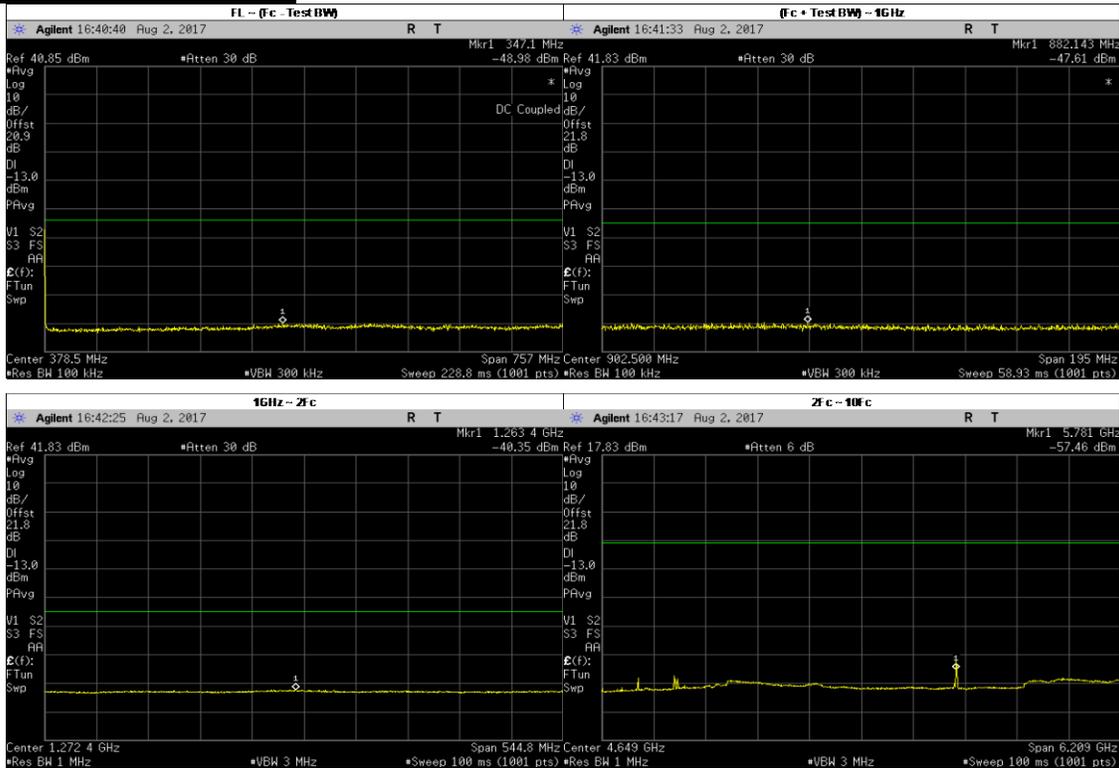


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	347.1208	-48.98	-13	PASS
(Fc + Test BW) ~ 1GHz	882.1429	-47.61	-13	PASS
1GHz ~ 2Fc	1263.408	-40.35	-13	PASS
2Fc ~ 10Fc	5781.354	-53.85	-13	PASS
	2413.181	-59.45	-13	PASS
	1549.775	-64.2059	-13	PASS
	1549.7750	-64.2059	-13	PASS
	2324.6620	-64.3959	-13	PASS
	3099.5500	-61.4513	-13	PASS
	3874.4370	-62.9876	-13	PASS
	4649.3250	-63.9915	-13	PASS
	5424.2120	-63.7821	-13	PASS
	6199.1000	-63.6627	-13	PASS
6973.9880	-60.8783	-13	PASS	
7748.8750	-60.3900	-13	PASS	

**Analog: 799.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

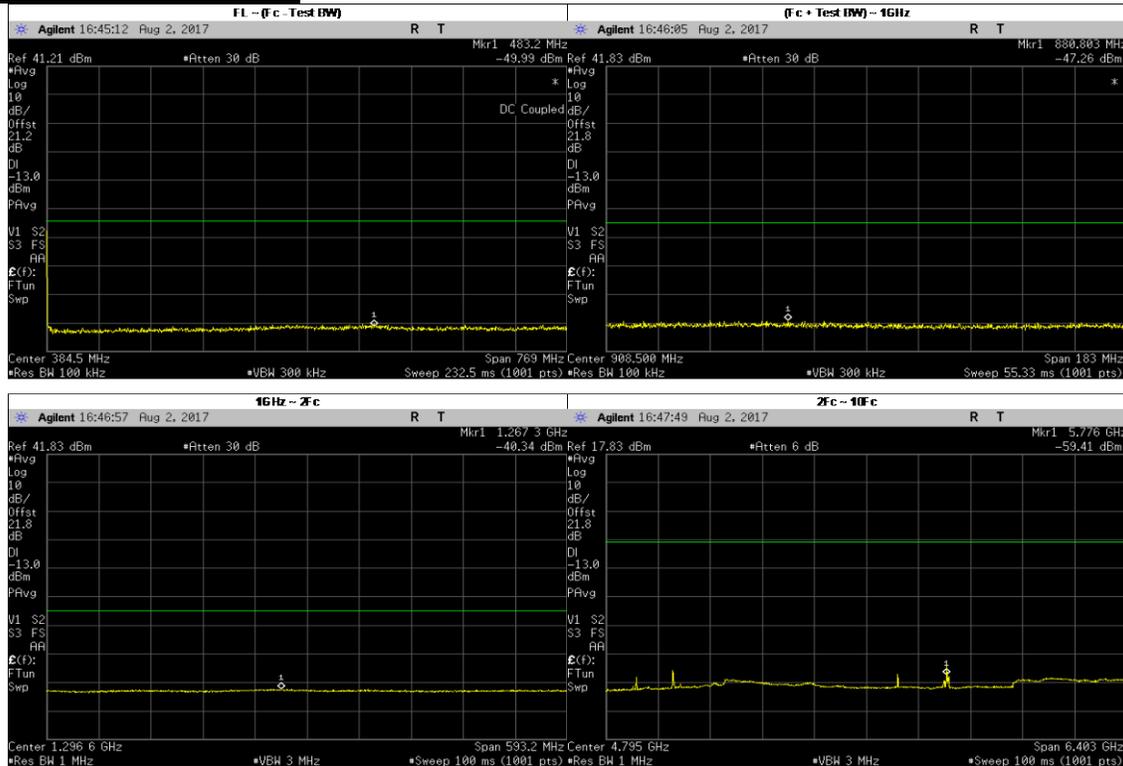

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	483.2211	-48.9200	-13	PASS
(Fc + Test BW) ~ 1GHz	880.8032	-47.2700	-13	PASS
1GHz ~ 2Fc	1267.2550	-40.3400	-13	PASS
2Fc ~ 10Fc	5776.3580	-55.9400	-13	PASS
	5175.1050	-59.2300	-13	PASS
	1598.1750	-64.9573	-13	PASS
	2397.2620	-64.2477	-13	PASS
	3196.3500	-61.6926	-13	PASS
	3995.4370	-62.7870	-13	PASS
	4794.5250	-63.8050	-13	PASS
	5593.6130	-64.1944	-13	PASS
	6392.7000	-63.6205	-13	PASS
	7191.7880	-60.8565	-13	PASS
	7690.8750	-60.9200	-13	PASS
7990.8750	-61.0000	-13	PASS	


**Analog: 804.9125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

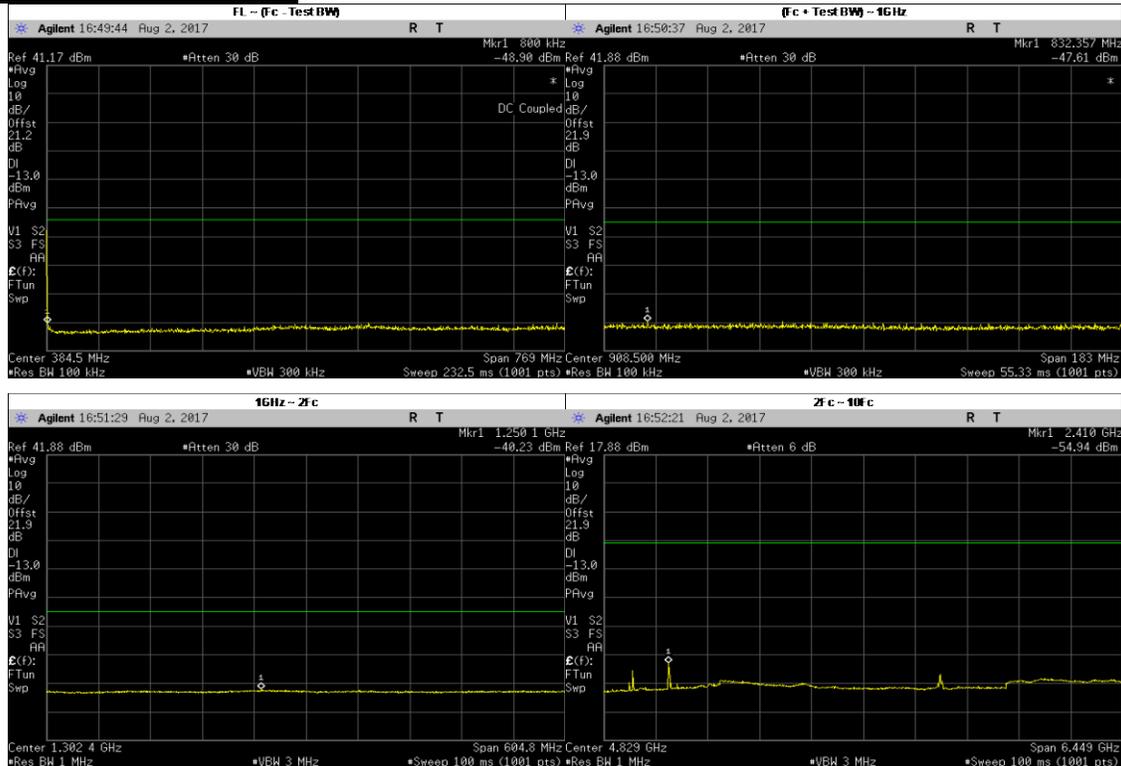

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	477.0753	-48.99	-13	PASS
(Fc + Test BW) ~ 1GHz	832.3566	-47.61	-13	PASS
1GHz ~ 2Fc	1250.147	-40.23	-13	PASS
2Fc ~ 10Fc	2410.182	-54.94	-13	PASS
	1965.625	-57.63	-13	PASS
	1609.825	-64.7962	-13	PASS
	2414.738	-57.1455	-13	PASS
	3219.65	-61.4745	-13	PASS
	4024.562	-62.6263	-13	PASS
	4829.475	-63.696	-13	PASS
	5634.387	-63.7402	-13	PASS
	6439.3	-63.8294	-13	PASS
	7244.212	-60.9543	-13	PASS
8049.1250	-61.4600	-13	PASS	


6.9.3. Test Result (Digital)

C4FM: 764.0125 MHz, 12.5 kHz Channel Spacing, Max Power(Not for FCC Review)

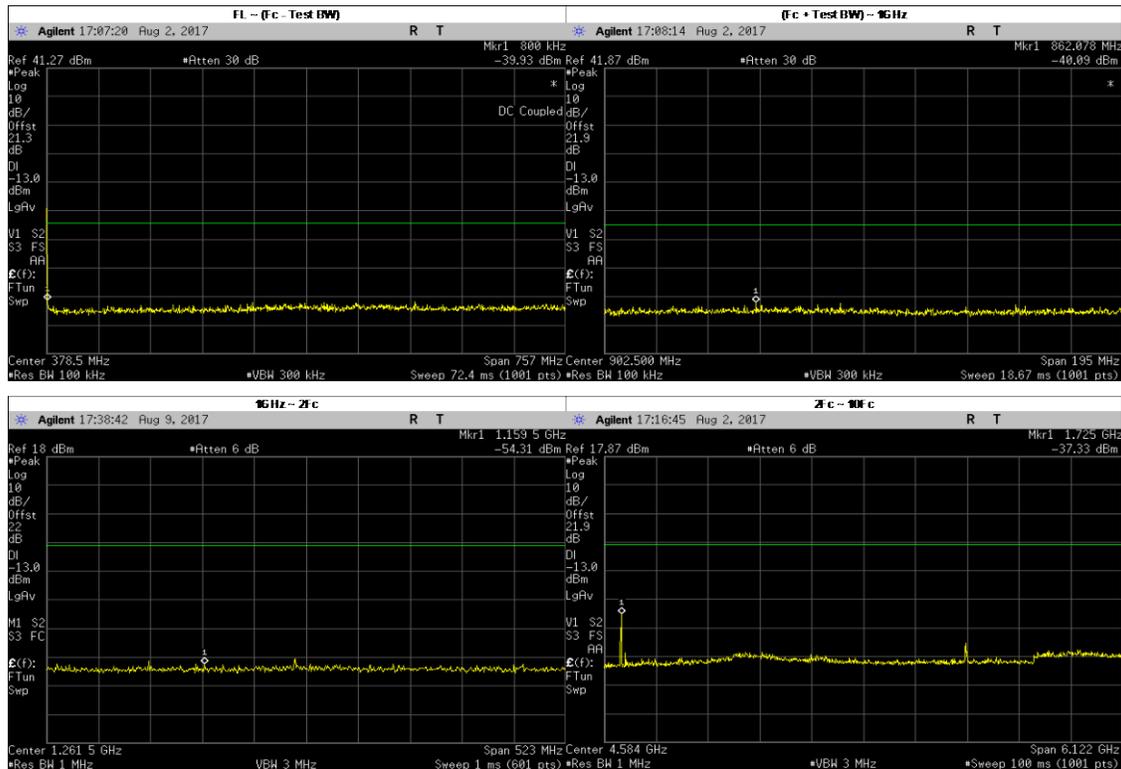


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	536.9357	-40.3600	-13	PASS
(Fc + Test BW) ~ 1GHz	862.0779	-40.0900	-13	PASS
1GHz ~ 2Fc	1159.5000	-54.3100	-13	PASS
2Fc ~ 10Fc	1724.8520	-37.3300	-13	PASS
	1528.0250	-55.0517	-13	PASS
	2292.0370	-55.1625	-13	PASS
	3056.0500	-51.2615	-13	PASS
	3820.0620	-53.2401	-13	PASS
	4584.0750	-54.4815	-13	PASS
	5348.0870	-53.9929	-13	PASS
	6112.1000	-54.0746	-13	PASS
	6876.1130	-51.9884	-13	PASS
7640.1250	-53.0800	-13	PASS	

**C4FM: 769.0125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90**

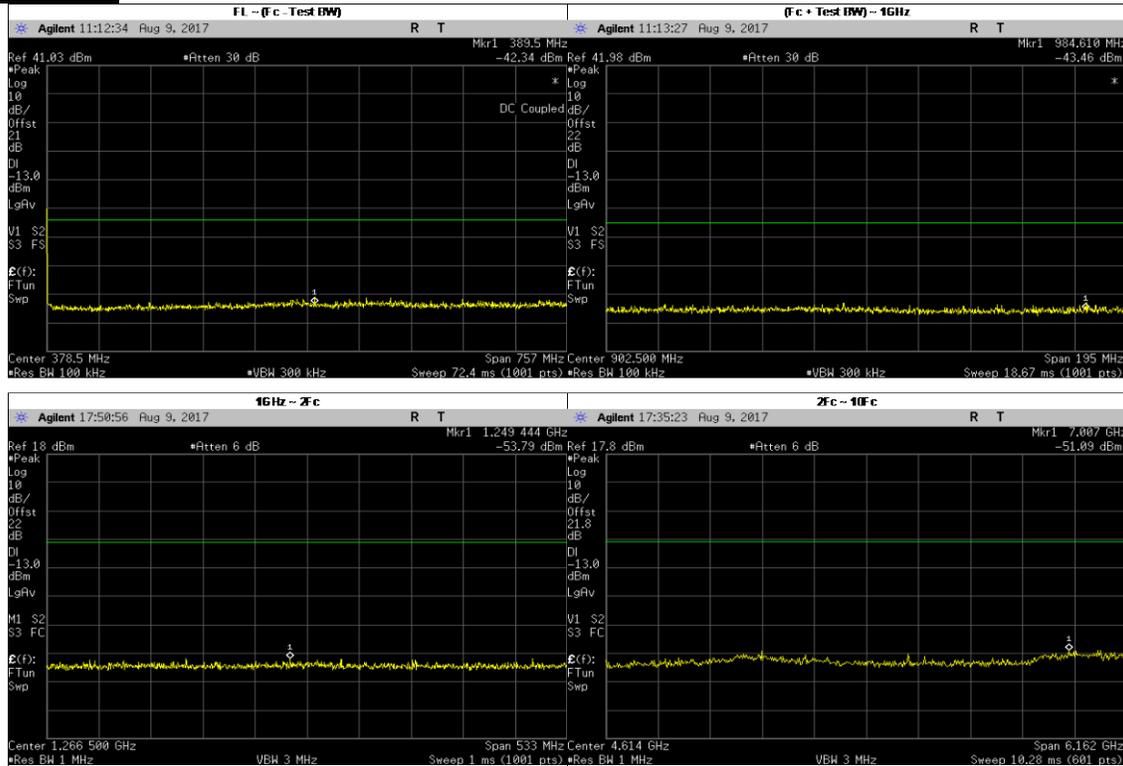


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	389.5000	-42.3400	-13	PASS
(Fc + Test BW) ~ 1GHz	984.6100	-43.4600	-13	PASS
1GHz ~ 2Fc	1249.4440	-53.7900	-13	PASS
2Fc ~ 10Fc	1538.0300	-55.8610	-13	PASS
	2307.0400	-55.9570	-13	PASS
	3076.0500	-52.6450	-13	PASS
	3845.0600	-55.7360	-13	PASS
	4614.0700	-56.5780	-13	PASS
	5383.0900	-56.4590	-13	PASS
	6152.1000	-55.1190	-13	PASS
	6921.1100	-52.6620	-13	PASS
	7690.1250	-53.3190	-13	PASS

**C4FM: 769.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

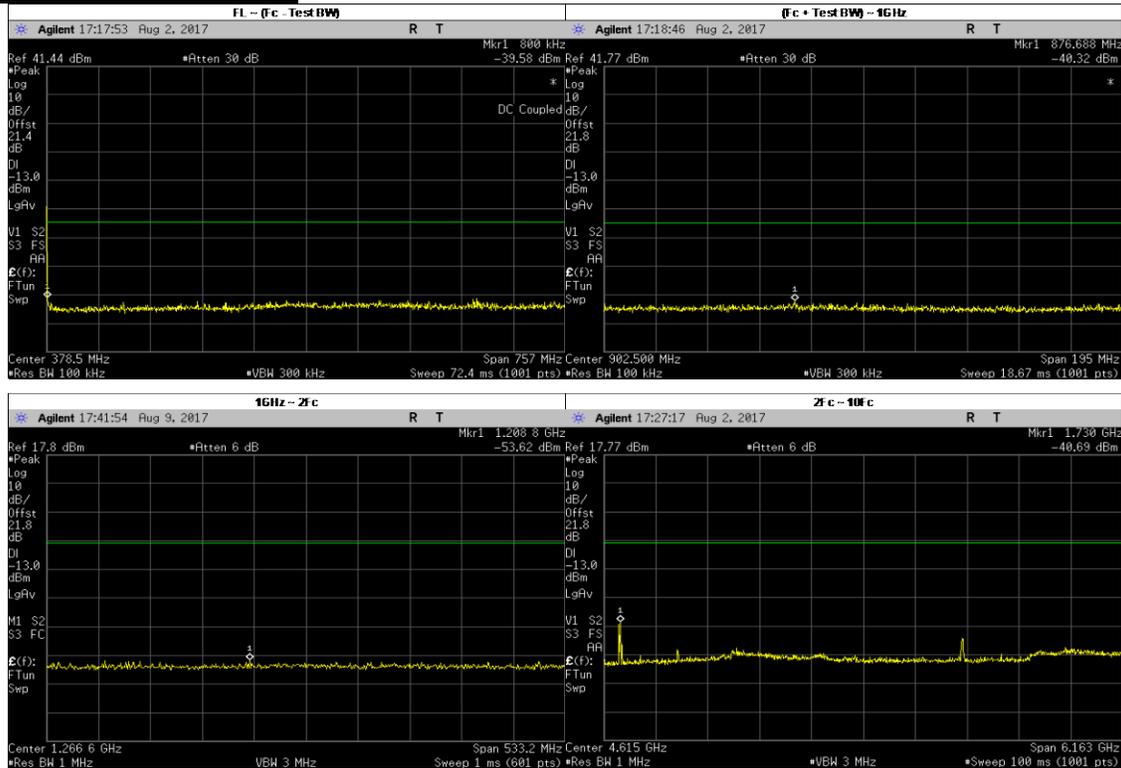


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	626.9276	-39.6800	-13	PASS
(Fc + Test BW) ~ 1GHz	876.6883	-40.3200	-13	PASS
1GHz ~ 2Fc	1208.8000	-53.6200	-13	PASS
2Fc ~ 10Fc	1730.1840	-40.6900	-13	PASS
	1538.1750	-53.9084	-13	PASS
	2307.2620	-54.3044	-13	PASS
	3076.3500	-51.3921	-13	PASS
	3845.4370	-53.1992	-13	PASS
	4614.5250	-53.7055	-13	PASS
	5383.6130	-54.2408	-13	PASS
	6152.7000	-53.6915	-13	PASS
	6921.7880	-51.2878	-13	PASS
7690.8750	-52.9600	-13	PASS	

**C4FM: 774.8875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

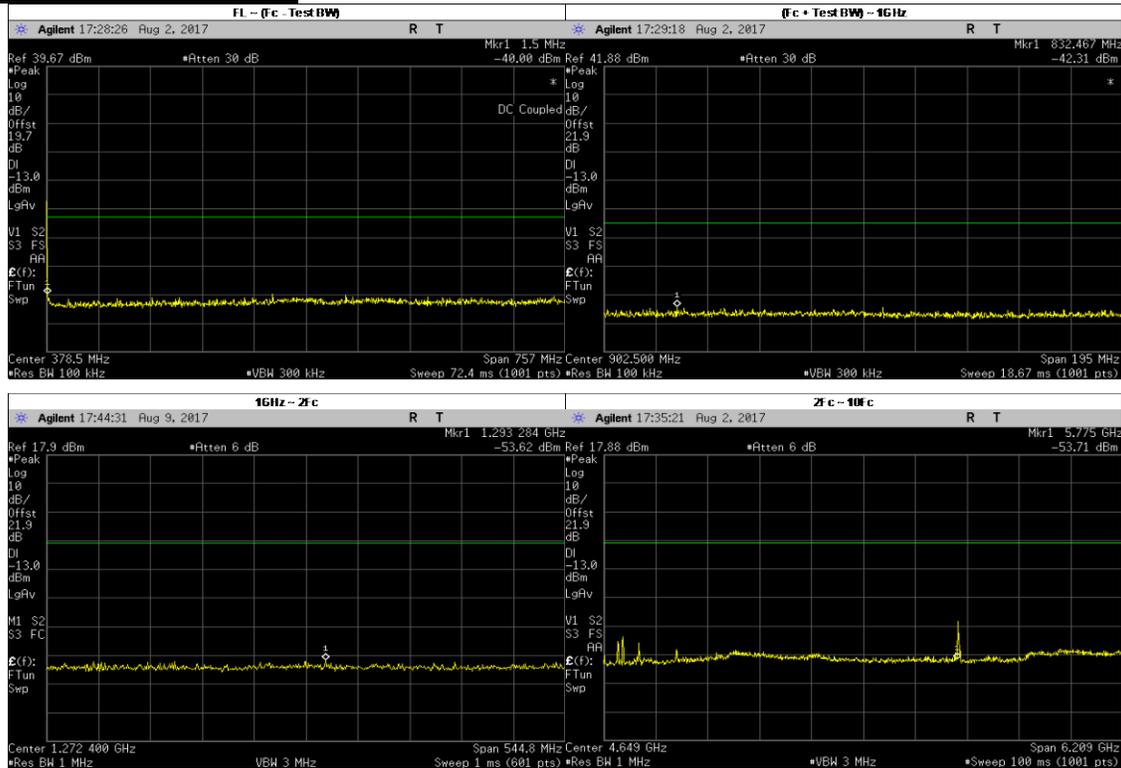


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	329.7274	-40.0100	-13	PASS
(Fc + Test BW) ~ 1GHz	832.4675	-42.3100	-13	PASS
1GHz ~ 2Fc	1293.2840	-53.6200	-13	PASS
2Fc ~ 10Fc	5775.1510	-40.3400	-13	PASS
	1774.2820	-45.8300	-13	PASS
	1712.2530	-47.4900	-13	PASS
	1549.7750	-52.9803	-13	PASS
	2324.6620	-54.5663	-13	PASS
	3099.5500	-51.1899	-13	PASS
	3874.4370	-53.5133	-13	PASS
	4649.3250	-53.9460	-13	PASS
	5424.2120	-52.8196	-13	PASS
	6199.1000	-53.1087	-13	PASS
6973.9880	-50.7993	-13	PASS	
7748.8750	-52.1300	-13	PASS	

**C4FM: 799.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

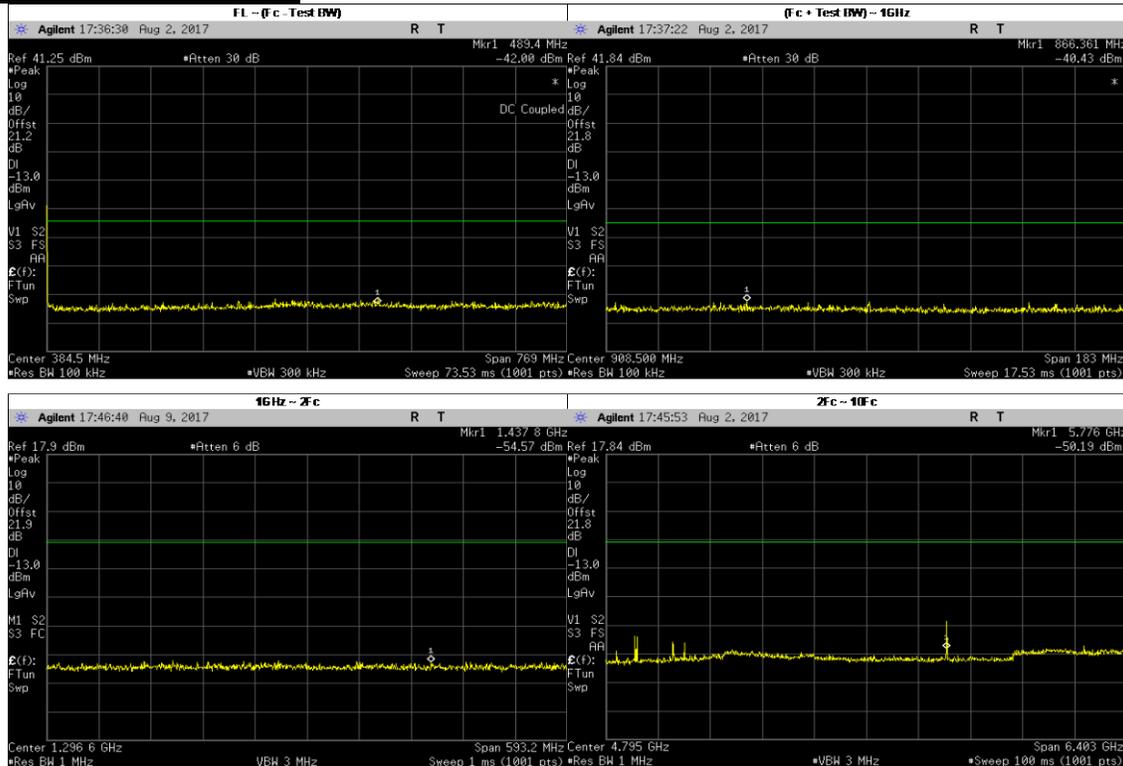


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	489.3669	-39.7000	-13	PASS
(Fc + Test BW) ~ 1GHz	866.3606	-40.4300	-13	PASS
1GHz ~ 2Fc	1437.8000	-54.5700	-13	PASS
2Fc ~ 10Fc	5776.3580	-40.6500	-13	PASS
	1951.3680	-45.9100	-13	PASS
	1976.9530	-46.2500	-13	PASS
	1598.1750	-55.2367	-13	PASS
	2397.2620	-54.4065	-13	PASS
	3196.3500	-51.2833	-13	PASS
	3995.4370	-53.1418	-13	PASS
	4794.5250	-54.2130	-13	PASS
	5593.6130	-54.3657	-13	PASS
	6392.7000	-53.5781	-13	PASS
	7191.7880	-51.4662	-13	PASS
7990.8750	-53.1600	-13	PASS	

**C4FM: 804.9125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

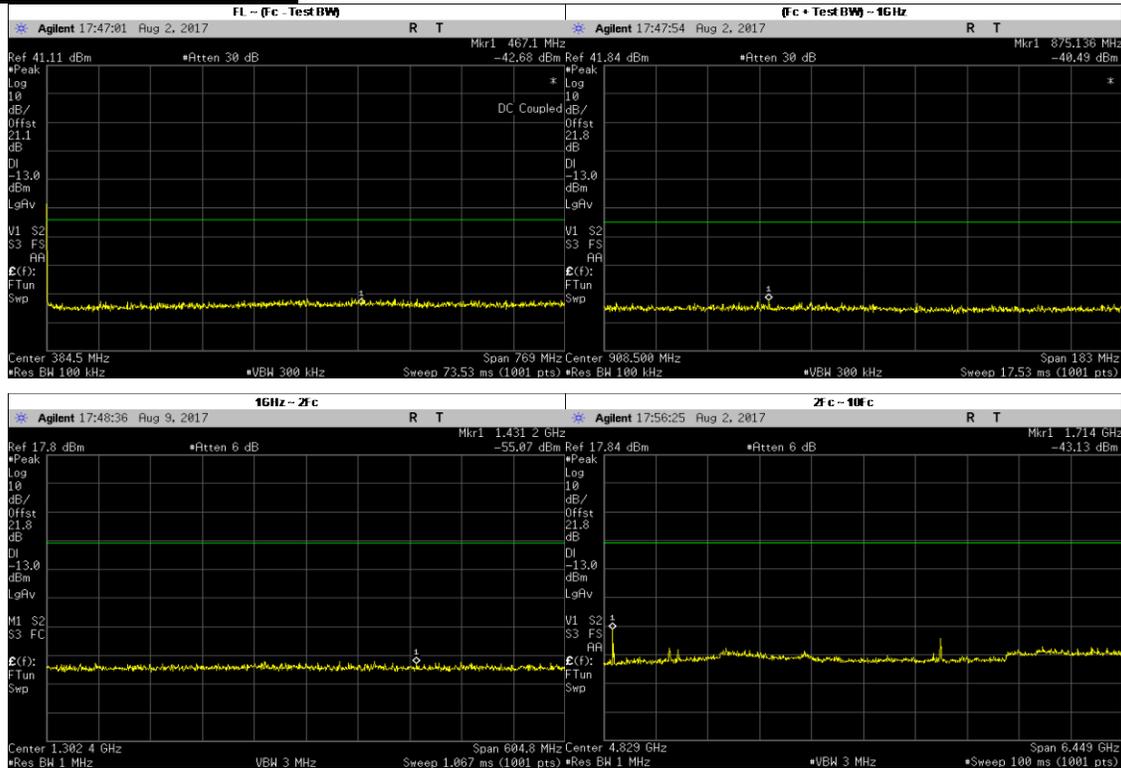


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	467.0884	-40.2000	-13	PASS
(Fc + Test BW) ~ 1GHz	875.1359	-40.4900	-13	PASS
1GHz ~ 2Fc	1431.2000	-55.0700	-13	PASS
2Fc ~ 10Fc	1714.3540	-43.1300	-13	PASS
	5786.2390	-46.2700	-13	PASS
	1609.8250	-55.5814	-13	PASS
	2414.7380	-50.5453	-13	PASS
	3219.6500	-51.9074	-13	PASS
	4024.5620	-53.1310	-13	PASS
	4829.4750	-54.5095	-13	PASS
	5634.3870	-53.9955	-13	PASS
	6439.3000	-53.6539	-13	PASS
	7244.2120	-51.5406	-13	PASS
8049.1250	-53.5600	-13	PASS	

Phase II: 764.0125 MHz, 12.5 kHz Channel Spacing, Max Power(Not for FCC Review)

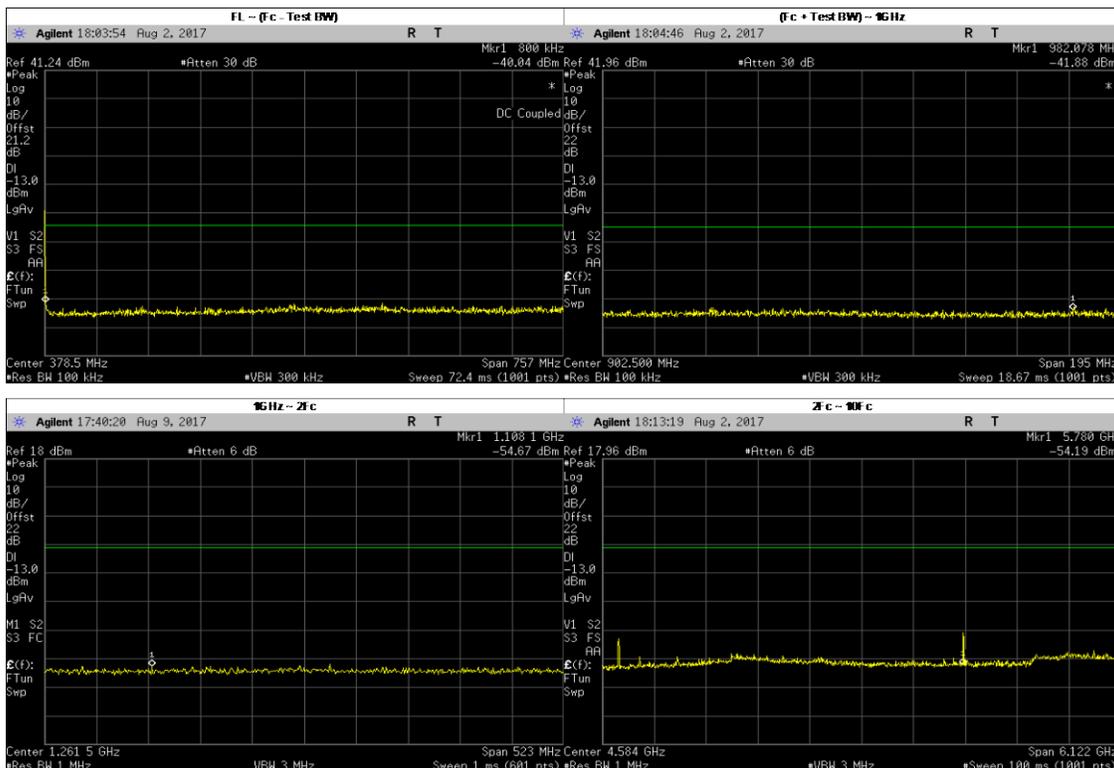


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	491.5616	-40.1300	-13	PASS
(Fc + Test BW) ~ 1GHz	982.0779	-40.7700	-13	PASS
1GHz ~ 2Fc	1108.1000	-54.6700	-13	PASS
2Fc ~ 10Fc	5779.7500	-42.8300	-13	PASS
	1718.7360	-44.9300	-13	PASS
	1528.0250	-54.8554	-13	PASS
	2292.0370	-54.6924	-13	PASS
	3056.0500	-51.2296	-13	PASS
	3820.0620	-52.3795	-13	PASS
	4584.0750	-53.2625	-13	PASS
	5348.0870	-53.4712	-13	PASS
	6112.1000	-53.7756	-13	PASS
	6876.1130	-51.5955	-13	PASS
7640.1250	-53.4500	-13	PASS	

**Phase II: 769.0125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90**

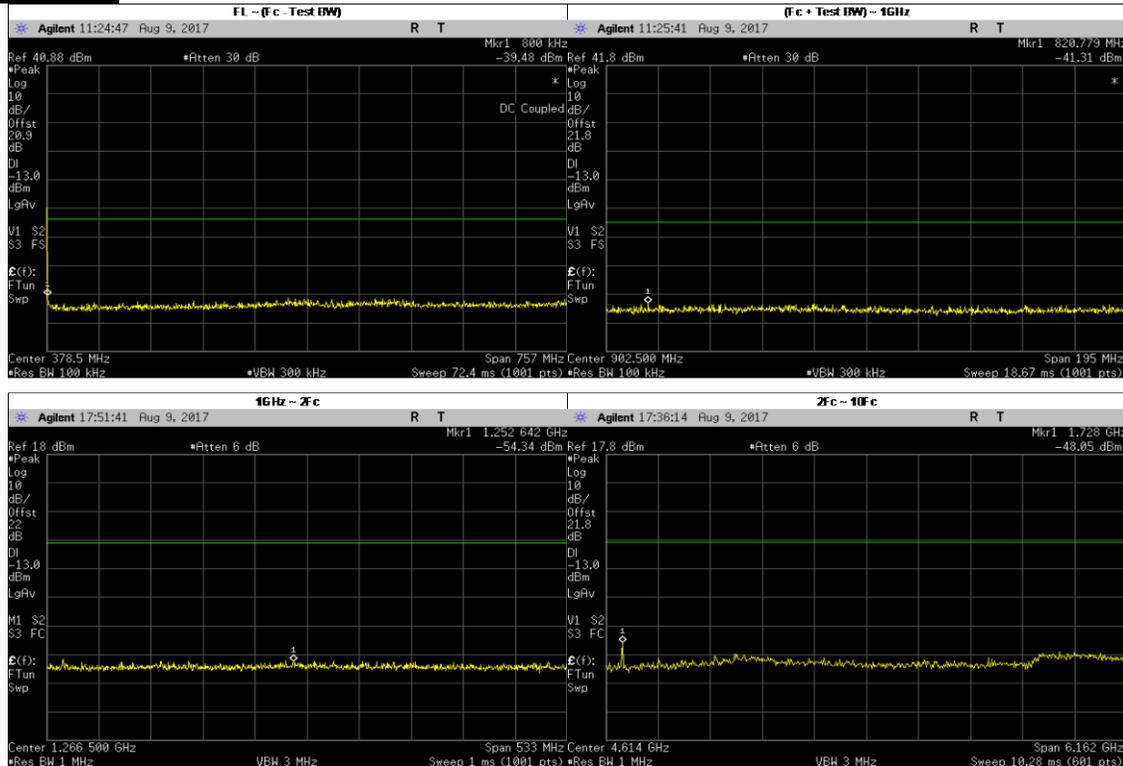


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	0.8010	-39.4800	-13	PASS
(Fc + Test BW) ~ 1GHz	820.7790	-41.3100	-13	PASS
1GHz ~ 2Fc	1252.6420	-54.3400	-13	PASS
2Fc ~ 10Fc	1728.0000	-48.0500	-13	PASS
	1538.0300	-56.3860	-13	PASS
	2307.0400	-56.0560	-13	PASS
	3076.0500	-52.7480	-13	PASS
	3845.0600	-54.7740	-13	PASS
	4614.0700	-56.0460	-13	PASS
	5383.0900	-57.0080	-13	PASS
	6152.1000	-55.8300	-13	PASS
	6921.1100	-52.7620	-13	PASS
7690.1250	-54.0460	-13	PASS	

**Phase II: 769.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

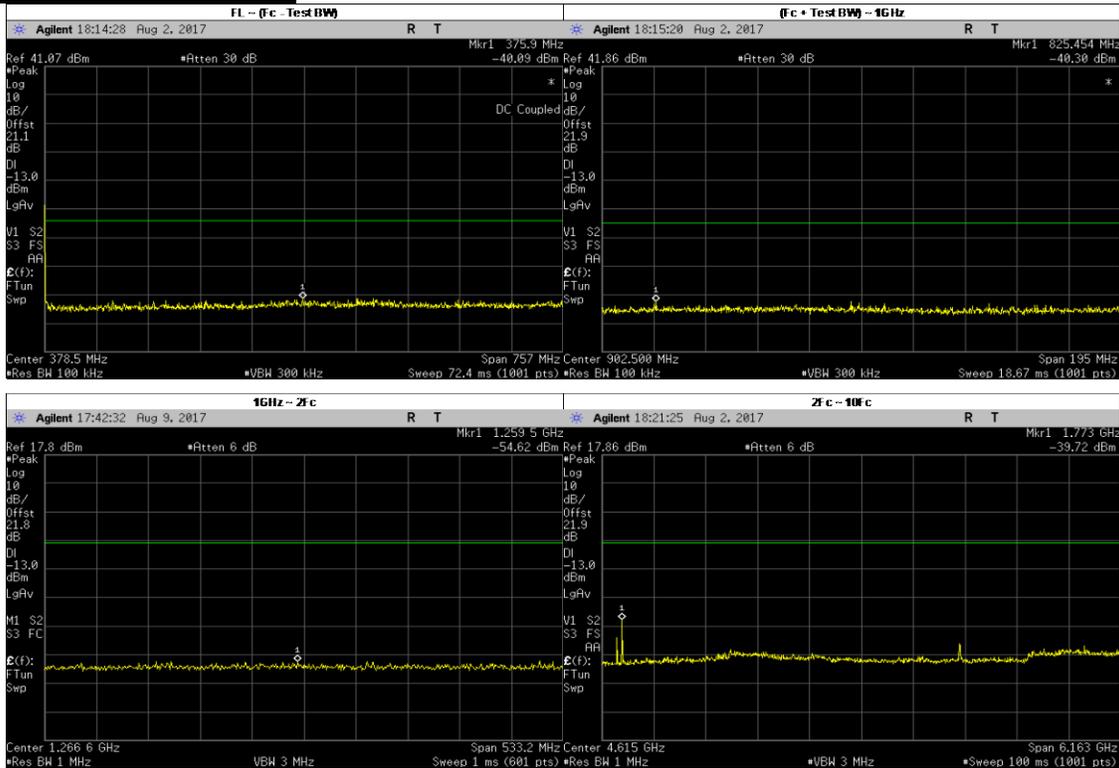


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	375.8577	-40.0900	-13	PASS
(Fc + Test BW) ~ 1GHz	825.4545	-40.3000	-13	PASS
1GHz ~ 2Fc	1259.5000	-54.6200	-13	PASS
2Fc ~ 10Fc	1773.2800	-39.7200	-13	PASS
	1711.7150	-46.0200	-13	PASS
	1538.1750	-55.2303	-13	PASS
	2307.2620	-53.3066	-13	PASS
	3076.3500	-52.1152	-13	PASS
	3845.4370	-53.4038	-13	PASS
	4614.5250	-53.9320	-13	PASS
	5383.6130	-53.5732	-13	PASS
	6152.7000	-53.4424	-13	PASS
	6921.7880	-52.1860	-13	PASS
7690.8750	-52.3800	-13	PASS	

**Phase II: 774.8875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

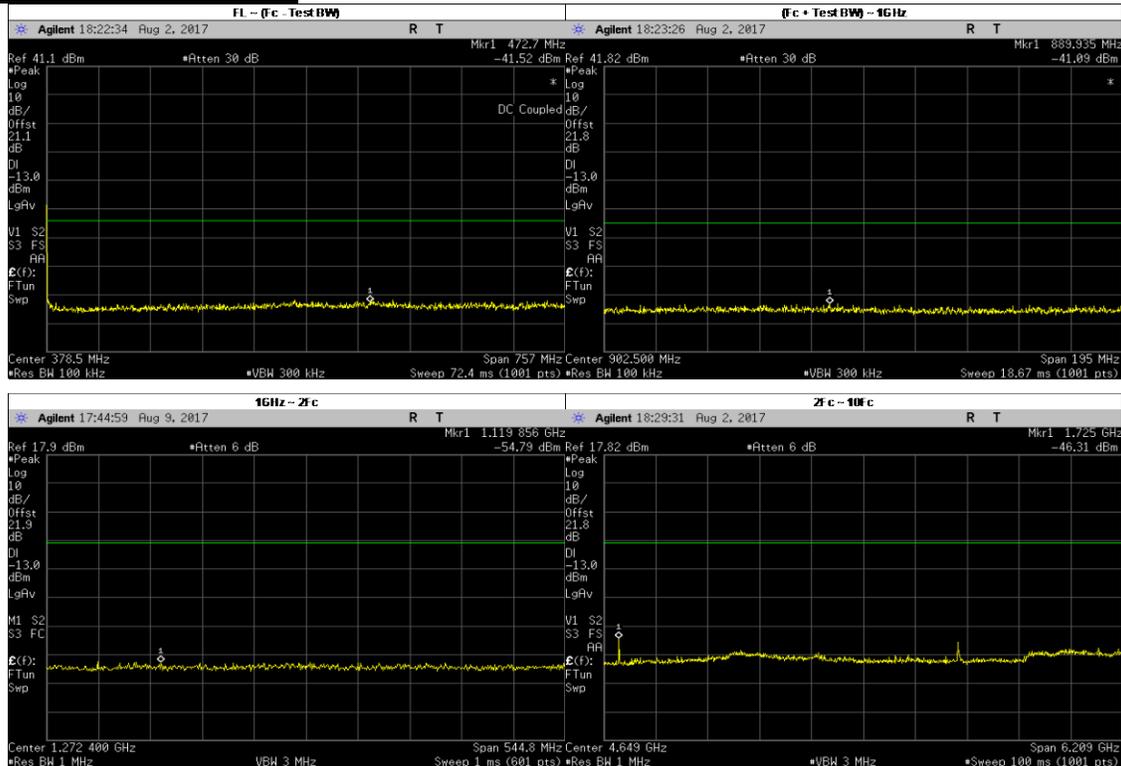


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	472.6557	-40.2900	-13	PASS
(Fc + Test BW) ~ 1GHz	889.9351	-41.0900	-13	PASS
1GHz ~ 2Fc	1119.8560	-54.7900	-13	PASS
2Fc ~ 10Fc	1724.6590	-46.3100	-13	PASS
	5775.1510	-47.5900	-13	PASS
	1549.7750	-54.8170	-13	PASS
	2324.6620	-54.0719	-13	PASS
	3099.5500	-51.8298	-13	PASS
	3874.4370	-53.3105	-13	PASS
	4649.3250	-54.7500	-13	PASS
	5424.2120	-54.3409	-13	PASS
	6199.1000	-54.3256	-13	PASS
6973.9880	-51.7177	-13	PASS	
7748.8750	-51.0100	-13	PASS	

**Phase II: 799.0875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

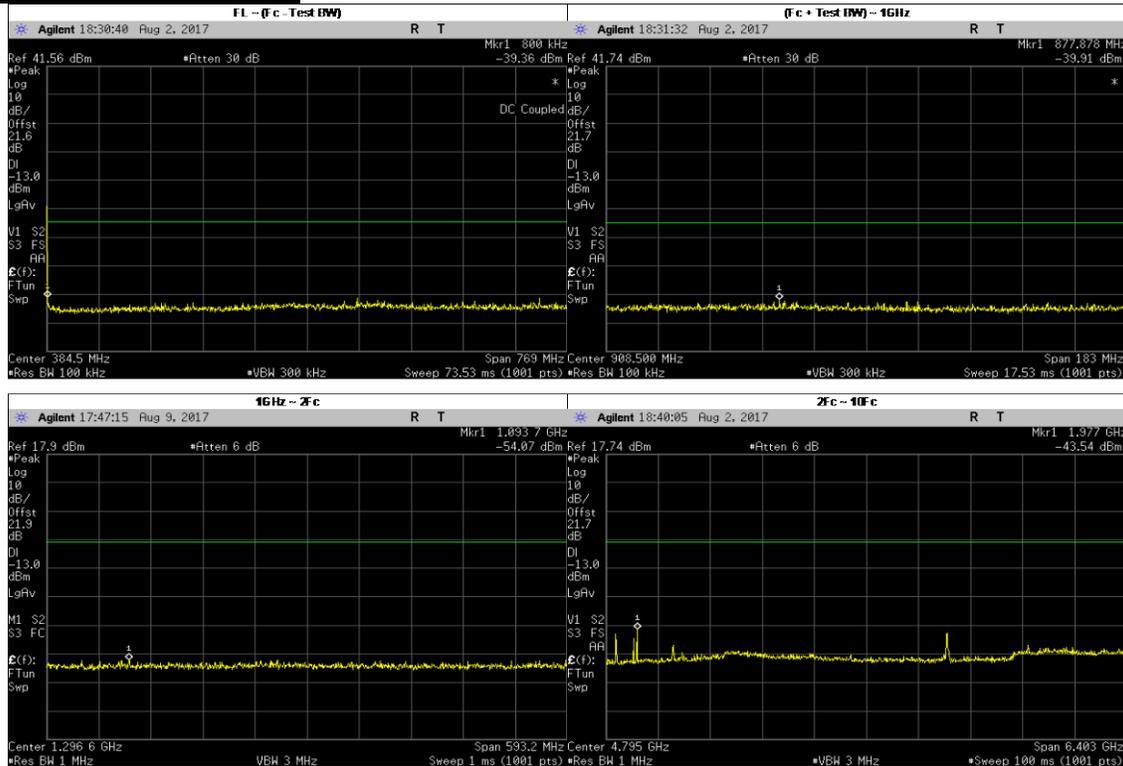

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	457.8698	-39.7300	-13	PASS
(Fc + Test BW) ~ 1GHz	877.8781	-39.9100	-13	PASS
1GHz ~ 2Fc	1093.7000	-54.0700	-13	PASS
2Fc ~ 10Fc	1976.9530	-43.5400	-13	PASS
	1714.7050	-45.0900	-13	PASS
	1932.1790	-46.8000	-13	PASS
	5782.7540	-45.0300	-13	PASS
	1598.1750	-55.5826	-13	PASS
	2397.2620	-54.2387	-13	PASS
	3196.3500	-51.9407	-13	PASS
	3995.4370	-53.5500	-13	PASS
	4794.5250	-54.2810	-13	PASS
	5593.6130	-54.4962	-13	PASS
	6392.7000	-54.2143	-13	PASS
	7191.7880	-51.4248	-13	PASS
7990.8750	-52.6700	-13	PASS	

**Phase II: 804.9125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90 and RSS 119**

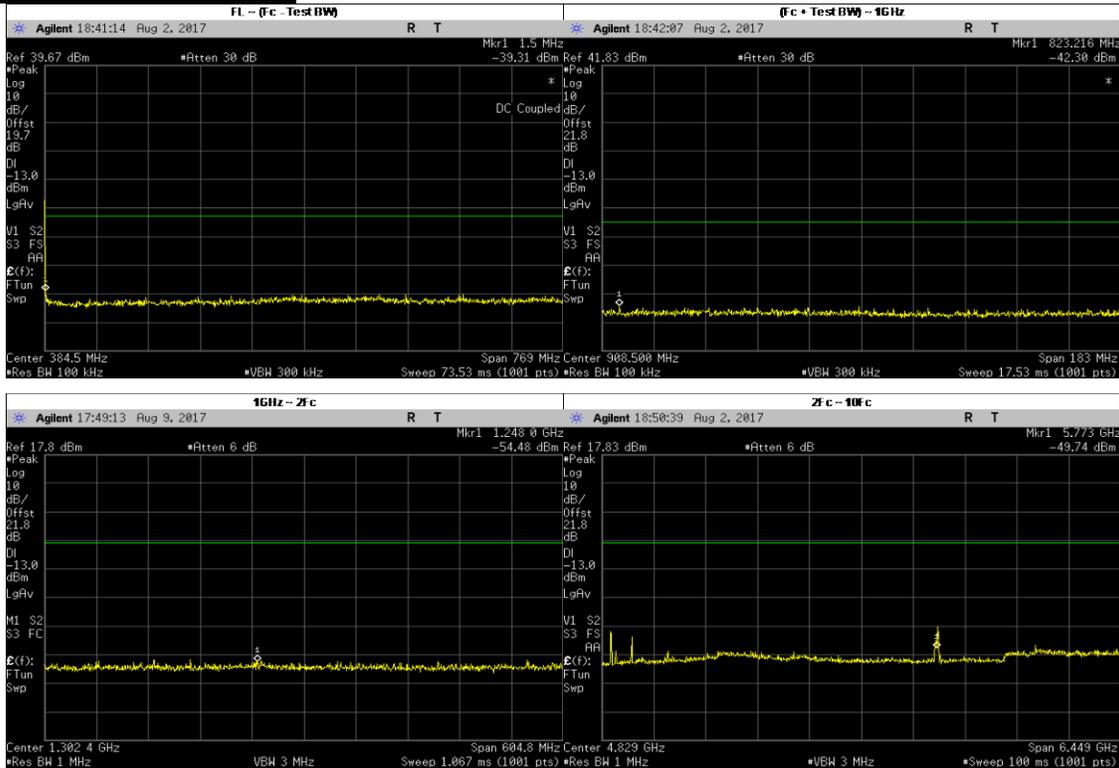

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (MHz)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	496.2809	-40.3600	-13	PASS
(Fc + Test BW) ~ 1GHz	823.2158	-42.3000	-13	PASS
1GHz ~ 2Fc	1248.0000	-54.4800	-13	PASS
2Fc ~ 10Fc	5773.3540	-42.1500	-13	PASS
	1714.3540	-44.1500	-13	PASS
	1978.5110	-45.7800	-13	PASS
	1609.8250	-55.4837	-13	PASS
	2414.7380	-52.8028	-13	PASS
	3219.6500	-51.7217	-13	PASS
	4024.5620	-53.1945	-13	PASS
	4829.4750	-54.2715	-13	PASS
	5634.3870	-54.5628	-13	PASS
	6439.3000	-54.3147	-13	PASS
	7244.2120	-51.7816	-13	PASS
	804.9125	-52.4900	-13	PASS
7990.8750	-52.6700	-13	PASS	


6.9.4. Test Limit

Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.10. Radiated Spurious Emission

6.10.1. Test Setup

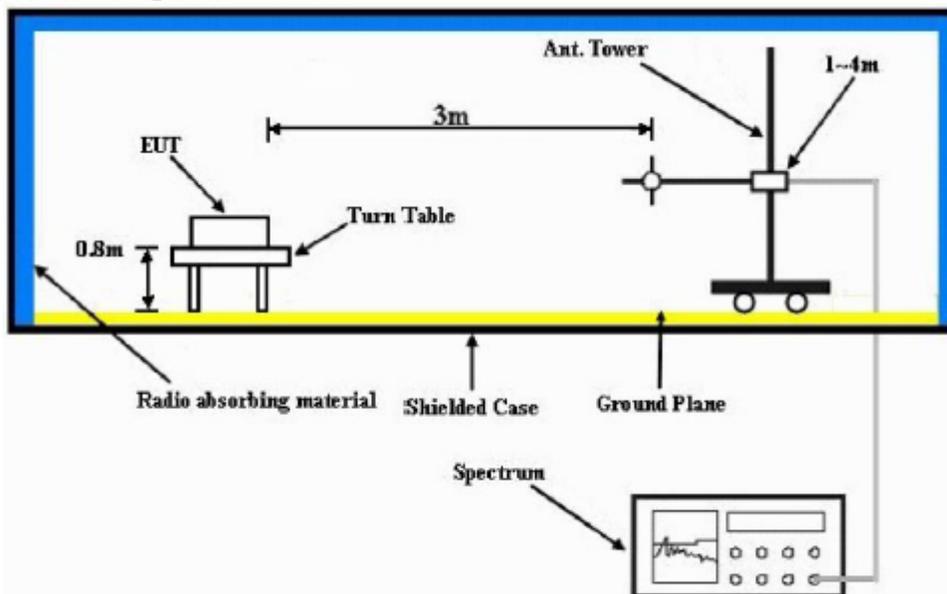

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1 MHz, VBW = 3 MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.10.2. Test Result (Analog)

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX Analog

764.012500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-60.8284 **	-61.3335 **
2292.0375	-13.0000	-56.1343 **	-55.7655 **
3056.0500	-13.0000	-53.0107 **	-52.9284 **
3820.0625	-13.0000	-50.3353 **	-51.4604 **
4584.0750	-13.0000	-50.2277 **	-49.6659 **
5348.0875	-13.0000	-47.5772 **	-47.4127 **
6112.1000	-13.0000	-44.3690 **	-44.2524 **
6876.1125	-13.0000	-42.1123 **	-42.6680 **
7640.1250	-13.0000	-43.5319 **	-44.0196 **

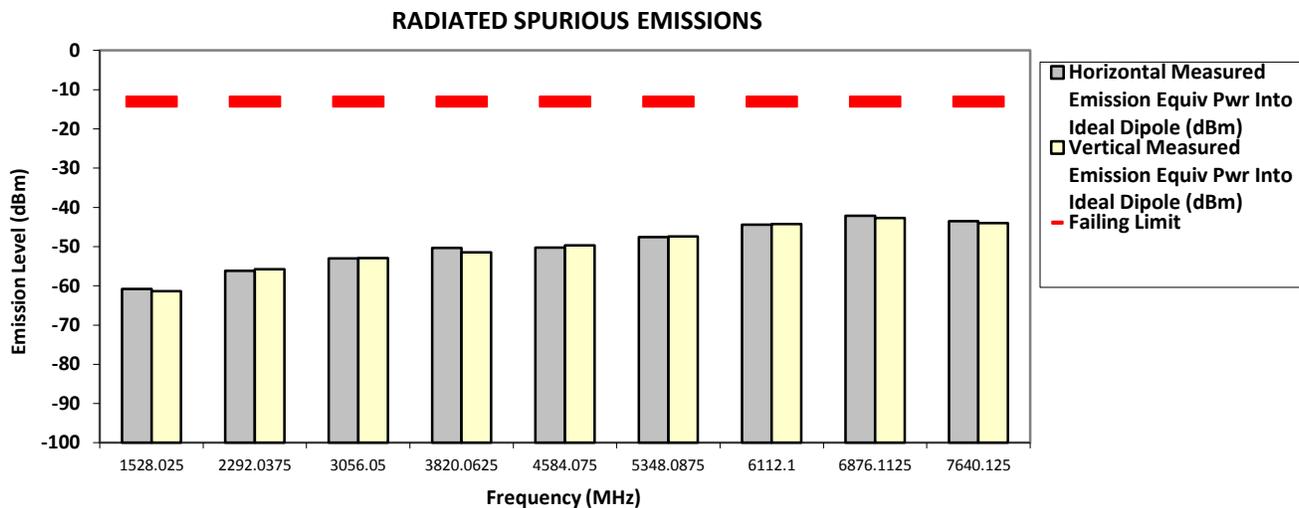

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-62.2353 **	-60.6358 **
2307.2625	-13.0000	-57.1204 **	-54.1778 **
3076.3500	-13.0000	-52.6952 **	-52.6021 **
3845.4375	-13.0000	-50.6119 **	-49.3752 **
4614.5250	-13.0000	-49.5373 **	-48.4906 **
5383.6125	-13.0000	-47.6203 **	-46.2566 **
6152.7000	-13.0000	-45.2633 **	-44.7544 **
6921.7875	-13.0000	-42.4705 **	-42.8066 **
7690.8750	-13.0000	-44.4757 **	-43.9393 **

RADIATED SPURIOUS EMISSIONS

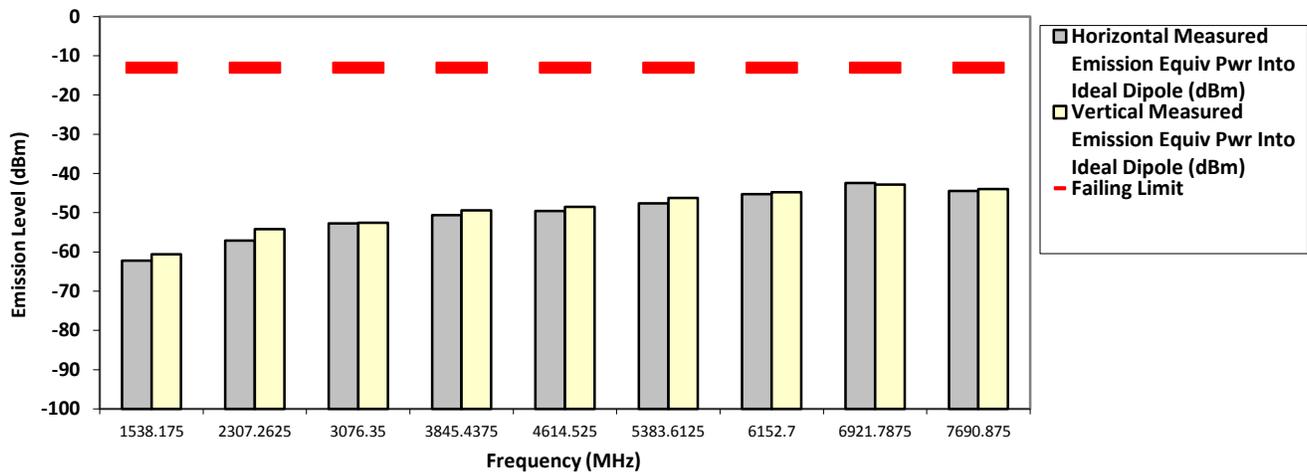

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX Analog

774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-60.9553 **	-60.2173 **
2324.6625	-13.0000	-56.3393 **	-55.5442 **
3099.5500	-13.0000	-53.2980 **	-52.5717 **
3874.4375	-13.0000	-50.2199 **	-49.2553 **
4649.3250	-13.0000	-49.8030 **	-48.1704 **
5424.2125	-13.0000	-47.0361 **	-47.0958 **
6199.1000	-13.0000	-45.7207 **	-45.0084 **
6973.9875	-13.0000	-42.3299 **	-42.5755 **
7748.8750	-13.0000	-45.4849 **	-44.8727 **

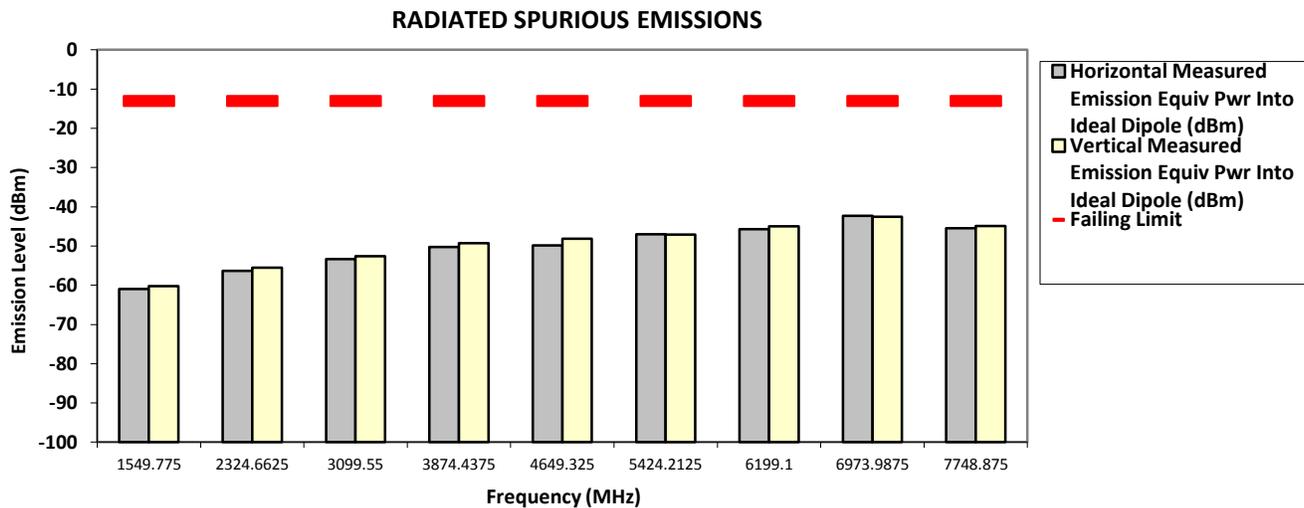

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.3512 **	-61.0475 **
2397.2625	-13.0000	-56.4746 **	-56.9916 **
3196.3500	-13.0000	-52.8946 **	-52.4494 **
3995.4375	-13.0000	-49.1796 **	-48.3698 **
4794.5250	-13.0000	-48.5788 **	-48.1330 **
5593.6125	-13.0000	-47.0495 **	-46.3890 **
6392.7000	-13.0000	-44.6482 **	-45.8750 **
7191.7875	-13.0000	-45.6230 **	-45.1054 **
7990.8750	-13.0000	-44.4855 **	-44.1641 **

RADIATED SPURIOUS EMISSIONS

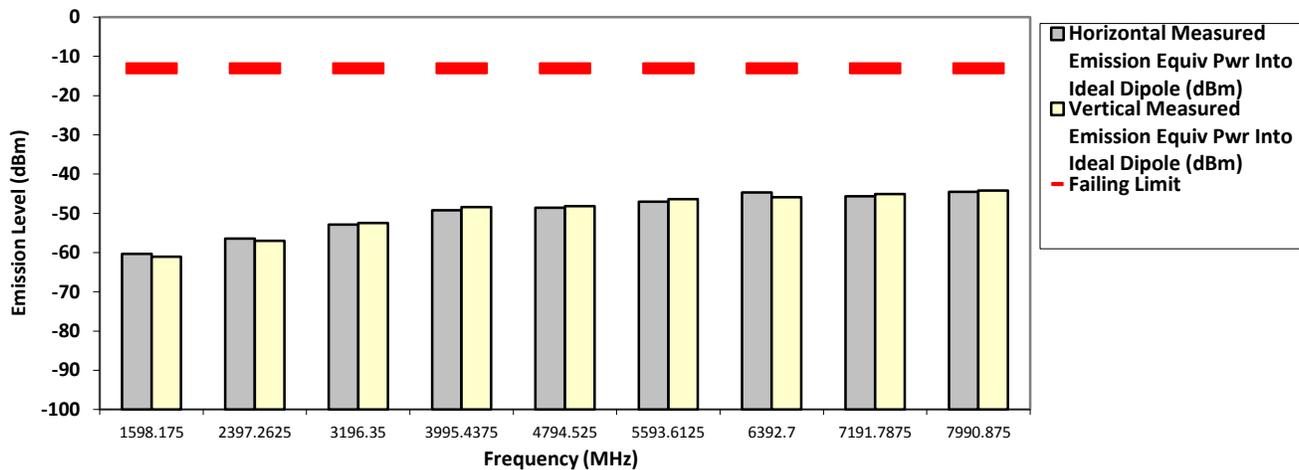

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-60.3735 **	-60.6182 **
2414.7375	-13.0000	-56.6832 **	-56.3924 **
3219.6500	-13.0000	-53.1886 **	-52.9411 **
4024.5625	-13.0000	-48.4888 **	-46.3700 **
4829.4750	-13.0000	-46.7430 **	-48.9336 **
5634.3875	-13.0000	-47.8199 **	-47.4231 **
6439.3000	-13.0000	-44.4070 **	-45.3456 **
6988.3000	-13.0000	-37.7900 *	-40.3700 *
7244.2125	-13.0000	-43.6487 **	-45.1789 **
8049.1250	-13.0000	-44.4448 **	-43.9627 **

RADIATED SPURIOUS EMISSIONS

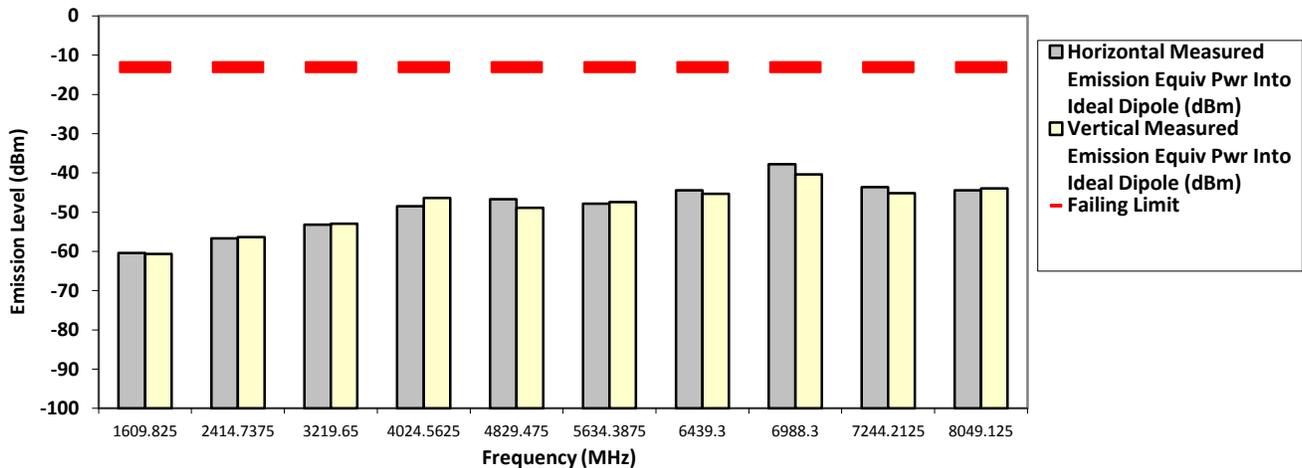

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1538.1750	-20.0000	-62.2353 **	-60.6358 **
2307.2625	-20.0000	-57.1204 **	-54.1778 **
3076.3500	-20.0000	-52.6952 **	-52.6021 **
3845.4375	-20.0000	-50.6119 **	-49.3752 **
4614.5250	-20.0000	-49.5373 **	-48.4906 **
5383.6125	-20.0000	-47.6203 **	-46.2566 **
6152.7000	-20.0000	-45.2633 **	-44.7544 **
6921.7875	-20.0000	-42.4705 **	-42.8066 **
7690.8750	-20.0000	-44.4757 **	-43.9393 **

RADIATED SPURIOUS EMISSIONS

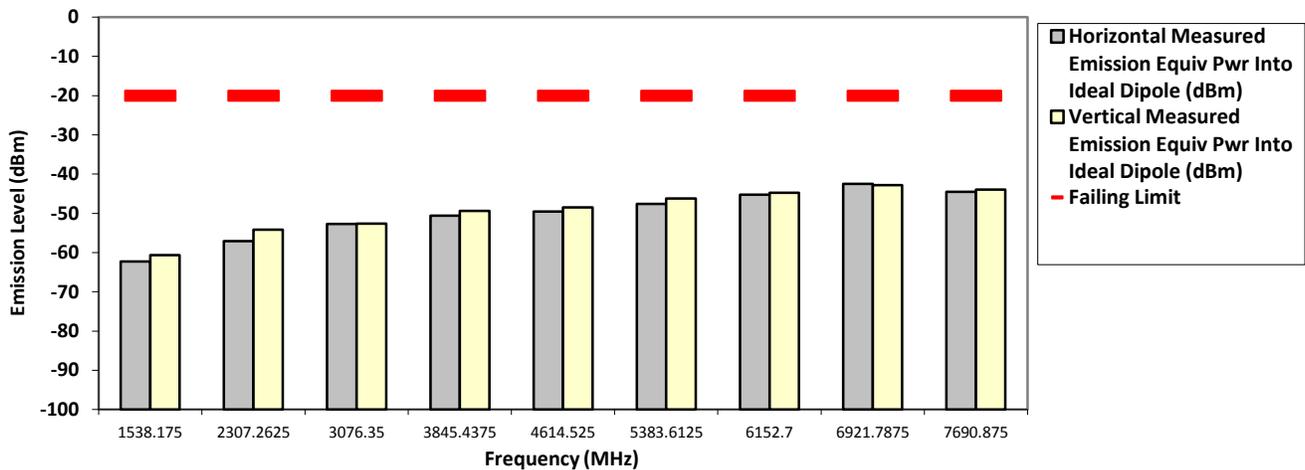

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1549.7750	-20.0000	-60.9553 **	-60.2173 **
2324.6625	-20.0000	-56.3393 **	-55.5442 **
3099.5500	-20.0000	-53.2980 **	-52.5717 **
3874.4375	-20.0000	-50.2199 **	-49.2553 **
4649.3250	-20.0000	-49.8030 **	-48.1704 **
5424.2125	-20.0000	-47.0361 **	-47.0958 **
6199.1000	-20.0000	-45.7207 **	-45.0084 **
6973.9875	-20.0000	-42.3299 **	-42.5755 **
7748.8750	-20.0000	-45.4849 **	-44.8727 **

RADIATED SPURIOUS EMISSIONS

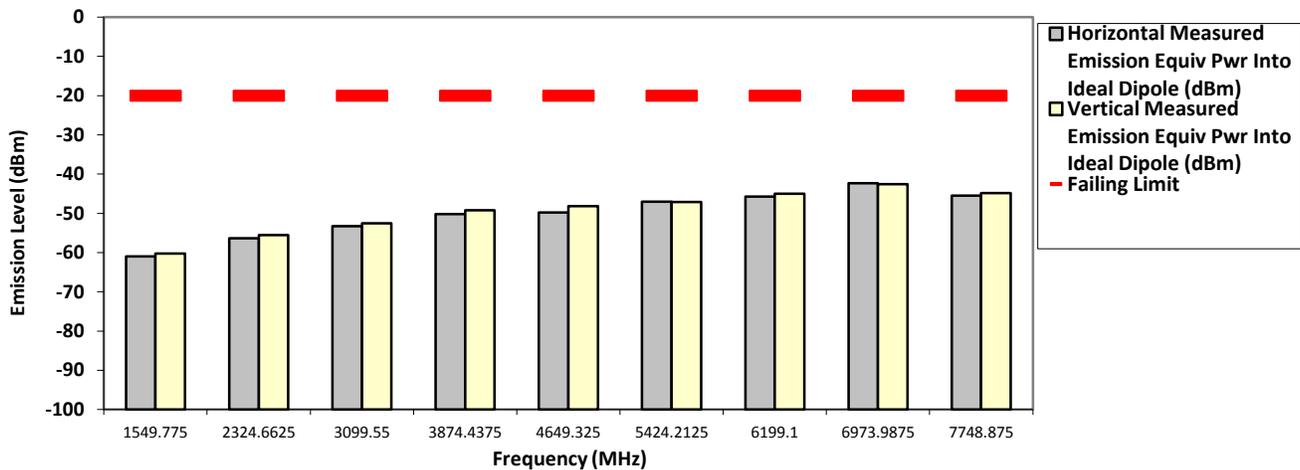

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX Analog

799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1598.1750	-20.0000	-60.3512 **	-61.0475 **
2397.2625	-20.0000	-56.4746 **	-56.9916 **
3196.3500	-20.0000	-52.8946 **	-52.4494 **
3995.4375	-20.0000	-49.1796 **	-48.3698 **
4794.5250	-20.0000	-48.5788 **	-48.1330 **
5593.6125	-20.0000	-47.0495 **	-46.3890 **
6392.7000	-20.0000	-44.6482 **	-45.8750 **
7191.7875	-20.0000	-45.6230 **	-45.1054 **
7990.8750	-20.0000	-44.4855 **	-44.1641 **

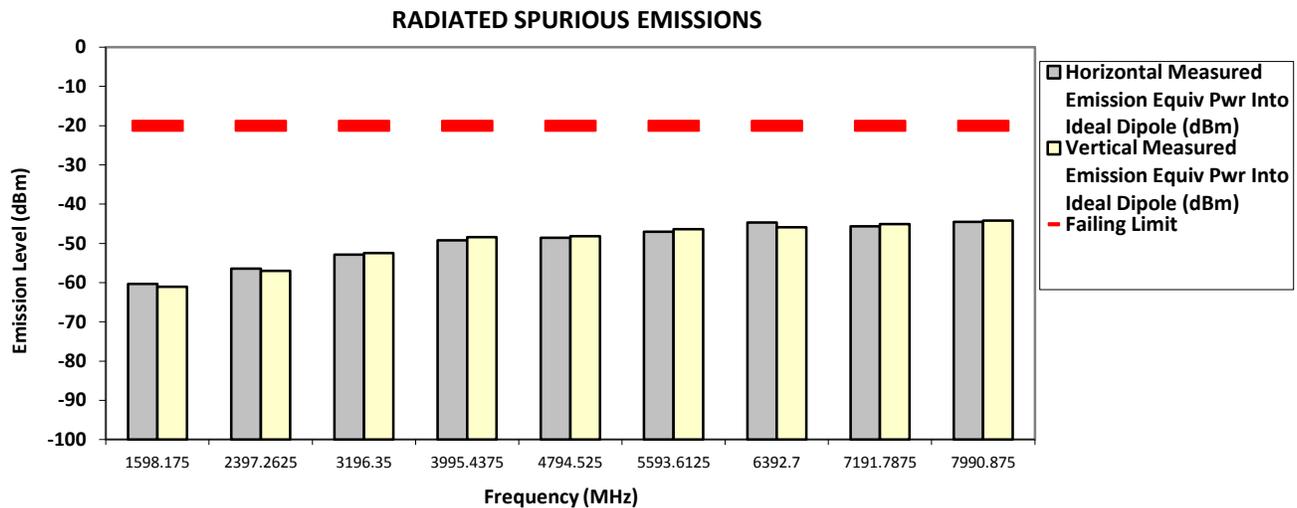

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX Analog


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-20.0000	-60.3735 **	-60.6182 **
2414.7375	-20.0000	-56.6832 **	-56.3924 **
3219.6500	-20.0000	-53.1886 **	-52.9411 **
4024.5625	-20.0000	-48.4888 **	-46.3700 **
4829.4750	-20.0000	-46.7430 **	-48.9336 **
5634.3875	-20.0000	-47.8199 **	-47.4231 **
6439.3000	-20.0000	-44.4070 **	-45.3456 **
6988.3000	-20.0000	-37.8900 *	-40.2800 *
7244.2125	-20.0000	-43.6487 **	-45.1789 **
8049.1250	-20.0000	-44.4448 **	-43.9627 **

RADIATED SPURIOUS EMISSIONS

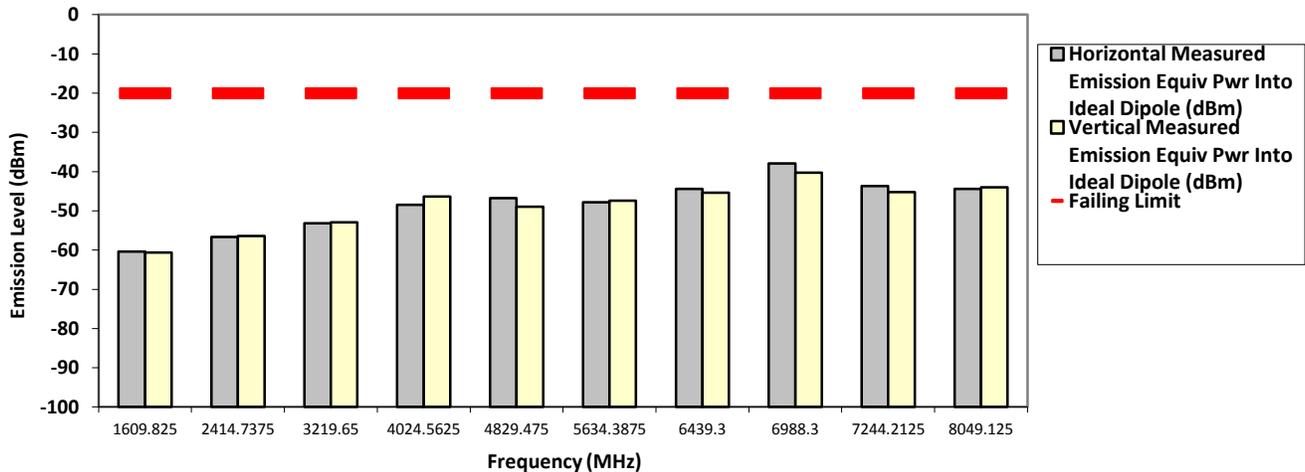

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil Fri, Aug 25, 2017
 Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.3 Hum(%RH): 71.4

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.10.3. Test Result (Digital)

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital C4FM

764.012500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-61.6638 **	-61.9402 **
2292.0375	-13.0000	-56.9635 **	-55.9090 **
3056.0500	-13.0000	-52.9422 **	-51.3720 **
3820.0625	-13.0000	-50.4613 **	-50.3131 **
4584.0750	-13.0000	-50.9331 **	-49.9766 **
5348.0875	-13.0000	-47.6418 **	-47.1148 **
6112.1000	-13.0000	-44.9674 **	-44.9205 **
6876.1125	-13.0000	-42.8039 **	-42.5489 **
7640.1250	-13.0000	-44.3288 **	-44.4930 **

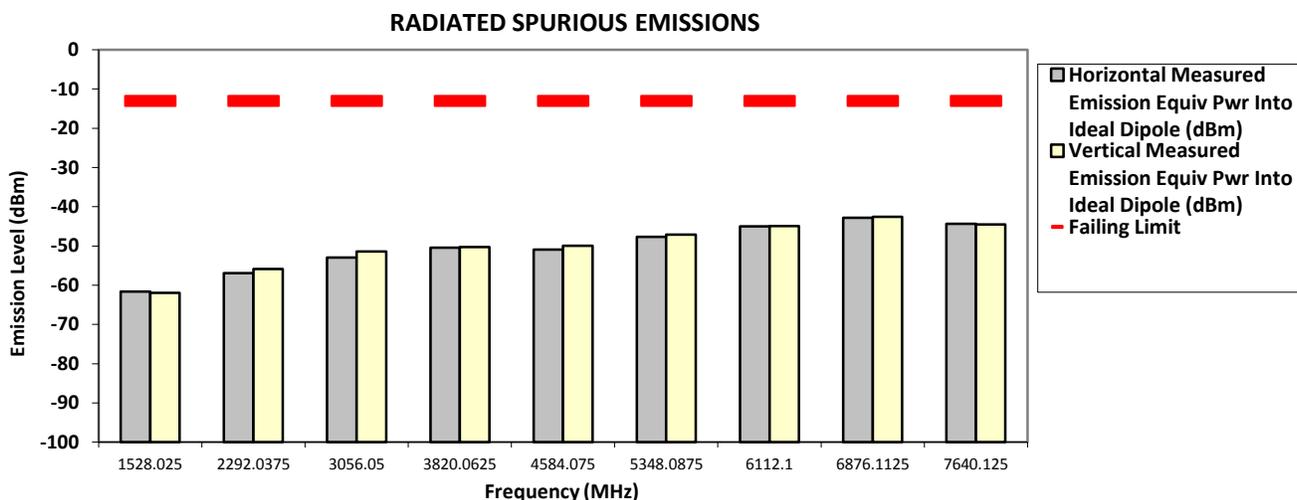

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital C4FM

769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.1193 **	-61.1492 **
2307.2625	-13.0000	-57.4832 **	-55.9410 **
3076.3500	-13.0000	-53.1265 **	-52.4831 **
3845.4375	-13.0000	-51.6684 **	-49.4928 **
4614.5250	-13.0000	-50.0570 **	-49.4880 **
5383.6125	-13.0000	-47.0557 **	-46.6683 **
6152.7000	-13.0000	-44.5843 **	-45.4879 **
6921.7875	-13.0000	-42.7084 **	-42.3676 **
7690.8750	-13.0000	-43.9613 **	-44.2404 **

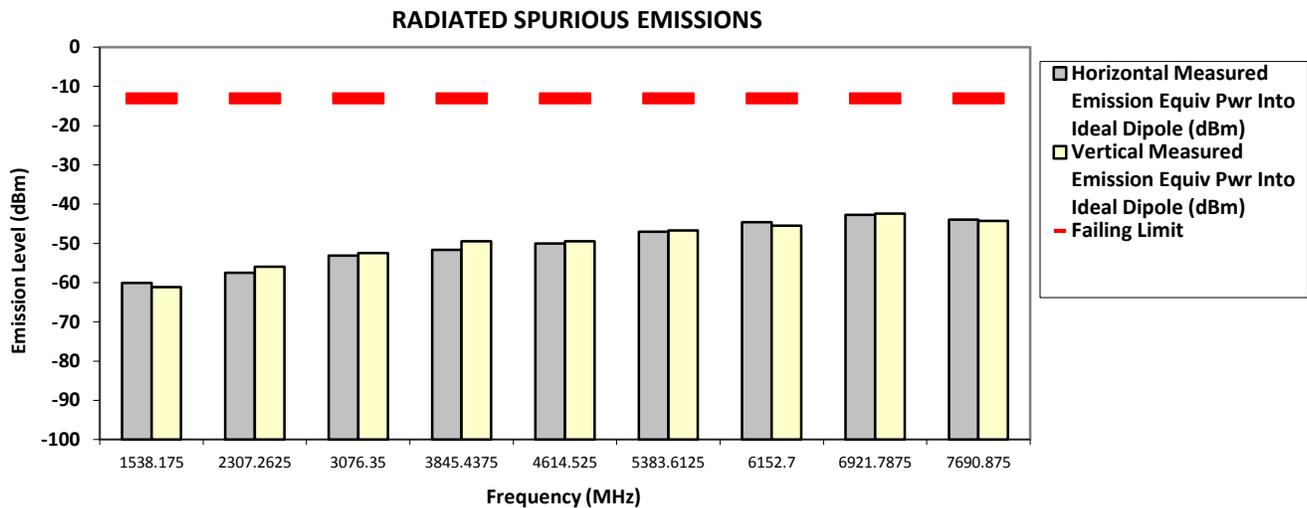

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-60.7718 **	-61.3960 **
2324.6625	-13.0000	-57.0669 **	-55.9546 **
3099.5500	-13.0000	-52.9187 **	-52.7950 **
3874.4375	-13.0000	-50.9035 **	-50.6220 **
4649.3250	-13.0000	-49.4927 **	-49.1554 **
5424.2125	-13.0000	-46.1869 **	-45.8212 **
6199.1000	-13.0000	-45.2857 **	-44.1934 **
6973.9875	-13.0000	-41.9546 **	-43.0756 **
7748.8750	-13.0000	-43.3771 **	-45.1268 **

RADIATED SPURIOUS EMISSIONS

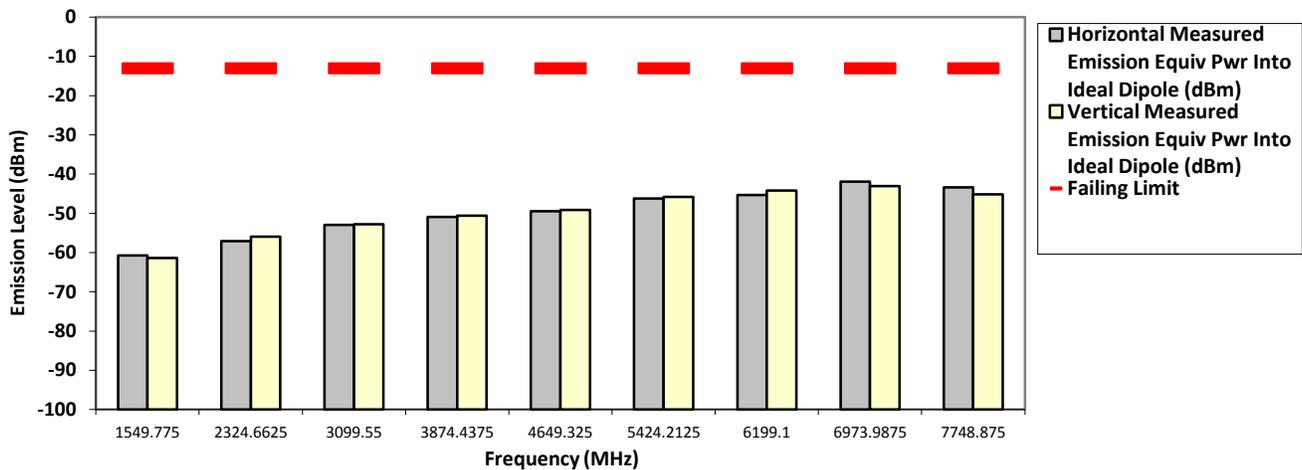

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.3140 **	-61.2141 **
2397.2625	-13.0000	-57.4394 **	-55.7303 **
3196.3500	-13.0000	-51.7767 **	-52.8150 **
3995.4375	-13.0000	-42.9500 *	-41.9800 *
4794.5250	-13.0000	-47.4792 **	-47.9270 **
5593.6125	-13.0000	-47.4748 **	-46.5329 **
6392.7000	-13.0000	-44.8426 **	-45.2547 **
7191.7875	-13.0000	-45.3144 **	-45.2131 **
7990.8750	-13.0000	-44.2205 **	-44.8320 **

RADIATED SPURIOUS EMISSIONS

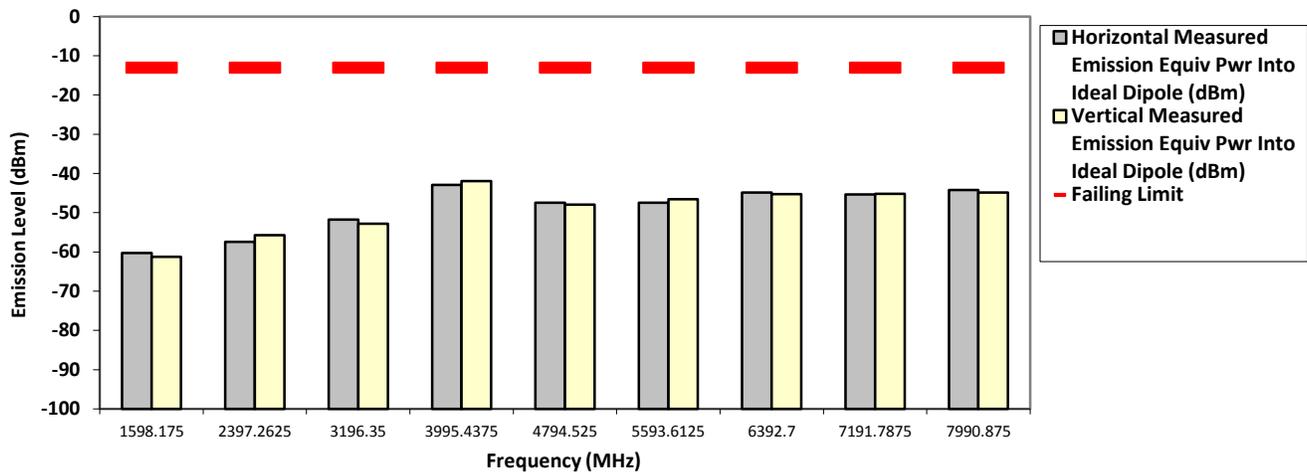

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK

Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-59.2562 **	-60.5491 **
2414.7375	-13.0000	-57.1484 **	-55.8216 **
3219.6500	-13.0000	-52.3985 **	-53.6436 **
4024.5625	-13.0000	-47.8849 **	-46.8333 **
4829.4750	-13.0000	-48.2231 **	-49.0727 **
5634.3875	-13.0000	-48.5695 **	-47.6237 **
6439.3000	-13.0000	-44.6973 **	-44.8120 **
6991.1000	-13.0000	-43.8600 *	-44.9500 *
7244.2125	-13.0000	-44.2578 **	-43.9596 **
8049.1250	-13.0000	-44.6025 **	-42.5468 **

RADIATED SPURIOUS EMISSIONS

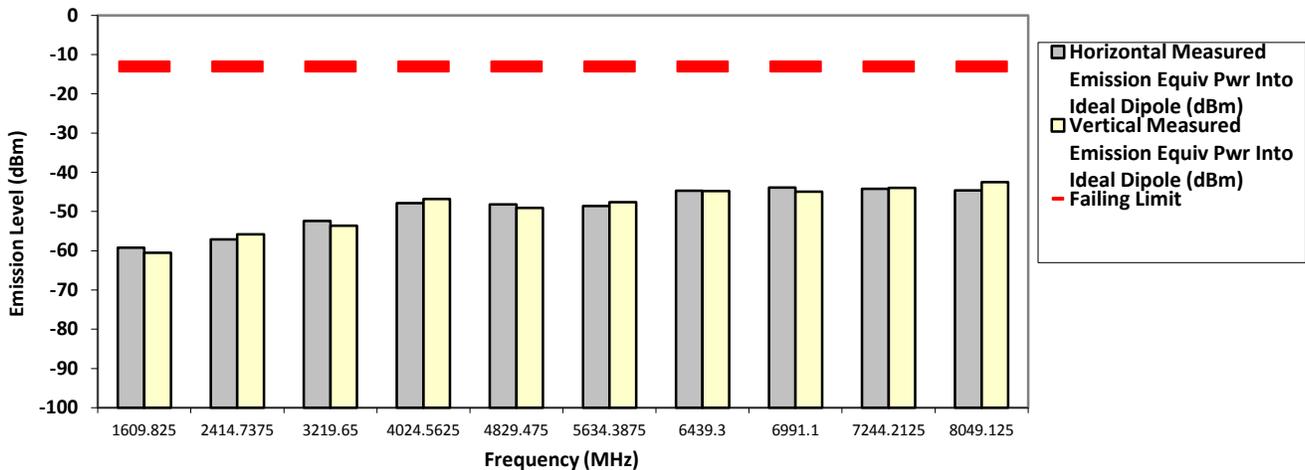

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


764.012500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1528.0250	-13.0000	-60.7050 **	-61.2601 **
2292.0375	-13.0000	-57.2492 **	-56.7108 **
3056.0500	-13.0000	-52.4149 **	-52.4767 **
3820.0625	-13.0000	-50.3599 **	-50.9899 **
4584.0750	-13.0000	-50.8299 **	-50.5048 **
5348.0875	-13.0000	-48.5979 **	-46.3295 **
6112.1000	-13.0000	-44.2721 **	-45.0092 **
6876.1125	-13.0000	-42.7407 **	-41.8588 **
7640.1250	-13.0000	-43.8650 **	-43.9342 **

RADIATED SPURIOUS EMISSIONS

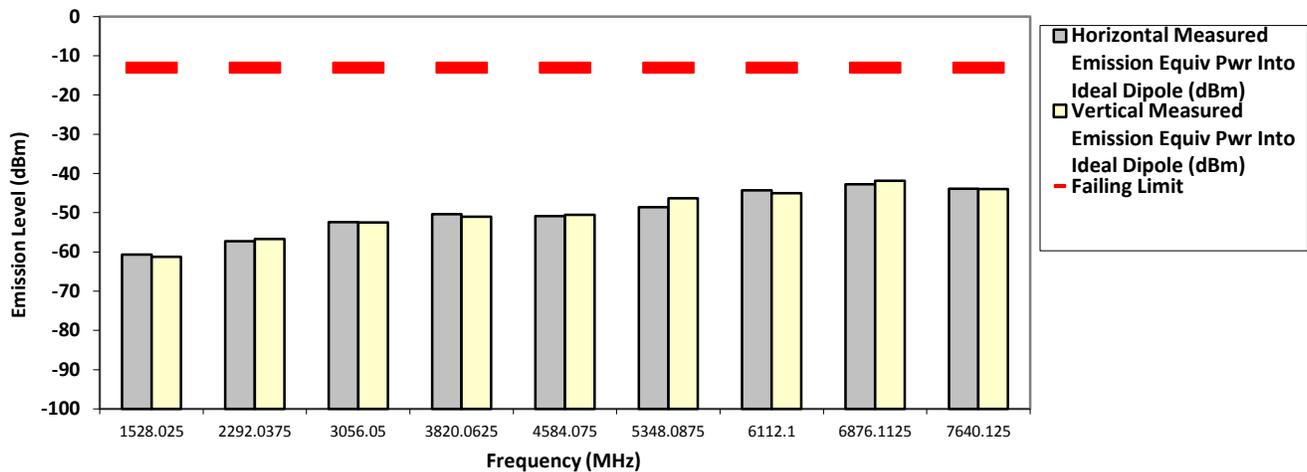

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital Phase II

769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1538.1750	-13.0000	-60.9629 **	-61.6334 **
2307.2625	-13.0000	-57.3610 **	-56.1955 **
3076.3500	-13.0000	-53.6668 **	-54.0126 **
3845.4375	-13.0000	-51.9537 **	-52.1799 **
4614.5250	-13.0000	-49.7788 **	-51.1968 **
5383.6125	-13.0000	-48.5809 **	-49.0613 **
6152.7000	-13.0000	-45.5386 **	-44.4479 **
6921.7875	-13.0000	-42.8188 **	-42.5990 **
7690.8750	-13.0000	-44.6460 **	-45.0270 **

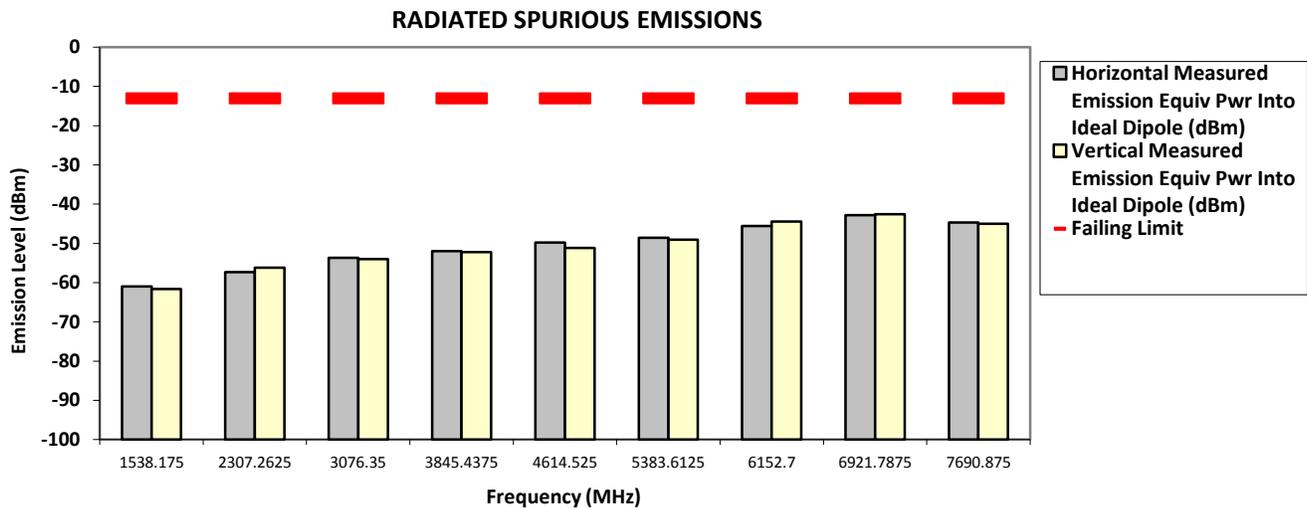

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital Phase II

774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-13.0000	-61.3986 **	-60.7680 **
2324.6625	-13.0000	-57.5251 **	-56.6295 **
3099.5500	-13.0000	-54.3952 **	-53.3410 **
3874.4375	-13.0000	-51.9777 **	-52.6061 **
4649.3250	-13.0000	-48.9649 **	-50.2036 **
5424.2125	-13.0000	-47.9169 **	-48.2143 **
6199.1000	-13.0000	-44.6541 **	-45.0175 **
6973.9875	-13.0000	-42.1790 **	-42.7688 **
7748.8750	-13.0000	-42.2989 **	-44.1452 **

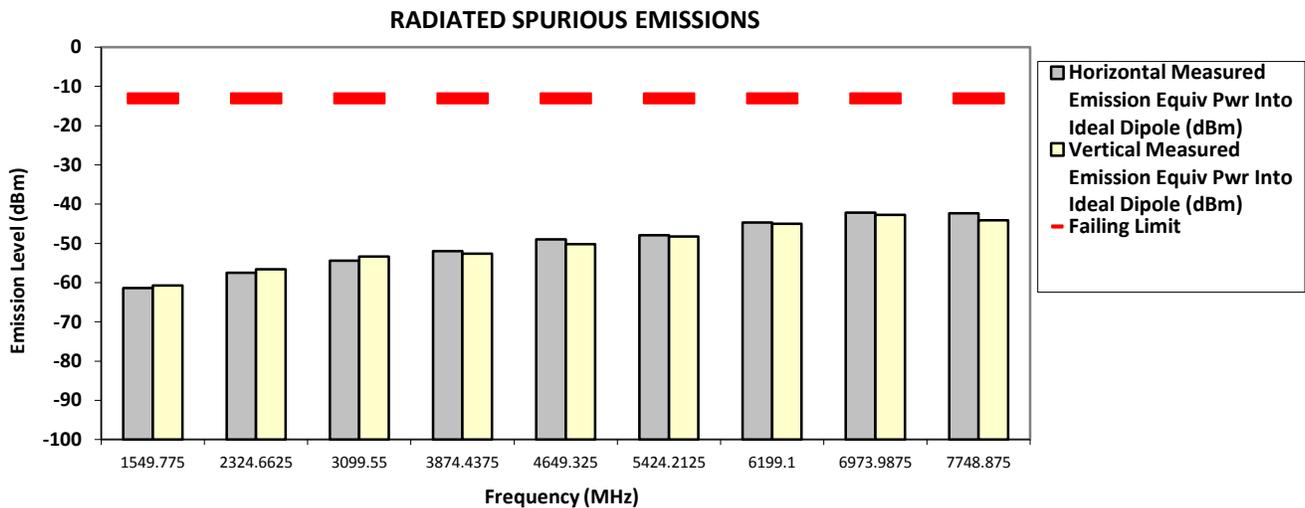

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-61.5806 **	-59.4753 **
2397.2625	-13.0000	-57.1468 **	-55.8634 **
3196.3500	-13.0000	-52.4553 **	-53.2538 **
3995.4375	-13.0000	-43.1400 *	-42.8100 *
4794.5250	-13.0000	-48.6145 **	-48.1544 **
5593.6125	-13.0000	-47.7575 **	-47.4850 **
6392.7000	-13.0000	-45.2456 **	-43.9033 **
7191.7875	-13.0000	-44.2709 **	-46.2815 **
7990.8750	-13.0000	-45.1153 **	-44.8185 **

RADIATED SPURIOUS EMISSIONS

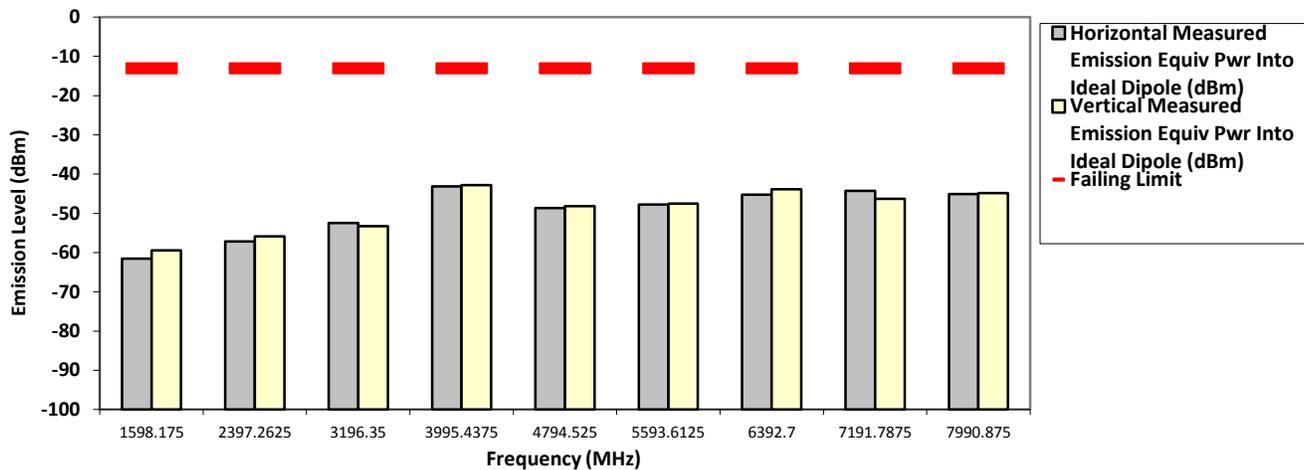

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-13.0000	-60.9688 **	-60.9907 **
2414.7375	-13.0000	-56.6010 **	-54.9655 **
3219.6500	-13.0000	-51.7843 **	-50.4343 **
4024.5625	-13.0000	-45.0845 **	-45.0226 **
4829.4750	-13.0000	-47.2475 **	-48.3785 **
5634.3875	-13.0000	-48.3108 **	-47.3255 **
6439.3000	-13.0000	-44.9071 **	-44.2609 **
6911.5000	-13.0000	-37.7600 *	-40.6500 *
7244.2125	-13.0000	-44.5793 **	-44.0516 **
8049.1250	-13.0000	-44.3664 **	-44.1513 **

RADIATED SPURIOUS EMISSIONS

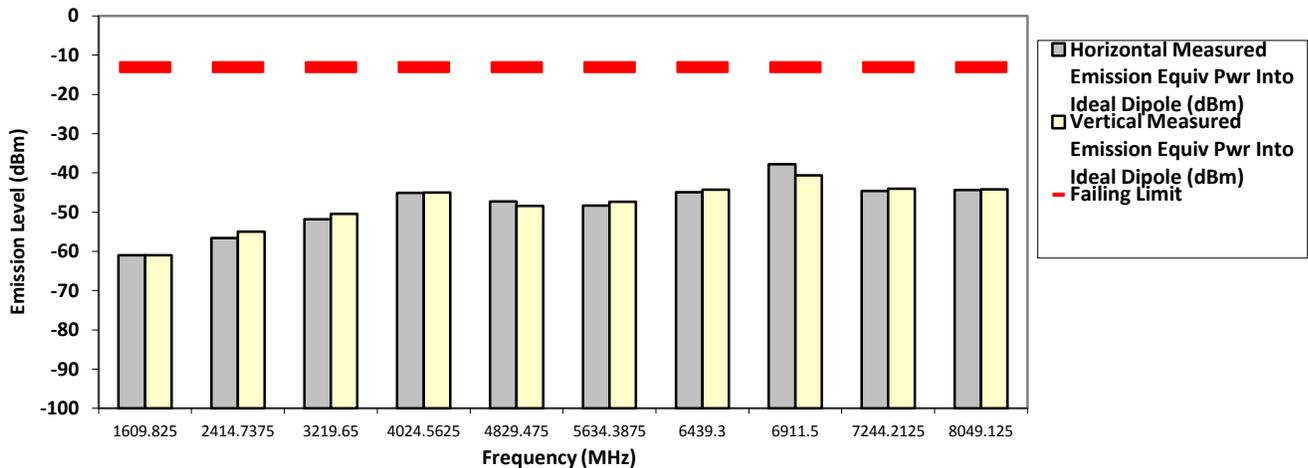

The data presented here was taken using the substitution method as found in the TIA/EIA-603E document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 18, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital C4FM

769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1538.1750	-20.0000	-60.1193 **	-61.1492 **
2307.2625	-20.0000	-57.4832 **	-55.9410 **
3076.3500	-20.0000	-53.1265 **	-52.4831 **
3845.4375	-20.0000	-51.6684 **	-49.4928 **
4614.5250	-20.0000	-50.0570 **	-49.4880 **
5383.6125	-20.0000	-47.0557 **	-46.6683 **
6152.7000	-20.0000	-44.5843 **	-45.4879 **
6921.7875	-20.0000	-42.7084 **	-42.3676 **
7690.8750	-20.0000	-43.9613 **	-44.2404 **

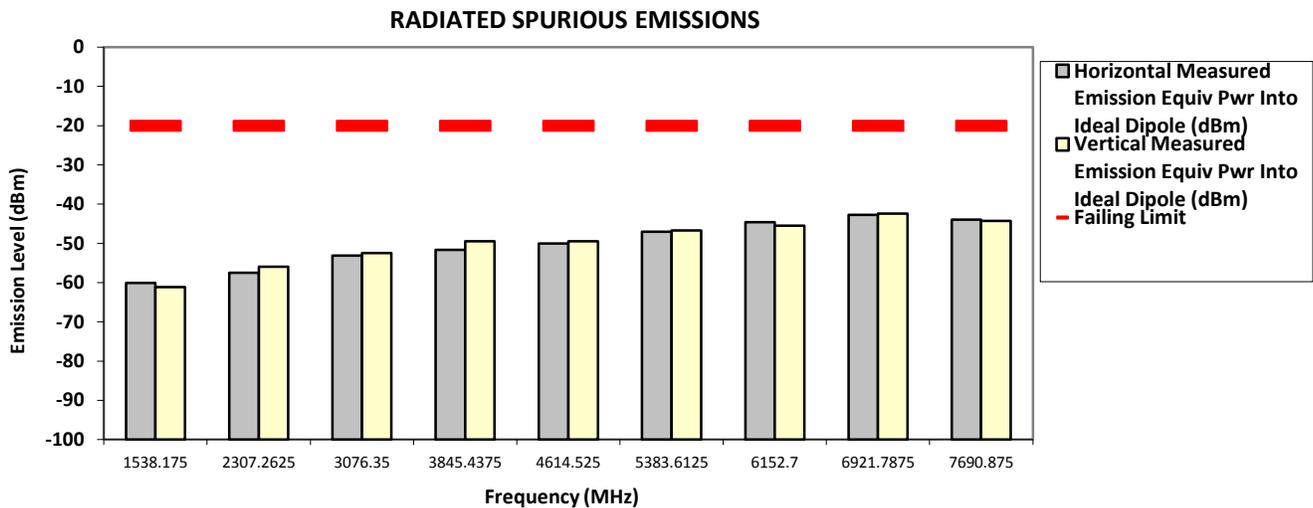

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1549.7750	-20.0000	-60.7718 **	-61.3960 **
2324.6625	-20.0000	-57.0669 **	-55.9546 **
3099.5500	-20.0000	-52.9187 **	-52.7950 **
3874.4375	-20.0000	-50.9035 **	-50.6220 **
4649.3250	-20.0000	-49.4927 **	-49.1554 **
5424.2125	-20.0000	-46.1869 **	-45.8212 **
6199.1000	-20.0000	-45.2857 **	-44.1934 **
6973.9875	-20.0000	-41.9546 **	-43.0756 **
7748.8750	-20.0000	-43.3771 **	-45.1268 **

RADIATED SPURIOUS EMISSIONS

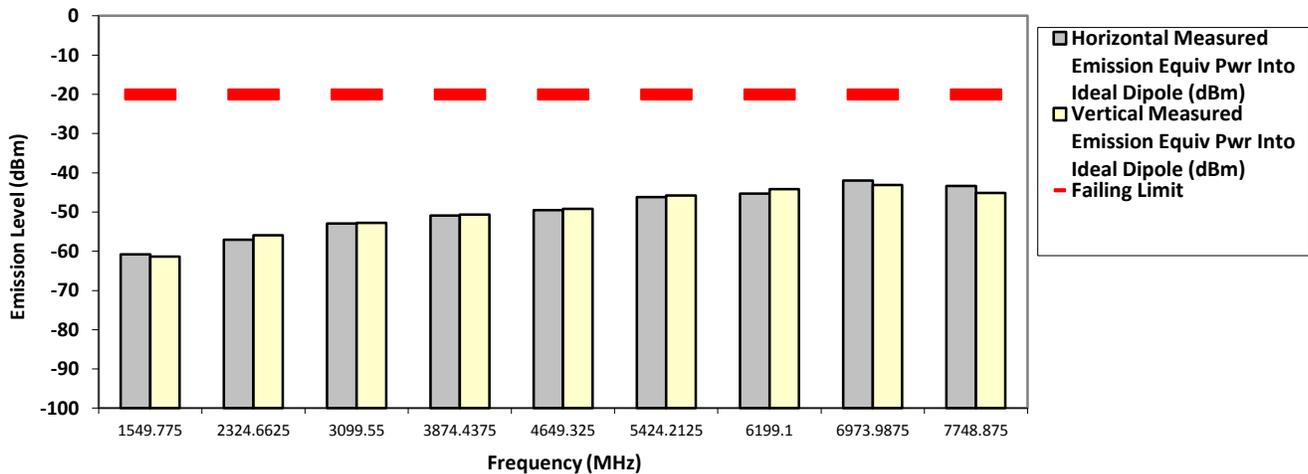

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-20.0000	-60.3140 **	-61.2141 **
2397.2625	-20.0000	-57.4394 **	-55.7303 **
3196.3500	-20.0000	-51.7767 **	-52.8150 **
3995.4375	-20.0000	-42.8300 *	-41.5400 *
4794.5250	-20.0000	-47.4792 **	-47.9270 **
5593.6125	-20.0000	-47.4748 **	-46.5329 **
6392.7000	-20.0000	-44.8426 **	-45.2547 **
7191.7875	-20.0000	-45.3144 **	-45.2131 **
7990.8750	-20.0000	-44.2205 **	-44.8320 **

RADIATED SPURIOUS EMISSIONS

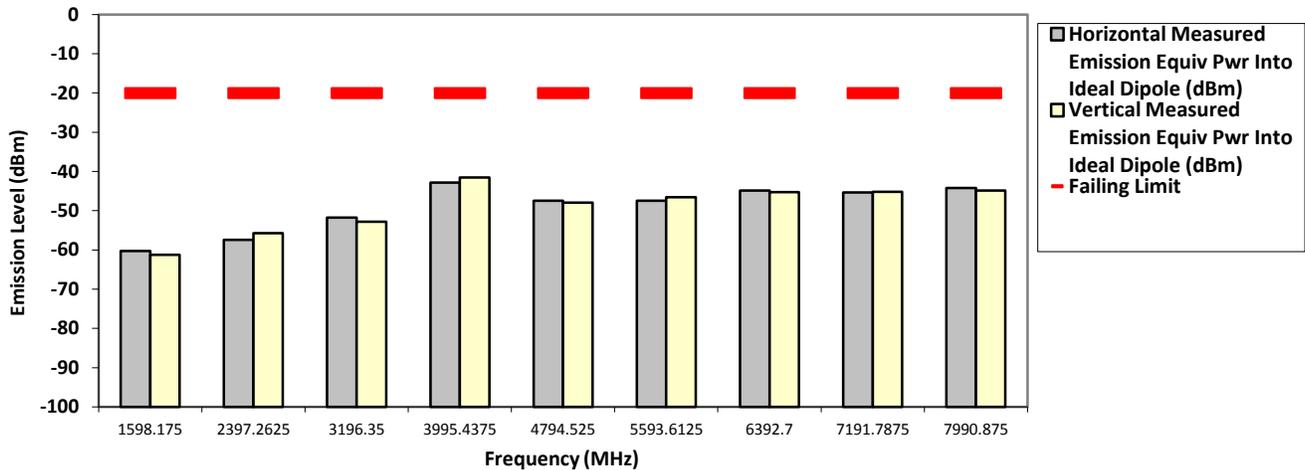

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 25, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.3 Hum(%RH): 71.4

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital C4FM


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-20.0000	-59.2562 **	-60.5491 **
2414.7375	-20.0000	-57.1484 **	-55.8216 **
3219.6500	-20.0000	-52.3985 **	-53.6436 **
4024.5625	-20.0000	-47.8849 **	-46.8333 **
4829.4750	-20.0000	-48.2231 **	-49.0727 **
5634.3875	-20.0000	-48.5695 **	-47.6237 **
6439.3000	-20.0000	-44.6973 **	-44.8120 **
6991.0000	-20.0000	-37.1800 *	-39.7200 *
7244.2125	-20.0000	-44.2578 **	-43.9596 **
8049.1250	-20.0000	-44.6025 **	-42.5468 **

RADIATED SPURIOUS EMISSIONS

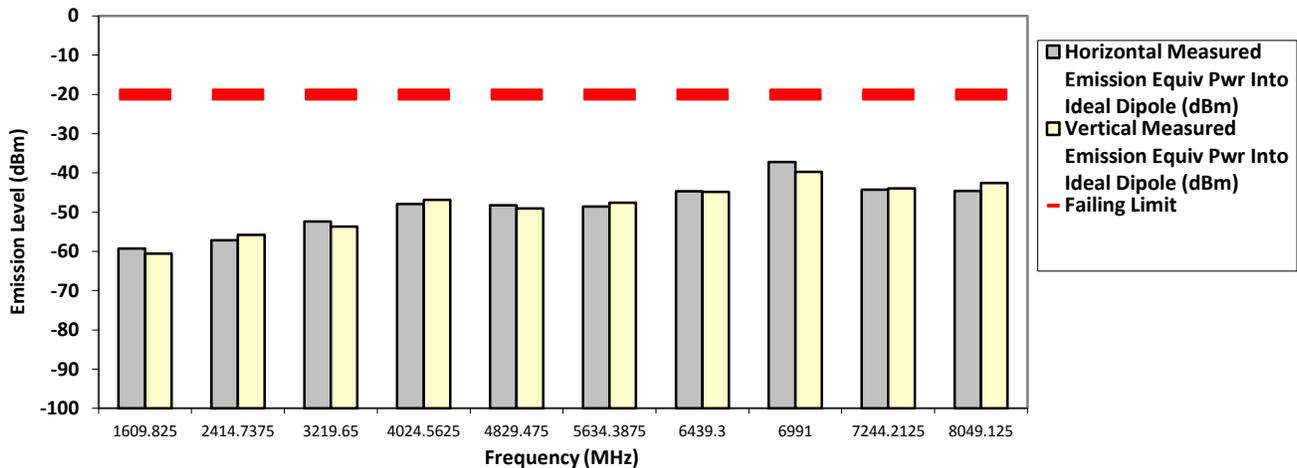

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil
 Industry Canada: 109AK
 Fri, Aug 25, 2017

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.3 Hum(%RH): 71.4

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


769.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1538.1750	-20.0000	-60.9629 **	-61.6334 **
2307.2625	-20.0000	-57.3610 **	-56.1955 **
3076.3500	-20.0000	-53.6668 **	-54.0126 **
3845.4375	-20.0000	-51.9537 **	-52.1799 **
4614.5250	-20.0000	-49.7788 **	-51.1968 **
5383.6125	-20.0000	-48.5809 **	-49.0613 **
6152.7000	-20.0000	-45.5386 **	-44.4479 **
6921.7875	-20.0000	-42.8188 **	-42.5990 **
7690.8750	-20.0000	-44.6460 **	-45.0270 **

RADIATED SPURIOUS EMISSIONS

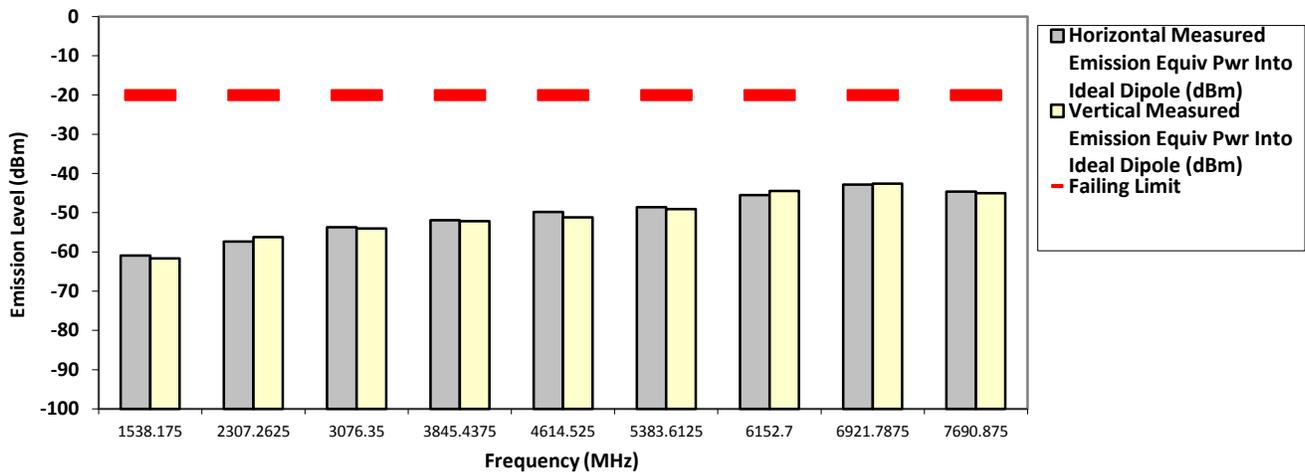

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


774.887500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1549.7750	-20.0000	-61.3986 **	-60.7680 **
2324.6625	-20.0000	-57.5251 **	-56.6295 **
3099.5500	-20.0000	-54.3952 **	-53.3410 **
3874.4375	-20.0000	-51.9777 **	-52.6061 **
4649.3250	-20.0000	-48.9649 **	-50.2036 **
5424.2125	-20.0000	-47.9169 **	-48.2143 **
6199.1000	-20.0000	-44.6541 **	-45.0175 **
6973.9875	-20.0000	-42.1790 **	-42.7688 **
7748.8750	-20.0000	-42.2989 **	-44.1452 **

RADIATED SPURIOUS EMISSIONS

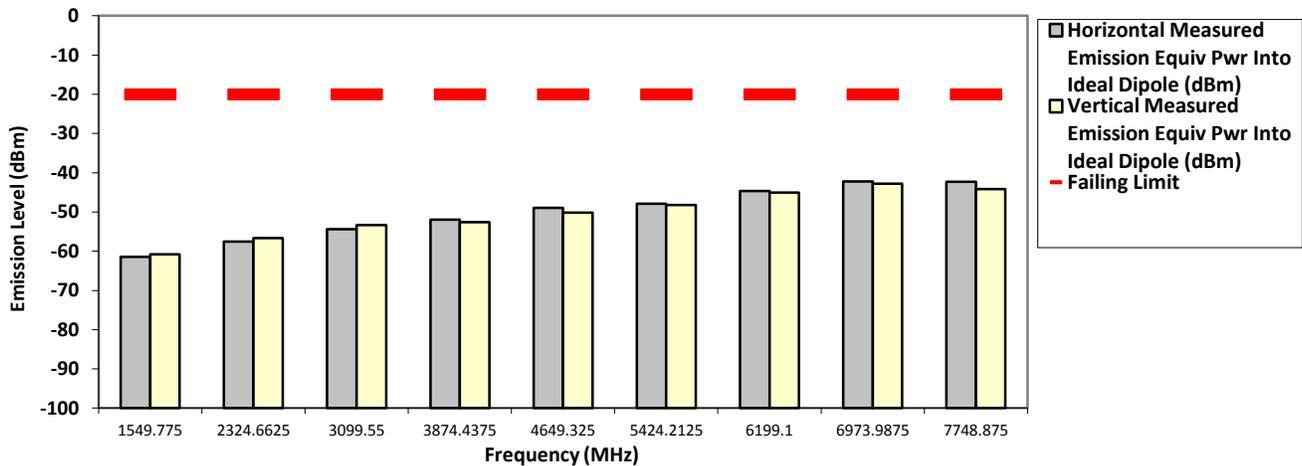

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil

Fri, Aug 18, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.2 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA


Test Mode: TX APCO Digital Phase II

799.087500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1598.1750	-20.0000	-61.5806 **	-59.4753 **
2397.2625	-20.0000	-57.1468 **	-55.8634 **
3196.3500	-20.0000	-52.4553 **	-53.2538 **
3995.4375	-20.0000	-40.2400 *	-41.4700 *
4794.5250	-20.0000	-48.6145 **	-48.1544 **
5593.6125	-20.0000	-47.7575 **	-47.4850 **
6392.7000	-20.0000	-45.2456 **	-43.9033 **
7191.7875	-20.0000	-44.2709 **	-46.2815 **
7990.8750	-20.0000	-45.1153 **	-44.8185 **

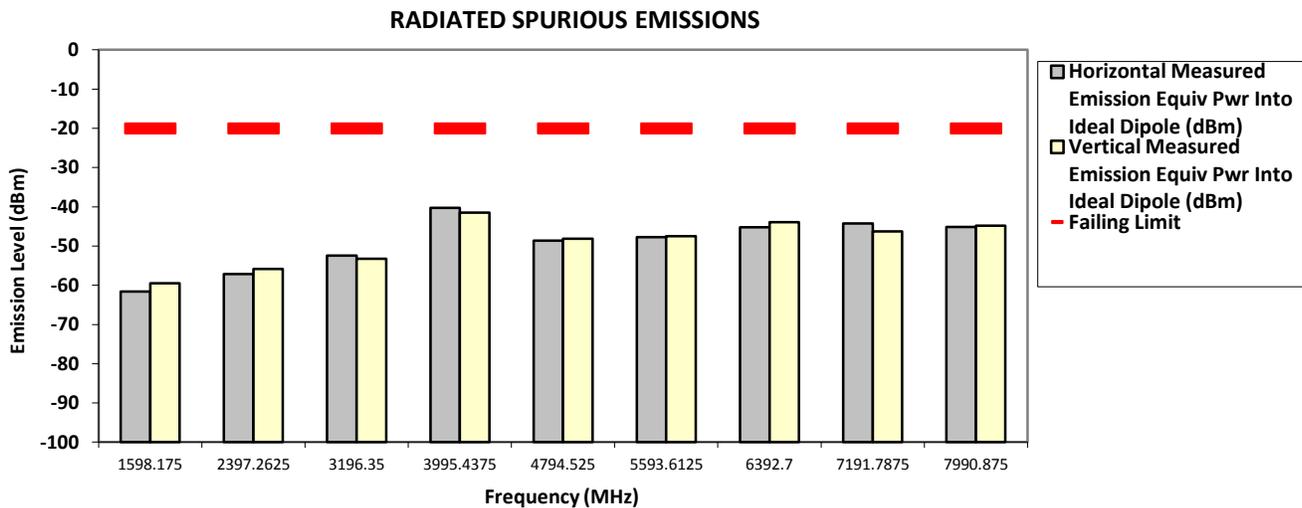

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin, Qawiman & Azil

Fri, Aug 25, 2017

Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.3 Hum(%RH): 71.4

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission

Model Number: H91TGD9PW7AN

S/N: 579TTME983

SR:09095-EMC-00008

Battery Part No: NNTN7034B

Accy Part No: NA

Test Mode: TX APCO Digital Phase II


804.912500 MHz

12.5 kHz

2.990 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1609.8250	-20.0000	-60.9688 **	-60.9907 **
2414.7375	-20.0000	-56.6010 **	-54.9655 **
3219.6500	-20.0000	-51.7843 **	-50.4343 **
4024.5625	-20.0000	-45.0845 **	-45.0226 **
4829.4750	-20.0000	-47.2475 **	-48.3785 **
5634.3875	-20.0000	-48.3108 **	-47.3255 **
6439.3000	-20.0000	-44.9071 **	-44.2609 **
6911.5000	-20.0000	-37.7600 *	-40.2100 *
7244.2125	-20.0000	-44.5793 **	-44.0516 **
8049.1250	-20.0000	-44.3664 **	-44.1513 **

RADIATED SPURIOUS EMISSIONS

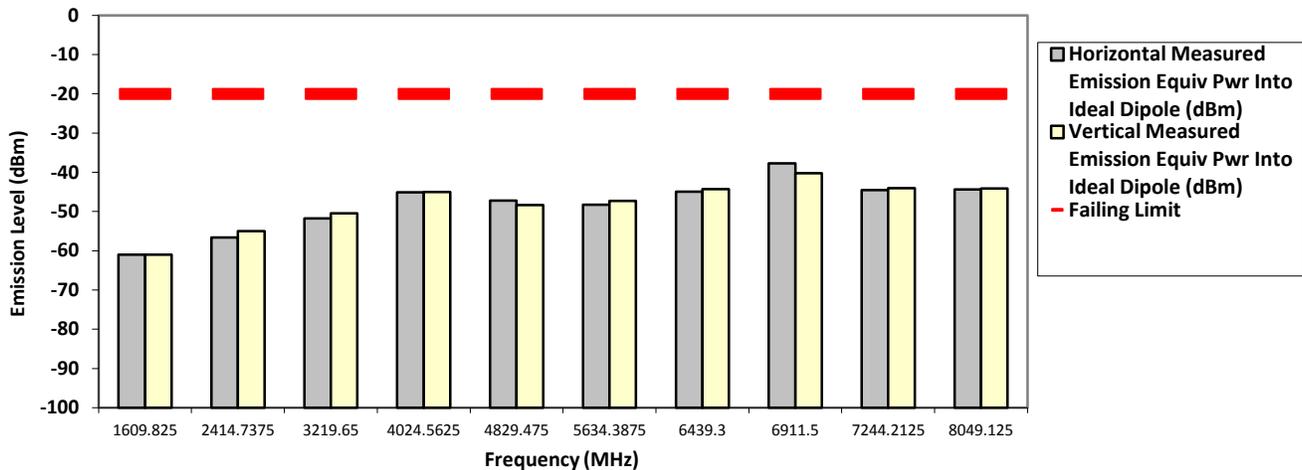

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin,Qawiman&Azil Fri, Aug 25, 2017
 Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.3 Hum(%RH): 71.4

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


6.10.4. Test Limit

Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Effective Radiated Power (ERP) / GNSS (EIRP for 1559 - 1610MHz)

6.11.1. Test Setup

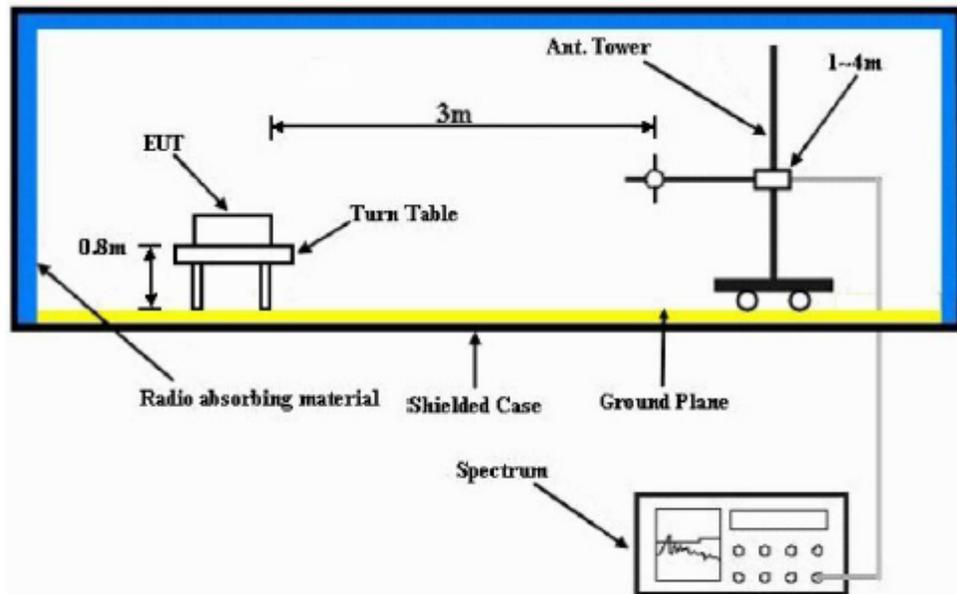

- 1) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100 kHz, VBW = 300 kHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.11.2. Test Result

90.541(d) ERP

Max ERP = Power at antenna – losses + max antenna gain (dBd), therefore,

$$\begin{aligned} \text{Max ERP} &= 2.99\text{W (34.76dBm)} - \text{losses (assuming no losses)} - 2\text{dBd (max antenna gain)} \\ &= 32.76 \text{ dBm (1.89W)} \end{aligned}$$

The max ERP of 1.89W meets the ERP limits of 90.541(d)

90.543(f) EIRP in the 1559-1610MHz band

		Notes:	1. NAR6595A
Tx Freq.	799.0875		
		Horizontal	Vertical
		Radiated	Radiated
	Frequency	Spur. Emiss.	Spur. Emiss.
Spur	MHz	(dBm)	(dBm)
2XFund	1598.175	-57.04	-50.81
		Notes:	2. NAR6595A
Tx Freq.	804.9125		
		Horizontal	Vertical
		Radiated	Radiated
	Frequency	Spur. Emiss.	Spur. Emiss.
Spur	MHz	(dBm)	(dBm)
2XFund	1609.8250	-57.85	-48.65

Highest EIRP emission in 1559-1610 MHz band is -48.65dBm.

$$PSD \text{ (dBm/Hz)} = \text{Power (dBm)} - 10 \log (\text{RBW})$$

RBW used is 1MHz, therefore

$$PSD = -48.65 - 10 \log (1\text{MHz}) = -108.65\text{dBm/Hz} = -78.65\text{dBW/MHz}$$

The equipment satisfies EIRP requirement per 90.543(f)


6.11.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBW). Power is given in terms of effective radiated power (ERP). The transmitting power of a portable (hand-held) unit must not exceed 3 watts ERP per 90.541(d) for devices operating within 763-775 and 793-805MHz.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

6.12. AC Power Line Conducted Spur Emissions

6.12.1. Test Setup

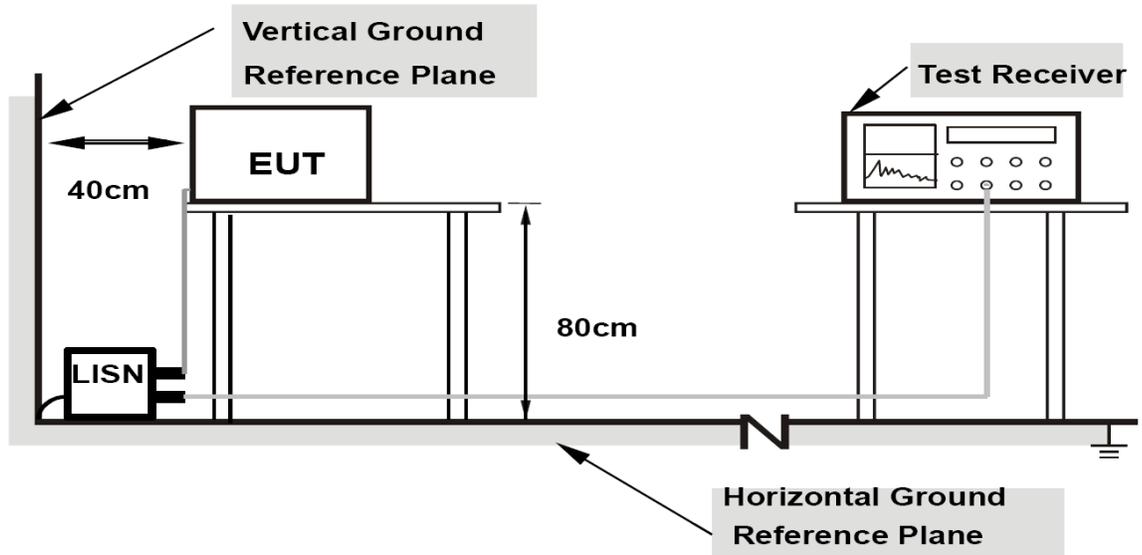

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50 μ H of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30 MHz was measured.

6.12.2. Test Result **Not Applicable**

6.12.3. Test Limit

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		