



**DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2**

**Motorola Solutions Inc.**  
**EME Test Laboratory**  
 8000 West Sunrise Blvd  
 Fort Lauderdale, FL. 33322

**Date of Report:** 07/07/2015  
**Report Revision:** C

**Responsible Engineer:** Jessica Zada (EME Engineer)  
**Report Author:** Jessica Zada (EME Engineer)  
**Date/s Tested:** 3/18/2015,3/20/2015, 6/05/2015, 6/25/2015-6/26/2015, 6/30/2015-7/01/2015  
**Manufacturer/Location:** Motorola Solutions Inc., Penang  
**Sector/Group/Div.:** AESS  
**Date submitted for test:** 03/09/2015  
**DUT Description:** APX4000XH 806-824MHz at 3.0W, 851-870MHz at 3.0W, 896-901MHz at 2.5W, 935-941MHz at 2.5W, 2.402-2.48 GHz at 10mW 12.5kHz/25kHz, Capable of digital and analog FM transmission, also capable of TDMA transmission. This radio is Bluetooth equipped.  
**Test TX mode(s):** CW (PTT)  
**Max. Power output:** 3.6 W for 806–824 MHz & 851-870 MHz, 3.0 W for 896-901 MHz & 935-941 MHz, 10 mW for 2.402-2.48 GHz  
**Nominal Power:** 3.0 W for 806–824 MHz & 851-870 MHz , 2.5 W for 896-901 MHz & 935-941 MHz , 10 mW 2.402-2.48 GHz  
**Tx Frequency Bands:** 806–824 MHz, 851-870 MHz, 896-901 MHz, 935-941 MHz, 2.402-2.48 GHz  
**Signaling type:** FM, TDMA, FHSS (Bluetooth)  
**Model(s) Tested:** PMUF1705A  
**Model(s) Certified:** PMUF1705A, H51VCH9PW7AN  
**Serial Number(s):** 305TRD0134, 305TRD0028  
**Classification:** Occupational/Controlled  
**FCC ID:** AZ489FT7063; 806–824 MHz, 851-870 MHz, 896-901 MHz, 935-941 MHz, 2.402-2.48 GHz  
**IC:** 109U-89FT7063

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

**Deanna Zakharia**  
 EMS EME Lab Senior Resource Manager,  
 Laboratory Director  
 Approval Date: 7/7/2015

**Certification Date:** 7/7/2015

**Certification No.:** L1150617P

**Part 1 of 2**

1.0	Introduction.....	4
2.0	FCC SAR Summary.....	4
3.0	Abbreviations / Definitions.....	4
4.0	Referenced Standards and Guidelines .....	5
5.0	SAR Limits .....	6
6.0	Description of Device Under Test (DUT) .....	6
7.0	Optional Accessories and Test Criteria .....	7
7.1	Antennas .....	7
7.2	Battery.....	7
7.3	Body worn Accessories .....	7
7.4	Audio Accessories .....	8
8.0	Description of Test System.....	9
8.1	Descriptions of Robotics/Probes/Readout Electronics .....	9
8.2	Description of Phantom(s).....	10
8.3	Description of Simulated Tissue.....	10
9.0	Additional Test Equipment.....	11
10.0	SAR Measurement System Validation and Verification .....	11
10.1	System Validation.....	11
10.2	System Verification .....	12
10.3	Equivalent Tissue Test Results.....	12
11.0	Environmental Test Conditions .....	13
12.0	DUT Test Setup and Methodology.....	13
12.1	Measurements .....	13
12.2	DUT Configuration(s) .....	14
12.3	DUT Positioning Procedures .....	14
12.3.1	Body.....	14
12.3.2	Head.....	14
12.3.3	Face.....	15
12.4	DUT Test Channels .....	15
12.5	SAR Result Scaling Methodology.....	15
12.6	DUT Test Plan .....	16
13.0	DUT Test Data.....	16
13.1	LMR assessments at the Body for 806-824 MHz band.....	16
13.2	LMR assessments at the Body for 851-870 MHz band.....	18
13.3	LMR assessments at the Body for 896-901 MHz band.....	20
13.4	LMR assessments at the Body for 935-941 MHz band.....	22
13.5	LMR assessments at the Face for 806-824 MHz band.....	23
13.6	LMR assessments at the Face for 851-870 MHz band.....	24
13.7	LMR assessment at the Face for 896-901 MHz band.....	25
13.8	LMR assessment at the Face for 896-901 MHz band.....	25
13.9	Assessment for Industry Canada .....	26
13.10	Assessment at the Bluetooth band .....	26

13.11 Shortened Scan Assessment ..... 26  
 14.0 Simultaneous Transmission Exclusion for BT ..... 27  
 15.0 Results Summary ..... 27  
 16.0 Variability Assessment ..... 28  
 17.0 System Uncertainty ..... 28

**APPENDICES**

A Measurement Uncertainty Budget ..... 29  
 B Probe Calibration Certificates ..... 32  
 C Dipole Calibration Certificates ..... 50

**Part 2 of 2**

**APPENDICES**

D System Verification Check Scans ..... 2  
 E DUT Scans ..... 13  
 F Shorten Scan of Highest SAR Configuration ..... 34  
 G DUT Test Position Photos ..... 36  
 H DUT, Body worn and audio accessories Photos ..... 37

**Report Revision History**

Date	Revision	Comments
04/07/2015	A	Initial release
06/04/2015	B	Update Nominal Power and add Simultaneous Results
07/07/2015	C	Additional Antenna Added

## 1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for handheld portable model number PMUF1705A. This device is classified as Occupational/Controlled.

## 2.0 FCC SAR Summary

**Table 1**

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
TNF	806-824 MHz	2.61	1.37	1.51	1.11
	851-870 MHz	4.02	2.11	1.91	1.38
	896-901 MHz	1.10	0.80	0.76	0.54
	935-941 MHz	1.36	0.74	0.87	0.62
*DSS	2402-2480MHz	NA	NA	NA	NA
*Simultaneous Results		NA	NA	NA	NA

\*Results not required per KDB (refer to sections 13.10 and 14.0)

## 3.0 Abbreviations / Definitions

BT: Bluetooth  
 CNR: Calibration Not Required  
 CW: Continuous Wave  
 C4FM: Continuous 4 Level Frequency Modulation  
 CQPSK: Compatible Quadrature Phase Shift Keying  
 DSP: Digital Signal Processing  
 DUT: Device Under Test  
 EME: Electromagnetic Energy  
 FHSS: Frequency Hopping Spread Spectrum  
 FM: Frequency Modulation  
 LMR: Land Mobile Radio  
 NA: Not Applicable  
 PTT: Push to Talk  
 QPSK: Quadrature Pulse Shift Key  
 RSM: Remote Speaker Microphone  
 SAR: Specific Absorption Rate  
 TDMA: Time Division Multiple Access  
 TNF: Licensed Non-Broadcast Transmitter Held to Face

Audio accessories: These accessories allow communication while the DUT is worn on the body.

Body worn accessories: These accessories allow the DUT to be worn on the body of the user.

Maximum Power: Defined as the upper limit of the production line final test station.

#### 4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1 (2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.: 1997.
- IEEE 1528 (2003), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2005
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5)— Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard (2014)
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9 kHz and 300 GHz." and “Attachment to resolution # 303 from July 2, 2002”
- IEC62209-2 Edition 1.0 2010-03, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).
- FCC KDB – 643646 D01 SAR Test for PTT Radios v01r01
- FCC KDB – 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB – 865664 D02 RF Exposure Reporting v01r01
- FCC KDB – 447498 D01 General RF Exposure Guidance v05r02

## 5.0 SAR Limits

**Table 2**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

## 6.0 Description of Device Under Test (DUT)

This portable device operates in the LMR bands using frequency modulation (FM) and TDMA signals incorporating traditional simplex two-way radio transmission protocol. This device also contains Bluetooth technology for short range wireless devices.

Time Division Multiple Access (TDMA) is used to allocate portions of the RF signal by dividing time into two slots. Time allocation enables each unit to transmit its voice information without interference from other transmitting units. Transmission from a unit or base station is accommodated during two time-slot lengths of 30 milliseconds with frame length of 60 milliseconds. C4FM CQPSK modulation is used at 12.5 kHz channel spacing. The TDMA technique requires sophisticated algorithms and a digital signal processor (DSP) to perform voice compressions/decompressions and RF modulation/demodulation. The maximum duty cycle for TDMA 1:2 is 50%.

The LMR bands in this device operate in a half duplex system. A half duplex system only allows the user to transmit or receive. This device cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

This device also incorporates a Class 1 Bluetooth device which is a Frequency Hopping Spread Spectrum (FHSS) technology. The Bluetooth radio modem is used to wireless link audio accessories. The maximum actual transmission duty cycle is imposed by the Bluetooth standard. The maximum duty cycle for BT is 76.1%. Refer to section 14.0 Simultaneous Transmission Exclusion.

The intended operating positions are “at the face” with the DUT at least 1 inch from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional remote accessories that are connected to the radio. Operation at the body without an audio accessory attached is possible by means of BT accessories.

## 7.0 Optional Accessories and Test Criteria

This device is offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in “SAR Test Reduction Considerations for Occupational PTT Radios” FCC KDB 643646 to assess compliance of this device. The following sections identify the test criteria and details for each accessory category. Refer to Exhibit 7B for antenna separation distances.

### 7.1 Antennas

There is one removable antenna and one internal BT antenna offered for this product. The Table below lists their descriptions.

**Table 3**

Antenna Models	Description	Selected for test	Tested
PMAF4020A	8/900 + GPS, ½ wave, 0 dBd	Yes	Yes
NAR6595A	7/800 + GPS, ¼ wave, -10 dBd	Yes	Yes
AN000113A01*	Internal Bluetooth, ¼ wave, 0 dBd	Yes	Yes

\* Refer to sections 13.14 and 14.0 for BT low power exclusion and simultaneous TX for antenna not tested.

### 7.2 Battery

There is one battery offered for this product. The Table below lists its' description.

**Table 4**

Battery Models	Description	Selected for test	Tested	Comments
NNTN8750A	APCO CSA battery	Yes	Yes	

### 7.3 Body worn Accessories

All body worn accessories were considered. The Table below lists the body worn accessories, and body worn accessory descriptions.

**Table 5**

Body worn Models	Description	Selected for test	Tested	Comments
PMLN6086A	Belt Clip 2.5 in.	Yes	Yes	
PMLN4651A	Belt Clip 2 in.	Yes	Yes	
PMLN7327A	Hard Leather Carry Case with 2.5 in. Swivel Belt Loop	Yes	Yes	
PMLN5610A	2.5 in. Replacement Swivel Belt Loop	No	No	No test required

## 7.4 Audio Accessories

All audio accessories were considered. The Table below lists the offered audio accessories and their descriptions. Exhibit 7B illustrates photos of the tested audio accessories.

**Table 6**

<b>Audio Acc. Models</b>	<b>Description</b>	<b>Selected for test</b>	<b>Tested</b>	<b>Comments</b>
PMMN4050A	Impres RSM (IP54) with 3.5mm audio jack	Yes	Yes	Default Audio
NNTN8379A	Hard-hat attached dual-muff heavy-duty headset with boom microphone	Yes	No	Used with NNTN8378A
NNTN8378A	Push-to-talk adapter	Yes	No	
PMMN4067B	Impres RSM (IP64) volume switch & emergency button	Yes	No	
PMLN6092A	Heavy duty headset with helmet attachment and boom microphone	Yes	No	Used with NNTN8378A
NNTN8383B	INC RSM with 3.5mm audio jack	Yes	No	
NNTN8382B	INC RSM IP57 submersible	Yes	No	
PMLN6090A	Tactical heavy duty headset with over-the-head headband and boom microphone, includes volume control	Yes	No	Used with NNTN8378A
PMLN6368A	Atex push to talk adapter	No	No	By similarity to NNTN8378A
PMLN5275C	Behind-the-head dual muff heavy-duty headset with boom microphone	Yes	No	
NNTN8380A	Hard-hat attached dual-muff heavy-duty headset with boom mic	No	No	By similarity to NNTN8379A
RLN4941A	Receive-only earpiece with translucent tube	No	No	Receive only
BDN6781A	One wire earbud, black	No	No	Receive only
PMLN6333A	Twin cup heavy duty headset with helmet attachment, boom microphone and extra high-attenuating twin shells	No	No	By similarity to PMLN6092A
RMN4054B	Receive-only dual muff heavy-duty headset	No	No	Receive only
RLN5314B	One wire earpiece with clear acoustic tube, beige	No	No	Receive only
PMLN6087A	Heavy duty headset with over-the-head headband and boom microphone	No	No	By similarity to PMLN6092A
RLN4941A	Receive-only earpiece with translucent tube	No	No	Receive only
RMN4054B	Receive-only dual muff heavy-duty headset	No	No	Receive only
PMLN6089A	Tactical heavy duty headset with helmet attachment and boom microphone, includes volume control	No	No	By similarity to PMLN6090A
RLN5313B	One wire earpiece with clear acoustic tube, black	No	No	Receive only

## 8.0 Description of Test System



### 8.1 Descriptions of Robotics/Probes/Readout Electronics

**Table 7**

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.8.2.969	DAE3	ES3DV3 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

### 8.2 Description of Phantom(s)

**Table 8**

Phantom Type	Phantom(s) Used	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (wood)
Triple Flat	NA	200MHz -6GHz; Er = 3-5, Loss Tangent = ≤0.05	280x175x175	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA	300MHz -6GHz; Er = < 5, Loss Tangent = ≤0.05	Human Model			
Oval Flat	√	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤0.05	600x400x190			

### 8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 9. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

**Simulated Tissue Composition (percent by mass)**

**Table 9**

Ingredients	900MHz	
	Head	Body
Sugar	56.5	44.9
Diacetin	0	0
De ionized – Water	40.95	53.06
Salt	1.45	0.94
HEC	1.0	1.0
Bact.	0.1	0.1

### 9.0 Additional Test Equipment

The Table below lists additional test equipment used during the SAR assessment.

**Table 10**

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
Speag Probe	ES3DV3	3301	9/24/2014	9/24/2015
Speag DAE	DAE3	363	1/15/2015	1/15/2016
Speag Dipole	D900V2	85	2/12/2014	2/12/2016
Power Meter (Keysight)	E4419B	MY45103725	3/2/2015	3/2/2016
Signal Generator (Keysight)	E4428C	MY47381119	6/7/2013	6/7/2015*
Signal Generator (Keysight)	E4438C	MY44270302	6/18/2015	6/18/2017
E-Series Avg. Power Sensor (Keysight)	E9301B	MY41495593	3/17/2015	3/17/2016
N-Series Avg. Power Sensor (Keysight)	N8482B	MY52080004	2/10/2015	2/10/2016
Bi-Directional Coupler (NARDA)	3020A	40296	1/31/2014	1/31/2016
AMP (Amplifier Research)	10W1000	5924	CNR	CNR
Power Meter (Keysight)	E4418B	US39251267	1/26/2015	1/26/2016
Power Sensor (Keysight)	8482B	3318A06774	2/27/2015	2/27/2016
Dickson Temperature Recorder	TM320	7081356	9/16/2014	9/16/2015
Omega Digital Thermometer with J Type TC Probe	HH202A	18801	6/9/2014	6/9/2015*
Omega Digital Thermometer with J Type TC Probe	HH202A	18800	4/6/2015	4/6/2016
Keysight PNA-L Network Analyzer	N5230C	MY49002155	8/4/2014	8/4/2015
Dielectric Probe Kit (DAK2)	DAK-12	1040	9/16/2014	9/16/2015

\*Out of calibration; replaced with MY44270302 and 18800 for continued testing.

### 10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system verification test results are included in appendices B, C & D respectively.

#### 10.1 System Validation

The SAR measurement system was validated according to procedures in KDB 865664. The validation status summary Table is below.

**Table 11**

Dates	Probe Calibration Point		Probe SN	Measured Tissue Parameters		Validation		
				$\sigma$	$\epsilon_r$	Sensitivity	Linearity	Isotropy
CW								
11/13/14	Body	900	3301	1.07	55.0	Pass	Pass	Pass
11/13/14	Head	900		1.00	40.5	Pass	Pass	Pass

## 10.2 System Verification

System verification checks were conducted each day during the SAR assessment. The results are normalized to 1W. Appendix D includes DASY plots for each day during the SAR assessment. The Table below summarizes the daily system check results used for the SAR assessment.

**Table 12**

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
3301	FCC Body	SPEAG D900V2 / 085	10.40 +/- 10%	2.81	11.24	3/20/2015
				2.72	10.88	6/05/2015
				2.59	10.36	6/25/2015
				2.58	10.32	6/26/2015
				2.64	10.56	6/30/2015
				2.62	10.48	7/01/2015
	IEEE/IEC Head		10.40 +/- 10%	2.52	10.08	3/18/2015
				2.49	9.76	6/05/2015
				2.46	9.84	6/26/2015
				2.45	9.80	6/30/2015

## 10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The Table below summarizes the measured tissue parameters used for the SAR assessment.

**Table 13**

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date		
824	FCC Body	0.97 (0.92-1.02)	55.2 (52.5-58.0)	0.98	53.7	6/30/2015		
	IEEE/IEC Head	0.90 (0.85-0.94)	41.6 (39.5-43.6)	0.93	40.9	6/30/2015		
851	FCC Body	0.99 (0.94-1.04)	55.2 (52.4-57.9)	1.02	53.0	3/20/2015		
				1.00	54.3	6/05/2015		
				0.99	54.8	6/25/2015		
				0.97	54.0	6/26/2015		
	IEEE/IEC Head			0.92 (0.87-0.96)	41.5 (39.4-43.6)	0.93	41.0	3/18/2015
				0.93	40.2	6/05/2015		
899	FCC Body	1.05 (1.00-1.10)	55.0 (52.3-57.8)	1.06	52.9	6/30/2015		
				1.05	52.7	7/01/2015		
	IEEE/IEC Head			0.97 (0.92-1.02)	41.5 (39.4-43.6)	1.00	40.0	6/30/2015

**Table 13 continued**

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
900	FCC Body	1.05 (1.00-1.10)	55.0 (52.3-57.8)	1.07	52.6	3/20/2015
				1.05	53.9	6/05/2015
				1.04	54.3	6/25/2015
				1.02	53.6	6/26/2015
				1.06	52.9	6/30/2015
				1.05	52.7	7/01/2015
	IEEE/ IEC Head	0.97 (0.92-1.02)	41.5 (39.4-43.6)	1.01	40.8	3/18/2015
				0.98	39.7	6/05/2015
0.98				40.6	6/26/2015	
1.00				40.0	6/30/2015	
938	FCC Body	1.07 (1.02-1.12)	55.0 (52.2-57.7)	1.05	5.33	6/26/2015
	IEEE/ IEC Head	0.99 (0.94-1.04)	41.5 (39.4-43.5)	1.02	40.3	6/26/2015

**11.0 Environmental Test Conditions**

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The Table below presents the range and average environmental conditions during the SAR tests reported herein:

**Table 14**

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 20.6-21.7°C Avg. 21.1 °C
Tissue Temperature	NA	Range: 20.3-21.5°C Avg. 20.9°C

Relative humidity target range is a recommended target

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

**12.0 DUT Test Setup and Methodology**

**12.1 Measurements**

SAR measurements were performed using the DASYS system described in section 8.0 using zoom scans. Oval flat phantoms filled with applicable simulated tissue were used for body and face testing.

The Table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

**Table 15**

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

## 12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered when implementing the guidelines specified in KDB 643646.

## 12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in Appendix H.

### 12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory as well as with and without the offered audio accessories as applicable.

### 12.3.2 Head

Not applicable.

### 12.3.3 Face

The DUT was positioned with its' front separated 2.5cm from the phantom.

## 12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * \text{roundup}[10 * (f_{high} - f_{low}) / f_c] + 1$$

Where

$N_c$  = Number of channels

$F_{high}$  = Upper channel

$F_{low}$  = Lower channel

$F_c$  = Center channel

## 12.5 SAR Result Scaling Methodology

The calculated 1-gram and 10-gram averaged SAR results indicated as “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” in the data Tables is determined by scaling the measured SAR to account for power leveling variations and power slump. A Table and graph of output power versus time is provided in Appendix F. For this device the “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” are scaled using the following formula:

$$Max\_Calc = SAR\_meas \cdot 10^{\frac{-Drift}{10}} \cdot \frac{P\_max}{P\_int} \cdot DC$$

$P\_max$  = Maximum Power (W)

$P\_int$  = Initial Power (W)

Drift = DASY drift results (dB)

$SAR\_meas$  = Measured 1-g or 10-g Avg. SAR (W/kg)

DC = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If  $P\_int > P\_max$ , then  $P\_max/P\_int = 1$ .

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

### 12.6 DUT Test Plan

The guidelines and requirements outlined in section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in CW mode and 50% duty cycle was applied to PTT configurations in the final results.

Standalone and simultaneous BT testing were assessed in sections 13.10 and 14.0 per the guidelines of KDB 447498.

### 13.0 DUT Test Data

#### 13.1 LMR assessments at the Body for 806-824 MHz band

Battery NNTN8750A was selected as the default battery for assessments at the Body because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (806-824 MHz) which are listed in Table 16. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 16**

Test Freq (MHz)	Power (W)
806.0000	3.52
815.0000	3.43
824.0000	3.54

#### Assessments at the Body with Body worn PMLN6086A

DUT assessment with offered antenna, default battery and default body worn accessory per KDB 643646. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 17**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAF4020A	NNTN8750A	PMLN6086A	PMMN4050A	806.0000								
				815.0000								
				824.0000	3.45	-0.24	2.33	1.73	1.28	0.95	ErC-Ab-150630-06	
NAR6595A				806.0000								
				815.0000								
				824.0000	3.43	-0.15	4.78	2.47	<b>2.60</b>	1.34	ErC-Ab-150630-07	

**Assessments at the Body with Body worn PMLN4651A**

DUT assessment with offered antenna, default battery and optional body worn accessory per KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 18**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAF4020A	NNTN8750A	PMLN4651A	PMMN4050A	806.0000								
				815.0000								
				824.0000	3.44	-0.27	2.30	1.71	1.28	0.95	ErC-Ab-150630-08	
NAR6595A				806.0000								
				815.0000								
				824.0000	3.44	-0.16	3.22	1.98	<b>1.75</b>	1.07	ErC-Ab-150630-09	

**Assessments at the Body with Body worn PMLN7327A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 19**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAF4020A	NNTN8750A	PMLN7327A	PMMN4050A	806.0000								
				815.0000								
				824.0000	3.45	-0.31	0.30	0.23	0.17	0.13	ErC-Ab-150630-10	
NAR6595A				806.0000								
				815.0000								
				824.0000	3.44	-0.19	1.80	1.34	<b>0.98</b>	0.73	ErC-Ab-150630-11	

**Assessment at the Body with other audio accessories**

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR tested for that audio accessory is not necessary.” This was applicable to all remaining accessories.

**Assessment of wireless BT configuration**

Assessment using the overall highest SAR configuration at the body from above without an audio accessory attached. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 20**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6595A	NNTN8750A	PMLN6086A	None/BT	806.0000							
				815.0000							
				824.0000	3.43	-0.12	4.83	2.54	<b>2.61</b>	1.37	ErC-Ab-150630-12

**13.2 LMR assessments at the Body for 851-870 MHz band**

Battery NNTN8750A was selected as the default battery for assessments at the Body because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (851-870 MHz) which are listed in Table 21. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 21**

Test Freq (MHz)	Power (W)
851.0000	3.58
860.0000	3.47
869.0000	3.52

**Assessments at the Body with Body worn PMLN6086A**

DUT assessment with offered antenna, default battery and default body worn accessory per KDB 643646. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 22**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN6086A	PMMN4050A	851.0000	3.55	-0.60	3.71	2.71	2.16	1.58	ErC-Ab-150320-02
				860.0000							
				869.0000							
NAR6595A				851.0000	3.44	-0.47	6.57	3.50	<b>3.83</b>	2.04	ErC-Ab-150626-11
				860.0000							
				869.0000							

**Assessments at the Body with Body worn PMLN4651A**

DUT assessment with offered antenna, default battery and optional body worn accessory per KDB 643646. Refer to Table 21 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 23**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN4651A	PMMN4050A	851.0000	3.57	-0.60	3.14	2.31	1.82	1.34	ErC-Ab-150320-03
				860.0000							
				869.0000							
NAR6595A				851.0000	3.43	-0.43	4.20	2.66	<b>2.43</b>	1.54	ErC-Ab-150625-11
				860.0000							
				869.0000							

**Assessments at the Body with Body worn PMLN7327A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 21 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 24**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN7327A	PMMN4050A	851.0000	3.56	-0.61	0.530	0.397	0.31	0.23	ErC-Ab-150320-04
				860.0000							
				869.0000							
NAR6595A				851.0000	3.45	-0.33	1.90	1.41	<b>1.07</b>	0.79	ErC-Ab-150625-12
				860.0000							
				869.0000							

**Assessment at the Body with other audio accessories**

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR tested for that audio accessory is not necessary.” This was applicable to all remaining accessories.

**Assessment of wireless BT configuration**

Assessment using the overall highest SAR configuration at the body from above without an audio accessory attached. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 25**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6595A	NNTN8750A	PMLN6086A	None/BT	851.0000	3.40	-0.51	5.74	3.21	<b>3.42</b>	1.91	ErC-Ab-150605-03
				860.0000							
				869.0000							

**13.3 LMR assessments at the Body for 896-901 MHz band**

Battery NNTN8750A was selected as the default battery for assessments at the Body because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (896-901 MHz) which are listed in Table 26. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 26**

Test Freq (MHz)	Power (W)
896.0125	2.94
899.0000	2.96
901.9875	2.96

**Assessments at the Body with Body worn PMLN6086A**

DUT assessment with offered antennas, default battery and, default body worn accessory per KDB 643646. Refer to Table 26 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 27**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN6086A	PMMN4050A	896.0125							
				899.0000	2.91	-0.54	1.58	1.15	<b>0.92</b>	0.67	ErC-Ab-150630-13
				901.9875							

**Assessments at the Body with Body worn PMLN4651A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Refer to Table 26 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 28**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN4651A	PMMN4050A	896.0125							
				899.0000	2.87	-0.49	1.47	1.07	<b>0.86</b>	0.63	ErC-Ab-150630-14
				901.9875							

**Assessments at the Body with Body worn PMLN7327A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Refer to Table 21 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 29**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN7327A	PMMN4050A	896.0125							
				899.0000	2.89	-0.43	0.27	0.20	<b>0.15</b>	0.12	ErC-Ab-150630-15
				901.9875							

**Assessment at the Body with other audio accessories**

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR tested for that audio accessory is not necessary.” This was applicable to all remaining accessories.

**Assessment of wireless BT configuration**

Assessment using the overall highest SAR configuration at the body from above without an audio accessory attached. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 30**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN6086A	None/BT	896.0125							
				899.0000	2.89	-0.63	1.83	1.33	1.10	0.80	ErC-Ab-150701-02
				901.9875							

**13.4 LMR assessments at the Body for 935-941 MHz band**

Battery NNTN8750A was selected as the default battery for assessments at the Body because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (935-941 MHz) which are listed in Table 31. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 31**

Test Freq (MHz)	Power (W)
935.0125	2.96
938.0000	2.98
940.9875	2.98

**Assessments at the Body with Body worn PMLN6086A**

DUT assessment with offered antennas, default battery and, default body worn accessory per KDB 643646. Refer to Table 31 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 32**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN6086A	PMMN4050A	935.0125							
				938.0000	2.94	-0.49	2.38	1.30	<b>1.36</b>	0.74	ErC-Ab-150626-02
				940.9875							

**Assessments at the Body with Body worn PMLN4651A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Refer to Table 31 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 33**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN4651A	PMMN4050A	935.0125							
				938.0000	2.95	-0.50	1.67	1.02	<b>0.95</b>	0.58	ErC-Ab-150626-03
				940.9875							

**Assessments at the Body with Body worn PMLN7327A**

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Refer to Table 31 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 34**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN7327A	PMMN4050A	935.0125							
				938.0000	2.94	-0.40	0.26	0.20	<b>0.15</b>	0.11	ErC-Ab-150626-04
				940.9875							

**Assessment at the Body with other audio accessories**

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR tested for that audio accessory is not necessary.” This was applicable to all remaining accessories.

**Assessment of wireless BT configuration**

Assessment using the overall highest SAR configuration at the body from above without an audio accessory attached. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 35**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	PMLN6086A	None/BT	935.0125							
				938.0000	2.94	-0.43	2.18	1.56	<b>1.23</b>	0.88	ErC-Ab-150626-08
				940.9875							

**13.5 LMR assessments at the Face for 806-824 MHz band**

Battery NNTN8750A was selected as the default battery for assessments at the Face because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (806-824 MHz) which are listed in Table 36. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 36**

Test Freq (MHz)	Power (W)
806.0000	3.52
815.0000	3.43
824.0000	3.54

DUT assessment with offered antennas, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Refer to Table 36 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 37**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAF4020A	NNTN8750A	None	None	806.0000								
				815.0000								
				824.0000	3.45	-0.30	2.52	1.84	0.41	1.03	ErC-Face-150630-02	
NAR6595A				806.0000								
				815.0000								
				824.0000	3.43	-0.18	2.76	2.03	<b>1.51</b>	1.11	ErC-Face-150630-03	

**13.6 LMR assessments at the Face for 851-870 MHz band**

Battery NNTN8750A was selected as the default battery for assessments at the Face because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (851-870 MHz) which are listed in Table 38. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 38**

Test Freq (MHz)	Power (W)
851.0000	3.58
860.0000	3.47
869.0000	3.52

DUT assessment with offered antennas, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Refer to Table 38 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 39**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	None	None	851.0000	3.57	-0.49	3.38	2.44	<b>1.91</b>	1.38	ErC-Face-150318-06
				860.0000							
				869.0000							
NAR6595A				851.0000	3.47	-0.33	3.37	2.47	1.89	1.38	ErC-Face-150605-07
				860.0000							
				869.0000							

**13.7 LMR assessment at the Face for 896-901 MHz band**

Battery NNTN7034B was selected as the default battery for assessments at the Face because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (896-901 MHz) which are listed in Table 40. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 40**

Test Freq (MHz)	Power (W)
896.0125	2.94
899.0000	2.96
901.9875	2.96

DUT assessment with offered antenna, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Refer to Table 28 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 41**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	None	None	896.0125							
				899.0000	2.85	-0.76	1.21	0.87	<b>0.76</b>	0.54	ErC-Face-150630-04
				901.9875							

**13.8 LMR assessment at the Face for 896-901 MHz band**

Battery NNTN7034B was selected as the default battery for assessments at the Face because it is the only offered battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (896-901 MHz) which are listed in Table 42. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 42**

Test Freq (MHz)	Power (W)
935.0125	2.96
938.0000	2.98
940.9875	2.98

DUT assessment with offered antenna, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Refer to Table 41 for highest output power

channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 43**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAF4020A	NNTN8750A	None	None	935.0125							
				938.0000	2.95	-0.56	1.51	1.07	<b>0.87</b>	0.62	ErC-Face-150626-07
				940.9875							

**13.9 Assessment for Industry Canada**

Not Applicable.

**13.10 Assessment at the Bluetooth band**

Per guidelines in KDB 447498, the following formula was used to determine the test exclusion for standalone Bluetooth transmitter;

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{F(\text{GHz})}] = 2.39 \text{ W/kg, which is } \leq 3 \text{ W/kg (1g)}$$

Where:

$$\text{Max. Power} = 7.61\text{mW (10mW*76.1\% duty cycle)}$$

$$\text{Min. test separation distance} = 5\text{mm for actual test separation} < 5\text{mm}$$

$$F(\text{GHz}) = 2.48 \text{ GHz}$$

Per the result from the calculation above, the standalone SAR assessment was not required for Bluetooth band. Therefore, SAR results for Bluetooth are not reported herein.

**13.11 Shortened Scan Assessment**

A “shortened” scan using the highest SAR configuration overall from above was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in Appendix D demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR result from the Table below is provided in Appendix F.

**Table 44**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6595A	NNTN8750A	PMLN6086A	PMMN4050A	851.0000	3.45	-0.33	7.14	3.74	4.02	2.11	ErC-Ab-150626-12

**14.0 Simultaneous Transmission Exclusion for BT**

Per guidelines in KDB 447498, the following formula was used to determine the test exclusion to an antenna that transmits simultaneously with other antennas for test distances ≤ 50mm:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{F(\text{GHz})/X}] = 0.32 \text{ W/kg, which is } \leq 0.4 \text{ W/kg (1g)}$$

Where:

X = 7.5 for 1g-SAR; 18.75 for 10g

Max. Power = 7.61mW (10mW\*76.1% duty cycle)

Min. test separation distance = 5mm for actual test separation < 5mm

F(GHz) = 2.48 GHz

Per the result from the calculation above, simultaneous exclusion is applied and therefore SAR results are not reported herein.

**15.0 Results Summary**

Based on the test guidelines from section 4.0 and satisfying frequencies within FCC bands and Industry Canada Frequency bands, the highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for this filing:

**Table 45**

Designator	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
<b>FCC</b>					
LMR	806-824	2.61	1.37	1.51	1.11
	851-869	4.02	2.11	1.91	1.38
	896-901	1.10	0.80	0.76	0.54
	935-941	1.36	0.74	0.87	0.62
Simultaneous		NA	NA	NA	NA

All results are scaled to the maximum output power.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing.

#### **16.0 Variability Assessment**

Per the guidelines in KDB 865664 SAR variability assessment is not required.

#### **17.0 System Uncertainty**

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value for Occupational exposure is less than 7.5W/kg.

## **Appendix A**

### **Measurement Uncertainty Budget**

### Uncertainty Budget for Device Under Test, for 900 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c<sub>i</sub></i> (1 g)	<i>c<sub>i</sub></i> (10 g)	1 g <i>u<sub>i</sub></i> (±%)	10 g <i>u<sub>i</sub></i> (±%)	<i>v<sub>i</sub></i>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.0	N	1.00	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Test sample Related</b>									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
<b>Combined Standard Uncertainty</b>			RSS				11	11	419
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>			<i>k</i> =2				22	22	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c<sub>i</sub>* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u<sub>i</sub>* – SAR uncertainty
- h) *v<sub>i</sub>* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

**Uncertainty Budget for System Verification (dipole & flat phantom) for 900 MHz**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol.	Prob.	Div.	<i>c<sub>i</sub></i>	<i>c<sub>i</sub></i>	1 g	10 g	<i>v<sub>i</sub></i>
		(± %)	Dist.		(1 g)	(10 g)	<i>u<sub>i</sub></i> (±%)	<i>u<sub>i</sub></i> (±%)	
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.0	N	1.00	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Dipole</b>									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
<b>Combined Standard Uncertainty</b>			RSS				9	9	99999
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>			<i>k</i> =2				18	18	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c<sub>i</sub>* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u<sub>i</sub>* – SAR uncertainty
- h) *v<sub>i</sub>* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

## **Appendix B**

### **Probe Calibration Certificates**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **Motorola EME**

Certificate No. **ES3-3301\_Sep14**

## CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3301**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cpl Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV3	SN: 3013	30-Dec-13 (No. ES3-3013, Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660, Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-09 (in house check Apr-13)	in house check: Apr-16
Network Analyzer HP 8753E	US3739D585	16-Oct-01 (in house check Oct-13)	in house check: Oct-14

Calibrated by:	Name <b>Claudio Leubler</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Technical Manager	

Issued: September 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

ES3DV3 – SN:3301

September 24, 2014

# Probe ES3DV3

## SN:3301

Manufactured: August 27, 2010  
Calibrated: September 24, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

ES3DV3- SN:3301

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3301

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.48	1.01	1.24	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	99.8	104.7	100.6	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	196.0	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		194.9	
		Z	0.0	0.0	1.0		182.9	
10012-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.64	66.0	17.0	1.87	135.0	$\pm 0.7 \%$
		Y	2.82	68.5	18.8		134.3	
		Z	3.36	71.1	20.0		147.5	
10013-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	11.10	70.3	23.0	9.46	133.1	$\pm 3.0 \%$
		Y	10.53	69.5	22.7		126.7	
		Z	10.96	69.9	22.8		122.1	
10059-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	2.97	67.5	17.7	2.12	133.5	$\pm 0.7 \%$
		Y	3.51	72.2	20.5		133.9	
		Z	3.80	72.5	20.5		147.3	
10060-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	6.67	83.5	23.9	2.83	144.1	$\pm 0.7 \%$
		Y	9.03	93.1	28.5		141.8	
		Z	11.85	95.0	28.5		134.1	
10061-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	7.74	82.2	23.9	3.60	148.4	$\pm 0.9 \%$
		Y	6.90	83.6	25.5		143.8	
		Z	10.31	88.0	26.4		138.3	
10071-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	11.29	70.7	23.5	9.83	129.8	$\pm 3.5 \%$
		Y	10.67	69.7	23.1		124.6	
		Z	11.81	71.9	24.2		146.4	
10072-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	10.90	70.5	23.3	9.62	127.2	$\pm 3.3 \%$
		Y	10.74	71.0	23.8		147.7	
		Z	11.49	72.0	24.2		144.5	
10073-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	10.94	70.7	23.7	9.94	122.7	$\pm 4.1 \%$
		Y	10.70	70.9	24.0		142.0	
		Z	11.64	72.4	24.7		141.5	
10074-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	11.13	71.1	24.2	10.30	120.8	$\pm 3.3 \%$
		Y	10.82	71.3	24.5		138.7	
		Z	11.69	72.4	24.9		139.5	
10075-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	12.35	74.4	26.5	10.77	149.2	$\pm 4.4 \%$
		Y	10.96	71.6	25.1		135.6	
		Z	12.00	73.1	25.7		137.3	
10076-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	12.37	74.5	26.7	10.94	146.4	$\pm 3.8 \%$
		Y	10.95	71.6	25.2		133.8	
		Z	12.11	73.4	25.9		136.7	

ES3DV3- SN:3301

September 24, 2014

10077-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	12.42	74.7	26.9	11.00	146.0	±4.1 %
		Y	10.95	71.7	25.4		132.9	
		Z	12.13	73.6	26.1		135.9	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.16	66.3	18.9	5.67	126.3	±1.4 %
		Y	6.28	67.2	19.7		126.8	
		Z	6.46	67.5	19.7		140.3	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	7.31	67.0	19.6	6.42	136.2	±1.7 %
		Y	7.34	67.5	20.1		135.9	
		Z	7.29	66.9	19.7		125.5	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	7.61	67.3	19.8	6.60	138.6	±1.7 %
		Y	7.60	67.7	20.2		137.8	
		Z	7.56	67.1	19.9		127.8	
10108-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.37	67.1	19.5	5.80	148.7	±1.7 %
		Y	6.36	67.6	20.1		148.8	
		Z	6.39	67.2	19.7		138.1	
10109-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.06	66.6	19.5	6.43	132.2	±1.7 %
		Y	7.06	67.2	20.0		131.7	
		Z	7.34	67.5	20.1		146.5	
10110-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.04	66.6	19.3	5.75	144.8	±1.7 %
		Y	6.02	67.1	19.9		143.8	
		Z	6.05	66.6	19.4		134.0	
10111-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	6.80	66.4	19.4	6.44	128.2	±1.7 %
		Y	6.77	66.9	19.9		126.8	
		Z	7.09	67.3	20.0		142.1	
10112-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.35	67.0	19.7	6.59	134.9	±1.9 %
		Y	7.28	67.3	20.2		132.1	
		Z	7.63	67.9	20.4		148.0	
10113-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.06	66.6	19.6	6.62	130.4	±1.7 %
		Y	7.00	67.1	20.1		128.1	
		Z	7.36	67.6	20.3		142.4	
10114-CAA	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.24	68.9	21.3	8.10	138.8	±2.2 %
		Y	10.25	69.3	21.7		136.5	
		Z	10.13	68.6	21.2		126.6	
10115-CAA	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	10.79	69.5	21.8	8.46	143.2	±2.5 %
		Y	10.69	69.5	21.9		140.9	
		Z	10.72	69.3	21.7		131.5	
10116-CAA	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	10.30	69.0	21.4	8.15	139.8	±2.2 %
		Y	10.23	69.2	21.6		137.9	
		Z	10.12	68.5	21.1		127.7	
10117-CAA	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.24	68.9	21.3	8.07	139.7	±2.2 %
		Y	10.19	69.1	21.5		138.1	
		Z	10.11	68.5	21.1		128.8	
10118-CAA	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	10.96	69.7	22.0	8.59	144.6	±2.5 %
		Y	10.85	69.8	22.1		142.9	
		Z	10.79	69.2	21.7		133.6	

ES3DV3- SN:3301

September 24, 2014

10119-CAA	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	10.30	69.1	21.4	8.13	140.0	±2.2 %
		Y	10.24	69.2	21.6		138.0	
		Z	10.18	68.7	21.3		127.6	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.54	67.3	19.8	6.49	138.8	±1.7 %
		Y	7.53	67.7	20.3		137.3	
		Z	7.51	67.2	19.8		128.5	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	7.67	67.3	19.8	6.53	139.5	±1.7 %
		Y	7.67	67.8	20.3		138.8	
		Z	7.64	67.2	19.9		130.2	
10142-CAB	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.85	66.3	19.1	5.73	141.0	±1.4 %
		Y	5.82	66.8	19.7		141.6	
		Z	5.90	66.5	19.4		133.1	
10143-CAB	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.82	67.2	19.8	6.35	148.8	±1.7 %
		Y	6.75	67.7	20.4		147.1	
		Z	6.87	67.3	20.0		139.7	
10144-CAB	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	6.88	66.5	19.5	6.65	126.1	±1.7 %
		Y	7.08	68.0	20.7		148.4	
		Z	7.18	67.4	20.2		139.9	
10145-CAB	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	5.55	65.8	18.9	5.76	136.3	±1.4 %
		Y	5.55	66.7	19.8		135.4	
		Z	5.63	66.1	19.2		128.4	
10146-CAB	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	6.50	67.0	19.8	6.41	140.2	±1.4 %
		Y	6.45	67.9	20.5		139.5	
		Z	6.56	67.1	20.0		131.2	
10147-CAB	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	6.78	67.2	20.0	6.72	140.5	±1.7 %
		Y	6.71	68.0	20.8		139.3	
		Z	6.86	67.4	20.3		132.8	
10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.07	66.7	19.5	6.42	130.9	±1.7 %
		Y	7.09	67.3	20.1		130.4	
		Z	7.37	67.7	20.2		146.5	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	7.32	66.9	19.7	6.60	133.1	±1.9 %
		Y	7.30	67.3	20.2		132.6	
		Z	7.61	67.8	20.3		148.4	
10154-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.02	66.5	19.2	5.75	144.2	±1.7 %
		Y	6.03	67.1	19.9		144.2	
		Z	6.06	66.6	19.5		133.8	
10155-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	6.78	66.3	19.3	6.43	128.0	±1.7 %
		Y	6.80	67.0	20.0		126.5	
		Z	7.09	67.3	20.0		141.8	
10156-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.80	66.2	19.1	5.79	140.8	±1.4 %
		Y	5.80	66.9	19.9		138.6	
		Z	5.84	66.3	19.4		130.6	
10157-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	6.83	67.2	19.9	6.49	147.7	±1.7 %
		Y	6.76	67.8	20.6		143.9	
		Z	6.83	67.1	20.0		135.6	

ES3DV3- SN:3301

September 24, 2014

10158-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.07	66.7	19.6	6.62	129.7	±1.7 %
		Y	7.03	67.2	20.2		126.9	
		Z	7.37	67.6	20.3		143.3	
10159-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	6.97	67.5	20.1	6.56	148.9	±1.9 %
		Y	6.87	68.0	20.7		144.7	
		Z	6.98	67.4	20.2		136.2	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.21	66.1	18.9	5.82	126.6	±1.4 %
		Y	6.51	67.8	20.2		148.5	
		Z	6.51	67.2	19.7		139.2	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.16	66.9	19.6	6.43	134.6	±1.7 %
		Y	7.13	67.4	20.2		130.6	
		Z	7.43	67.7	20.2		146.8	
10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.38	67.1	19.8	6.58	135.8	±1.7 %
		Y	7.31	67.4	20.3		132.2	
		Z	7.67	68.0	20.4		148.4	
10166-CAB	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.98	65.6	18.7	5.46	133.0	±1.2 %
		Y	4.98	66.6	19.7		129.0	
		Z	5.21	66.5	19.5		142.4	
10167-CAB	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.92	66.8	19.6	6.21	134.2	±1.7 %
		Y	5.80	67.5	20.4		130.1	
		Z	6.23	67.9	20.4		147.0	
10168-CAB	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.38	67.0	20.0	6.79	134.8	±1.9 %
		Y	6.25	67.7	20.8		129.5	
		Z	6.70	68.1	20.8		146.8	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.00	66.5	19.4	5.73	147.6	±1.4 %
		Y	4.93	67.4	20.4		142.9	
		Z	5.05	66.7	19.8		134.0	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.79	67.8	20.4	6.52	148.0	±1.7 %
		Y	5.57	68.1	21.1		141.2	
		Z	5.86	68.0	20.7		134.6	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.79	67.9	20.4	6.49	148.0	±1.7 %
		Y	5.58	68.3	21.2		141.0	
		Z	5.84	67.9	20.7		135.8	
10175-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.99	66.5	19.4	5.72	147.0	±1.4 %
		Y	4.93	67.4	20.4		142.3	
		Z	5.05	66.7	19.8		134.1	
10176-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.79	67.8	20.4	6.52	148.0	±1.7 %
		Y	5.58	68.1	21.1		141.1	
		Z	5.84	67.8	20.7		134.3	
10177-CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	4.99	66.5	19.4	5.73	146.6	±1.7 %
		Y	4.93	67.4	20.4		142.6	
		Z	5.06	66.7	19.8		134.1	
10178-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.80	67.8	20.4	6.52	147.7	±1.7 %
		Y	5.59	68.2	21.1		141.1	
		Z	5.84	67.8	20.6		133.7	

ES3DV3- SN:3301

September 24, 2014

10179-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.83	68.0	20.6	6.50	148.0	±1.7 %
		Y	5.58	68.2	21.1		141.3	
		Z	5.85	68.0	20.7		134.7	
10180-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.80	67.9	20.4	6.50	148.0	±1.7 %
		Y	5.60	68.3	21.2		141.4	
		Z	5.85	67.9	20.7		134.4	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.98	66.5	19.4	5.72	147.1	±1.4 %
		Y	4.93	67.4	20.4		142.7	
		Z	5.02	66.6	19.7		133.7	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	5.81	67.9	20.5	6.52	148.3	±1.7 %
		Y	5.59	68.2	21.1		141.9	
		Z	5.83	67.8	20.6		134.0	
10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.79	67.8	20.4	6.50	147.6	±1.7 %
		Y	5.58	68.2	21.1		142.1	
		Z	5.83	67.8	20.6		134.5	
10184-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.00	66.6	19.4	5.73	147.3	±1.4 %
		Y	4.95	67.4	20.4		143.6	
		Z	5.03	66.6	19.7		133.5	
10185-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.79	67.8	20.4	6.51	147.8	±1.7 %
		Y	5.60	68.2	21.2		142.3	
		Z	5.83	67.8	20.6		133.9	
10186-AAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	5.81	67.9	20.5	6.50	148.0	±1.7 %
		Y	5.60	68.3	21.1		142.4	
		Z	5.86	68.0	20.7		135.5	
10187-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	5.00	66.6	19.5	5.73	147.0	±1.4 %
		Y	4.94	67.4	20.4		143.7	
		Z	5.06	66.7	19.8		134.4	
10188-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.80	67.8	20.5	6.52	147.6	±1.9 %
		Y	5.60	68.2	21.1		142.6	
		Z	5.85	67.8	20.7		134.3	
10189-AAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.81	67.9	20.5	6.50	148.0	±1.9 %
		Y	5.60	68.2	21.1		142.9	
		Z	5.85	67.9	20.7		135.6	
10193-CAA	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	9.87	68.5	21.1	8.09	133.0	±2.5 %
		Y	9.82	68.9	21.6		129.5	
		Z	10.22	69.3	21.7		146.8	
10194-CAA	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	9.96	68.7	21.2	8.12	135.0	±2.5 %
		Y	9.91	69.1	21.7		131.8	
		Z	10.26	69.4	21.8		148.7	
10195-CAA	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	10.11	68.9	21.4	8.21	136.5	±2.5 %
		Y	9.92	68.8	21.6		132.7	
		Z	10.41	69.6	21.9		149.8	
10196-CAA	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.91	68.6	21.2	8.10	135.0	±2.5 %
		Y	9.74	68.6	21.4		131.1	
		Z	10.23	69.4	21.7		149.1	

ES3DV3- SN:3301

September 24, 2014

10197-CAA	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	9.97	68.7	21.2	8.13	135.5	±2.5 %
		Y	9.86	68.9	21.6		132.8	
		Z	10.30	69.5	21.8		149.9	
10198-CAA	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	10.18	69.0	21.5	8.28	136.5	±2.2 %
		Y	10.01	69.0	21.7		133.4	
		Z	9.98	68.3	21.2		123.7	
10219-CAA	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.79	68.5	21.1	8.03	134.3	±2.7 %
		Y	9.67	68.7	21.4		131.7	
		Z	10.05	69.1	21.5		149.2	
10220-CAA	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	9.98	68.7	21.3	8.13	135.9	±2.2 %
		Y	9.85	68.8	21.5		133.1	
		Z	9.92	68.5	21.2		123.4	
10221-CAA	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	10.17	68.9	21.4	8.27	136.5	±2.2 %
		Y	10.03	69.0	21.7		134.2	
		Z	10.01	68.4	21.2		124.6	
10222-CAA	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	10.24	69.0	21.3	8.06	141.0	±2.2 %
		Y	10.21	69.2	21.6		139.4	
		Z	10.09	68.5	21.1		128.8	
10223-CAA	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	10.86	69.7	21.9	8.48	146.1	±2.5 %
		Y	10.79	69.8	22.1		143.7	
		Z	10.67	69.1	21.6		133.7	
10224-CAA	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	10.25	69.1	21.3	8.08	140.7	±2.2 %
		Y	10.21	69.2	21.6		139.2	
		Z	10.08	68.5	21.1		128.5	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.10	66.1	19.0	5.81	126.0	±1.4 %
		Y	6.43	67.8	20.3		149.8	
		Z	6.41	67.3	19.8		139.5	
10298-AAA	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.66	66.1	19.1	5.72	139.4	±1.4 %
		Y	5.66	66.9	19.9		138.4	
		Z	5.73	66.3	19.3		130.2	
10299-AAA	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	6.67	67.3	19.9	6.39	145.2	±1.7 %
		Y	6.56	67.8	20.5		142.3	
		Z	6.69	67.3	20.0		134.0	
10300-AAA	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	6.86	67.4	20.1	6.60	144.3	±1.7 %
		Y	6.75	68.0	20.7		142.9	
		Z	6.91	67.5	20.2		134.8	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.65	66.6	19.3	6.06	129.1	±1.7 %
		Y	6.73	67.4	20.1		128.2	
		Z	7.00	67.9	20.2		143.1	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.53	65.9	17.0	1.71	136.4	±0.7 %
		Y	3.41	73.0	21.4		135.7	
		Z	3.03	69.8	19.4		149.3	
10316-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	10.12	68.8	21.5	8.36	134.2	±2.2 %
		Y	10.03	69.2	21.9		130.1	
		Z	10.06	68.6	21.5		122.4	

ES3DV3- SN:3301

September 24, 2014

10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.33	65.2	16.6	1.54	137.1	±0.7 %
		Y	3.11	71.7	20.8		137.0	
		Z	2.76	68.8	19.0		127.4	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	9.99	68.7	21.3	8.23	133.7	±2.5 %
		Y	9.92	69.0	21.8		130.4	
		Z	10.32	69.5	21.9		149.8	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	9.87	68.6	21.3	8.14	133.6	±2.5 %
		Y	9.78	68.9	21.7		129.5	
		Z	10.24	69.6	21.9		149.1	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	9.99	68.8	21.4	8.19	134.9	±2.2 %
		Y	9.81	68.8	21.6		130.3	
		Z	9.81	68.2	21.1		122.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 11 and 12).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3301

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3301

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>g</sup>	Depth (mm) <sup>g</sup>	Unct. (k=2)
150	52.3	0.76	7.37	7.37	7.37	0.06	1.20	± 13.3 %
220	49.0	0.81	7.38	7.38	7.38	0.08	1.20	± 13.3 %
300	45.3	0.87	7.67	7.67	7.67	0.18	1.30	± 13.3 %
450	43.5	0.87	6.74	6.74	6.74	0.19	2.05	± 13.3 %
750	41.9	0.89	6.53	6.53	6.53	0.34	1.79	± 12.0 %
900	41.5	0.97	6.23	6.23	6.23	0.32	1.85	± 12.0 %
1810	40.0	1.40	5.04	5.04	5.04	0.74	1.21	± 12.0 %
1950	40.0	1.40	4.87	4.87	4.87	0.75	1.24	± 12.0 %
2300	39.5	1.67	4.75	4.75	4.75	0.80	1.21	± 12.0 %
2450	39.2	1.80	4.49	4.49	4.49	0.72	1.31	± 12.0 %
2600	39.0	1.96	4.34	4.34	4.34	0.80	1.26	± 12.0 %
3500	37.9	2.91	4.29	4.29	4.29	1.00	1.13	± 13.1 %
3700	37.7	3.12	4.11	4.11	4.11	1.00	1.11	± 13.1 %

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>g</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3301

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3301

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
150	61.9	0.80	7.03	7.03	7.03	0.08	1.30	± 13.3 %
220	60.2	0.86	7.46	7.46	7.46	0.08	1.20	± 13.3 %
300	58.2	0.92	7.06	7.06	7.06	0.10	1.50	± 13.3 %
450	56.7	0.94	7.10	7.10	7.10	0.11	1.20	± 13.3 %
750	55.5	0.96	6.15	6.15	6.15	0.60	1.36	± 12.0 %
900	55.0	1.05	6.00	6.00	6.00	0.45	1.58	± 12.0 %
1810	53.3	1.52	4.79	4.79	4.79	0.80	1.22	± 12.0 %
1950	53.3	1.52	4.83	4.83	4.83	0.48	1.74	± 12.0 %
2300	52.9	1.81	4.48	4.48	4.48	0.70	1.25	± 12.0 %
2450	52.7	1.95	4.31	4.31	4.31	0.80	1.16	± 12.0 %
2600	52.5	2.16	4.15	4.15	4.15	0.64	0.92	± 12.0 %
3500	51.3	3.31	3.64	3.64	3.64	1.00	1.32	± 13.1 %
3700	51.0	3.55	3.56	3.56	3.56	1.00	1.28	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES30V3- SN:3301

September 24, 2014

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

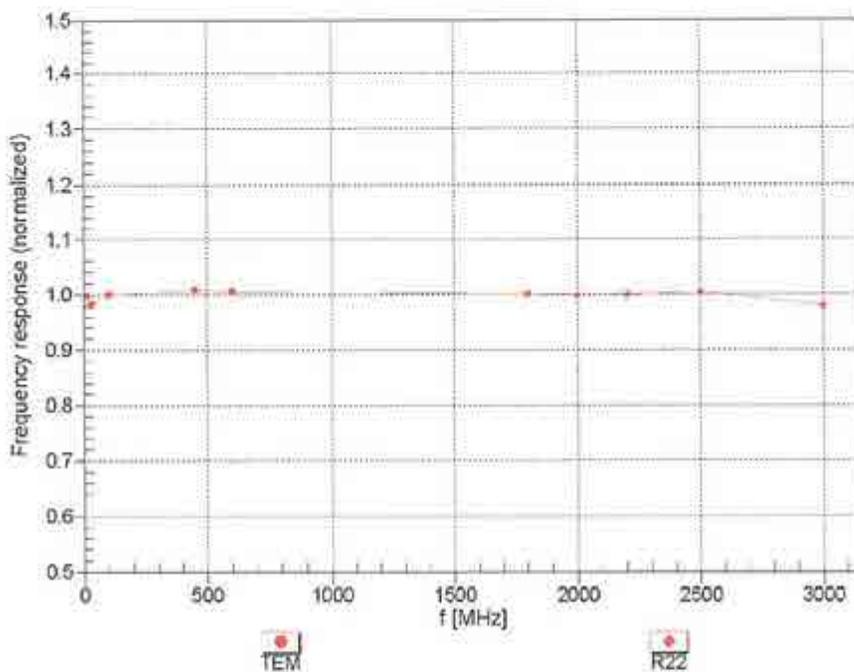

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)


ES3DV3- SN:3301

September 24, 2014

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22


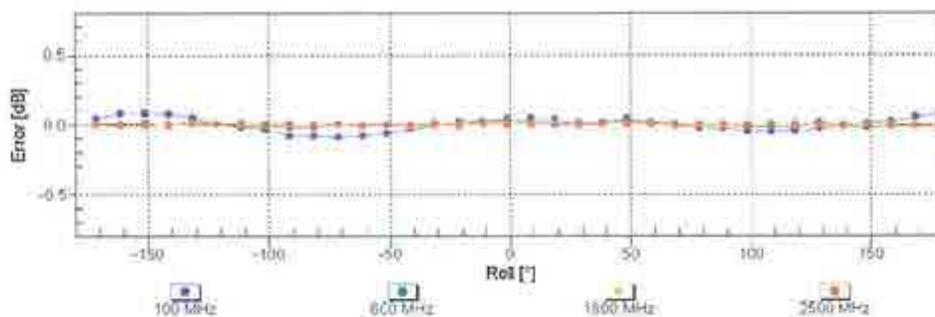


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

ES3DV3- SN:3301

September 24, 2014

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

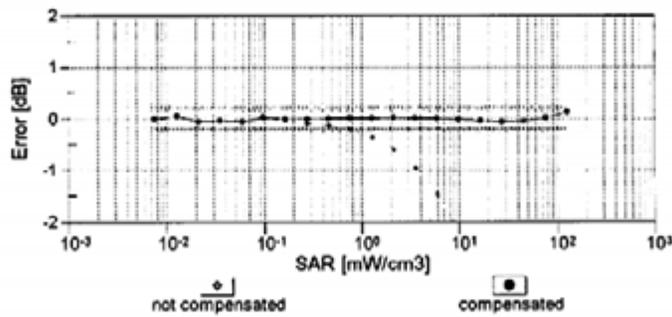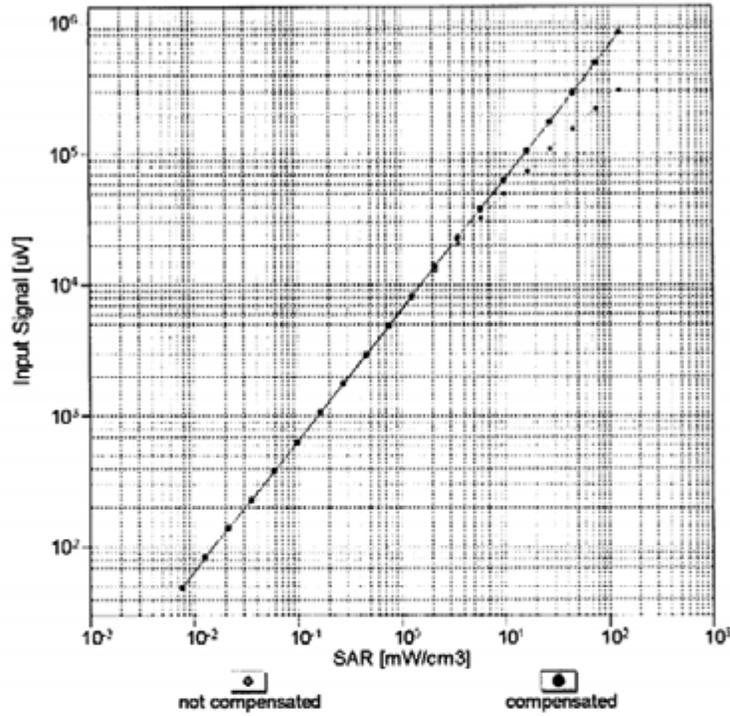


Uncertainty of Linearity Assessment: ± 0.6% (k=2)


ES3DV3- SN:3301

September 24, 2014

### Conversion Factor Assessment

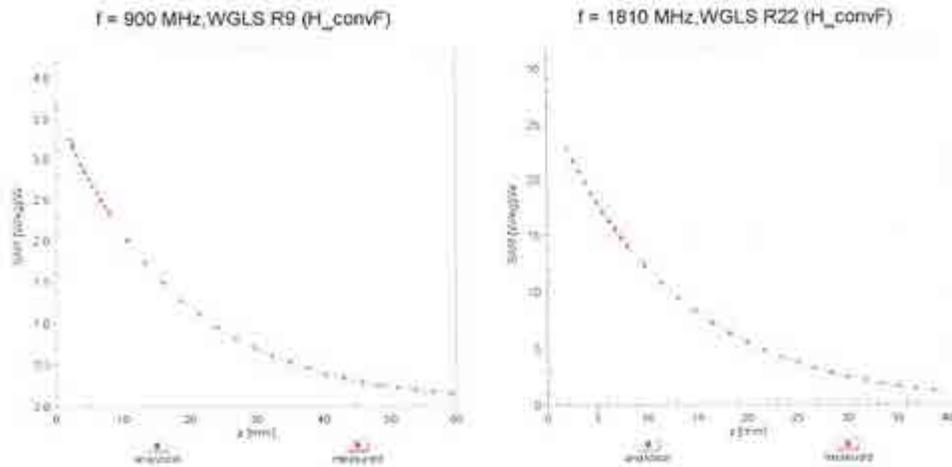

### Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

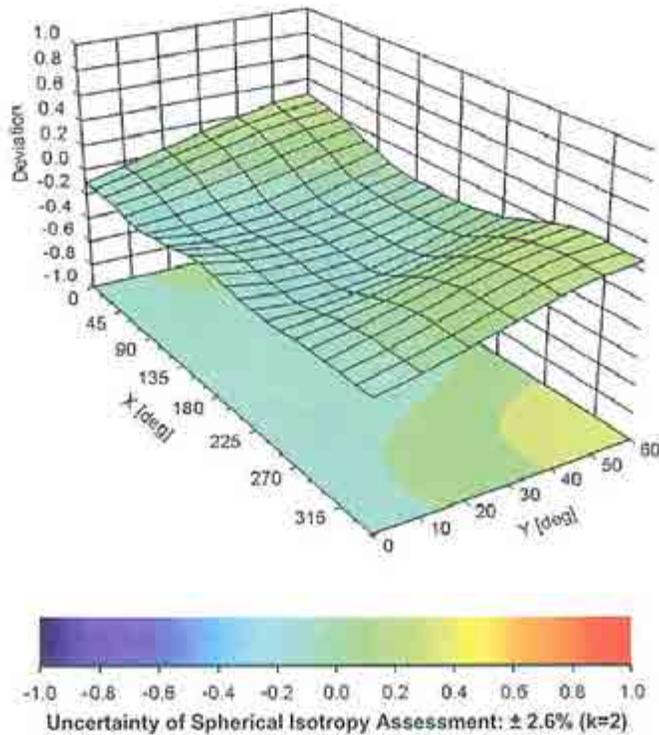

ES3DV3- SN:3301

September 24, 2014

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3301

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-71.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	2 mm

## Appendix C Dipole Calibration Certificates

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **Motorola EME**

Certificate No: **D900V2-085\_Feb14**

CALIBRATION CERTIFICATE																																															
Object	D900V2 - SN: 085																																														
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz																																														
Calibration date	February 12, 2014																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>09-Oct-13 (No. 217-01827)</td> <td>Oct-14</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>09-Oct-13 (No. 217-01827)</td> <td>Oct-14</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>09-Oct-13 (No. 217-01828)</td> <td>Oct-14</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5058 (20K)</td> <td>04-Apr-13 (No. 217-01736)</td> <td>Apr-14</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.3 / 06327</td> <td>04-Apr-13 (No. 217-01739)</td> <td>Apr-14</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>30-Dec-13 (No. ES3-3205_Dec13)</td> <td>Dec-14</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>25-Apr-13 (No. DAE4-601_Apr13)</td> <td>Apr-14</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator R&amp;S SMT-06</td> <td>100005</td> <td>04-Aug-99 (in house check Oct-13)</td> <td>In house check: Oct-16</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-13)</td> <td>in house check: Oct-14</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14	Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14	Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14	Reference 20 dB Attenuator	SN: 5058 (20K)	04-Apr-13 (No. 217-01736)	Apr-14	Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14	Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14	DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	in house check: Oct-14
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14																																												
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14																																												
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14																																												
Reference 20 dB Attenuator	SN: 5058 (20K)	04-Apr-13 (No. 217-01736)	Apr-14																																												
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14																																												
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14																																												
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	in house check: Oct-14																																												
Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 																																												
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																												
			Issued: February 12, 2014																																												
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

**Calibration Laboratory of**  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL tissue simulating liquid  
 ConvF sensitivity in TSL / NORM x,y,z  
 N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.4 ± 6 %	0.95 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	10.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.65 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.66 W/kg ± 16.5 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 6 %	1.03 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	10.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.66 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.70 W/kg ± 16.5 % (k=2)

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.8 $\Omega$ + 0.9 j $\Omega$
Return Loss	- 34.2 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	47.1 $\Omega$ - 0.7 j $\Omega$
Return Loss	- 30.2 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.391 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	September 20, 2000

**DASY5 Validation Report for Head TSL**

Date: 11.02.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 085**

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 0.95 \text{ S/m}$ ;  $\epsilon_r = 40.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY52 Configuration:**

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 58.223 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.91 W/kg


**SAR(1 g) = 2.58 W/kg; SAR(10 g) = 1.65 W/kg**

Maximum value of SAR (measured) = 3.01 W/kg

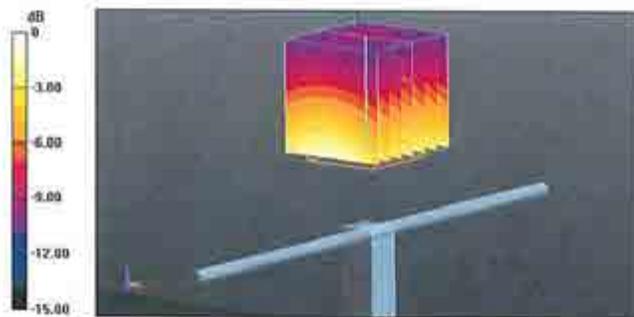

0 dB = 3.01 W/kg = 4.79 dBW/kg

### Impedance Measurement Plot for Head TSL

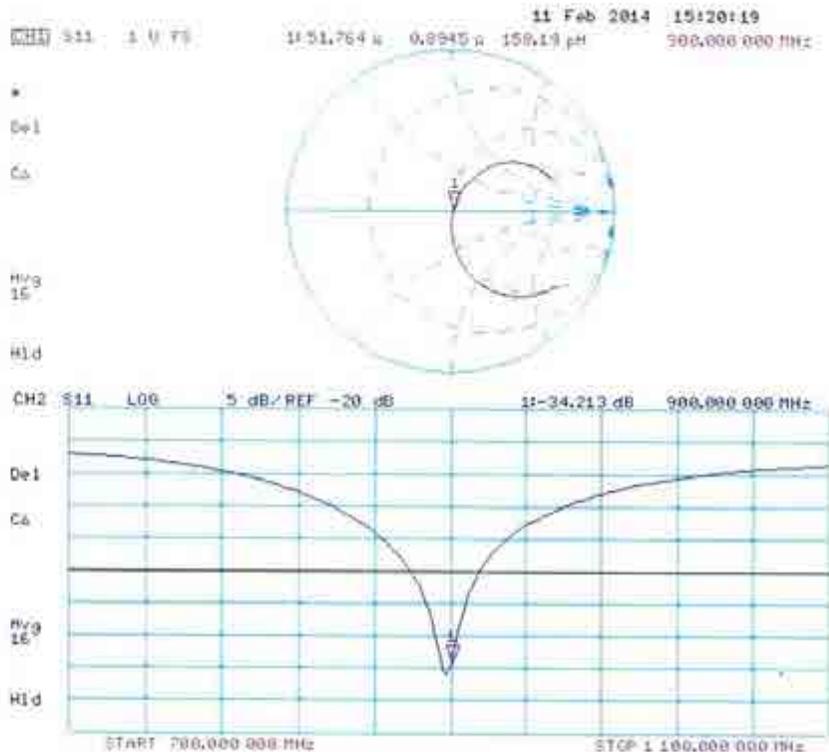

**DASY5 Validation Report for Body TSL**

Date: 12.02.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 085**

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.03$  S/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY52 Configuration:**

- Probe: ES3DV3 - SN3205; ConvF(5.98, 5.98, 5.98); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm 2/Zoom Scan (7x7x7)/Cube 0;**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.048 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.84 W/kg


**SAR(1 g) = 2.58 W/kg; SAR(10 g) = 1.66 W/kg**

Maximum value of SAR (measured) = 3.01 W/kg

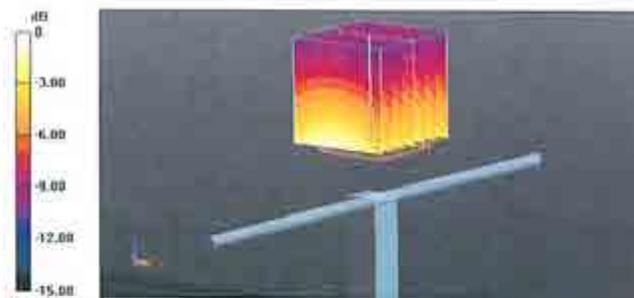

0 dB = 3.01 W/kg = 4.79 dBW/kg

### Impedance Measurement Plot for Body TSL

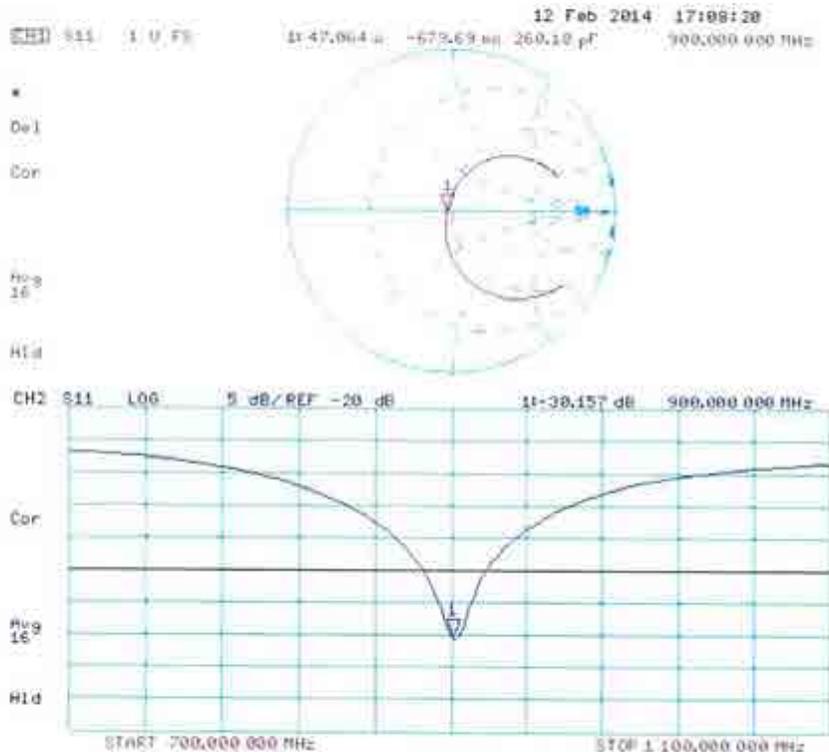

### Dipole Data

The table below includes dipole impedance and return loss measurement data measured by Motorola Solutions' EME lab. The results meet the requirements stated in KDB 865664.

Dipole 900-085	Head			Body		
	Impedance		Return Loss	Impedance		Return Loss
Date Measured	real $\Omega$	imag $j\Omega$	dB	real $\Omega$	imag $j\Omega$	dB
2/26/2014	52.81	-1.09	-30.59	51.56	1.34	-33.88
2/25/2015	52.64	-3.19	-27.79	50.90	3.44	-29.10