

**MOTOROLA SOLUTIONS**

CERTIFICATE 2518.05

DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 2 of 2**Motorola Solutions, Inc.****EME Test Laboratory**

Motorola Solutions Malaysia Sdn Bhd (455657-H)
 Plot 2, Bayan Lepas Technoplex Industrial Park,
 Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 11/13/2015**Report Revision:** B

Responsible Engineer: Chang Chi Chern (EME Engineer)
Report Author: Chang Chi Chern (EME Engineer)
Date/s Tested: 09/30/15 – 10/13/2015
Manufacturer/Location: Motorola Solutions, Inc, Penang
DUT Description: Handheld Portable – NKP 403-527 MHz 4 W GNSS BT WIFI GOB and FKP 403-527 MHz 4 W GNSS BT WIFI GOB
Test TX mode(s): CW (PTT), Bluetooth, and WLAN 802.11b/g/n
Max. Power output: 4.8 W (UHF band), 10.0 mW (Bluetooth), 22.4 mW (802.11b), 8.3 mW (802.11g), 12.6 mW (802.11n)
Nominal Power: 4.0 W (UHF band), 8.9 mW (Bluetooth), 16.6 mW (802.11b), 6.6 mW (802.11g), 10.0 mW (802.11n)
Tx Frequency Bands: LMR 403-527 MHz; Bluetooth 2.402-2.480 GHz; WLAN 2.412-2.462 GHz
Signaling type: FM, FHSS (Bluetooth), 802.11b/g/n (WLAN)
Model(s) Tested: PMUE3681B & PMUE3675B
Model(s) Certified: PMUE3681B & PMUE3675B
Serial Number(s): 807TRRC885, 807TRRC887, 871TRR8909, 871TRR8913
Classification: Occupational/Controlled
FCC ID: AZ489FT7065; LMR 406.125-512 MHz, Bluetooth 2.402-2.480 GHz, WLAN 2.412-2.462 GHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.
IC: 109U-89FT7065; This report contains results that are immaterial for IC equipment approval, which are clearly identified.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Deanna Zakharia
EMS EME Lab Senior Resource Manager,
Laboratory Director
Approval Date: 11/13/2015

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory

Date/Time: 9/30/2015 7:08:53 AM

Robot#: DASY5-PG-1 | Run#: TLC-SYSP-450B-150930-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 21.0 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.052dB
 Adjusted SAR (1W): 4.80mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):



Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Reference Value = 39.15 V/m; Power Drift = -0.03 dB
 Fast SAR: SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.863 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.42 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
 Reference Value = 39.15 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 2.00 W/kg
 SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.794 W/kg (SAR corrected for target medium)

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

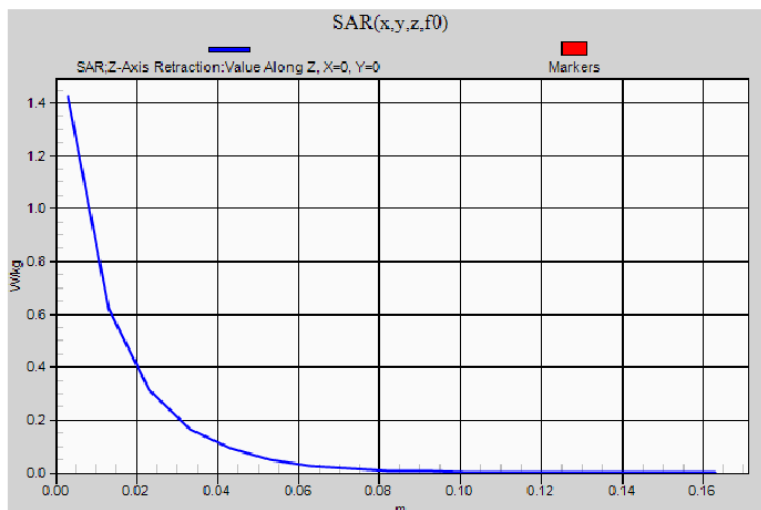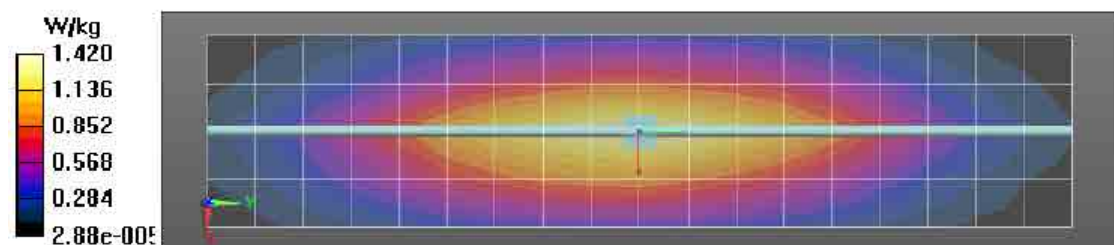

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/1/2015 7:33:54 AM

Robot#: DASY5-PG-1 | Run#: TLC-SYSP-450B-151001-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.8 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.16dB
 Adjusted SAR (1W): 4.32 mW/g (1g)

Comments:

Duty Cycle: 1:1. Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):



Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 36.90 V/m; Power Drift = -0.04 dB
 Fast SAR: SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.788 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.30 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 36.90 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 1.79 W/kg
 SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.709 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.26 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.25 W/kg

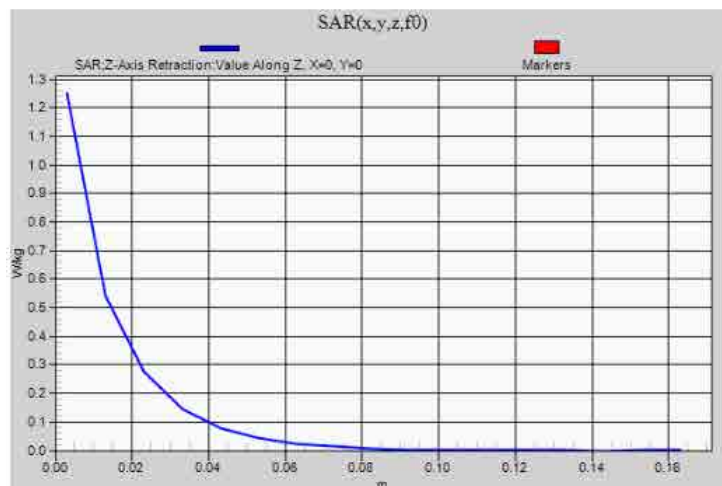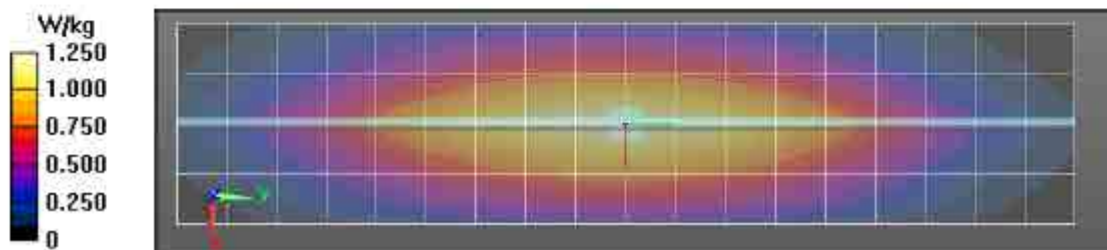

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/2/2015 7:27:53 AM

Robot#: DASY5-PG-1 | Run#: TLC-SYSP-450B-151002-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.8 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.12dB
 Adjusted SAR (1W): 4.48 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):




Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 37.76 V/m; Power Drift = -0.01 dB
 Fast SAR: SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.798 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.30 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 37.76 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.82 W/kg
 SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.739 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.31 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

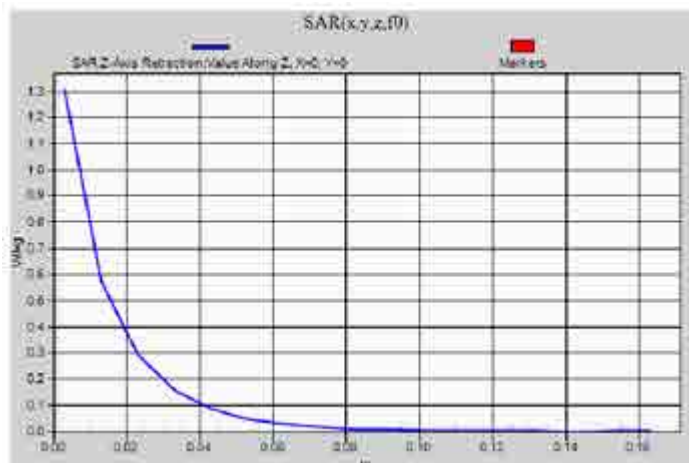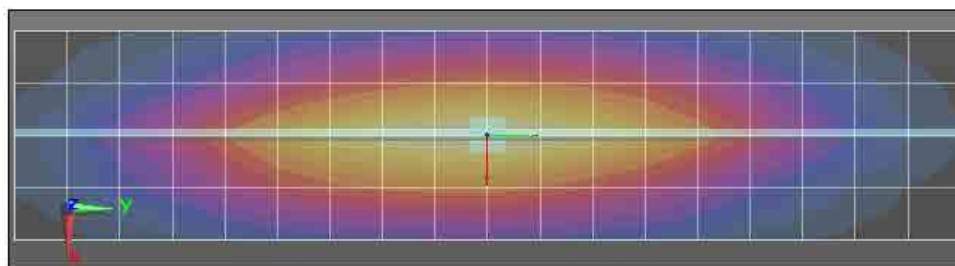

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/3/2015 7:28:08 AM

Robot#: DASY5-PG-1 | Run#: TLC-SYSP-450B-151003-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.4 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.047dB
 Adjusted SAR (1W): 4.60 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 38.44 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.819 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.34 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.44 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.88 W/kg



SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.766 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.36 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.37 W/kg

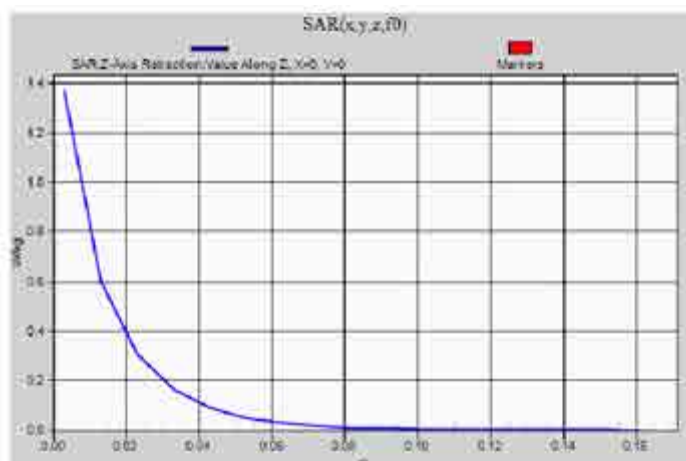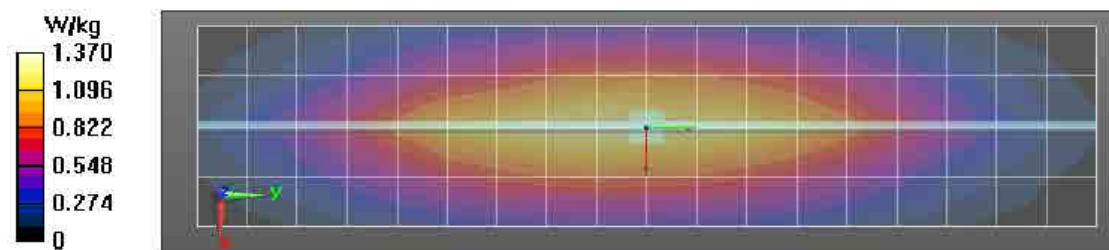

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/4/2015 9:00:36 AM

Robot#: DASY5-PG-1 | Run #: TLC-SYSP-450B-151004-01
 Dipole Model#: D450V3
 Phantom#: ELIS 1150
 Tissue Temp: 20.6 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.11dB
 Adjusted SAR (1W): 4.28 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 36.82 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.764 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.25 W/kg



Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 36.82 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.705 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.25 W/kg

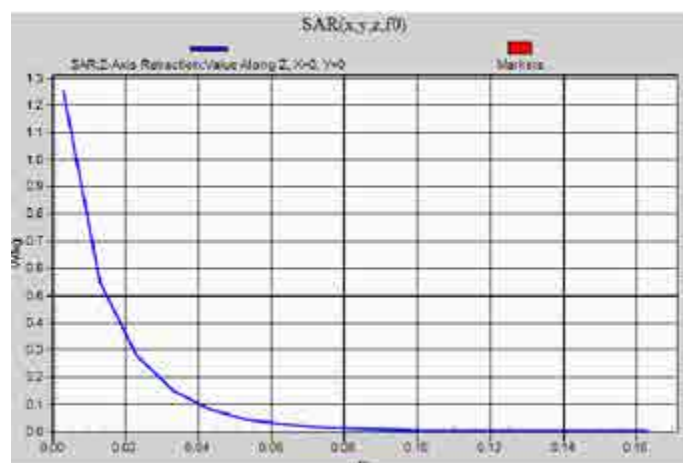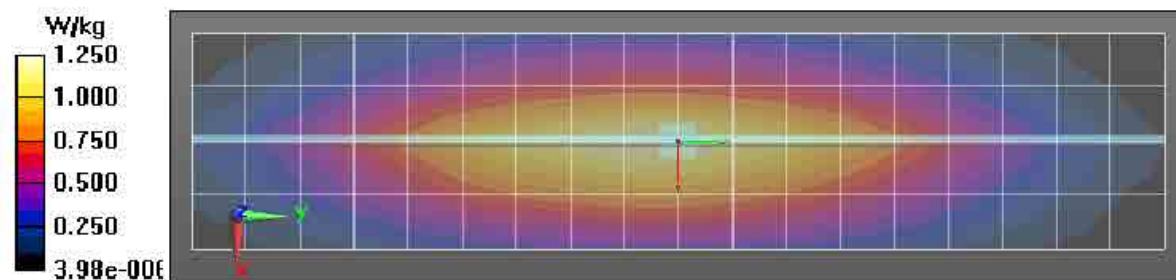Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/5/2015 8:42:45 AM

Robot#: DASY5-PG-1 | Run#: FIE-SYSP-450B-151005-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.8 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.12 dB
 Adjusted SAR (1W): 4.68 mW/g (1g)

Comments:

Duty Cycle: 1:1. Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 38.28 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.820 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.35 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x7x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.28 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.769 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.37 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

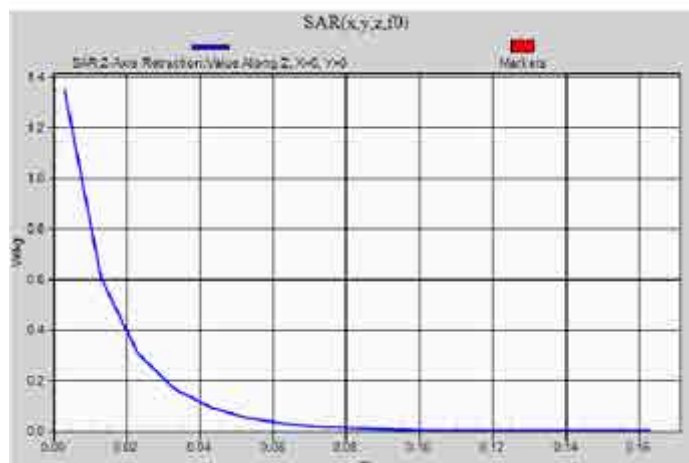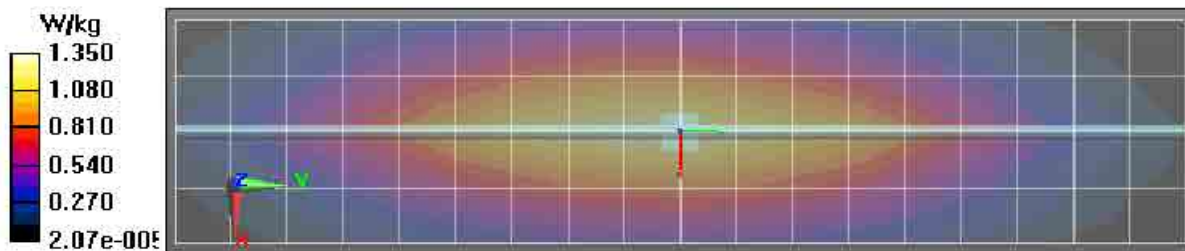

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/6/2015 7:46:04 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151006-11
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.1 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.1 dB
 Adjusted SAR (1W): 4.76 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):



Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 38.85 V/m; Power Drift = 0.00 dB
 Fast SAR: SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.843 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.37 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 38.85 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 1.92 W/kg
 SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.787 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.39 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

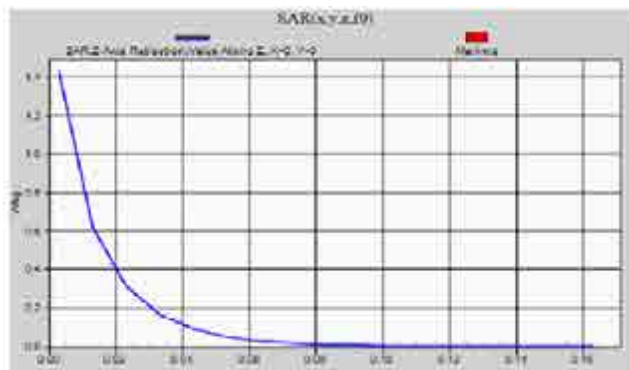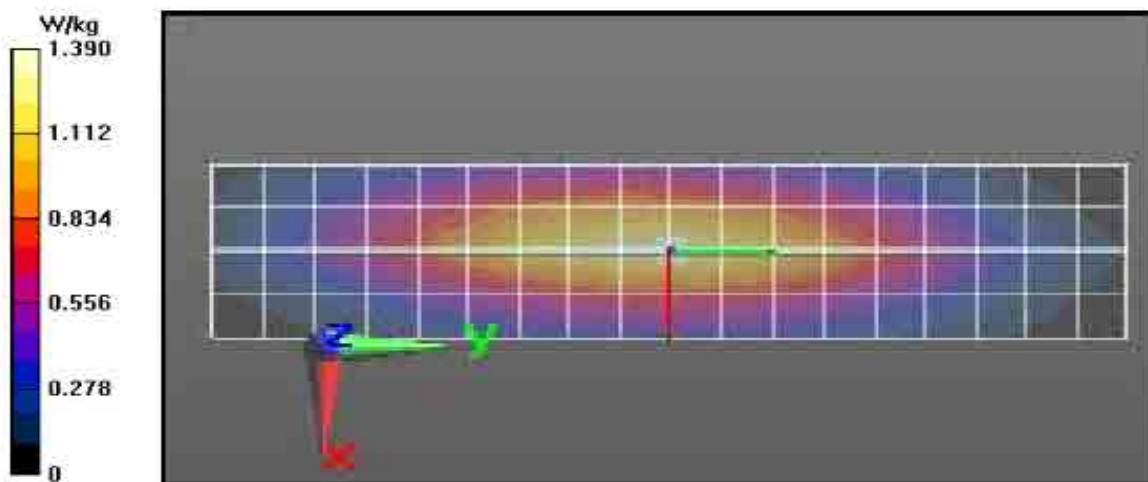

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/7/2015 7:54:35 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151007-11
 Dipole Model# D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.6 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.023 dB
 Adjusted SAR (1W): 4.52 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, , Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 38.01 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.811 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.33 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.01 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.749 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.32 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

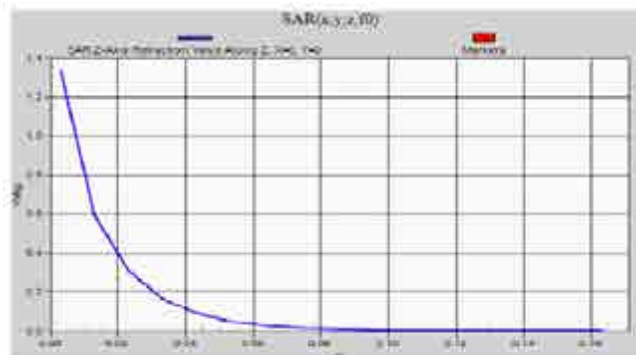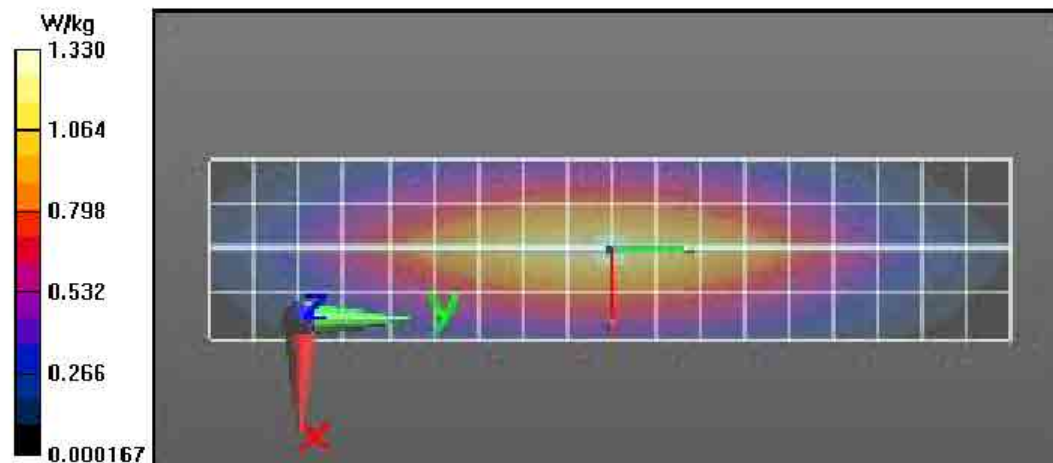

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/8/2015 6:23:15 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151008-08
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.1 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.034 dB
 Adjusted SAR (1W): 4.56 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 37.85 V/m; Power Drift = -0.00 dB

Fast SAR: SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.807 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.32 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 37.85 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.83 W/kg




SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.751 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.33 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.32 W/kg

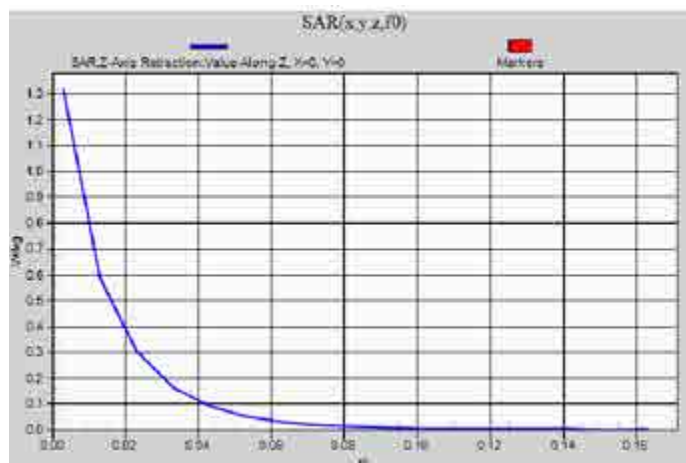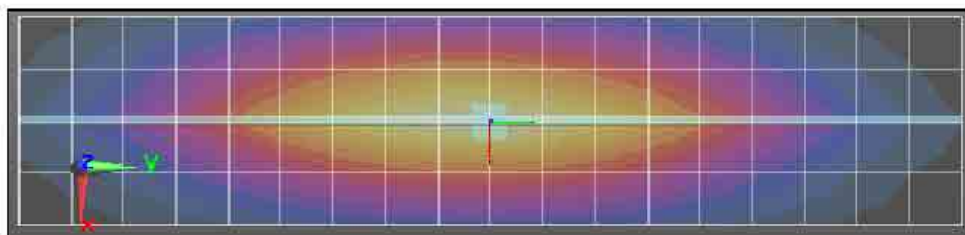

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/9/2015 6:50:19 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151009-10
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.6 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.039 dB
 Adjusted SAR (1W): 4.64 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 38.24 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.826 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.35 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.91 W/kg



SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.760 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.36 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.34 W/kg

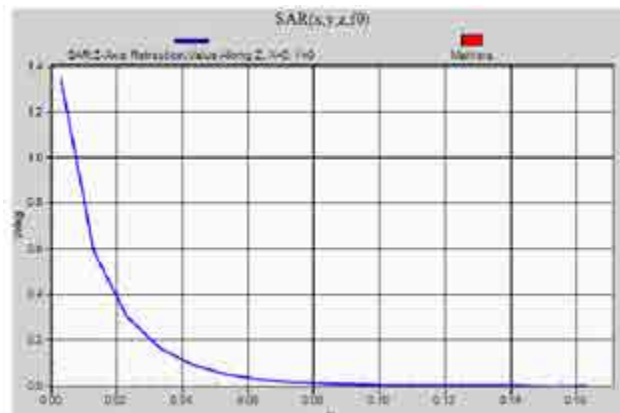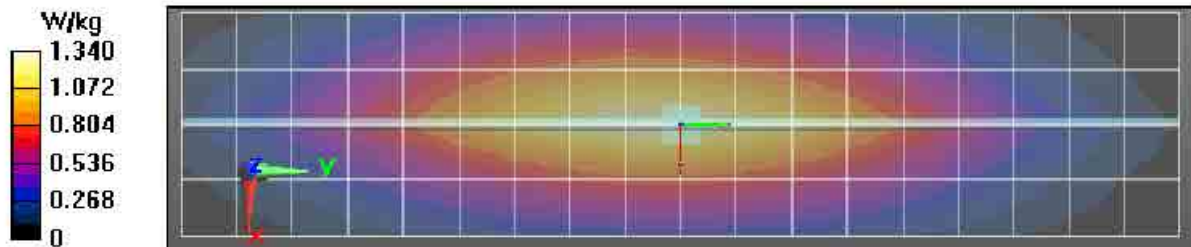

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/11/2015 6:14:35 PM

Robot#: DASY5-PG-1 | Run#: AZ-SYSP-450B-151011-11
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 20.6 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (ID): 0.090 dB
 Adjusted SAR (1W): 4.60 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 39.35 V/m; Power Drift = -0.17 dB

Fast SAR: SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.871 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.41 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 39.35 V/m; Power Drift = -0.17 dB



Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.758 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.33 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 1.36 W/kg

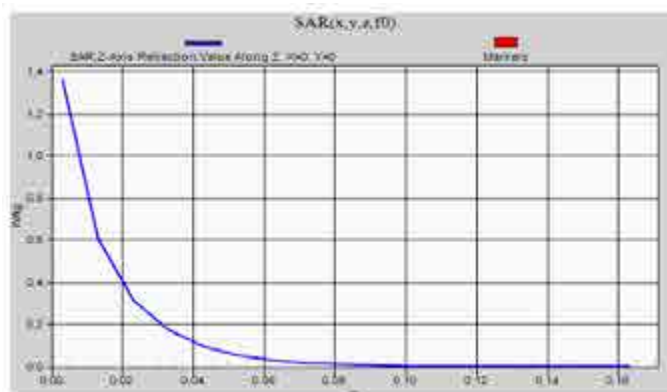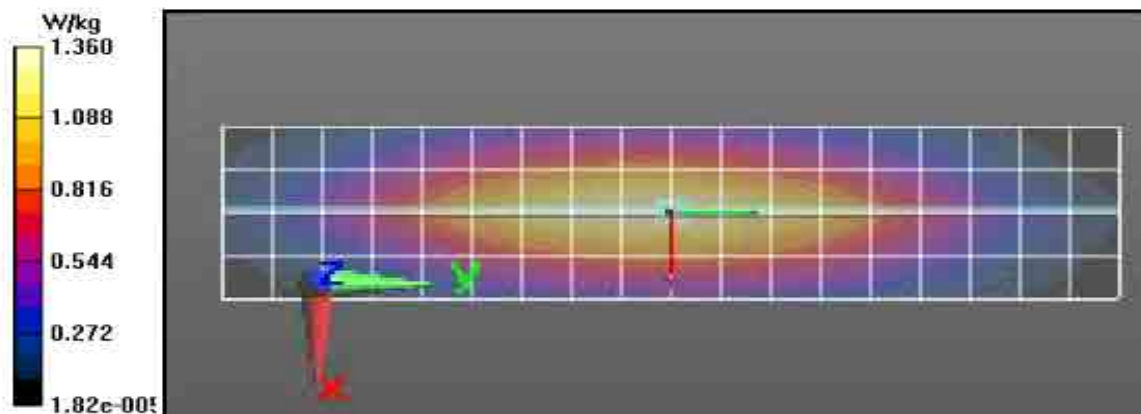

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/12/2015 7:26:06 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151012-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 21.1 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.089 dB
 Adjusted SAR (1W): 4.48 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 37.70 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.797 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.29 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 37.70 V/m; Power Drift = -0.02 dB




Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.736 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.30 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

Maximum value of SAR (measured) = 1.29 W/kg

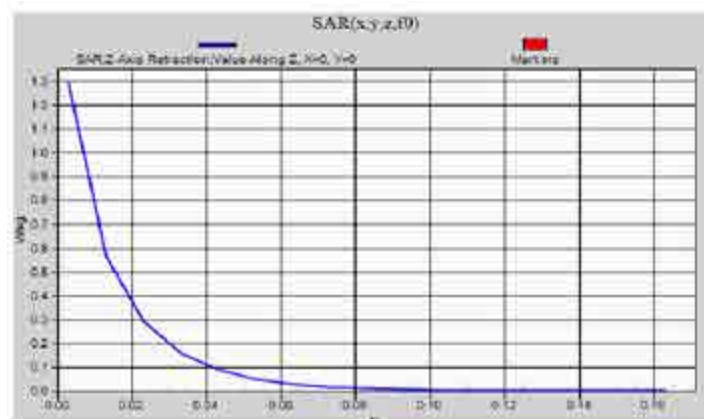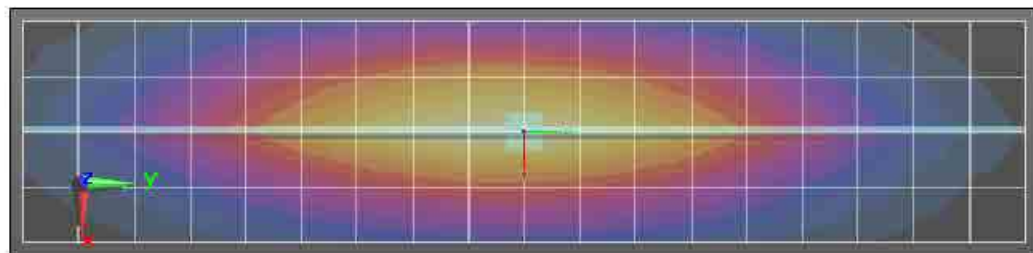

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/13/2015 9:49:05 AM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450B-151013-01
 Dipole Model#: D450V3
 Phantom#: ELI5 1150
 Tissue Temp: 21.4 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.037 dB
 Adjusted SAR (1W): 4.60 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, , Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 38.48 V/m; Power Drift = -0.05 dB

Fast SAR: SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.827 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.35 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.48 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.761 W/kg (SAR corrected for target medium)

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.35 W/kg

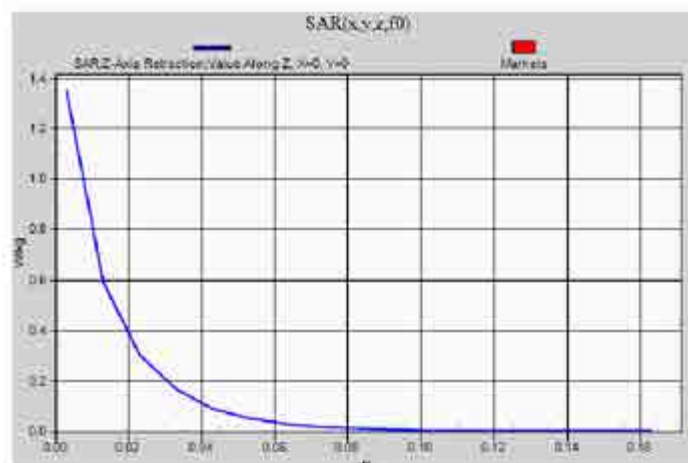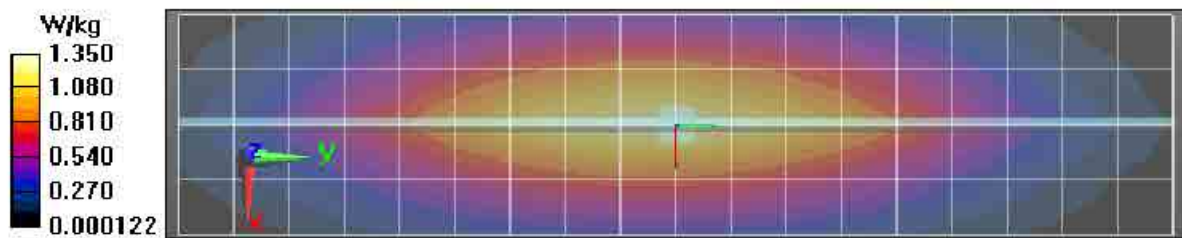

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/9/2015 6:12:13 PM

Robot#: DASY5-PG-1 | Run#: MO-SYSP-450H-151009-18
 Dipole Model#: D450V3
 Phantom#: ELI4 1028
 Tissue Temp: 20.2 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.04 dB
 Adjusted SAR (1W): 4.40 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 43.5$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.61, 6.61, 6.61); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 39.20 V/m; Power Drift = -0.04 dB

Fast SAR: SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.776 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.27 W/kg

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (5x19x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 39.20 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.733 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.28 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

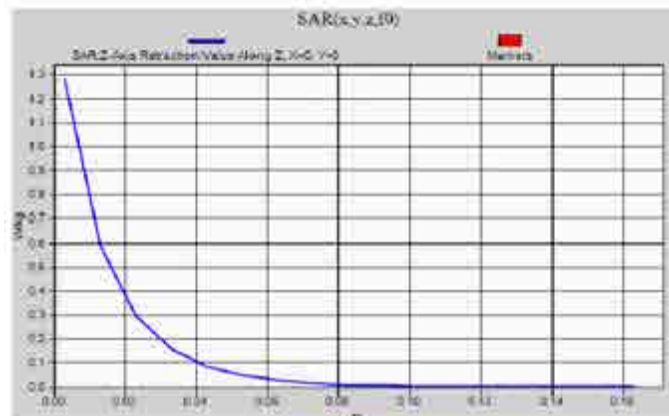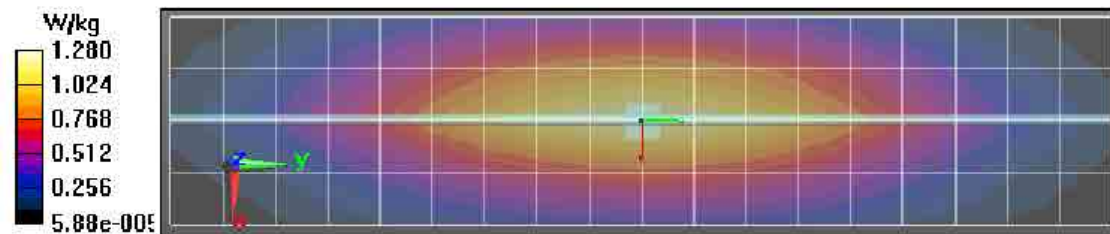

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/10/2015 5:11:43 PM

Robot#: DASY5-PG-1 | Run#: TLC-SYSP-450H-151010-13
 Dipole Model# D450V3
 Phantom#: ELI4 1028
 Tissue Temp: 20.4 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.071dB
 Adjusted SAR (1W): 4.72 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 44.9$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.61, 6.61, 6.61); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 40.60 V/m; Power Drift = -0.00 dB

Fast SAR: SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.840 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.37 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 40.60 V/m; Power Drift = -0.00 dB




Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.783 W/kg (SAR corrected for target medium)

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.39 W/kg

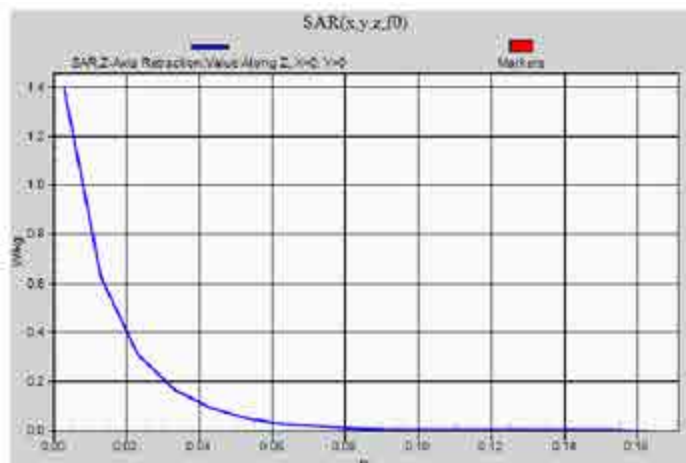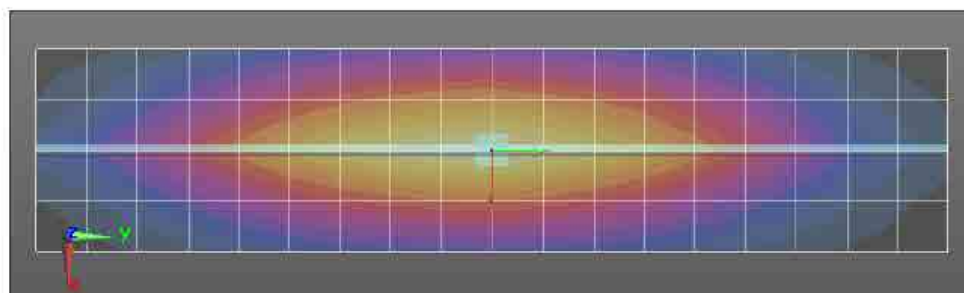

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/11/2015 10:26:25 AM

Robot#: DASY5-PG-1 | Run#: FIE-SYSP-450H-151011-01
 Dipole Model#: D450V3
 Phantom#: ELI4 1028
 Tissue Temp: 20.5 (C)
 Serial#: 1053
 Test Freq: 450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.042 dB
 Adjusted SAR (1W): 4.80 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 44.2$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.61, 6.61, 6.61); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (41x181x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 40.57 V/m; Power Drift = 0.12 dB

Fast SAR: SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.824 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.33 W/kg



Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x6x7)/Cube 0:Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 40.57 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.803 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.37 W/kg

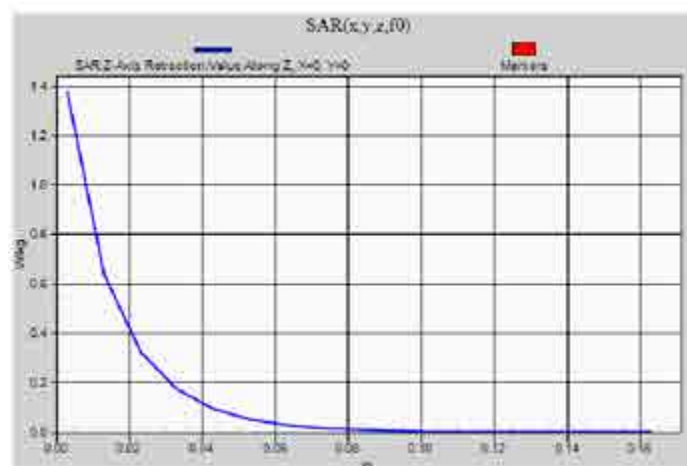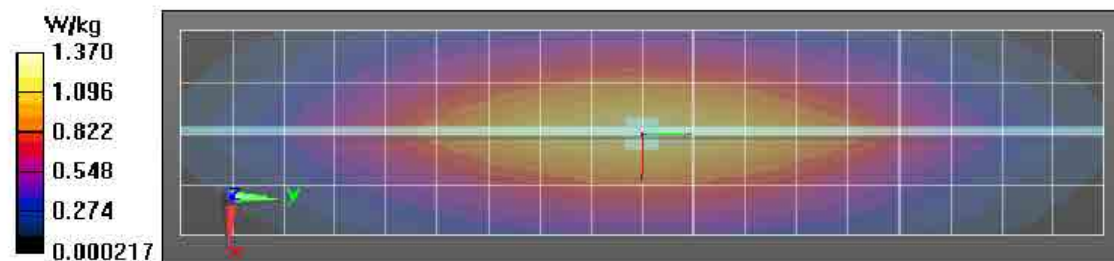Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/5/2015 9:43:07 AM

Robot#: DASY5-PG-02 | Run#: AZ-SYSP-2450B-151005-01

Dipole Model# D2450V2

Phantom# ELI5 1147

Tissue Temp: 20.6 (C)

Serial#: 781

Test Freq: 2450.000 (MHz)

Start Power: 250 (mW)

Rotation (1D): 0.046 dB

Adjusted SAR (1W): 50.80 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7364, Frequency: 2450 MHz, ConvF(7.33, 7.33, 7.33); Calibrated: 6/23/2015

Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 102.3 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.11 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 21.0 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.3 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 27.9 W/kg



SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.9 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 20.4 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 20.6 W/kg

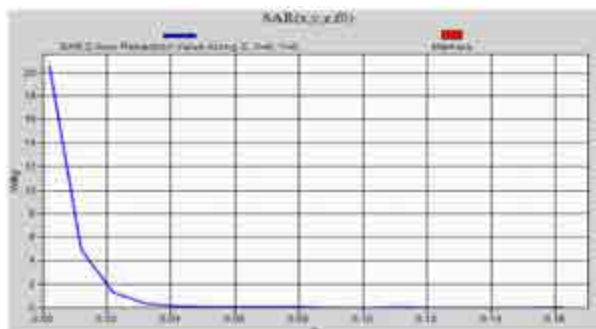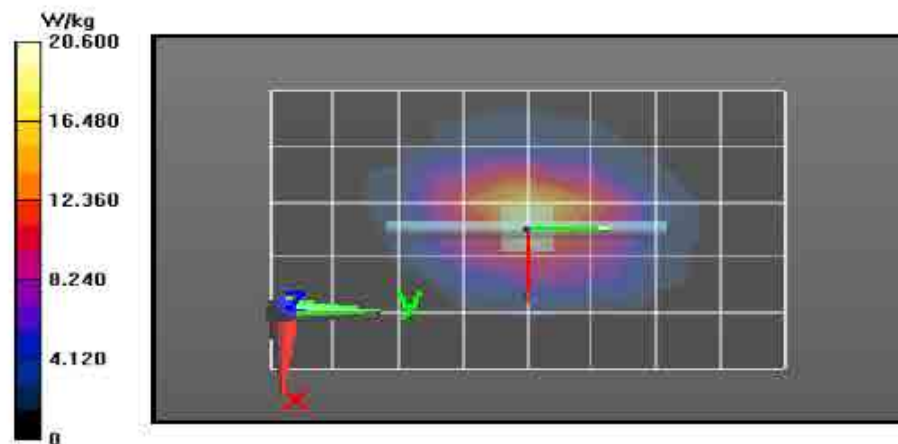

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/7/2015 7:43:16 AM

Robot#: DASY5-PG-02 | Run#: FIE-SYSP-2450B-151007-01
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 21.4 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.065 dB
 Adjusted SAR (1W): 49.20 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, Frequency: 2450 MHz, ConvF(7.33, 7.33, 7.33); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 100.6 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.87 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 20.5 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.6 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.5 W/kg



SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.7 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 19.3 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 19.6 W/kg

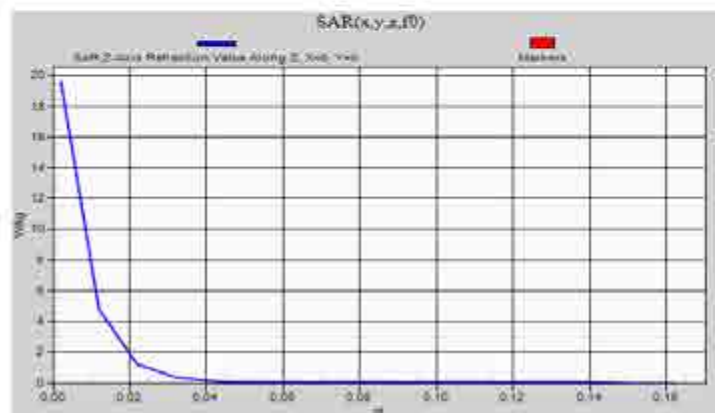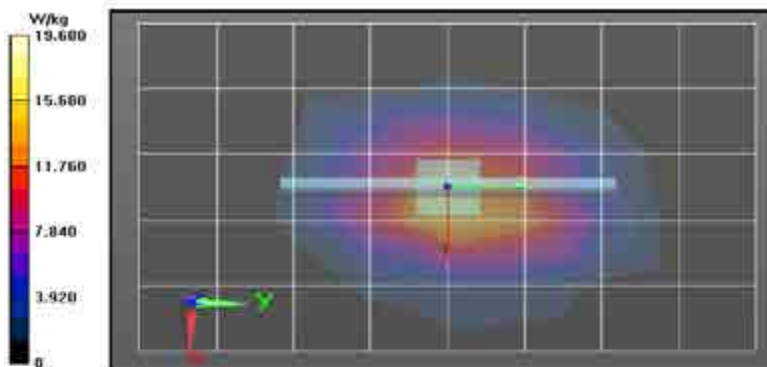

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/8/2015 7:23:44 AM

Robot#: DASY5-PG-02 | Run#: FIE-SYSP-2450B-151008-01
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 20.9 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.048 dB
 Adjusted SAR (1W): 51.20 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, Frequency: 2450 MHz, ConvF(7.33, 7.33, 7.33); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 102.4 V/m; Power Drift = -0.00 dB

Fast SAR: SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 21.5 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.4 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 28.1 W/kg



SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.96 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 20.5 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 20.7 W/kg

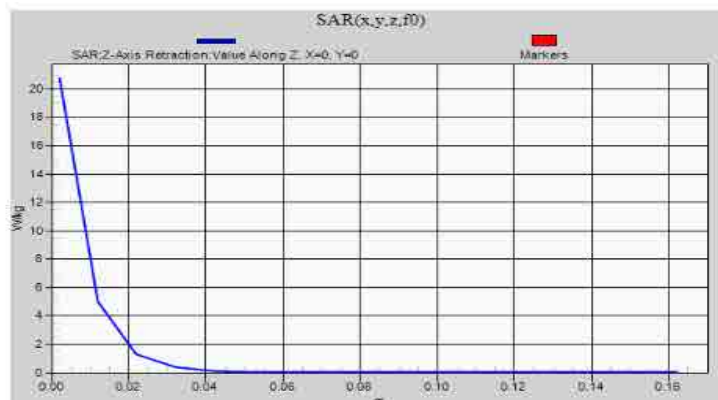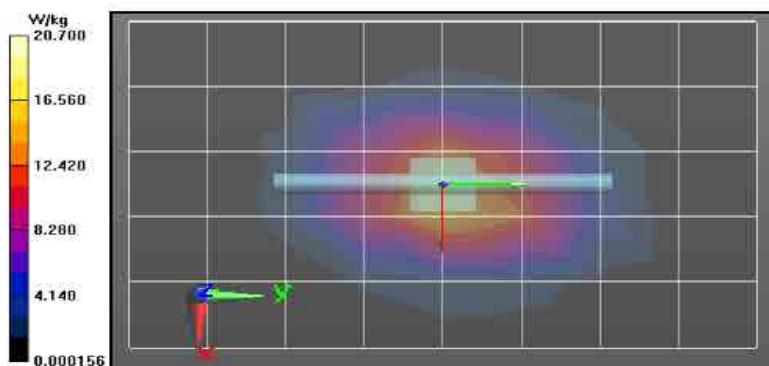

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/9/2015 7:51:12 AM

Robot#: DASY5-PG-02 | Run#: FIE-SYSP-2450B-151009-01
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 21.2 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.060 dB
 Adjusted SAR (1W): 51.60 mW/g (1g)

Comments:

Duty Cycle: 1:1. Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 47.9$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, , Frequency: 2450 MHz, ConvF(7.33, 7.33, 7.33); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 103.2 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 21.5 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.2 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 28.1 W/kg



SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.95 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 20.4 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 20.6 W/kg

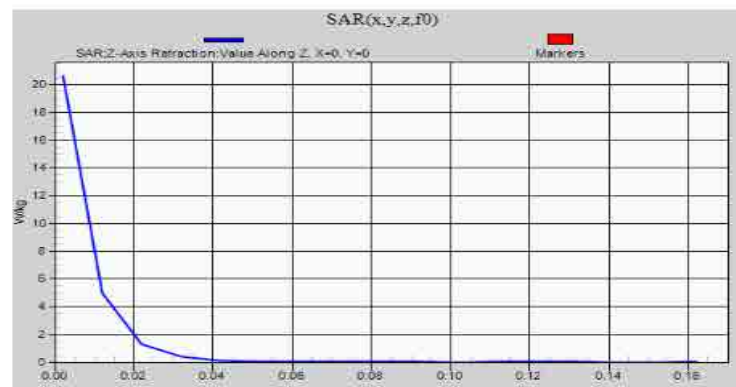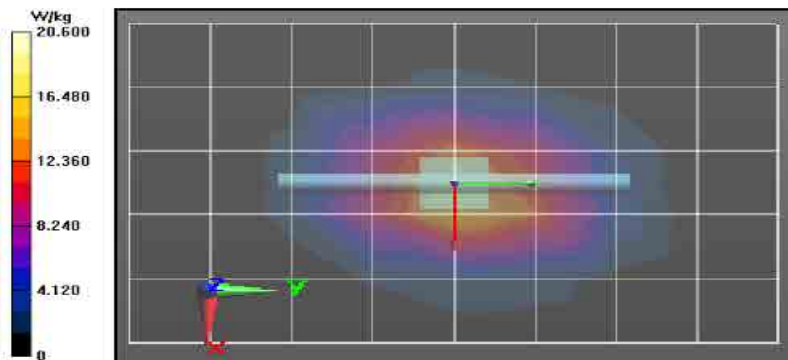

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/11/2015 12:15:38 PM

Robot#: DASY5-PG-02 | Run#: KKL-SYSP-2450H-151011-04
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 20.7 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.066dB
 Adjusted SAR (1W): 54.00 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 37.2$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, Frequency: 2450 MHz, ConvF(7.18, 7.18, 7.18); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm

Reference Value = 108.7 V/m; Power Drift = -0.00 dB

Fast SAR: SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.61 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 22.2 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement
 grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.7 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 29.9 W/kg



SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 21.4 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 21.8 W/kg

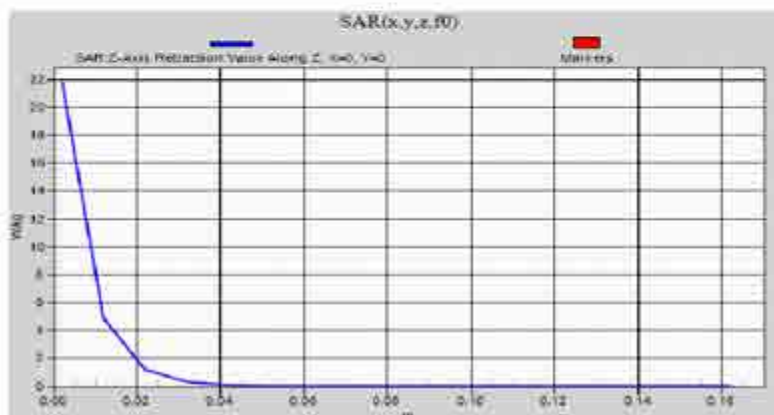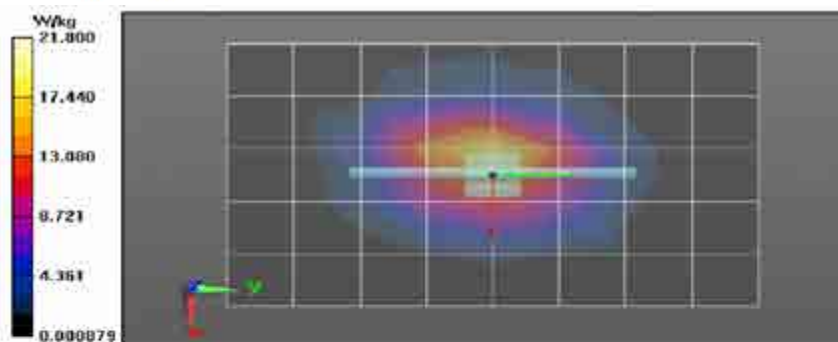

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/12/2015 7:07:27 AM

Robot#: DASY5-PG-02 | Run#: FIE-SYSP-2450H-151012-01
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 21.2 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.110 dB
 Adjusted SAR (1W): 52.40 mW/g (1g)

Comments:

Duty Cycle: 1:1. Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.1$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, . Frequency: 2450 MHz, ConvF(7.18, 7.18, 7.18); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 108.0 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.5 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 21.9 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 28.8 W/kg



SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.07 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 20.9 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 21.3 W/kg

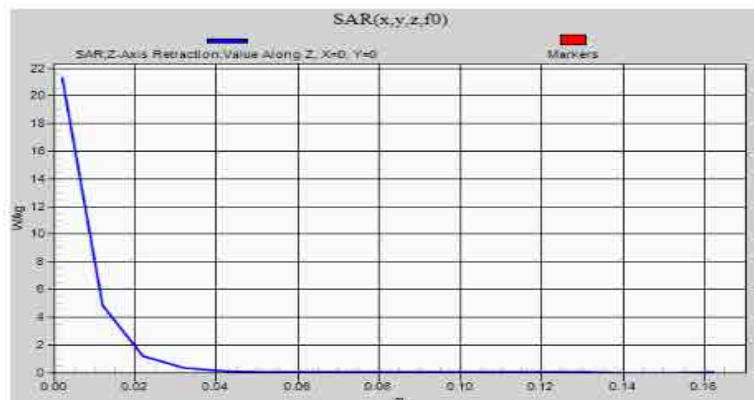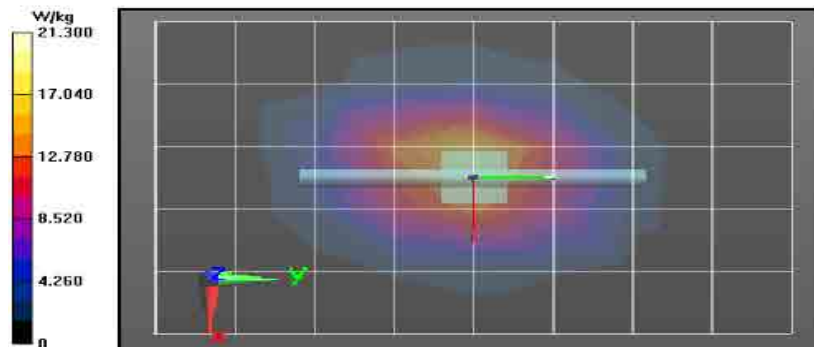

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/13/2015 7:22:37 AM

Robot#: DASY5-PG-02 | Run#: FIE-SYSP-2450H-151013-01
 Dipole Model#: D2450V2
 Phantom#: ELI5 1147
 Tissue Temp: 21.3 (C)
 Serial#: 781
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.065 dB
 Adjusted SAR (1W): 52.40 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 36.8$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, , Frequency: 2450 MHz, ConvF(7.18, 7.18, 7.18); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x81x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 108.1 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.46 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 21.6 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.1 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.03 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 21.0 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

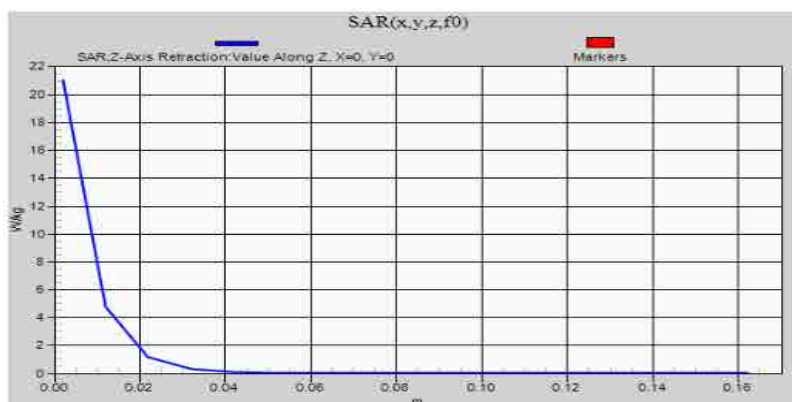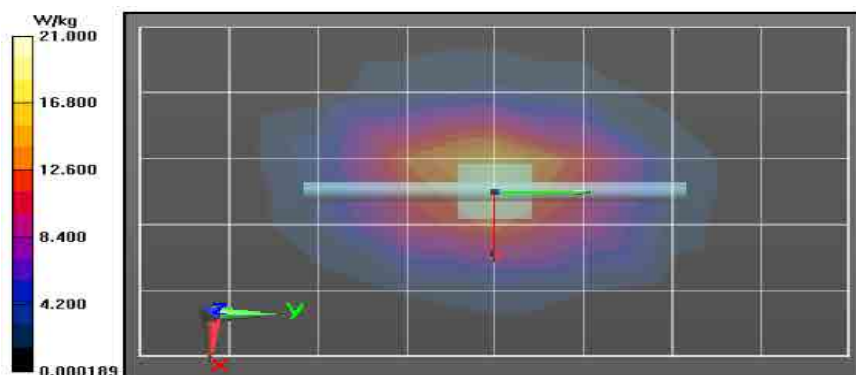

Appendix E

DUT Scans

Assessments at the Body with Body worn RLN4570A

Table 18

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/2/2015 12:51:19 PM

Robot#: DASY5-PG-1 | Run#: TLC-AB-151002-06
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 20.2 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4070A
 Test Freq: 450.000(MHz)
 Battery: PMNN4407BR
 Carry Acc: RLN4570A
 Audio Acc: PMMN4024A
 Start Power: 4.76 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014

Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x181x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 109.9 V/m; Power Drift = -0.32 dB

Fast SAR: SAR(1 g) = 11.5 W/kg; SAR(10 g) = 8.22 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 12.9 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 109.9 V/m; Power Drift = -0.49 dB


Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 10.8 W/kg; SAR(10 g) = 7.54 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.3 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 12.0 W/kg

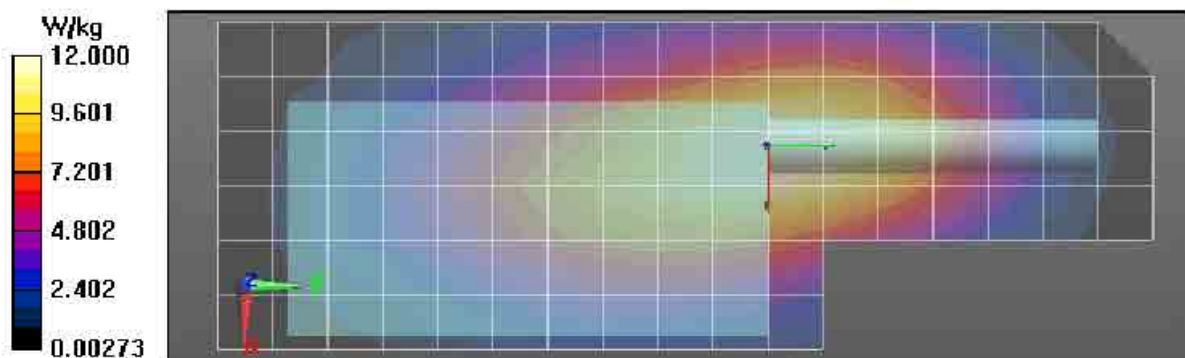

Assessments at the Body with Body worn HLN6602A

Table 19

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/5/2015 6:20:49 PM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151005-12
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 19.8 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4070A
 Test Freq: 450.0000 (MHz)
 Battery: PMNN4407BR
 Carry Acc: HLN6602A
 Audio Acc: PMMN4024A
 Start Power: 4.72 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014

Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 105.1 V/m; Power Drift = -0.39 dB

Fast SAR: SAR(1 g) = 10.4 W/kg; SAR(10 g) = 7.48 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 11.7 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5 \text{ mm}$, $dy=7.5 \text{ mm}$, $dz=5 \text{ mm}$


Reference Value = 105.1 V/m; Power Drift = -0.57 dB

Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 9.75 W/kg; SAR(10 g) = 6.91 W/kg (SAR corrected for target medium)

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20 \text{ mm}$, $dy=20 \text{ mm}$, $dz=10 \text{ mm}$

Maximum value of SAR (measured) = 10.8 W/kg

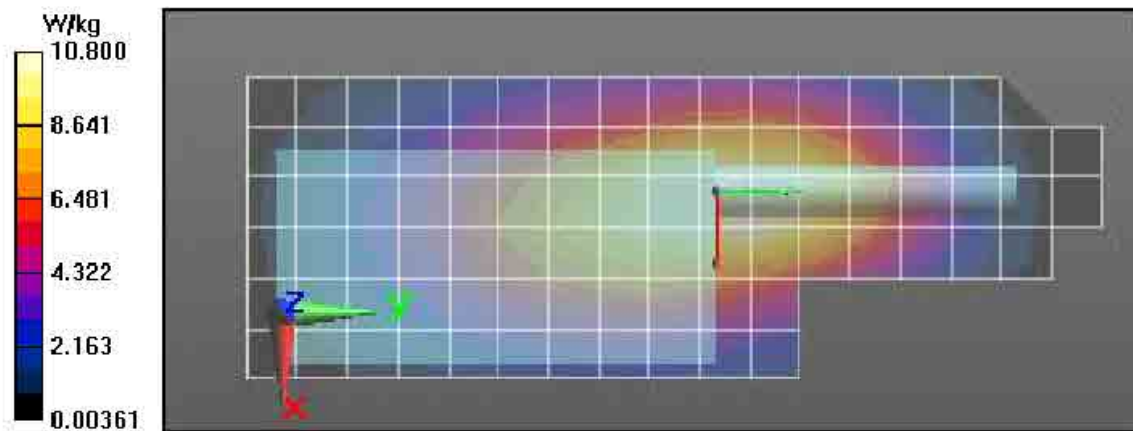

Assessments at the Body with Body worn RLN4815A

Table 20

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/6/2015 5:20:30 PM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151006-21
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 20.5 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4071A
 Test Freq: 470.0000 (MHz)
 Battery: PMNN4407BR
 Carry Acc: RLN4815A
 Audio Acc: PMMN4024A
 Start Power: 4.76 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 470$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 470 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 84.06 V/m; Power Drift = -0.49 dB

Fast SAR: SAR(1 g) = 6.02 W/kg; SAR(10 g) = 4.37 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 6.74 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 84.06 V/m; Power Drift = -0.66 dB


Peak SAR (extrapolated) = 8.06 W/kg

SAR(1 g) = 5.62 W/kg; SAR(10 g) = 4.11 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.33 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 6.21 W/kg

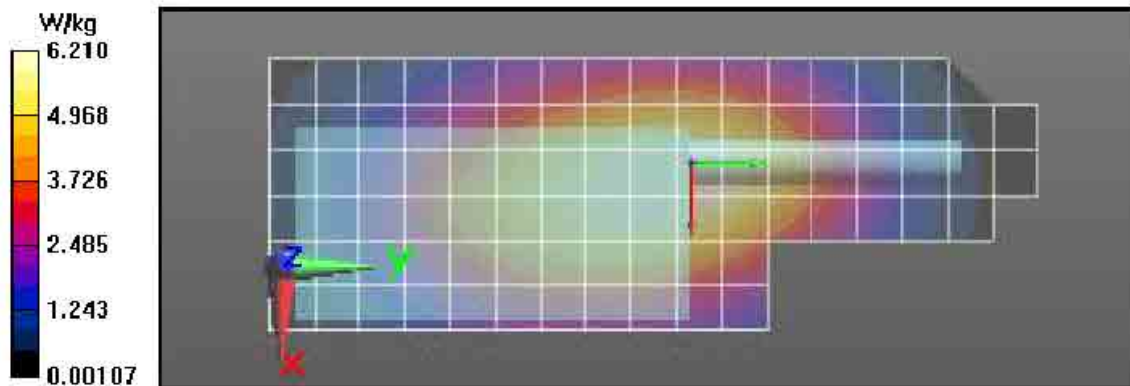

Assessments at the Body with Body worn PMLN7008A

Table 21

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/7/2015 9:34:21 AM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151007-13
 Model#: PMUE3681B
 Phantom#: ELIS 1150
 Tissue Temp: 20.3 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4071A
 Test Freq: 470.000 (MHz)
 Battery: PMNN4407BR
 Carry Acc: PMLN7008A
 Audio Acc: PMMN4024A
 Start Power: 4.75 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 470$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 470 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 93.69 V/m; Power Drift = -0.42 dB

Fast SAR: SAR(1 g) = 7.82 W/kg; SAR(10 g) = 5.58 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 8.83 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.69 V/m; Power Drift = -0.59 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 7.38 W/kg; SAR(10 g) = 5.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 8.44 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 8.38 W/kg

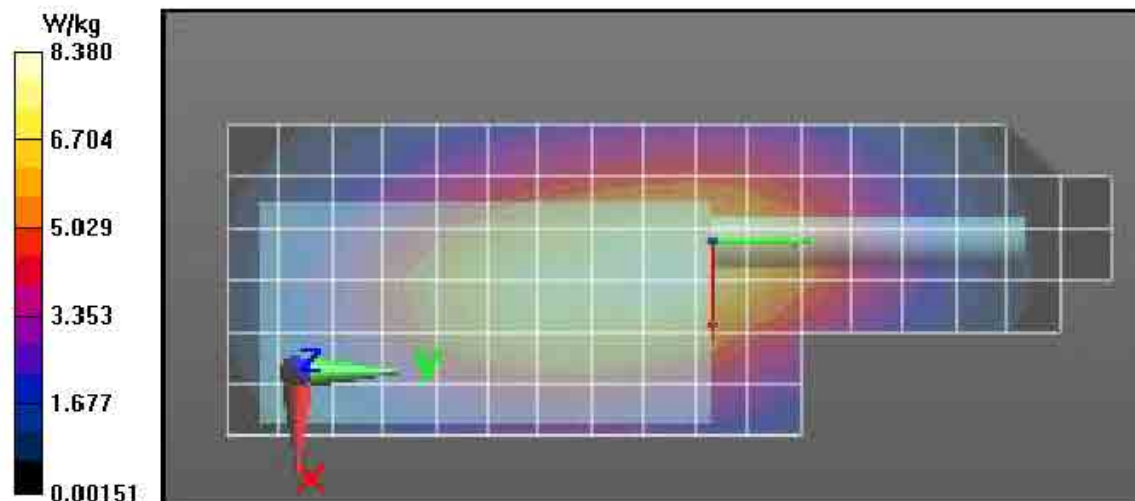

Assessments at the Body with Body worn PMLN4651A

Table 22

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/8/2015 12:31:39 AM

Robot#: DASY5-PG-1 | Run#: MO-AB-151008-01
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 19.9 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4071A
 Test Freq: 470.000 (MHz)
 Battery: PMNN4407BR
 Carry Acc: PMLN4651A
 Audio Acc: PMMN4024A
 Start Power: 4.70 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 470$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, , Frequency: 470 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 96.05 V/m; Power Drift = -0.46 dB

Fast SAR: SAR(1 g) = 8.17 W/kg; SAR(10 g) = 5.78 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 9.29 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 96.05 V/m; Power Drift = -0.61 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 5.32 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 8.71 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 8.55 W/kg

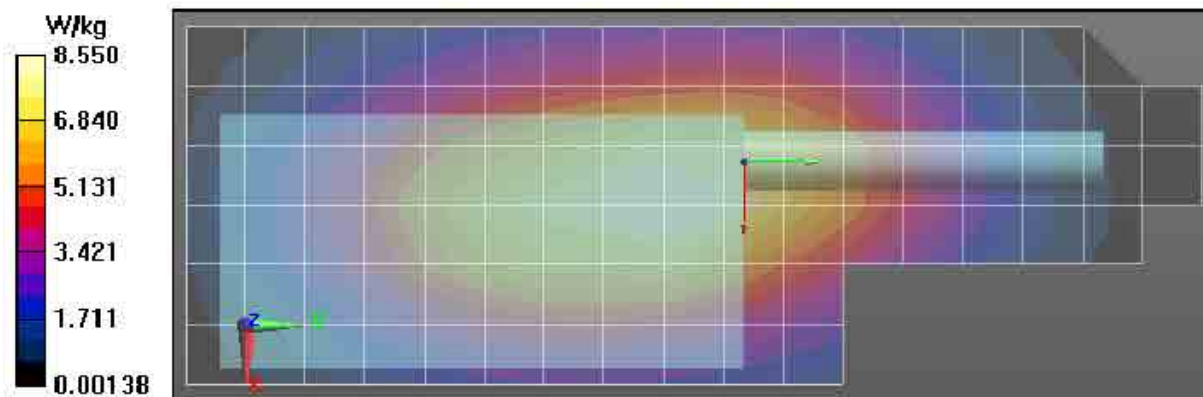

Assessments at the Body with Body worn PMLN7296A

Table 23

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/8/2015 9:17:34 AM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151008-12
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 20.2 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4071A
 Test Freq: 470.000 (MHz)
 Battery: PMNN4488A
 Carry Acc: PMLN7296A
 Audio Acc: PMMN4024A
 Start Power: 4.80 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 470$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 470 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 74.69 V/m; Power Drift = -0.30 dB

Fast SAR: SAR(1 g) = 5.96 W/kg; SAR(10 g) = 4.2 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 6.78 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 74.69 V/m; Power Drift = -0.44 dB

Peak SAR (extrapolated) = 8.46 W/kg

SAR(1 g) = 5.62 W/kg; SAR(10 g) = 3.96 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.39 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

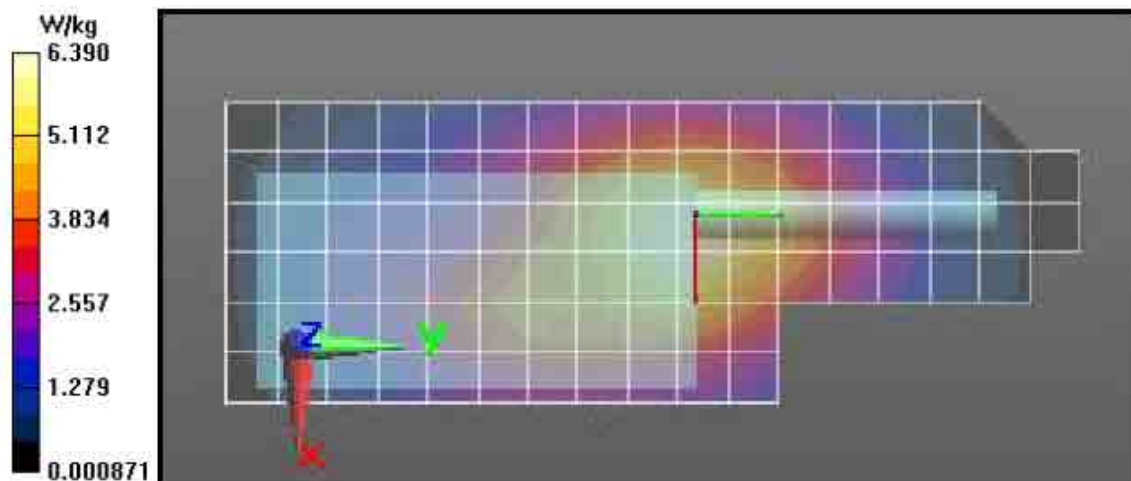

Assessment at the Body with other audio accessories

Table 24

Motorola Solutions, Inc. EME Laboratory
Date/Time: 10/9/2015 1:14:17 AM

Robot#: DASY5-PG-1 | Run#: MO-AB-151009-02
Model#: PMUE3681B
Phantom#: ELI5 1150
Tissue Temp: 20.3 (C)
Serial#: 807TRRC885
Antenna: PMAE4070A
Test Freq: 450.000 (MHz)
Battery: PMNN4407BR
Carry Acc: RLN4570A
Audio Acc: RMN5137A
Start Power: 4.75 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 112.3 V/m; Power Drift = -0.44 dB

Fast SAR: SAR(1 g) = 12.1 W/kg; SAR(10 g) = 8.71 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 13.6 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 112.3 V/m; Power Drift = -0.62 dB


Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 11.3 W/kg; SAR(10 g) = 7.91 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.8 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 12.6 W/kg

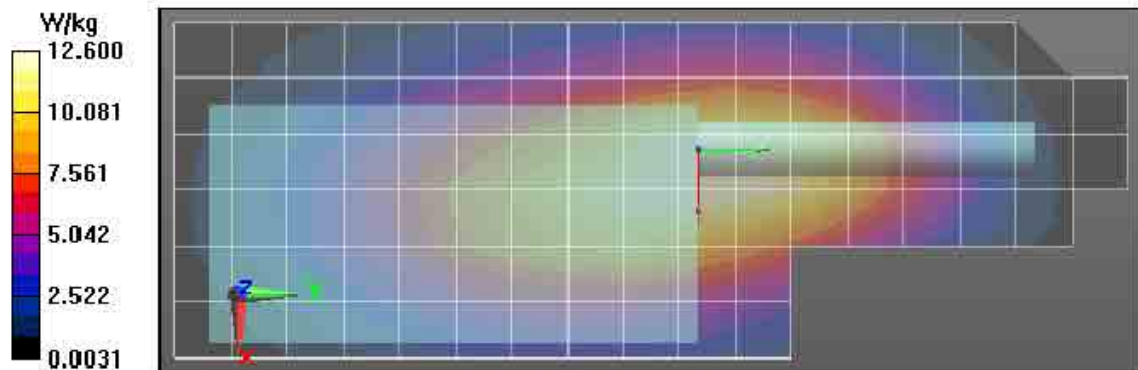

Assessment of wireless BT configuration

Table 25

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/11/2015 7:11:39 PM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151011-12
 Model#: PMUE3681B
 Phantom#: ELI5 1150
 Tissue Temp: 20.1 (C)
 Serial#: 807TRRC887
 Antenna: PMAE4070A
 Test Freq: 450.000 (MHz)
 Battery: PMNN4407BR
 Carry Acc: RLN4570A
 Audio Acc: NONE
 Start Power: 4.80 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$
 Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 124.8 V/m; Power Drift = -0.65 dB

Fast SAR: SAR(1 g) = 13.3 W/kg; SAR(10 g) = 9.61 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 14.8 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 124.8 V/m; Power Drift = -0.81 dB


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 8.83 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 13.8 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 13.5 W/kg

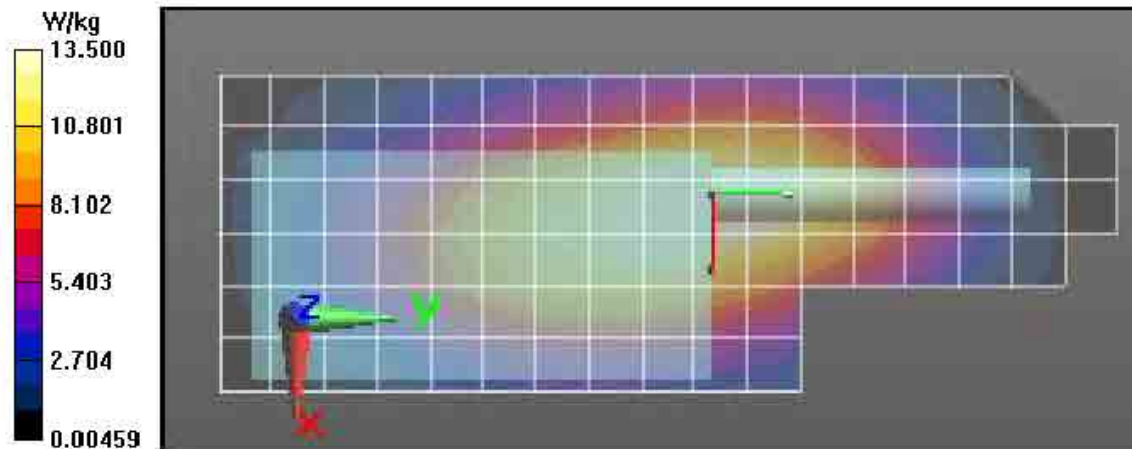

Assessments at the Body for 802.11 b/g/n

Table 27

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/9/2015 3:13:15 PM

Robot#: DASY5-PG-2 | Run#: TLC-AB-151009-07
 Model#: PMUE3681B
 Phantom#: ELI5 1147
 Tissue Temp: 19.9(C)
 Serial#: 807TRRC887
 Antenna: 0104039J80 WiFi Ant
 Test Freq: 2412.000 (MHz)
 Battery: NNTN8560A
 Carry Acc: RLN4570A
 Audio Acc: None
 Start Power: 0.0191 (W)

Comments:

Duty Cycle: 1:1.53815, Medium parameters used: $f = 2412$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7364, Frequency: 2412 MHz, ConvF(7.33, 7.33, 7.33); Calibrated: 6/23/2015
 Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/Body Scan/1-Area Scan (121x251x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.284 V/m; Power Drift = 4.51 dB

Fast SAR: SAR(1 g) = 0.00517 W/kg; SAR(10 g) = 0.00164 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.0139 W/kg

2-3 GHz-Rev.2/Body Scan/3-Zoom Scan (13x13x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.284 V/m; Power Drift = -1.64 dB


Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.00786 W/kg; SAR(10 g) = 0.00267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0215 W/kg

2-3 GHz-Rev.2/Body Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.00169 W/kg

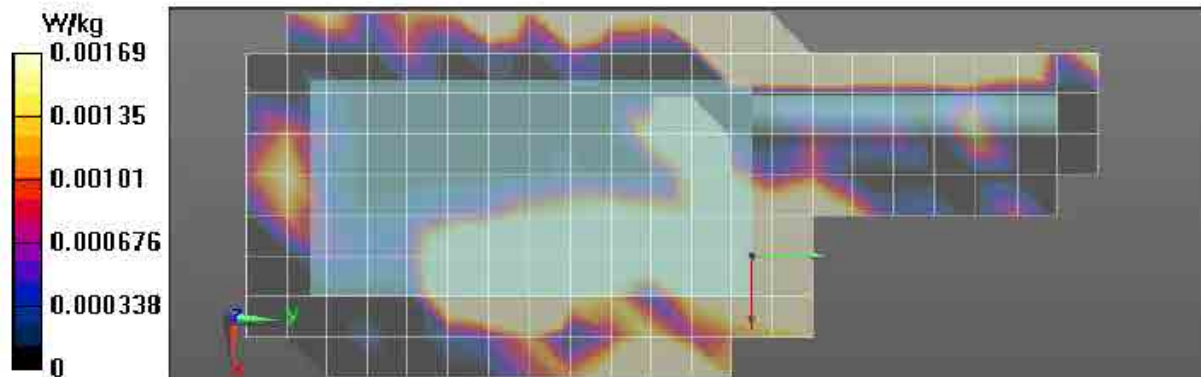

Assessments at the Face

Table 29

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/10/2015 5:51:41 PM

Robot#: DASY5-PG-1 | Run#: TLC-FACE-151010-14
 Model#: PMUE3681B
 Phantom#: ELI4 1028
 Tissue Temp: 20.5 (C)
 Serial#: 807TRRC885
 Antenna: PMAE4071A
 Test Freq: 470.000 (MHz)
 Battery: PMNN4489A
 Carry Acc: NONE
 Audio Acc: NONE
 Start Power: 4.70 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 470$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³
 Probe: ES3DV3 - SN3096, Frequency: 470 MHz, ConvF(6.61, 6.61, 6.61); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Face Scan/1-Area Scan (71x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 87.09 V/m; Power Drift = -0.34 dB

Fast SAR: SAR(1 g) = 6.26 W/kg; SAR(10 g) = 4.57 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 6.99 W/kg

Below 2 GHz-Rev.2/Face Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.09 V/m; Power Drift = -0.54 dB


Peak SAR (extrapolated) = 8.00 W/kg

SAR(1 g) = 5.93 W/kg; SAR(10 g) = 4.38 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.62 W/kg

Below 2 GHz-Rev.2/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 6.39 W/kg

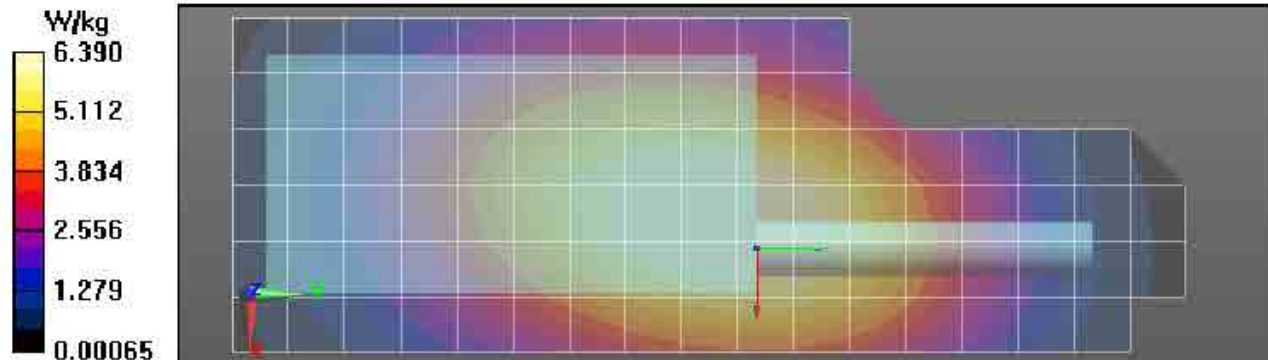

Assessments at the Face for 802.11 b/g/n

Table 31

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/13/2015 5:17:44 PM

Robot#: DASY5-PG-2 | Run#: TLC-FACE-151013-09
 Model#: PMUE3681B
 Phantom#: ELI5 1147
 Tissue Temp: 19.4 (C)
 Serial#: 807TRRC885
 Antenna: 0104039J80 WiFi Ant
 Test Freq: 2412.000 (MHz)
 Battery: PMNN4435AR
 Carry Acc: None
 Audio Acc: None
 Start Power: 0.0190 (W)

Comments:

Duty Cycle: 1:1.53815, Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7364, , Frequency: 2412 MHz, ConvF(7.18, 7.18, 7.18); Calibrated: 6/23/2015

Electronics: DAE4 Sn684, Calibrated: 11/5/2014

2-3 GHz-Rev.2/Face Scan/1-Area Scan (81x211x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 3.341 V/m; Power Drift = 1.89 dB

Fast SAR: SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.018 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.0407 W/kg

2-3 GHz-Rev.2/Face Scan/3-Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.467 V/m; Power Drift = -1.37 dB


Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.020 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.116 W/kg

2-3 GHz-Rev.2/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.0217 W/kg

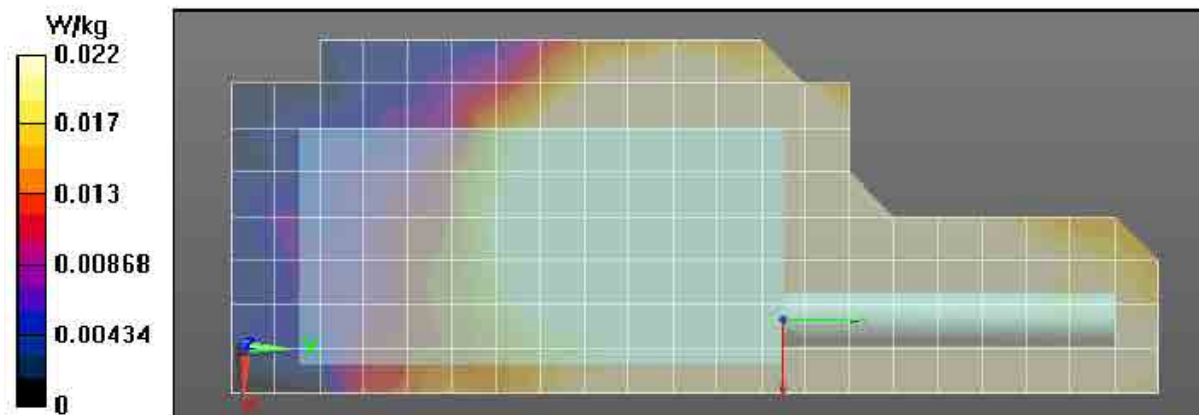

Assessments at the Body for Outside Part 90

Table 32

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/12/2015 4:14:59 PM

Robot#: DASY5-PG-1 | Run#: AZ-AB-151012-12
 Model#: PMUE3675B
 Phantom#: ELI5 1150
 Tissue Temp: 19.8 (C)
 Serial#: 871TRR8913
 Antenna: PMAE4071A
 Test Freq: 527.000(MHz)
 Battery: PMNN4407BR
 Carry Acc: RLN4570A
 Audio Acc: NONE
 Start Power: 4.80 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 527 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Probe: ES3DV3 - SN3096, Frequency: 527 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014

Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 123.7 V/m; Power Drift = -0.53 dB

Fast SAR: SAR(1 g) = 13.5 W/kg; SAR(10 g) = 9.71 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 15.2 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 123.7 V/m; Power Drift = -0.71 dB


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 9.2 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 14.2 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 13.8 W/kg

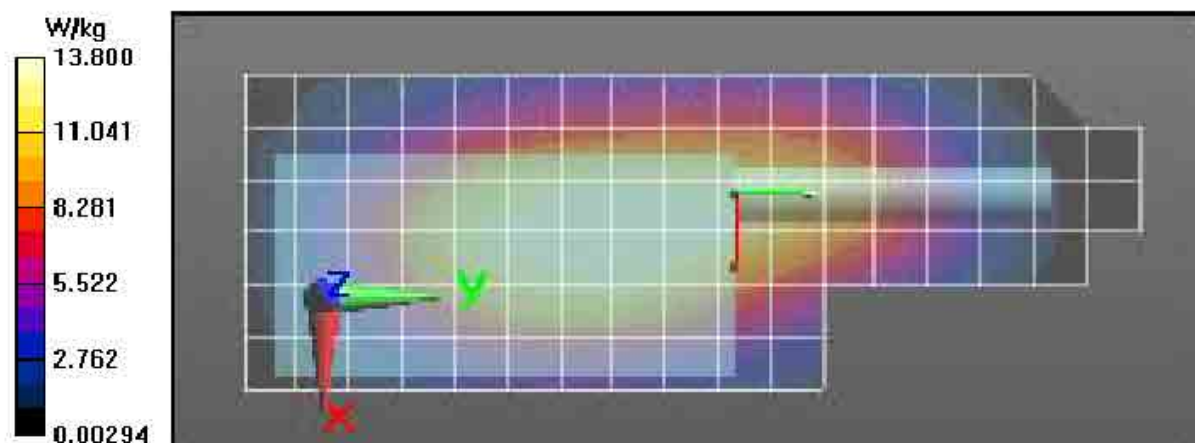

Assessments at the Face for Outside Part 90

Table 32

Motorola Solutions, Inc. EME Laboratory

Date/Time: 10/11/2015 4:53:48 PM

Robot#: DASY5-PG-1 | Run#: AZ-FACE-151011-09
 Model#: PMUE3675B
 Phantom#: ELI4 1028
 Tissue Temp: 19.9 (C)
 Serial#: 871TRR8909
 Antenna: PMAE4071A
 Test Freq: 527.0000 (MHz)
 Battery: PMNN4489A
 Carry Acc: NONE
 Audio Acc: NONE
 Start Power: 4.63 (W)


Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 527 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$
 Probe: ES3DV3 - SN3096, Frequency: 527 MHz, ConvF(6.61, 6.61, 6.61); Calibrated: 11/12/2014
 Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Face Scan/1-Area Scan (71x181x1): Interpolated grid: $dx=1.500 \text{ mm}$,
 $dy=1.500 \text{ mm}$
 Reference Value = 93.00 V/m; Power Drift = -0.30 dB
 Fast SAR: SAR(1 g) = 6.88 W/kg; SAR(10 g) = 5.01 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 7.70 W/kg

Below 2 GHz-Rev.2/Face Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5 \text{ mm}$,
 $dy=7.5 \text{ mm}$, $dz=5 \text{ mm}$
 Reference Value = 93.00 V/m; Power Drift = -0.47 dB
 Peak SAR (extrapolated) = 8.69 W/kg
 SAR(1 g) = 6.57 W/kg; SAR(10 g) = 4.9 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 7.29 W/kg

Below 2 GHz-Rev.2/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20 \text{ mm}$,
 $dy=20 \text{ mm}$, $dz=10 \text{ mm}$
 Maximum value of SAR (measured) = 7.24 W/kg

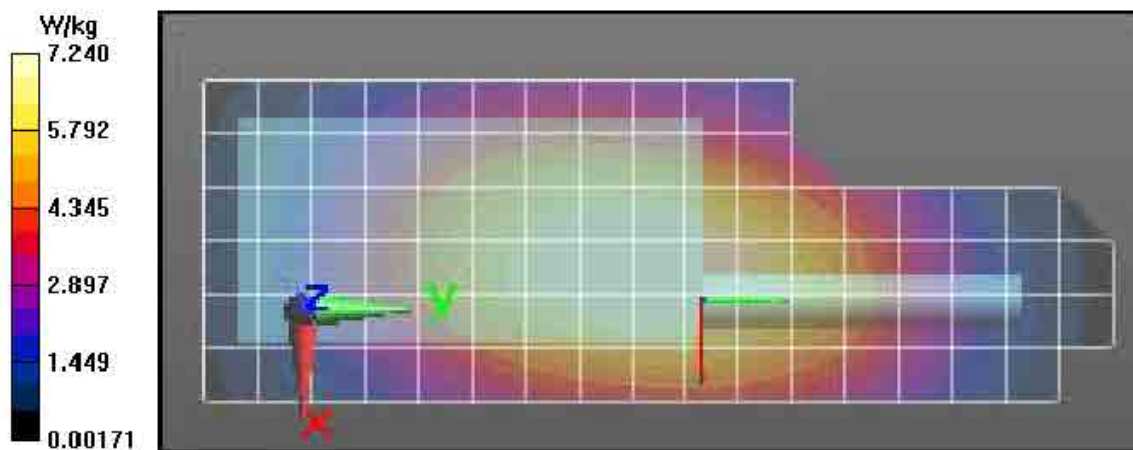

APPENDIX F

Shortened Scan of Highest SAR configuration

Shortened Scan Table 33

Motorola Solutions, Inc. EME Laboratory
Date/Time: 10/12/2015 9:47:29 AM

Robot#: DASY5-PG-1 | Run#: MO-AB-151012-04
Model#: PMUE3681B
Phantom#: ELI5 1150
Tissue Temp: 20.8 (C)
Serial#: 807TRRC887
Antenna: PMAE4070A
Test Freq: 450.000 (MHz)
Battery: PMNN4407BR
Carry Acc: RLN4570A
Audio Acc: NONE
Start Power: 4.80 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 55.4$; $\rho = 1000 \text{ kg/m}^3$
Probe: ES3DV3 - SN3096, Frequency: 450 MHz, ConvF(6.73, 6.73, 6.73); Calibrated: 11/12/2014
Electronics: DAE4 Sn1294, Calibrated: 11/3/2014

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x201x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 119.4 V/m; Power Drift = -0.46 dB

Fast SAR: SAR(1 g) = 12.5 W/kg; SAR(10 g) = 9.04 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 13.9 W/kg

Below 2 GHz-Rev.2/Ab Scan/2-Volume 2D Scan (41x41x1): Interpolated grid: $dx=0.7500 \text{ mm}$, $dy=0.7500 \text{ mm}$, $dz=1.000 \text{ mm}$

Reference Value = 119.4 V/m; Power Drift = -0.50 dB

Fast SAR: SAR(1 g) = 12.2 W/kg; SAR(10 g) = 8.88 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 13.4 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5 \text{ mm}$, $dy=7.5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 130.3 V/m; Power Drift = -0.45 dB


Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 9.2 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 14.6 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20 \text{ mm}$, $dy=20 \text{ mm}$, $dz=10 \text{ mm}$

Maximum value of SAR (measured) = 13.2 W/kg

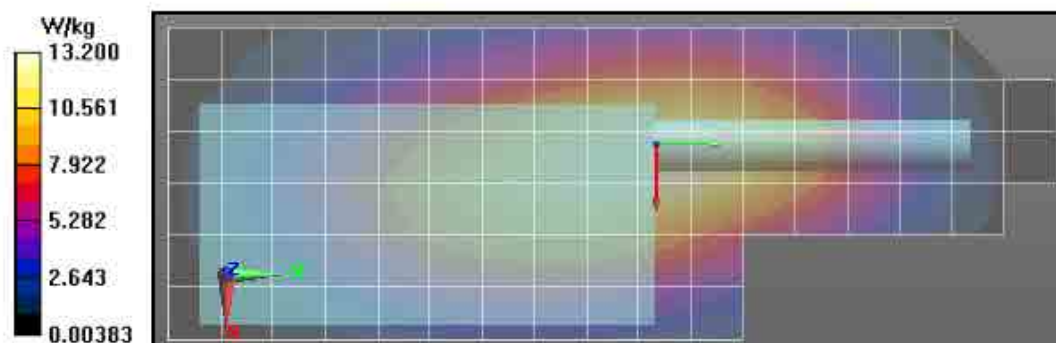

Shortened scan reflects highest SAR producing configuration and is compared to the full scan.

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)	SAR 10g (W/kg)
Shorten scan (zoom)	33	6	7.21	5.10
Full scan (area & zoom)	25	23	7.41	5.32

APPENDIX G

DUT Test Position Photos

Photos available in Exhibit 7B

APPENDIX H

DUT, Body worn and audio accessories Photos

Photos available in Exhibit 7B