

**Test Report No. 7191116525-EEC15/03**  
dated 16 Dec 2015



PSB Singapore

**Note:** This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

**Choose certainty.  
Add value.**

**TEST REPORT COVER PAGE**

Product Information			
Product Name / Description:	PORTABLE TWO-WAY RADIO (BLUETOOTH CLASSIC)	Applicant Company Number:	109U
Model Number(s):	AAH81QCN9TA2AN	UPN Number:	89FT7072
All Used IC Test Site(s) Reg. #:	2932I-1	SAR Test Lab Company Number:	--

Emissions Information								
	Band 1	Band 2	Band 3	Band 4	Band 5	Band 6	Band 7	Band 8
RSS # & Issue #	RSS-247 & Issue 1							
Frequency Min (MHz)	2402							
Frequency Max (MHz)	2480							
RF Power Min (W) Conducted / EIRP / ERP	--							
RF Power Max (W) Conducted	0.0076							
Field Strength Units @ distance	104.5 dB $\mu$ V/m @ 3m							
Measured BW (kHz) (99%, 26dB, 6dB, etc.)	1225 (99%)							
Calculated BW (kHz) As per TRC-43	1200							
Emission Classification (FID, GID, DID, etc.)	1M23G1 D							
Transmitter Spurious Units @ distance	19.6GHz 56.1 dB $\mu$ V/m (Peak), 50.2 dB $\mu$ V/m (Ave) @ 3m							
	B	B	B	B	B	B	B	B
RSS # & Issue #								
Frequency Min (MHz)								
Frequency Max (MHz)								
RF Power Min (W) Conducted / EIRP / ERP								
RF Power Max (W) Conducted / EIRP / ERP								
Field Strength Units @ distance								
Measured BW (kHz) (99%, 26dB, 6dB, etc.)								
Calculated BW (kHz) As per TRC-43								
Emission Classification (FID, GID, DID, etc.)								
Transmitter Spurious Units @ distance								

**Agreement Signature**

ATTESTATION: The test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Applicant / Agent Name:	Lim Cher Hwee	Applicant / Agent Title:	Assistant Vice President
Applicant / Agent Signature:		Signature Date:	16 Dec 2015

**Test Report No. 7191116525-EEC15/03**  
dated 16 Dec 2015



PSB Singapore

**Note:** This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

Choose certainty.  
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
47 CFR FCC Parts 15B & C  
RSS-GEN Issue 4: 2014  
RSS-247 Issue 1: 2015  
OF A  
**PORTABLE TWO-WAY RADIO (BLUETOOTH CLASSIC)**  
[ Model : AAH81QCN9TA2AN ]  
[ FCC ID : AZ489FT7072 & IC : 109U-89FT7072 ]

**TEST FACILITY** TÜV SÜD PSB Pte Ltd  
Electrical & Electronics Centre (EEC), Product Services,  
No. 1 Science Park Drive, Singapore 118221

**FCC REG. NO.** 99142 (3m and 10m Semi-Anechoic Chamber, Science Park)

**IND. CANADA REG. NO.** 2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

**PREPARED FOR** Motorola Solutions Malaysia Sdn Bhd  
Plot 2, Technoplex Industrial Park Mukim 12 Swd,  
Medan Bayan Lepas, Bayan Lepas Industrial Park, 11900 Bayan Lepas,  
Pulau Penang,  
Malaysia  
Tel : +604 2528543 Fax : +604 8503099

**QUOTATION NUMBER** 2191019559

**JOB NUMBER** 7191116525

**TEST PERIOD** 22 Jun 2015 – 23 Nov 2015

**PREPARED BY**

Quek Keng Huat  
Higher Associate Engineer

**APPROVED BY**

Lim Cher Hwee  
Assistant Vice President



TÜV SÜD PSB

Laboratory:  
TÜV SÜD PSB Pte. Ltd.  
No.1 Science Park Drive  
Singapore 118221

Phone : +65-6885 1333  
Fax : +65-6776 8670  
E-mail: testing@tuv-sud-psb.sg  
www.tuv-sud-psb.sg  
Co. Reg : 199002667R

Regional Head Office:  
TÜV SÜD Asia Pacific Pte. Ltd.  
1 Science Park Drive, #02-01  
Singapore 118221  
TUV®



**TABLE OF CONTENTS**

TEST SUMMARY .....	4
PRODUCT DESCRIPTION .....	6
SUPPORTING EQUIPMENT DESCRIPTION.....	8
EUT OPERATING CONDITIONS.....	9
RADIATED EMISSION TEST.....	10
CARRIER FREQUENCY SEPARATION TEST .....	14
SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST.....	18
NUMBER OF HOPPING FREQUENCIES TEST .....	32
AVERAGE FREQUENCY DWELL TIME TEST.....	36
MAXIMUM PEAK POWER TEST.....	44
RF CONDUCTED SPURIOUS EMISSIONS TEST.....	46
BAND EDGE COMPLIANCE (CONDUCTED) TEST.....	57
BAND EDGE COMPLIANCE (RADIATED) TEST.....	65
PEAK POWER SPECTRAL DENSITY TEST.....	70
ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS.....	79
ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	88
ANNEX C FCC, IC LABELS & POSITION.....	89
ANNEX D TEST SITE DESCRIPTION .....	91



**TEST SUMMARY**

The product was tested in accordance with the customer's specifications.

**Test Results Summary**

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15 & RSS-GEN Issue 4: 2014 and RSS-247 Issue 1: 2015		
15.207 RSS-GEN 8.8	Conducted Emissions	Not Applicable *See Note 5
15.205, 15.209 RSS-GEN 8.9, 8.10	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(1) RSS-247 5.1(2)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247(a)(1)(iii) RSS-247 5.1(4)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247(b)(1) RSS-247 5.4(2)	Maximum Peak Power	Pass
15.247(d) RSS-247 5.5	RF Conducted Spurious Emissions	Pass
15.247(d) RSS-247 5.5	Band Edge Compliance (Conducted)	Pass
15.247(d) RSS-247 5.5	Band Edge Compliance (Radiated)	Pass
15.247(e) RSS-102 4.0, RSS-GEN 3.2	Peak Power Spectral Density	Pass



**TEST SUMMARY**

**Notes**

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.402
Channel 39	2.441
Channel 78	2.480

2. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
3. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2014 and ANSI C63.10: 2013.
5. The Equipment Under Test (EUT) is a battery operated device / DC operated device and contains no provision for public utility connections. And the Equipment Under Test (EUT) will be powered off and not operational during charging mode.
6. The EUT was tested using fully charged batteries with DC voltage of 3.78V.
5. 99% Bandwidth Measurement is applicable to RSS-247 only.
6. RSS-102 is RSS-102 Issue 4: 2015.
7. The unit was also investigated for inter-modulation products between the co-located Bluetooth and the land mobile radios. All inter-modulation products between the co-located radios were found to be compliant to the FCC limits of 15.209 and Industry Canada RSS-GEN.
8. The EUT uses a 0.5dBi internal PIFA which connects to the RF port via a spring contact. The EUT meets the requirement of FCC 15.203.
9. The maximum measured RF power of the Equipment Under Test is 8.81dBm.
10. All tests except Maximum Peak Power and Band Edge Compliance (Radiated) were tested at the maximum power of the RF module which is higher than the supported maximum EUT RF power. The Maximum Peak Power and Band Edge Compliance (Radiated) tests were tested at the maximum RF power of the EUT.

**Modifications**

No modifications were made.



**PRODUCT DESCRIPTION**

Description : The Equipment Under Test (EUT) is a **PORTABLE TWO-WAY RADIO**.

Manufacturer : Motorola Solutions Malaysia Sdn Bhd  
Plot 2, Technoplex Industrial Park Mukim 12 Swd,  
Medan Bayan Lepas, Bayan Lepas Industrial Park, 11900 Bayan Lepas,  
Pulau Penang,  
Malaysia

Model Number : AAH81QCN9TA2AN

FCC ID : AZ489FT7072

IC : 109U-89FT7072

Serial Number : 682TRH2026 (RF Radiated Radio)  
682TRH2021 (RF Conducted Radio)

Microprocessor : Ti OMAPL138BZCEA3R

Operating / Transmitting Frequency : Bluetooth / Bluetooth LE  
2.402GHz (lower channel) to 2.480GHz (upper channel)  
79 channels (Bluetooth), 40 channels (Bluetooth LE)

WiFi  
2.412GHz (lower channel) to 2.462GHz (upper channel)  
11 channels

Land Mobile  
403.0125MHz (lower channel) to 469.9875MHz (upper channel)

Clock / Oscillator Frequency : Tx/Rx 403MHz - 470MHz, LO: 806MHz - 940MHz

Modulation : Bluetooth  
Gaussian Frequency Shift Keying (GFSK)  
( $\pi/4$ ) DQPSK  
8DPSK

WiFi  
Differential Binary Phase Shift Keying (DBPSK)  
Differential Quadrature Phase Shift Keying (DQPSK)  
Complementary Code Keying (CCK )  
Binary Phase Shift Keying (BPSK)  
Quadrature Phase Shift Keying (QPSK)  
16-Quadrature Amplitude Modulation (16QAM)  
64-Quadrature Amplitude Modulation (64QAM)

Land Mobile  
Frequency Modulation (FM)

Antenna Gain : 0.5 dBi (PIFA Antenna)



---

**PRODUCT DESCRIPTION**

(Continued)

Port / Connectors : Refer to manufacturer's user manual / operating manual

Rated Input Power : 3.7Vdc 8.5Wh 2300mAh Lithium ION battery

Accessories : Refer to manufacturer's user manual / operating manual





**SUPPORTING EQUIPMENT DESCRIPTION**


<b>Equipment Description (Including Brand Name)</b>	<b>Model, Serial &amp; FCC ID Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Fujitsu Laptop	M/N: S6310 S/N: R7100269 FCC ID: DoC	Nil
Fujitsu AC Adapter	M/N: CP293662-01 S/N: O6X00399B FCC ID: DoC	1.80m unshielded power cable
Microsoft Wheel Mouse	M/N: X08-71118 S/N: Nil FCC ID: DoC	Nil





**EUT OPERATING CONDITIONS**

<b>47 CFR FCC Part 15, RSS-GEN Issue 4: 2014 and RSS-247 Issue 1: 2015</b>
<ol style="list-style-type: none"><li>1. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)</li><li>2. Spectrum Bandwidth (20dB and 99% Bandwidth Measurement)</li><li>3. Maximum Peak Power</li><li>4. RF Conducted Spurious Emissions</li><li>5. Band Edge Compliance (Conducted)</li><li>6. Peak Power Spectral Density</li></ol>
The EUT was exercised by operating in maximum continuous transmission with frequency hopping off, i.e transmitting at lower, middle and upper channels respectively at one time.
<b>47 CFR FCC Part 15, RSS-GEN Issue 4: 2014 and RSS-247 Issue 1: 2015</b>
<ol style="list-style-type: none"><li>1. Carrier Frequency Separation</li><li>2. Number of Hopping Frequencies</li><li>3. Average Frequency Dwell Time</li><li>4. Band Edge Compliance (Conducted)</li><li>5. Band Edge Compliance (Radiated)</li></ol>
The EUT was exercised by operating in maximum continuous transmission with frequency hopping on.

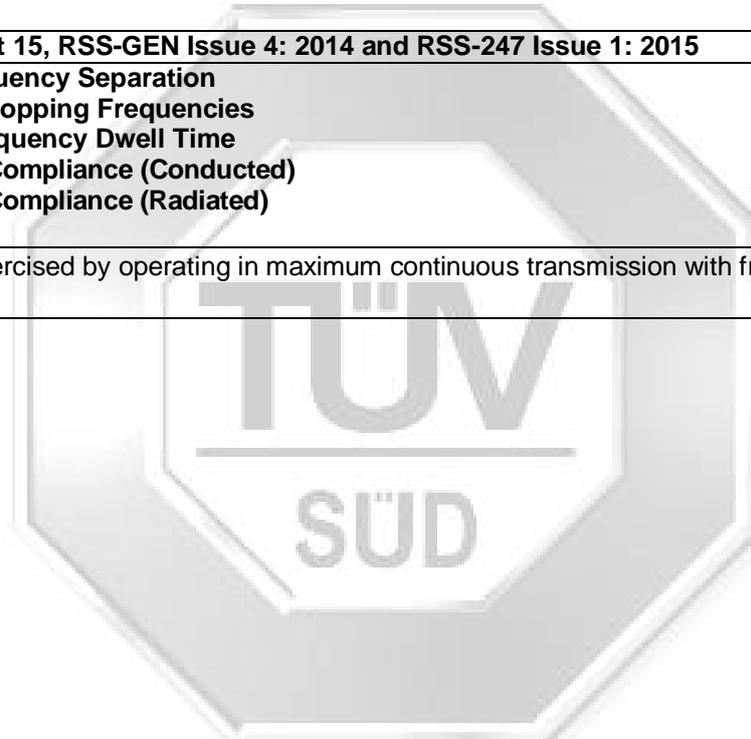



**RADIATED EMISSION TEST**

**47 CFR FCC Part 15.205 and & RSS-GEN 8.10 Restricted Bands**

MHz		MHz		MHz		GHz	
0.090	- 0.110	16.42	- 16.423	399.9	- 410	4.5	- 5.15
0.495	- 0.505	16.69475	- 16.69525	608	- 614	5.35	- 5.46
2.1735	- 2.1905	16.80425	- 16.80475	960	- 1240	7.25	- 7.75
4.125	- 4.128	25.5	- 25.67	1300	- 1427	8.025	- 8.5
4.17725	- 4.17775	37.5	- 38.25	1435	- 1626.5	9.0	- 9.2
4.20725	- 4.20775	73	- 74.6	1645.5	- 1646.5	9.3	- 9.5
6.215	- 6.218	74.8	- 75.2	1660	- 1710	10.6	- 12.7
6.26775	- 6.26825	108	- 121.94	1718.8	- 1722.2	13.25	- 13.4
6.31175	- 6.31225	123	- 138	2200	- 2300	14.47	- 14.5
8.291	- 8.294	149.9	- 150.05	2310	- 2390	15.35	- 16.2
8.362	- 8.366	156.52475	- 156.52525	2483.5	- 2500	17.7	- 21.4
8.37625	- 8.38675	156.7	- 156.9	2690	- 2900	22.01	- 23.12
8.41425	- 8.41475	162.0125	- 167.17	3260	- 3267	23.6	- 24.0
12.29	- 12.293	167.72	- 173.2	3332	- 3339	31.2	- 31.8
12.51975	- 12.52025	240	- 285	3345.8	- 3358	36.43	- 36.5
12.57675	- 12.57725	322	- 335.4	3600	- 4400	Above 38.6	
13.36	- 13.41						

**47 CFR FCC Part 15.209 and & RSS-GEN 8.9 Radiated Emission Limits**

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m)
0.009 - 0.490	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 - 88	40.0 @ 3m
88 - 216	43.5 @ 3m
216 - 960	46.0 @ 3m
Above 960	54.0* @ 3m

\* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

**47 CFR FCC Part 15.209, RSS-GEN 8.9 and 8.10 Radiated Emission Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
R&S Test Receiver – ESI1	ESI40	100010	14 Jul 2016	1 year
Schaffner Bilog Antenna –(30MHz-2GHz) BL3 (Ref)	CBL6112D	2549	29 Jan 2016	1 year
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	02 Oct 2016	1 year
TDK-RF Horn Antenna	HRN-0118	130256	20 Apr 2016	1 year
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	13 Mar 2016	1 year
Agilent Preamplifier(1GHz-26.5GHz) (PA18)	8449D	3008A02305	06 Oct 2016	1 year
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441096	09 Oct 2016	1 year
Micro-Tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2016	1 year



**RADIATED EMISSION TEST**

**47 CFR FCC Parts 15.209, RSS-GEN 8.9 and 8.10 Radiated Emission Test Setup**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table. For >1GHz measurements, the EUT is raised further to a height of 1.5m with a non-metallic foam block.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

**47 CFR FCC Parts 15.209, RSS-GEN 8.9 and 8.10 Radiated Emission Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in the range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9 kHz to 10<sup>th</sup> harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

**Sample Calculation Example**

At 300 MHz	Q-P limit = 46.0 dB $\mu$ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB $\mu$ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 46.0 - 40.0 = 6.0	i.e. 6.0 dB below Q-P limit



**RADIATED EMISSION TEST**

**47 CFR FCC Part 15.205, 15.209 and RSS-GEN 8.9 and 8.10 Radiated Emission Results**

Test Input Power	3.7Vdc	Temperature	22°C
Test Distance	3m (≥30MHz – 25GHz)	Relative Humidity	55%
Modulation	GFSK (Worst)	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
257.7180	21.4	46.0	24.6	108	29	H	39
339.5390	38.7	46.0	7.3	280	354	H	39
341.0930	37.0	46.0	9.0	100	74	V	39
782.3000	34.9	46.0	11.1	100	184	V	39
799.3740	27.1	46.0	18.9	101	15	V	39
879.4150	29.9	46.0	16.1	100	80	V	39

Test Input Power	3.7Vdc	Temperature	22°C
Test Distance	3m (1GHz – 25GHz)	Relative Humidity	55%
Modulation	GFSK (Worst Mode)	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Spurious Emissions above 1GHz - 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.0429	34.0	74.0	40.0	27.7	54.0	26.3	300	214	V	0
2.2165	36.4	74.0	37.6	32.1	54.0	21.9	100	15	H	0
7.2241	45.2	74.0	28.8	40.1	54.0	13.9	100	328	V	0
18.7305	54.7	74.0	19.3	48.5	54.0	5.5	400	0	V	0
19.4532	54.9	74.0	19.1	48.6	54.0	5.4	400	142	V	0
19.5868	55.0	74.0	19.0	50.0	54.0	4.0	400	301	V	0

Spurious Emissions above 1GHz - 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
2.2594	41.1	74.0	32.9	34.3	54.0	19.7	100	20	H	39
4.9061	40.9	74.0	33.1	38.0	54.0	16.0	100	274	H	39
7.3529	47.1	74.0	26.9	41.3	54.0	12.7	300	84	H	39
19.5789	56.1	74.0	17.9	50.2	54.0	3.8	400	137	H	39
19.6182	55.9	74.0	18.1	50.1	54.0	3.9	400	22	V	39
19.6889	55.9	74.0	18.1	49.7	54.0	4.3	400	50	H	39



**RADIATED EMISSION TEST**

**47 CFR FCC Parts 15.205, 15.209 and RSS-GEN 8.9 and 8.10 Radiated Emission**

Spurious Emissions above 1GHz - 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	PoI (H/V)	Ch
3.4594	39.0	74.0	35.0	35.9	54.0	18.1	100	20	H	78
5.8505	40.9	74.0	33.1	34.4	54.0	19.6	400	309	V	78
7.3529	45.2	74.0	28.8	39.7	54.0	14.3	100	328	V	78
19.3118	53.3	74.0	20.7	48.0	54.0	6.0	100	216	H	78
19.3904	53.6	74.0	20.4	48.7	54.0	5.3	100	241	H	78
19.7230	54.4	74.0	19.6	48.2	54.0	5.8	100	228	H	78

Notes

- All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
 RBW: 100kHz                      VBW: 1MHz  
>1GHz  
 RBW: 1MHz                        VBW: 3MHz
- The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
- The upper frequency of radiated emission investigations was according to requirements stated in RSS-GEN 6.13.
- The channel in the table refers to the transmit channel of the EUT.
- Radiated Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is ±4.0dB.



**CARRIER FREQUENCY SEPARATION TEST**

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Carrier Frequency Separation Limits**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, the EUT may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW (21dBm).

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Carrier Frequency Separation Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Parts 15.247(a) (1) and RSS-247 5.1(2) Carrier Frequency Separation Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100 kHz and 300 kHz.
5. All other supporting equipment was powered separately from other filtered mains.

**47 CFR FCC Parts 15.247(a) (1) and RSS-247 5.1(2) Carrier Frequency Separation Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.400GHz and 2.405GHz.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.438.5GHz to 2.443.5GHz
  - b. 2.478GHz to 2.481GHz




**CARRIER FREQUENCY SEPARATION TEST**

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Carrier Frequency Separation Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	1 – 4	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.000
38 and 39 (2.440GHz and 2.441GHz)	1.000
39 and 40 (2.441GHz and 2.442GHz)	1.000
77 and 78 (2.479GHz and 2.480GHz)	1.000

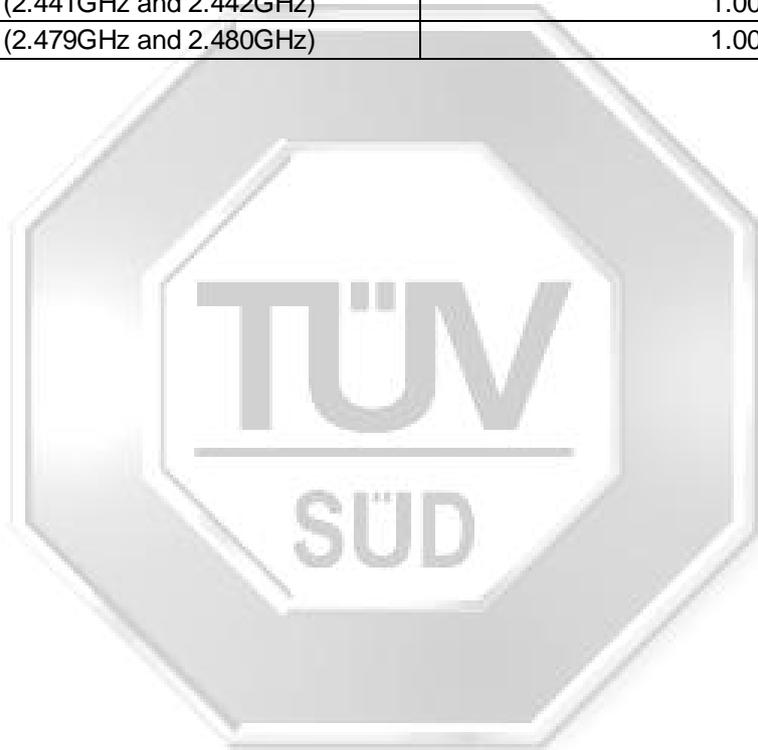




CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

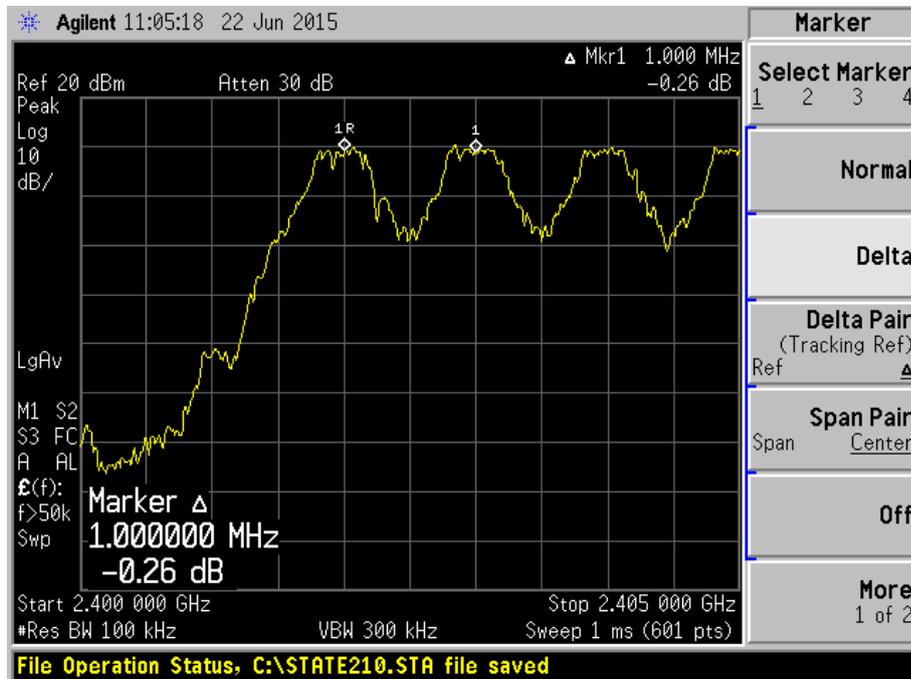

Plot 1 - Channels 0 (lower ch) and 1 (ch after lower ch) Separation

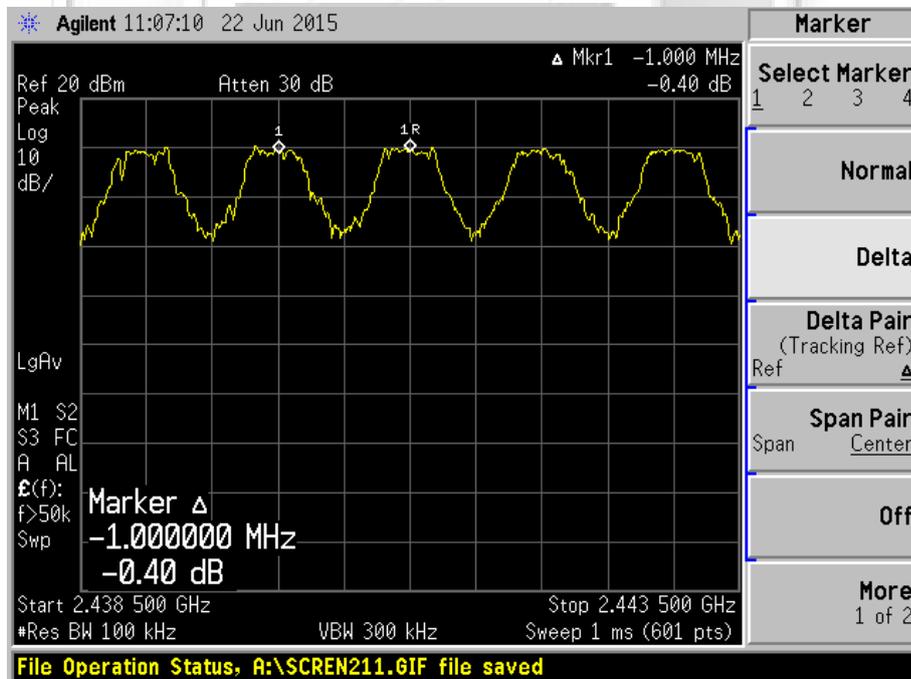


Plot 2 - Channels 38 (preceding mid ch) and 39 (mid ch) Separation




CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

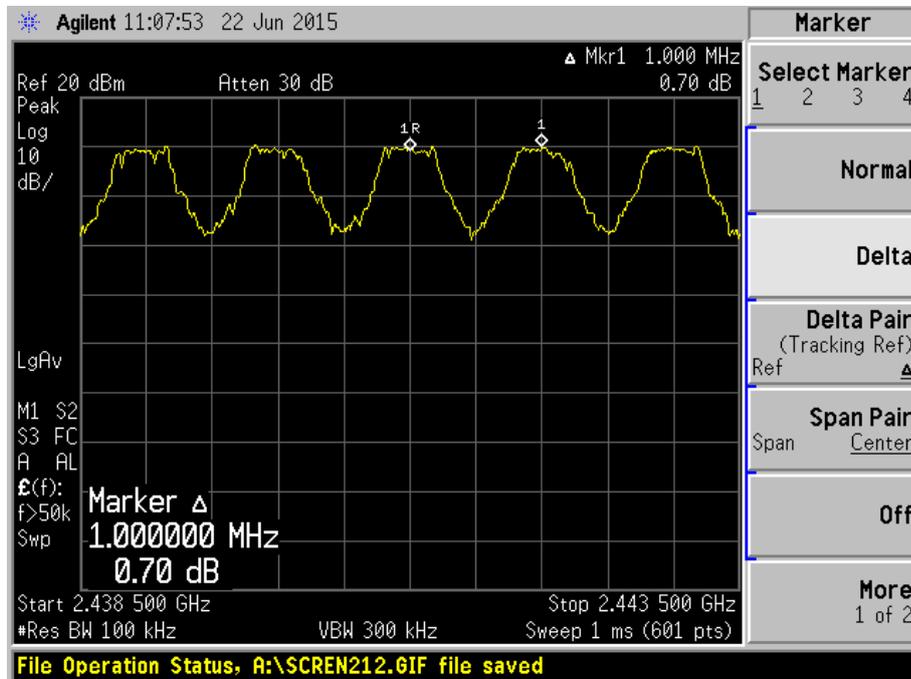

Plot 3 - Channels 39 (*mid ch*) and 40 (*ch after mid ch*) Separation

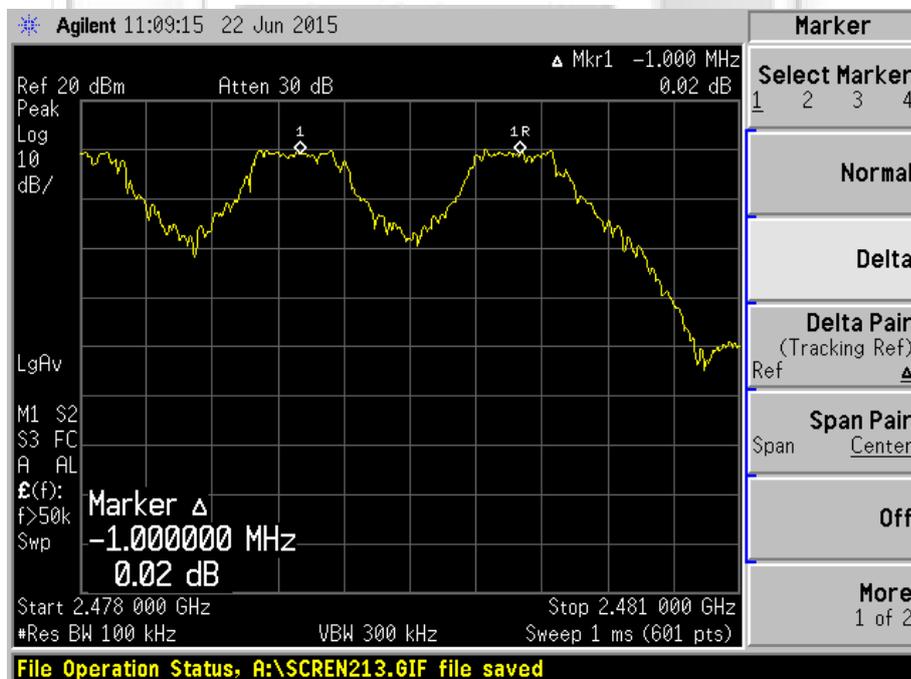

Plot 4 - Channels 77 (*preceding upper ch*) and 78 (*upper ch*) Separation



**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Spectrum Bandwidth (20dB and 99% Bandwidth Measurement) Limits**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Spectrum Bandwidth (20dB and 99% Bandwidth Measurement) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Parts 15.247(a) (1) and RSS-247 5.1(2) Spectrum Bandwidth (20dB and 99% Bandwidth Measurement) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10 kHz and 30 kHz.
5. All other supporting equipment was powered separately from other filtered mains.

**47 CFR FCC Parts 15.247(a) (1) and RSS-247 5.1(2) Spectrum Bandwidth (20dB and 99% Bandwidth Measurement) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB and 99% bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. For 6dB bandwidth measurement, the frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser. For 99% bandwidth measurement, the spectrum analyser power measurement was activated with bandwidth measurement as 99%.
5. For 6dB bandwidth measurement, the 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $|f_H - f_L|$ . For 99% bandwidth measurement, the measured 99% bandwidth shown on the spectrum analyser was recorded.
1. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid chi*) and Channel 79 (2.480GHz) (*upper chi*) respectively.



**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**47 CFR FCC Part 15.247(a) (1) and RSS-247 5.1(2) Spectrum Bandwidth (20dB and 99% Bandwidth Measurement) Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	5 – 7 (GFSK) 8 – 10 (( $\pi/4$ ) DQPSK) 11 – 13 (8DPSK)	Relative Humidity	60%
Attached Plots (99%)	14 – 16 (GFSK) 17 – 19 (( $\pi/4$ ) DQPSK) 20 – 22 (8DPSK)	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

**GFSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
0 (lower ch)	2.402	0.940	0.848
39 (mid ch)	2.441	0.930	0.835
78 (upper ch)	2.480	0.930	0.857

**( $\pi/4$ )DQPSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
0 (lower ch)	2.402	1.317	1.190
39 (mid ch)	2.441	1.292	1.188
78 (upper ch)	2.480	1.292	1.190


**8DPSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
0 (lower ch)	2.402	1.292	1.202
39 (mid ch)	2.441	1.287	1.215
78 (upper ch)	2.480	1.272	1.225




**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK**

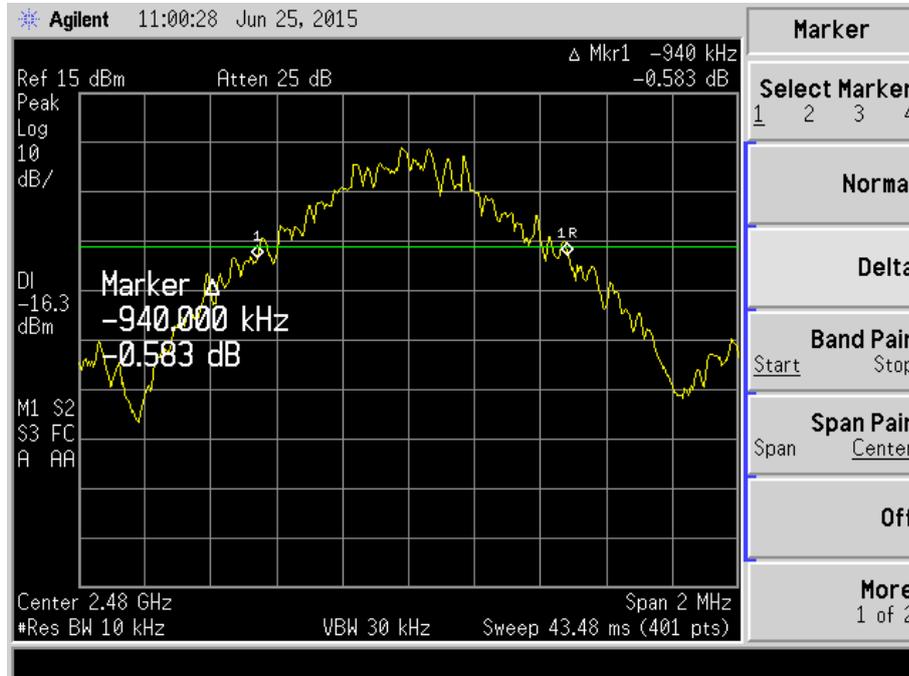

**Plot 5 – Channel 0 (lower ch)**

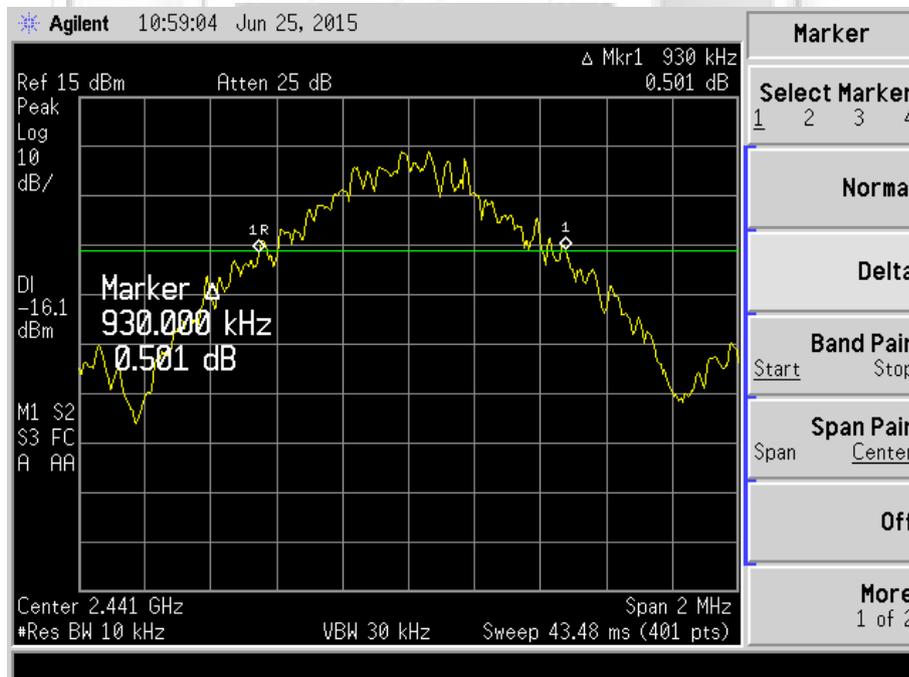


**Plot 6 – Channel 39 (mid ch)**



**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK**

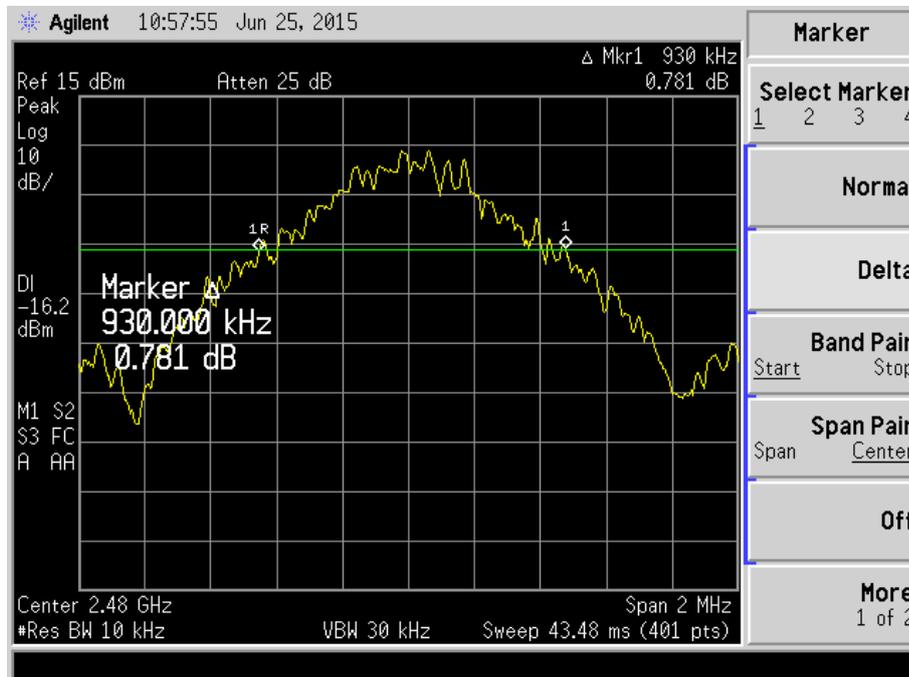


**Plot 7 – Channel 78 (upper ch)**






**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – ( $\pi/4$ ) DQPSK**

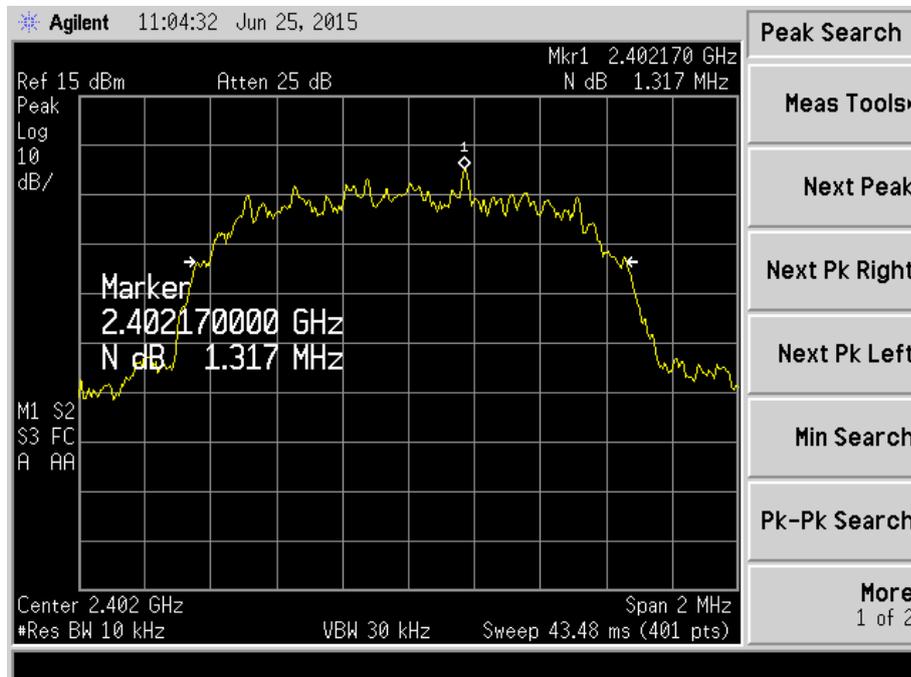

**Plot 8 – Channel 0 (lower ch)**

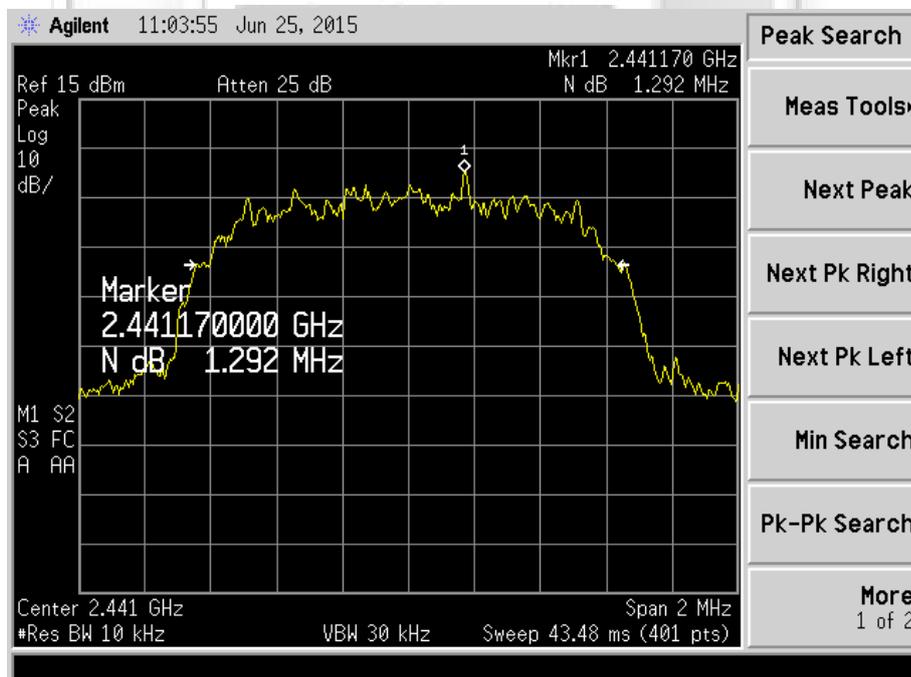


**Plot 9 – Channel 39 (mid ch)**



**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – ( $\pi/4$ ) DQPSK**

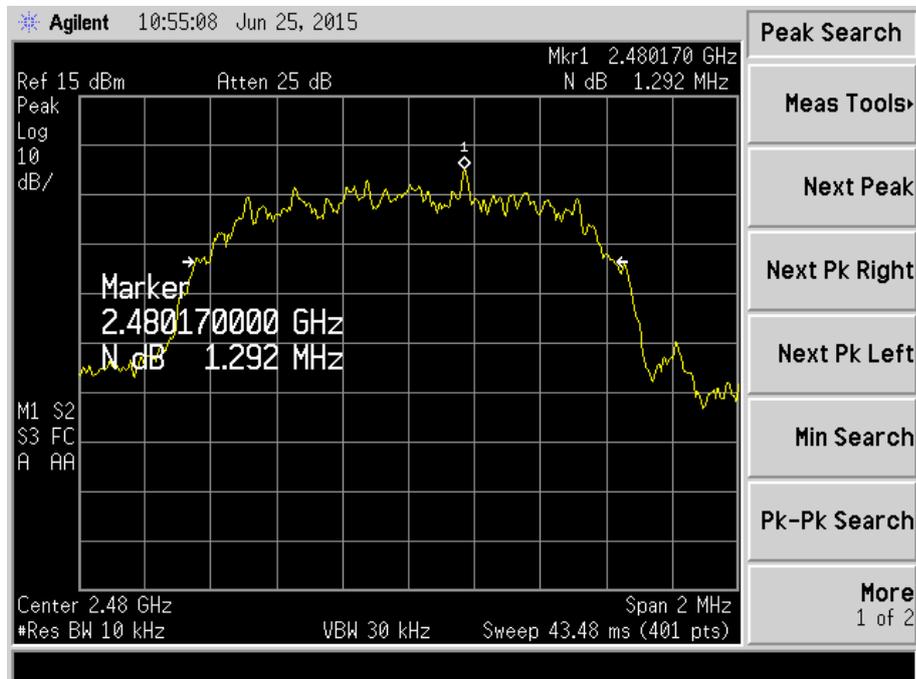


Plot 10 – Channel 78 (upper ch)






**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK**

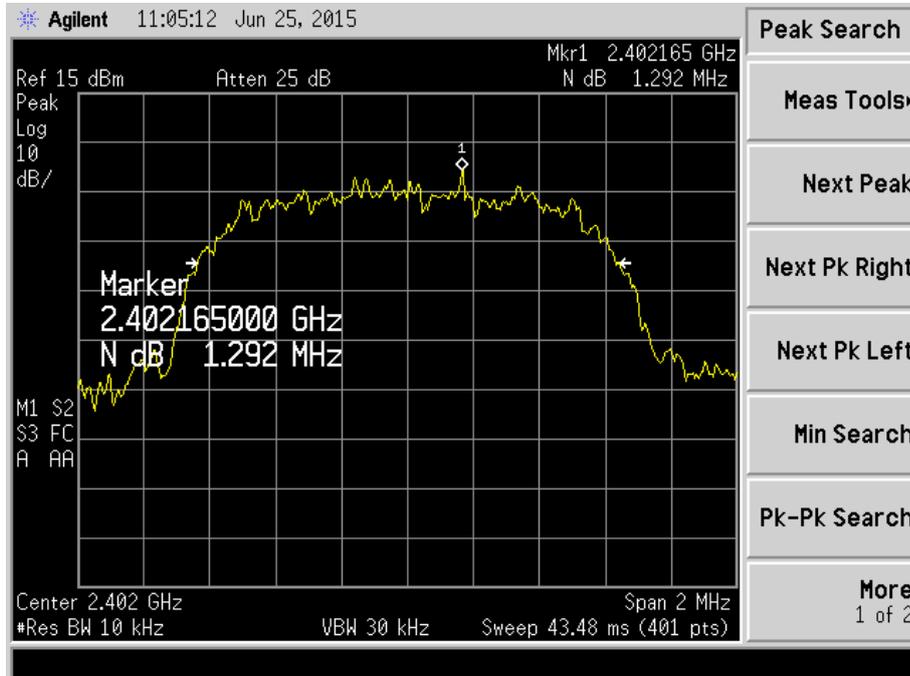

**Plot 11 – Channel 0 (lower ch)**

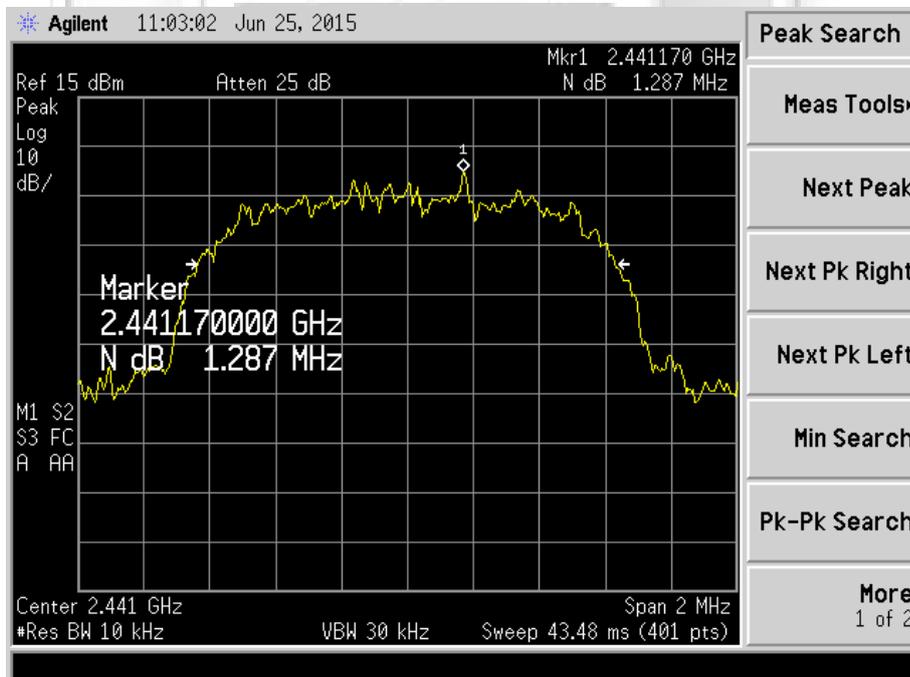


**Plot 12 – Channel 39 (mid ch)**



**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK**

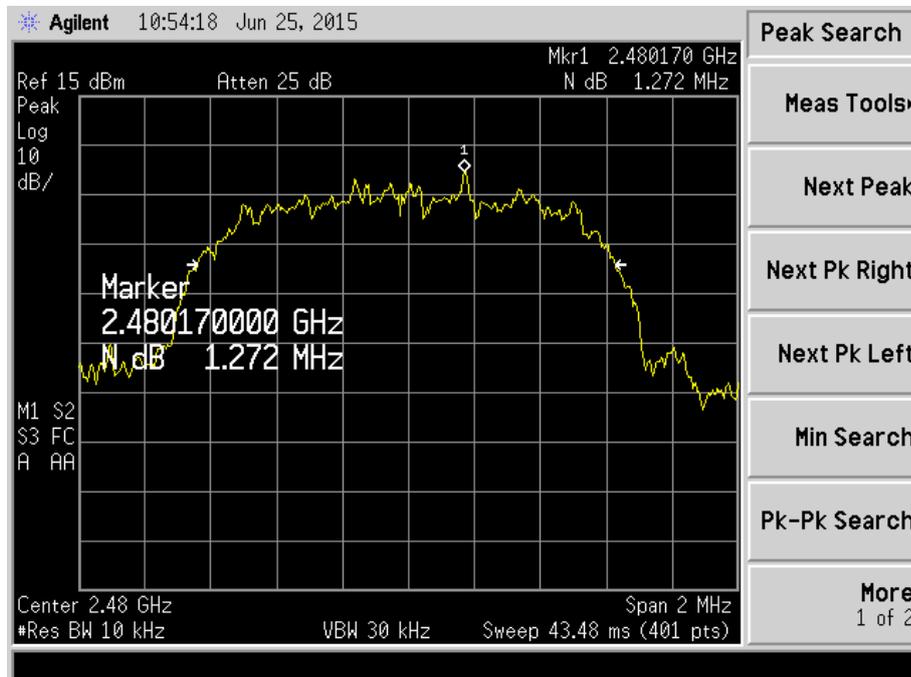


Plot 13 – Channel 78 (upper ch)






**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99%dB Bandwidth Measurement) Plots – GFSK**

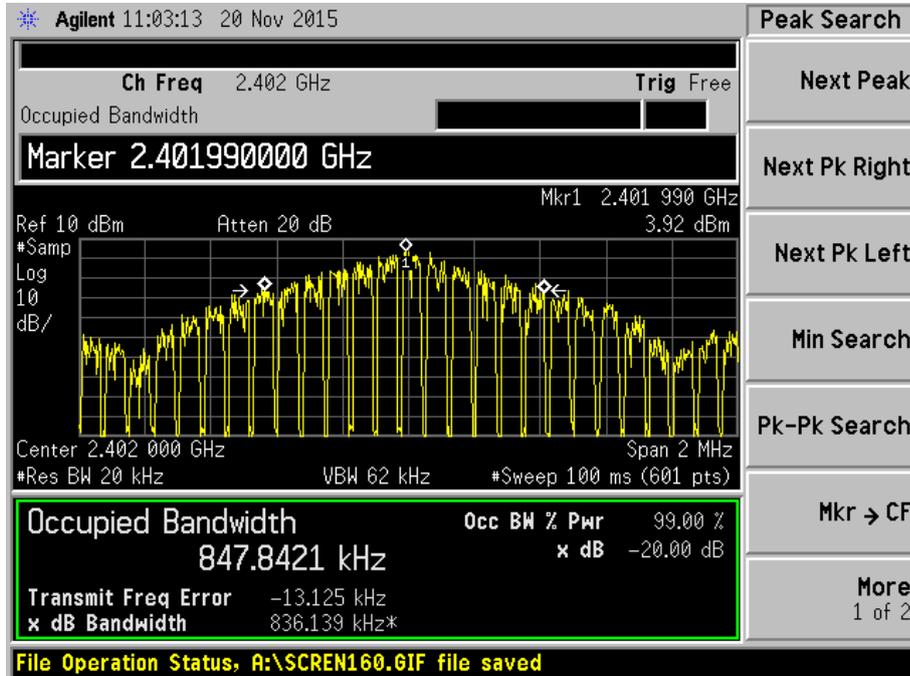

Plot 14 – Channel 0 (lower ch)

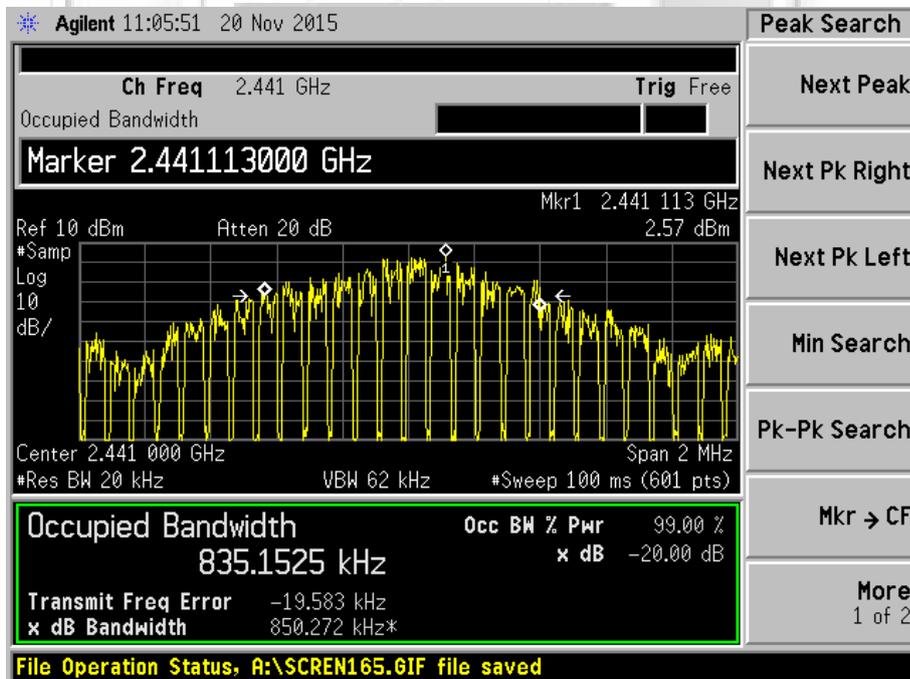


Plot 15 – Channel 39 (mid ch)




**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99% Bandwidth Measurement) Plots – GFSK**

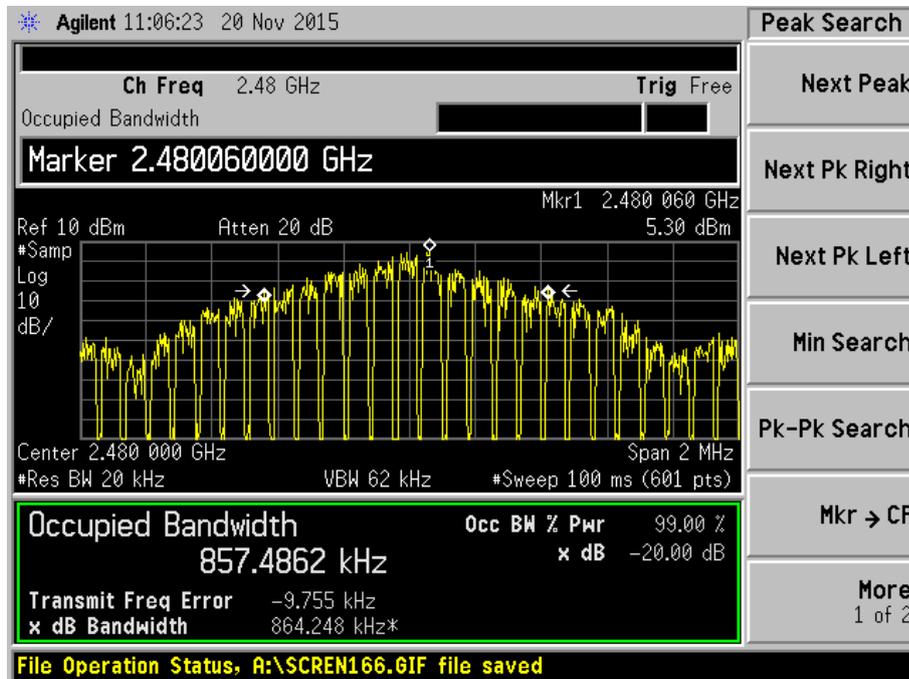


Plot 16 – Channel 78 (upper ch)

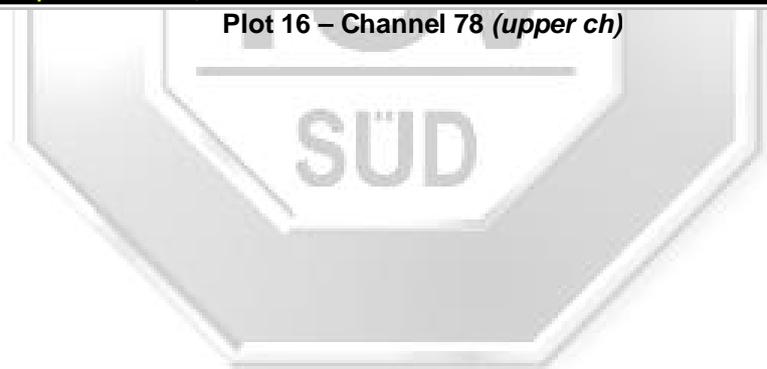




**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99% Bandwidth Measurement) Plots – ( $\pi/4$ ) DQPSK**

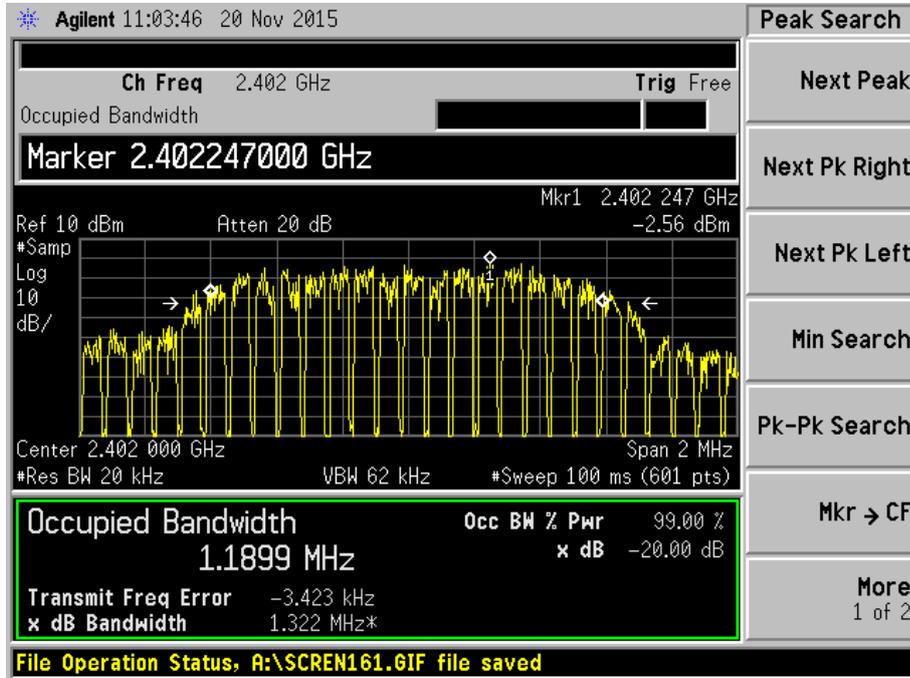

Plot 17 – Channel 0 (lower ch)

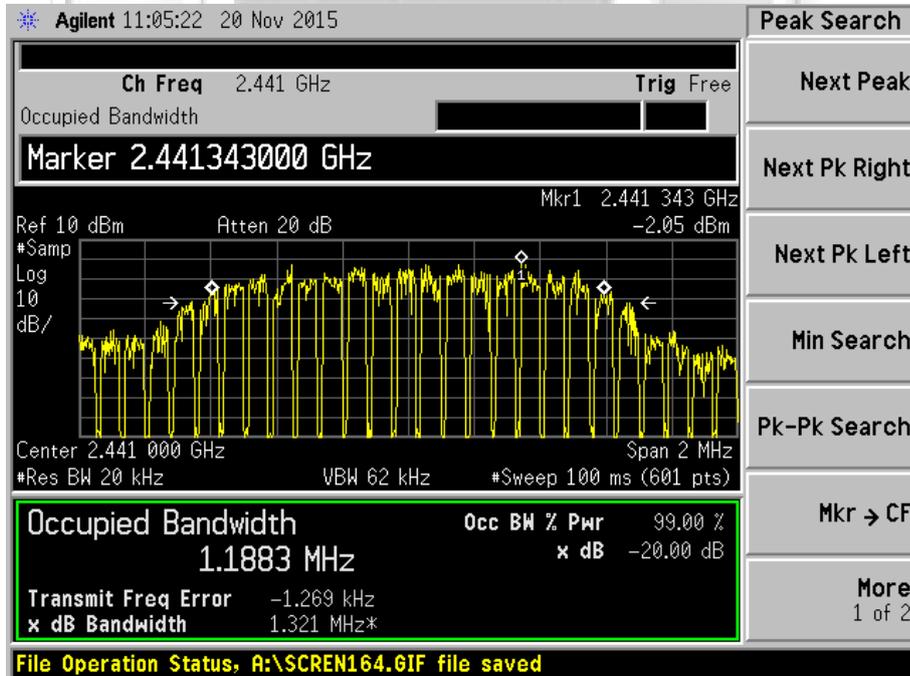


Plot 18 – Channel 39 (mid ch)




**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99% Bandwidth Measurement) Plots – ( $\pi/4$ ) DQPSK**

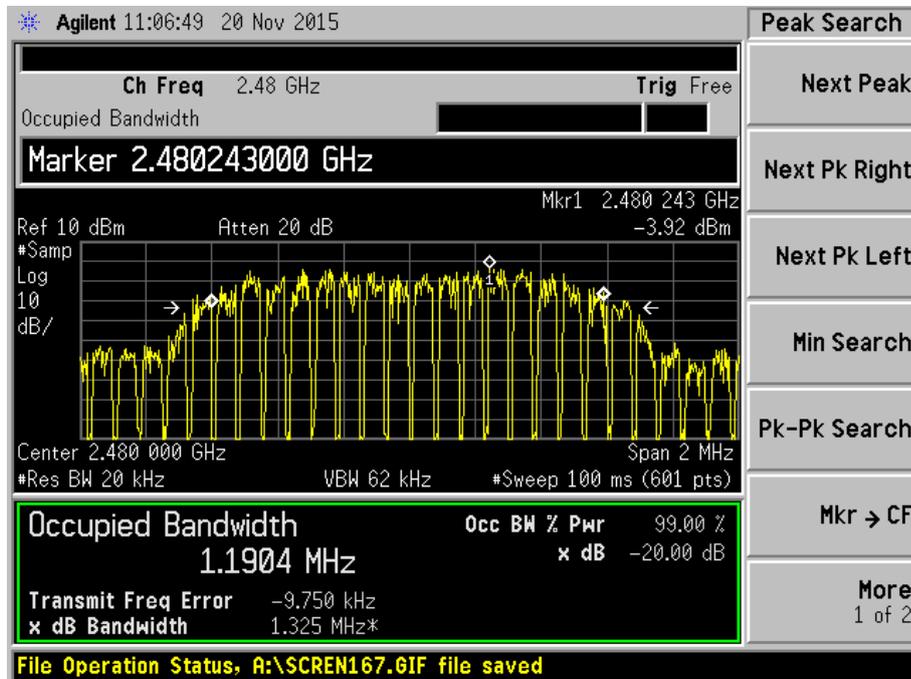


Plot 19 – Channel 78 (upper ch)

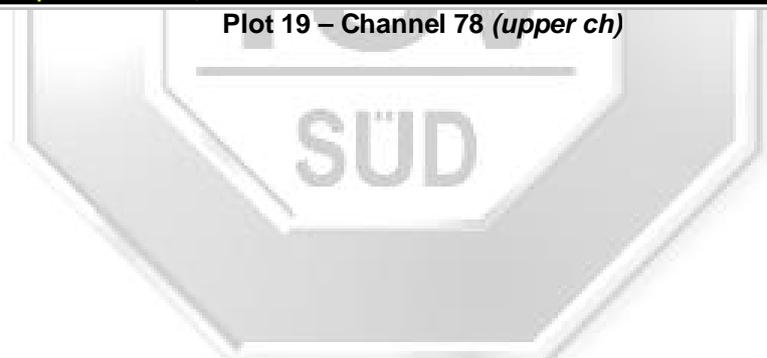




**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99% Bandwidth Measurement) Plots – 8DPSK**

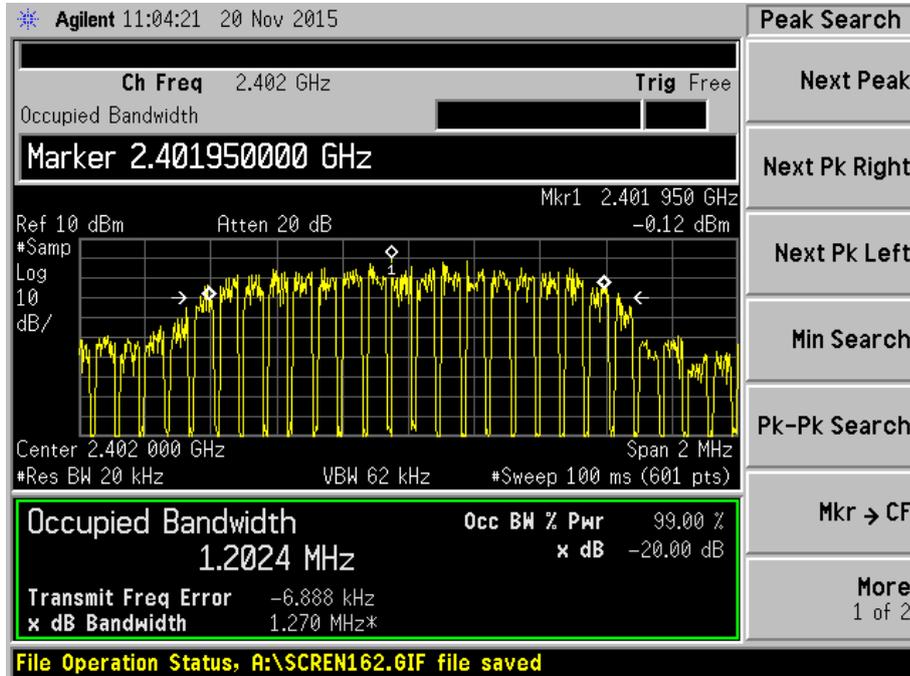

Plot 20 – Channel 0 (lower ch)

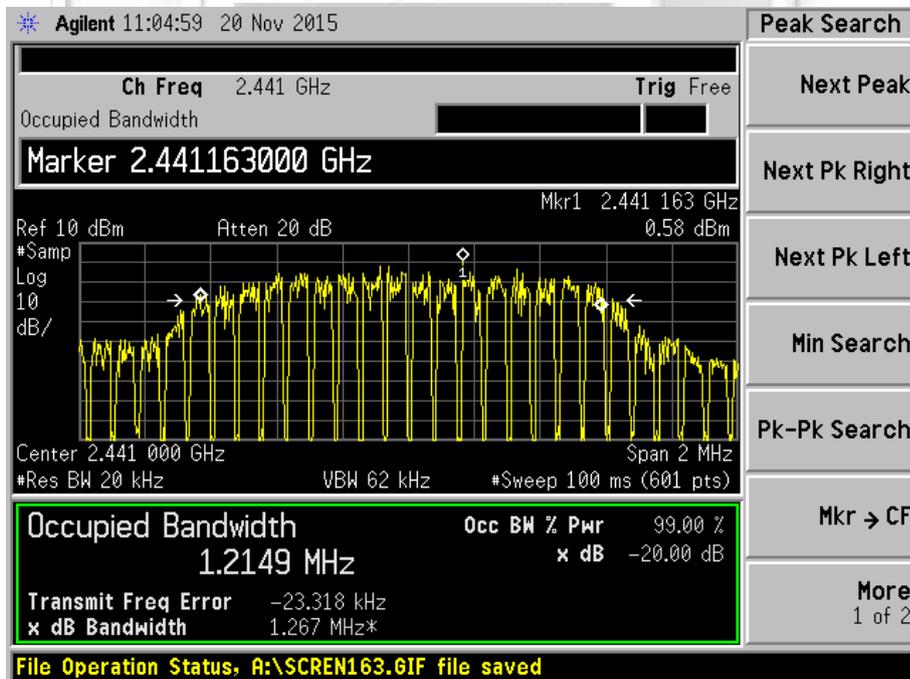


Plot 21 – Channel 39 (mid ch)



**SPECTRUM BANDWIDTH (20dB and 99% BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (99% Bandwidth Measurement) Plots – 8DPSK**

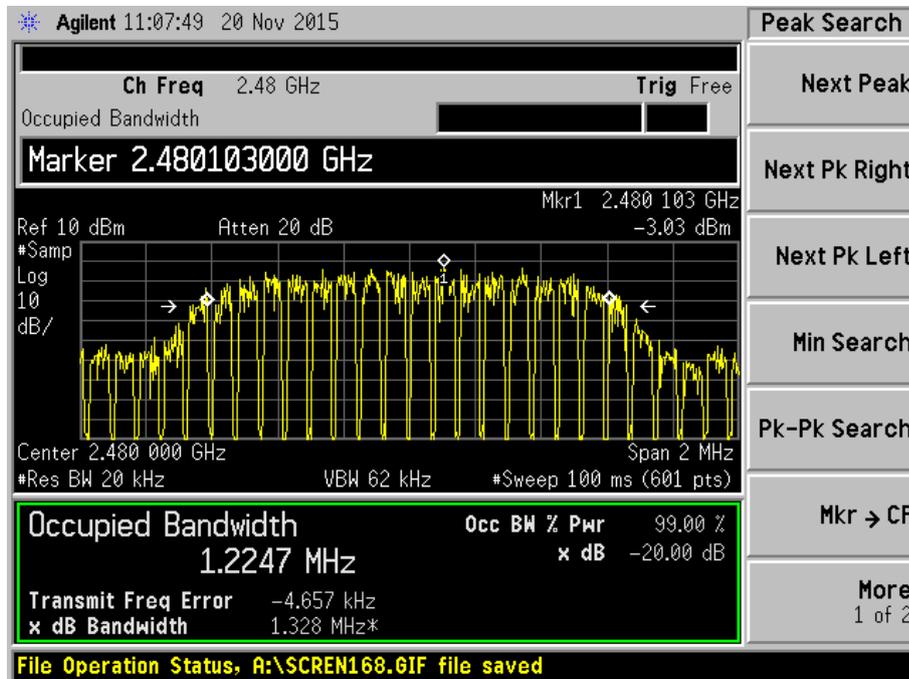

Plot 22 – Channel 78 (upper ch)





**NUMBER OF HOPPING FREQUENCIES TEST**

**47 CFR FCC Part 15.247(a) (1) (iii) and RSS-247 5.1(4) Number of Hopping Frequencies Limits**

The EUT shows compliance to the requirements of this section, which states the EUT, shall use at least 15 channels.

**47 CFR FCC Part 15.247(a) (1) (iii) and RSS-247 5.1(4) Number of Hopping Frequencies Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Part 15.247(a) (1) (iii) and RSS-247 5.1(4) Number of Hopping Frequencies Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100 kHz and 300 kHz.
5. All other supporting equipment was powered separately from other filtered mains.

**47 CFR FCC Part 15.247(a) (1) (iii) and RSS-247 5.1(4) Number of Hopping Frequencies Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.390GHz and 2.420GHz.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.420GHz to 2.441GHz
  - b. 2.441GHz to 2.461GHz
  - c. 2.461GHz to 2.483GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.



**NUMBER OF HOPPING FREQUENCIES TEST**

**47 CFR FCC Part 15.247(a) (1) (iii) and RSS-247 5.1(4) Number of Hopping Frequencies Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	23 – 26	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


The EUT was found to have 79 hopping frequencies. Please refer to the attached plots.






NUMBER OF HOPPING FREQUENCIES TEST

Number of Hopping Frequencies Plots

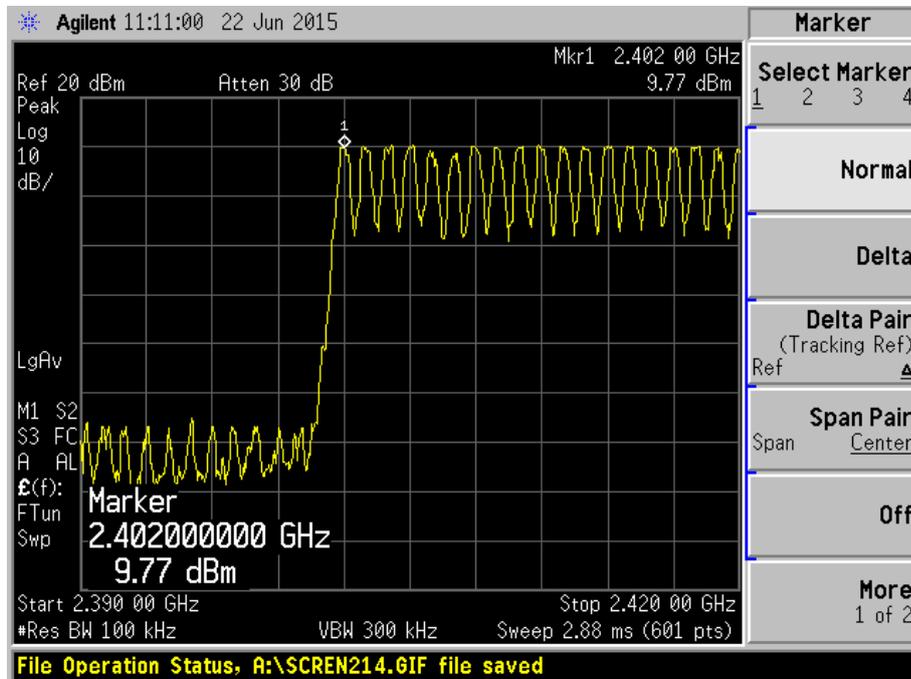

Plot 23 - Channels 0 to 18

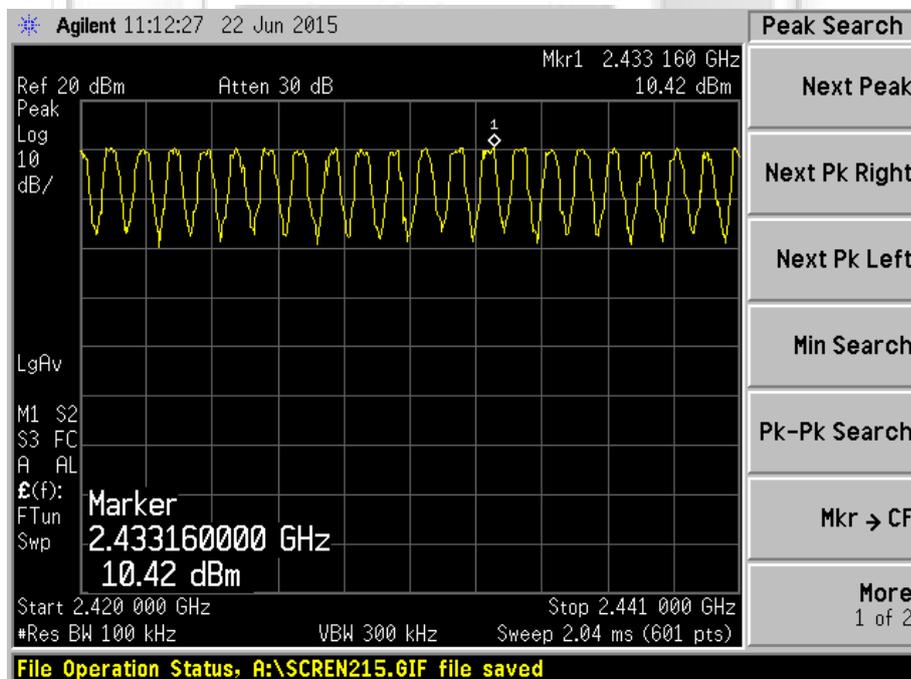


Plot 24 - Channels 18 to 39




NUMBER OF HOPPING FREQUENCIES TEST

Number Of Hopping Frequencies Plots

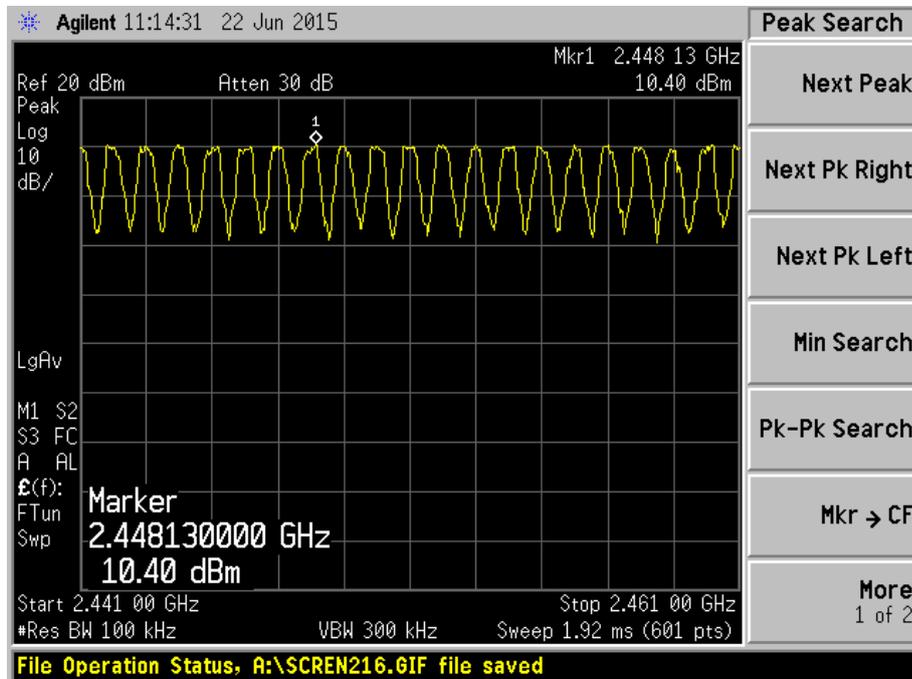

Plot 25 - Channels 39 to 59

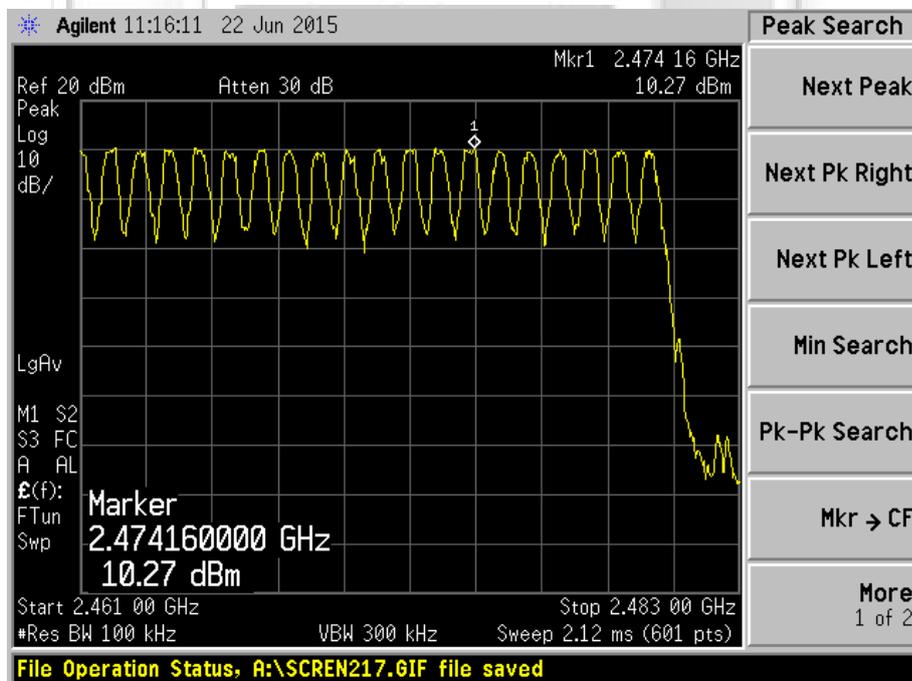

Plot 26 - Channels 59 to 78



**AVERAGE FREQUENCY DWELL TIME TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) and RSS-247 5.1(4) Average Frequency Dwell Time Limits**

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**47 CFR FCC Part 15.247(a)(1)(iii) and RSS-247 5.1(4) Average Frequency Dwell Time Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Part 15.247(a)(1)(iii) and RSS-247 5.1(4) Average Frequency Dwell Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**CFR FCC Part 15.247(a)(1)(iii) and RSS-247 5.1(4) Average Frequency Dwell Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz (*lower ch*) with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed based on general expression as shown below:  
$$\text{Average Frequency Dwell Time} = \frac{[\text{measured time slot length} \times \text{hopping rate} / \text{number of hopping channels}] \times [0.4 \times \text{number of hopping channels}]$$
5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz (*mid ch*) and 2.480GHz (*upper ch*) respectively.



**AVERAGE FREQUENCY DWELL TIME TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	27 – 29 (DH1) 30 – 32 (DH3) 33 – 35 (DH5)	Relative Humidity	60%
Hopping Rate	1600 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Liau Lee Yin

**DH1**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	0.3750	0.200	0.4
39 (mid ch)	2.441	0.3750	0.200	0.4
78 (upper ch)	2.480	0.3733	0.200	0.4

**DH3**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	1.6300	0.2608	0.4
39 (mid ch)	2.441	1.6300	0.2608	0.4
78 (upper ch)	2.480	1.6300	0.2608	0.4

**DH5**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	2.8750	0.3067	0.4
39 (mid ch)	2.441	2.8750	0.3067	0.4
78 (upper ch)	2.480	2.8750	0.3067	0.4

**Notes**

1. Average Frequency Dwell time = Pulse Time\*(Hop Rate/2/Number of Channels)\*31.6 (DH1)  
Pulse Time\*(Hop Rate/4/Number of Channels)\*31.6 (DH3)  
Pulse Time\*(Hop Rate/6/Number of Channels)\*31.6 (DH5)


where:

- Hop Rate = 1600
- Number of Channels = 79




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH1**

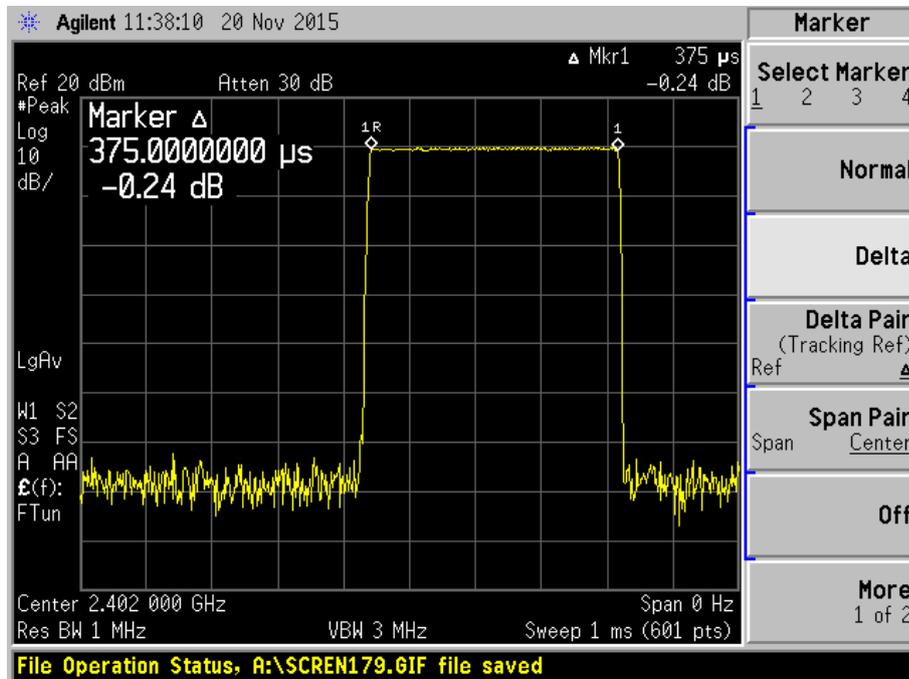

Plot 27 – Channel 0 (lower ch)

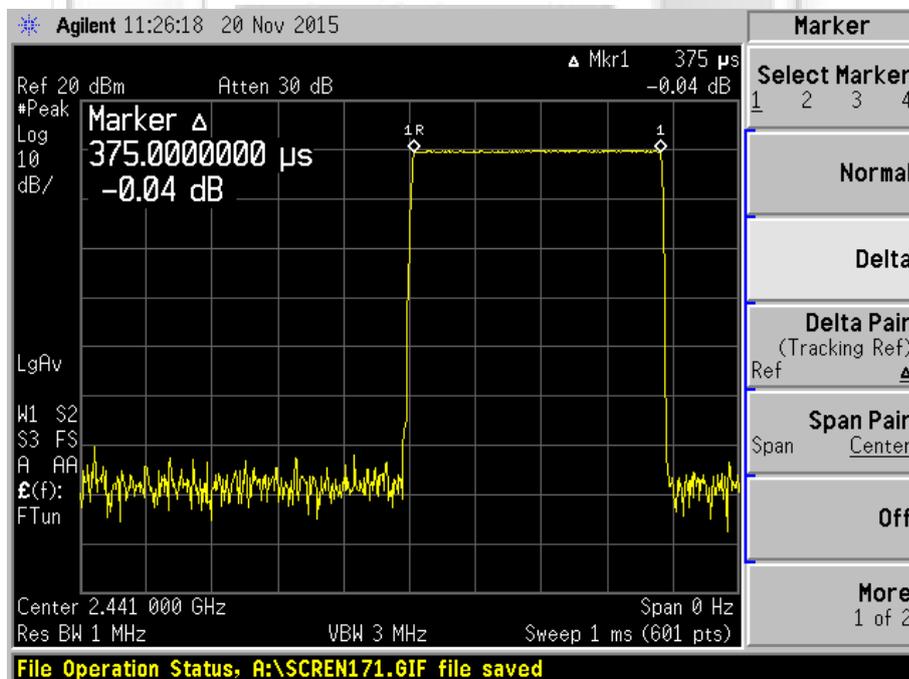


Plot 28 – Channel 39 (mid ch)




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH1**

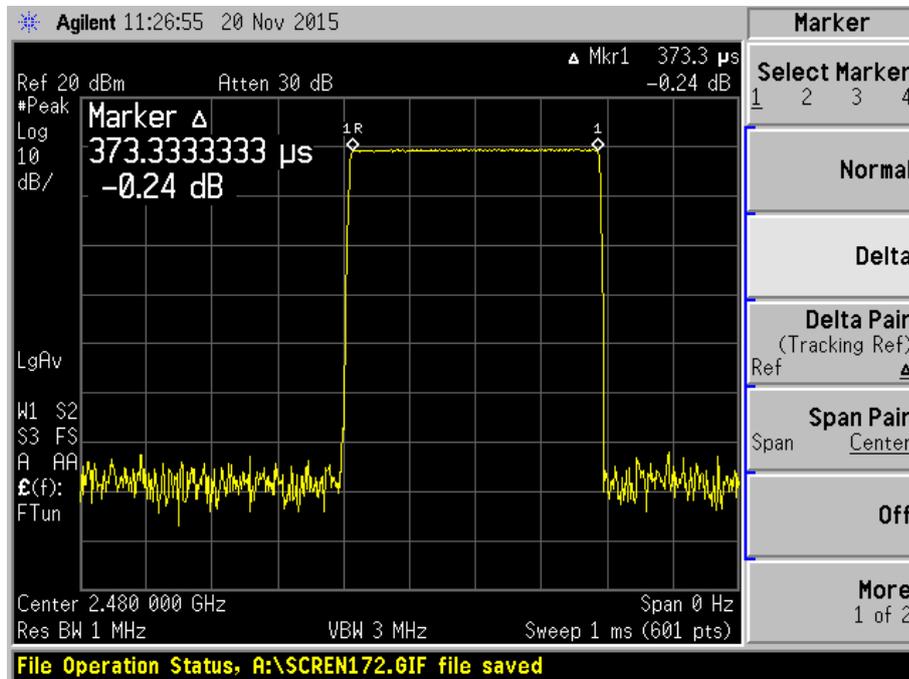


Plot 29 – Channel 78 (upper ch)

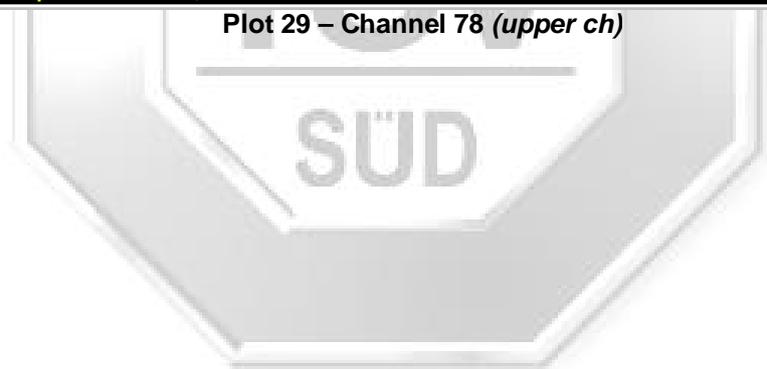




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH3**

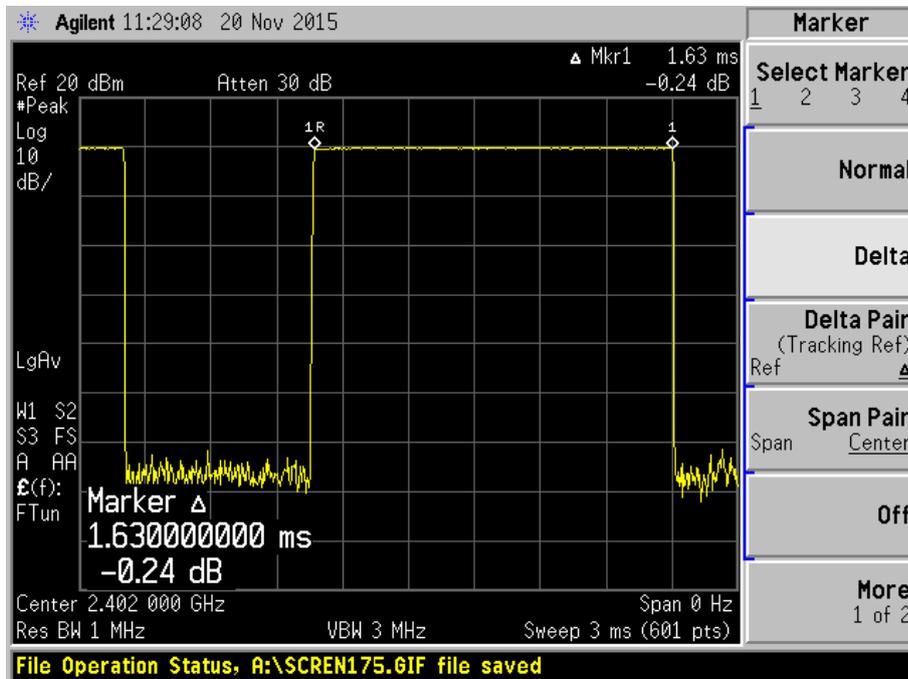

**Plot 30 – Channel 0 (lower ch)**

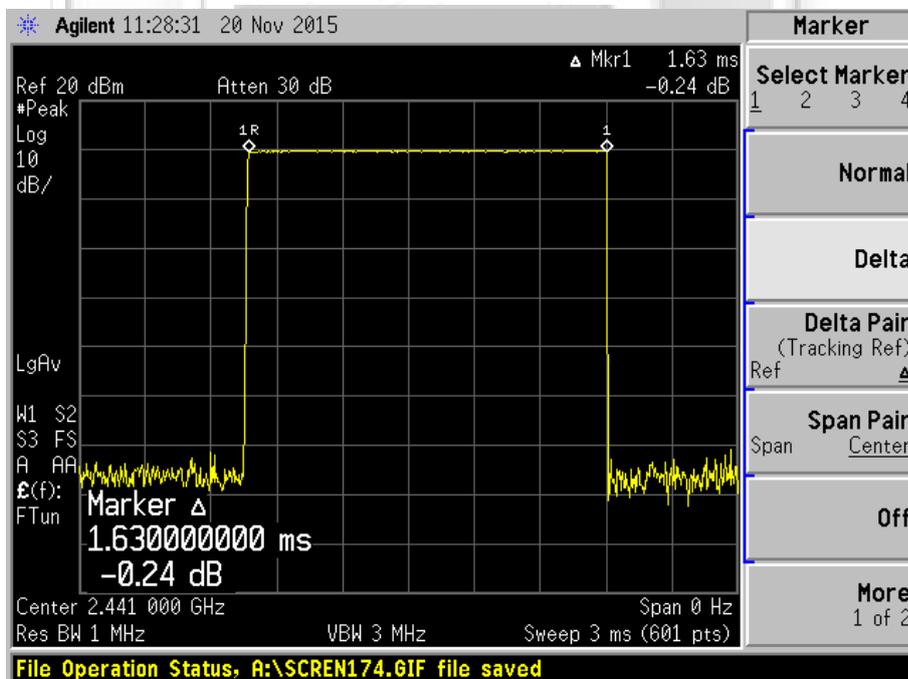


**Plot 31 – Channel 39 (mid ch)**




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH3**

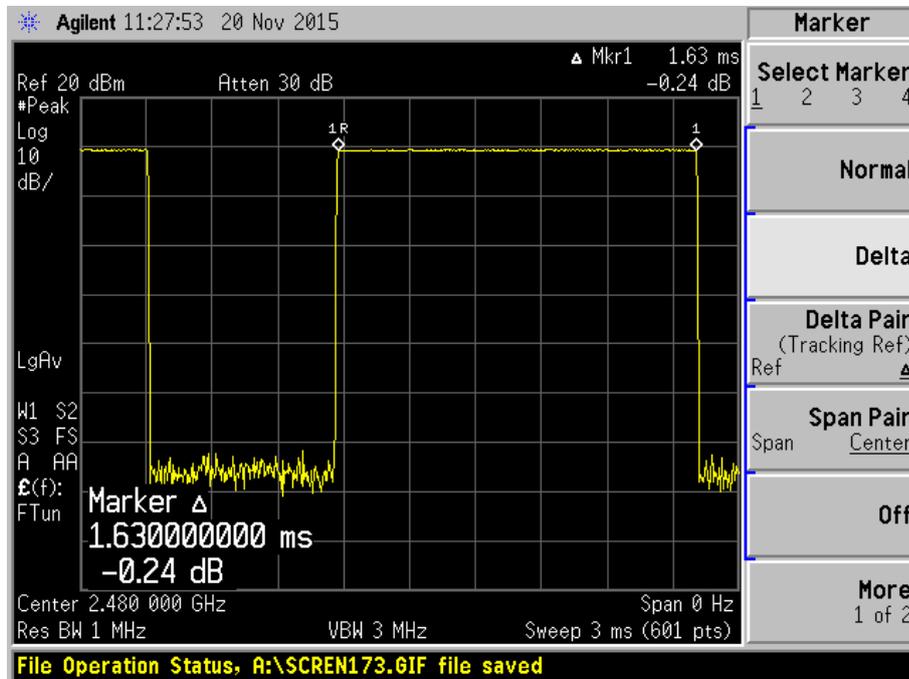


Plot 32 – Channel 78 (upper ch)

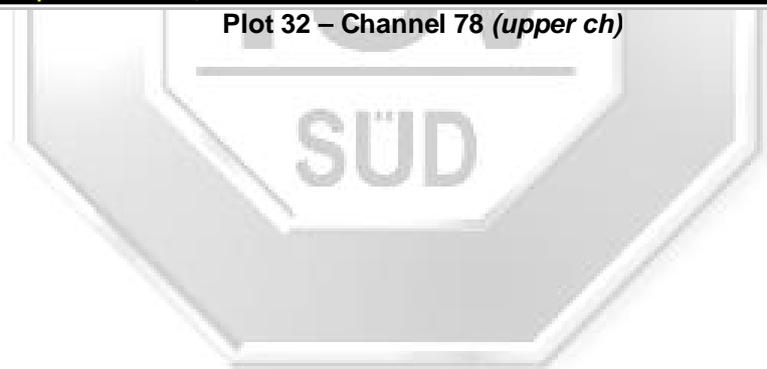




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH5**

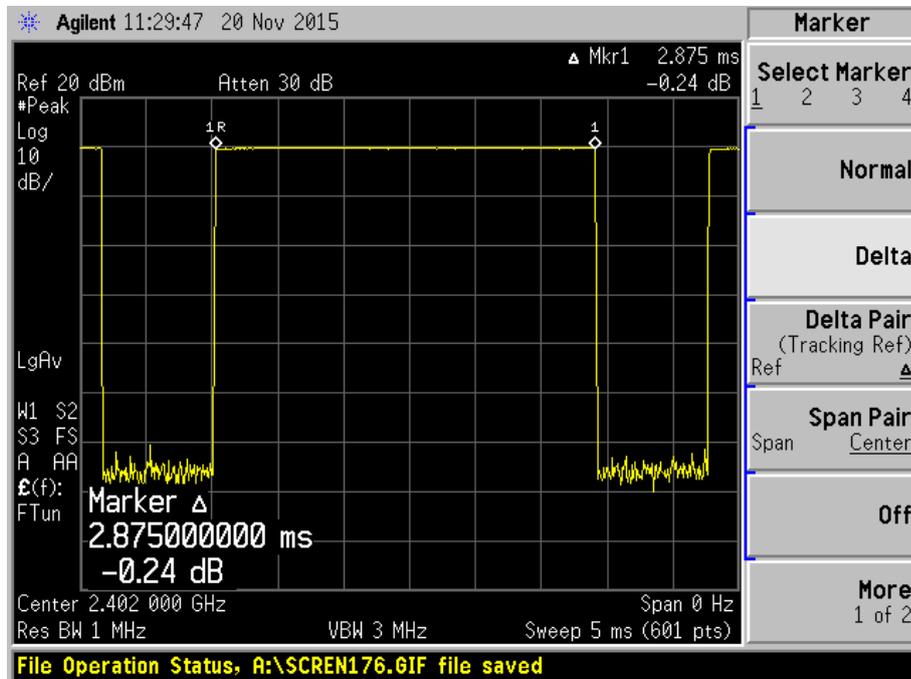

**Plot 33 – Channel 0 (lower ch)**

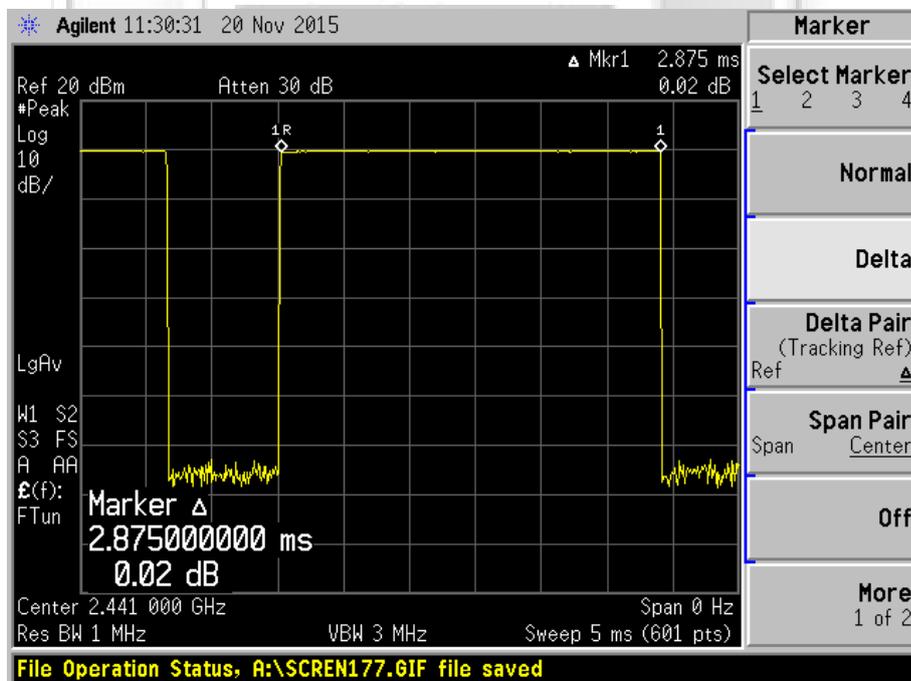


**Plot 34 – Channel 39 (mid ch)**




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH5**

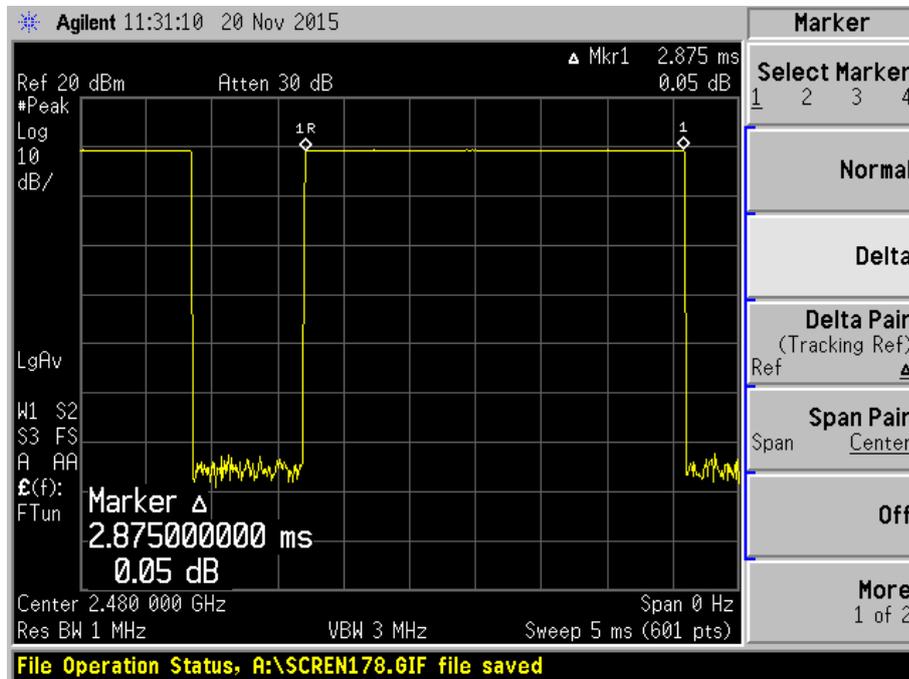

Plot 35 – Channel 78 (upper ch)

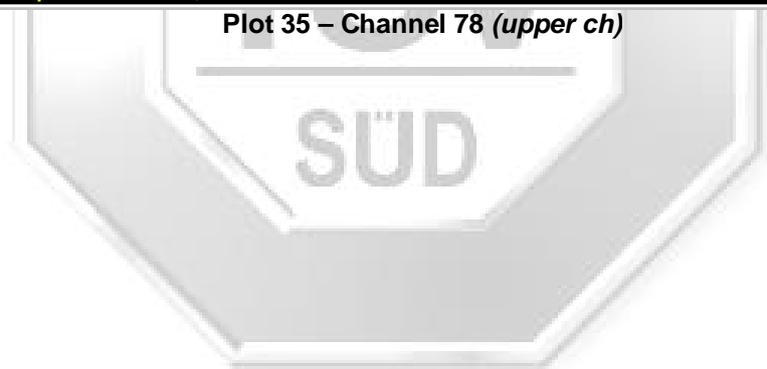



**MAXIMUM PEAK POWER TEST**

**47 CFR FCC Part 15.247(b)(1) and RSS-247 5.4(2) Maximum Peak Power Limits**

The EUT shows compliance to the requirements of this section, which states the EUT employing at least 75 non-overlapping hopping channels shall not exceed 1W (30dBm). For the EUT employs other frequency hopping systems, the peak power shall not greater than 0.125W (21dBm).

**47 CFR FCC Part 15.247(b)(1) and RSS-247 5.4(2) Maximum Peak Power Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Boonton Electronics RF Power Meter	4532	72901	27 Aug 2016	1 year
Boonton Electronics Peak Power Sensor	56218-S/1	1417	27 Aug 2016	1 year

**47 CFR FCC Part 15.247(b)(1) and RSS-247 5.4(2) Maximum Peak Power Limits**

The EUT shows compliance to the requirements of this section, which states the EUT employing at least 75 non-overlapping hopping channels shall not exceed 1W (30dBm). For the EUT employs other frequency hopping systems, the peak power shall not greater than 0.125W (21dBm).

**47 CFR FCC Part 15.247(b)(1) and RSS-247 5.4(2) Maximum Peak Power Test Instrumentation**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The Equivalent Isotropic Radiated Power (EIRP) of the EUT was computed by adding its antenna gain to the measured maximum peak power.
4. The steps 2 to 3 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



**MAXIMUM PEAK POWER TEST**

**47 CFR FCC Part 15.247(b)(1) and RSS-247 5.4(2) Maximum Peak Power Results**

Test Input Power	3.7Vdc	Temperature	24°C
Antenna Gain	0.5 dBi	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

**GFSK**

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)
0 (lower ch)	2.402	0.0076	0.0085	1.0
39 (mid ch)	2.441	0.0076	0.0085	1.0
78 (upper ch)	2.480	0.0073	0.0082	1.0

**( $\pi/4$ ) DQPSK**

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)
0 (lower ch)	2.402	0.0041	0.0046	1.0
39 (mid ch)	2.441	0.0041	0.0046	1.0
78 (upper ch)	2.480	0.0039	0.0044	1.0

**8DPSK**

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)
0 (lower ch)	2.402	0.0041	0.0046	1.0
39 (mid ch)	2.441	0.0041	0.0046	1.0
78 (upper ch)	2.480	0.0039	0.0044	1.0

**Notes**

1. Nil.



**RF CONDUCTED SPURIOUS EMISSIONS TEST**

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 RF Conducted Spurious Emissions Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 RF Conducted Spurious Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 RF Conducted Spurious Emissions Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 RF Conducted Spurious Emissions Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



**RF CONDUCTED SPURIOUS EMISSIONS TEST**

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 RF Conducted Spurious Emissions Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	36 – 41 (GFSK) 42 – 47 (( $\pi$ /4) DQPSK) 48 – 53 (8DPSK)	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


All spurious signals found were below the specified limit. Please refer to the attached plots.






RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

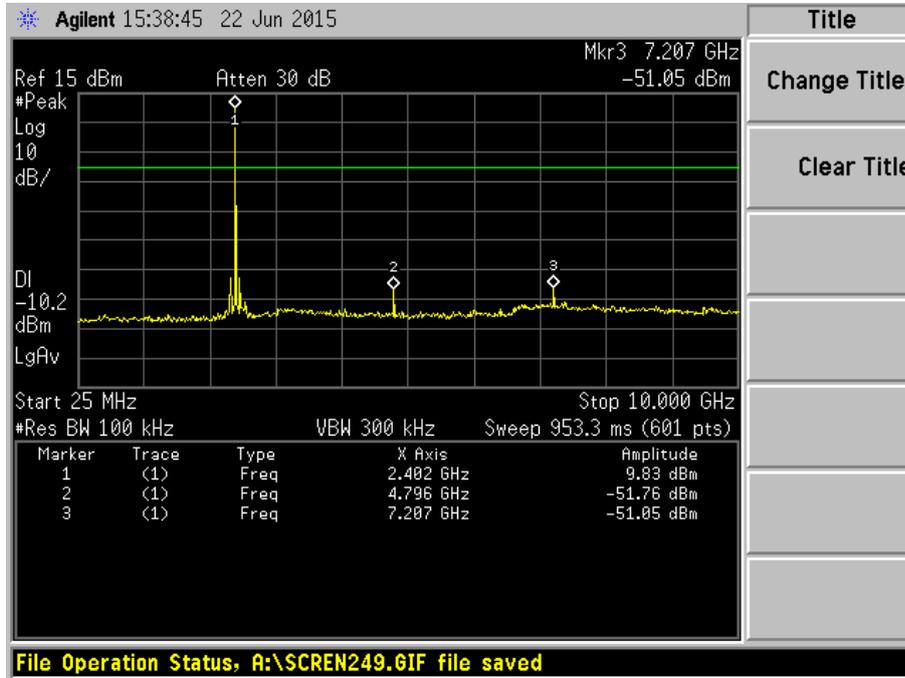

Plot 36 – Channel 0 (lower ch)

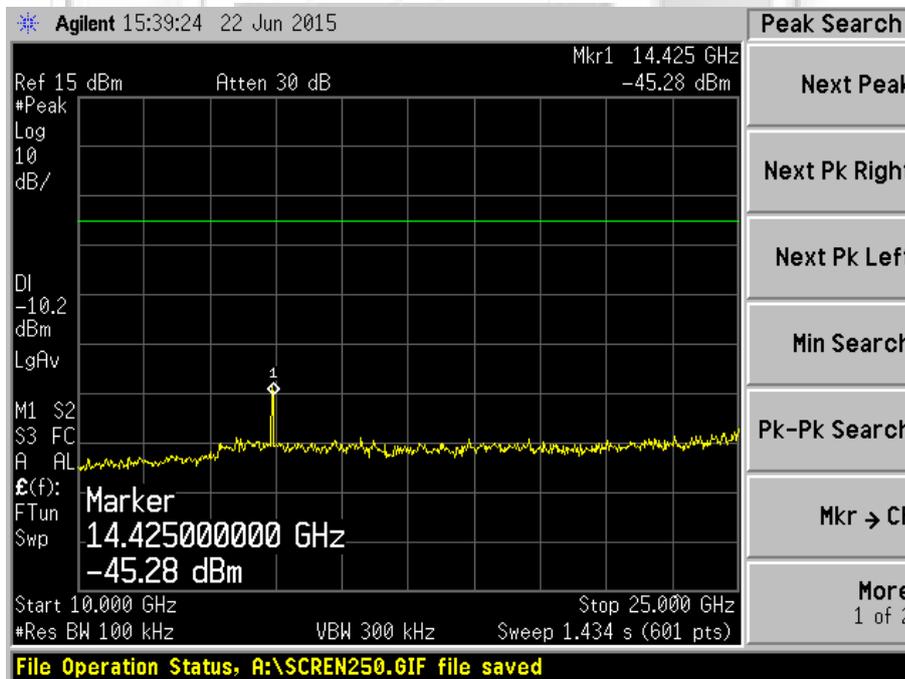


Plot 37 – Channel 0 (lower ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

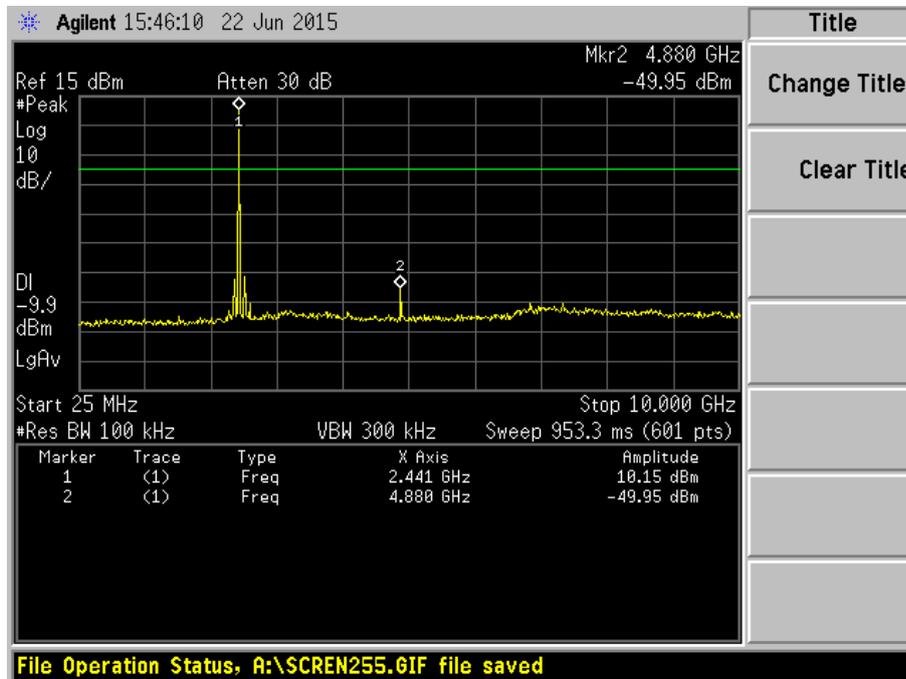

Plot 38 – Channel 39 (mid ch)

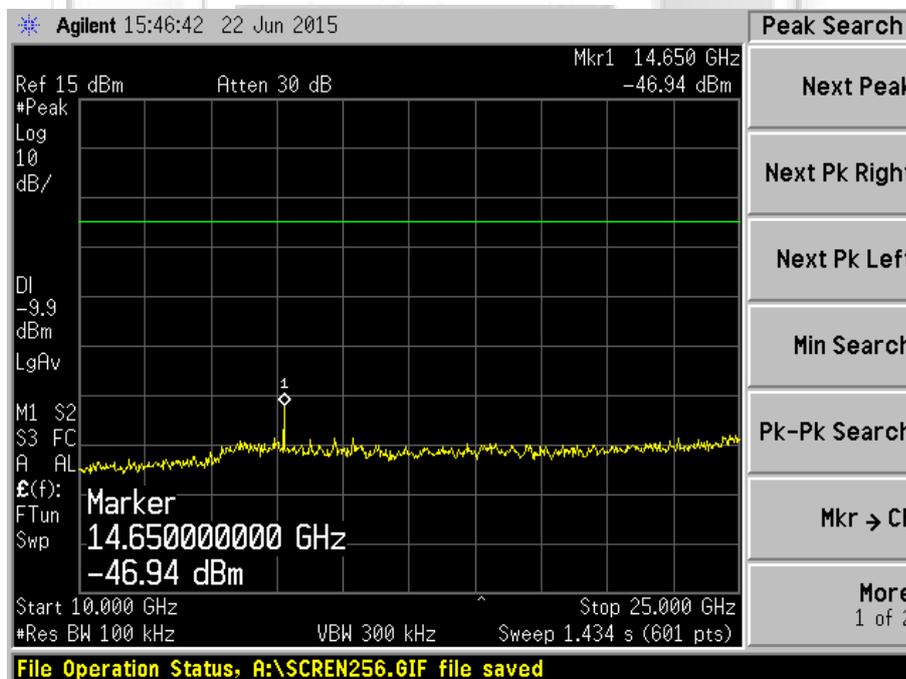


Plot 39 – Channel 39 (mid ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – GFSK

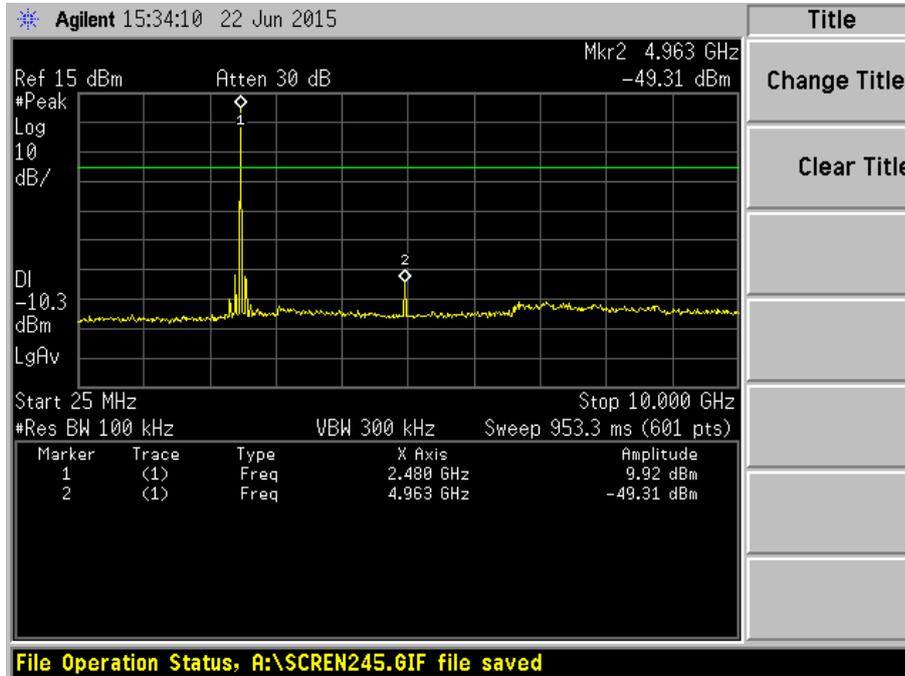

Plot 40 – Channel 78 (upper ch)

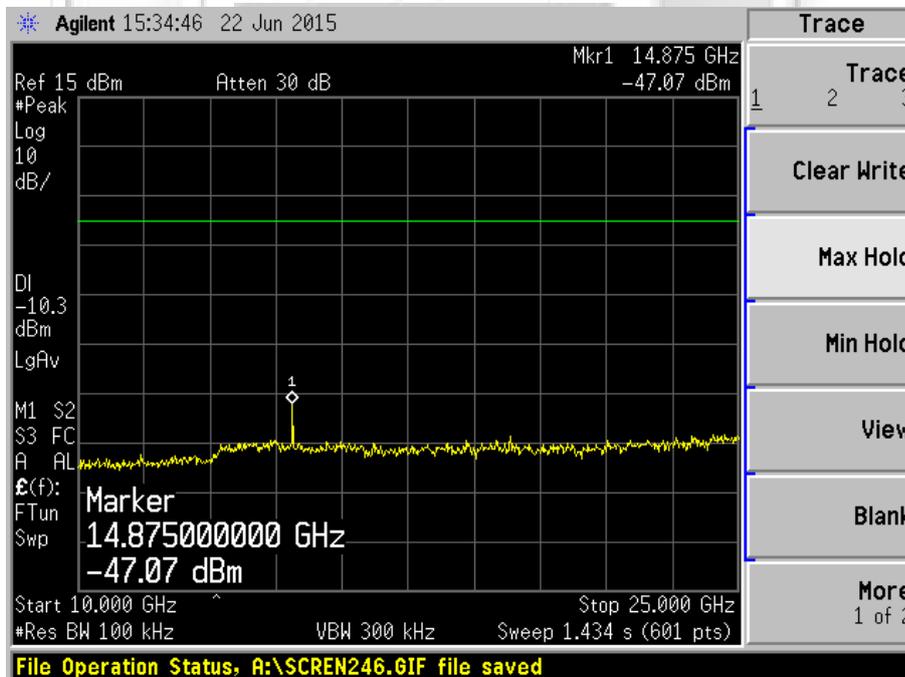


Plot 41 – Channel 78 (upper ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ( $\pi/4$ )DQPSK

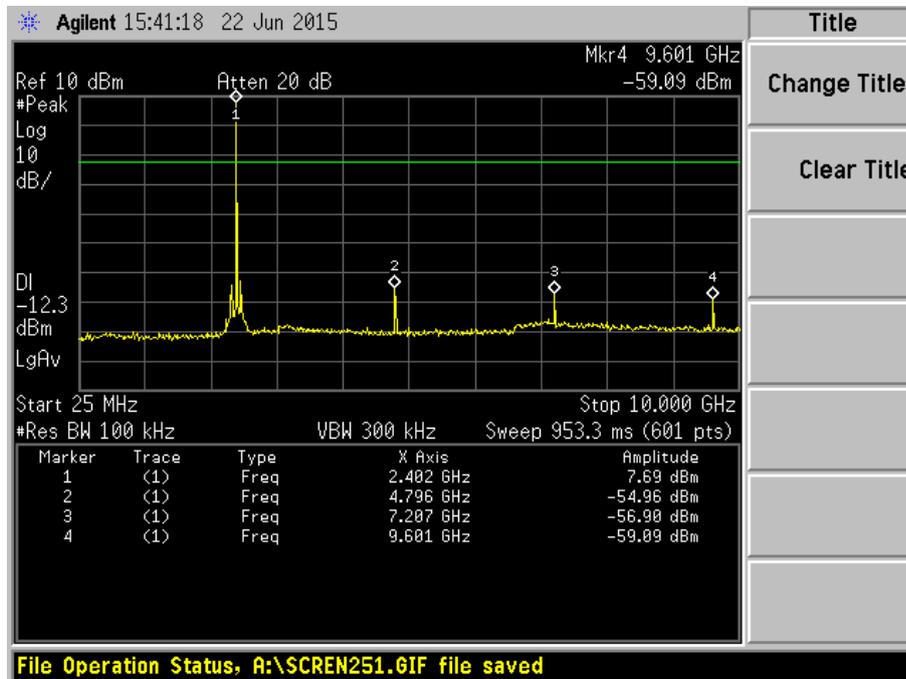

Plot 42 – Channel 0 (lower ch)

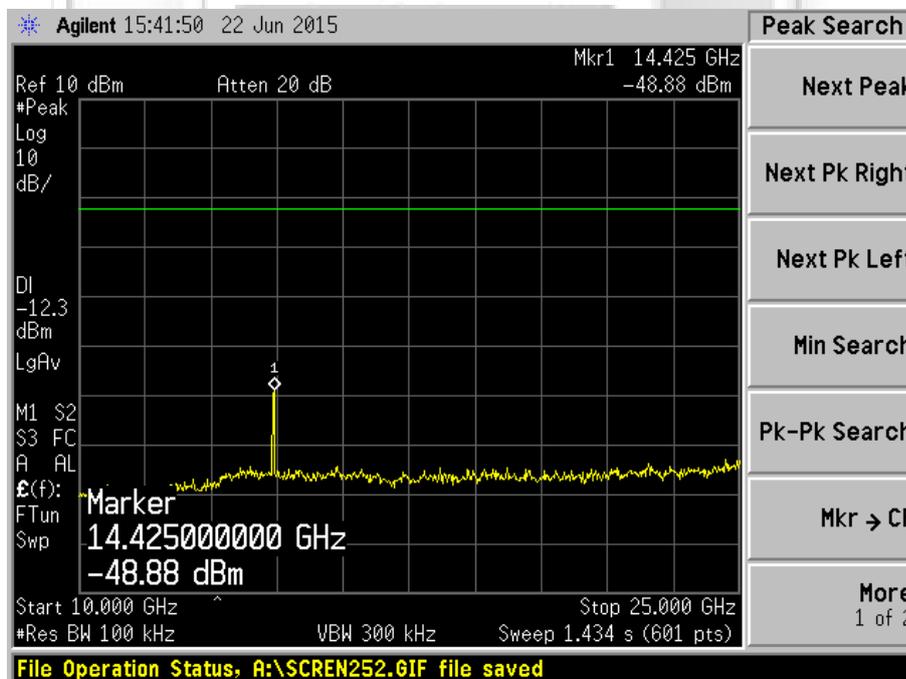


Plot 43 – Channel 0 (lower ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ( $\pi/4$ )DQPSK

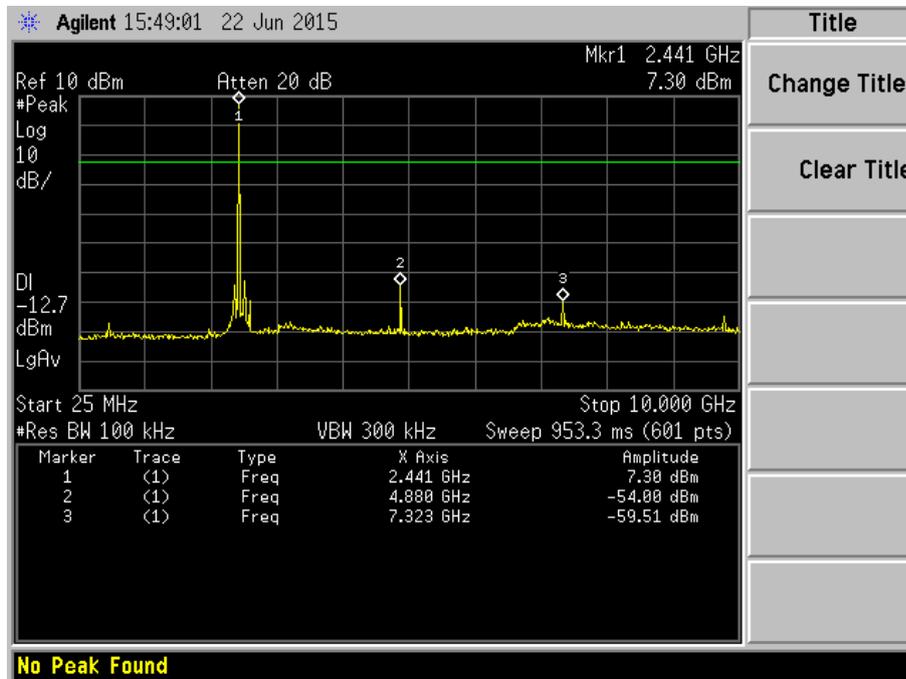

Plot 44 – Channel 39 (mid ch)

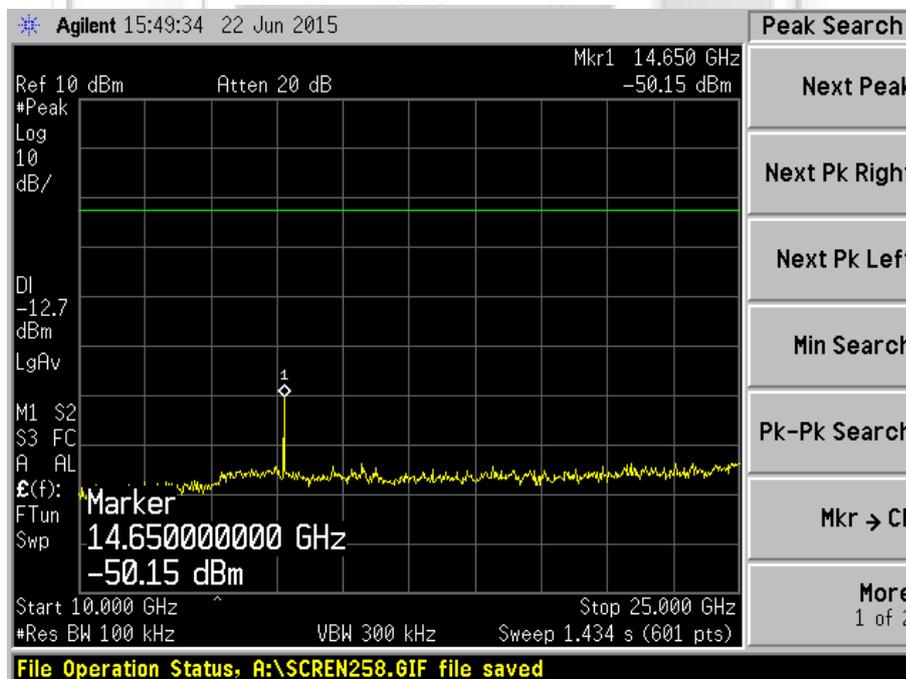


Plot 45 – Channel 39 (mid ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – ( $\pi/4$ )DQPSK

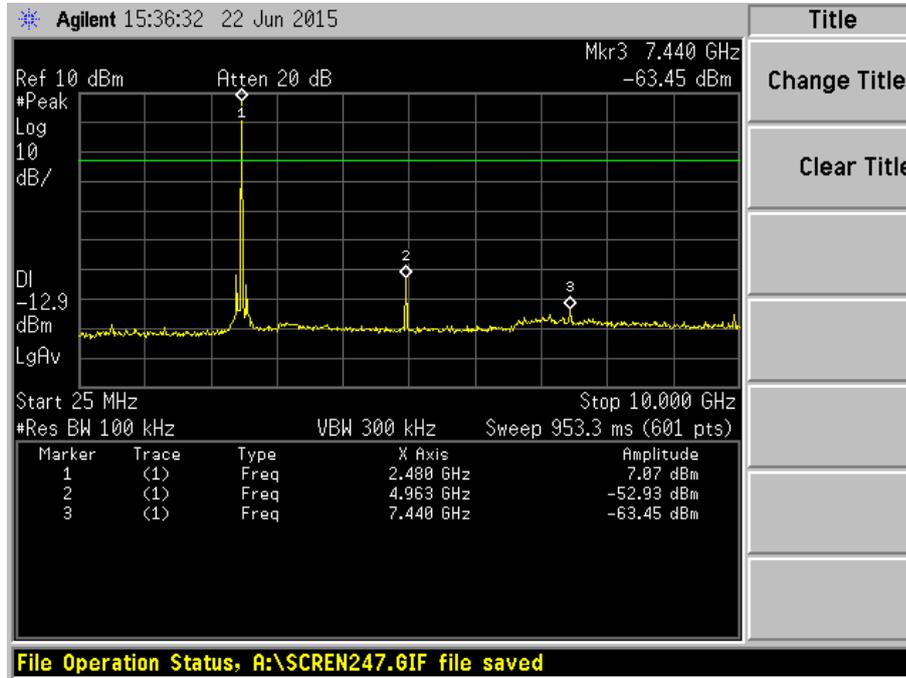

Plot 46 – Channel 78 (upper ch)

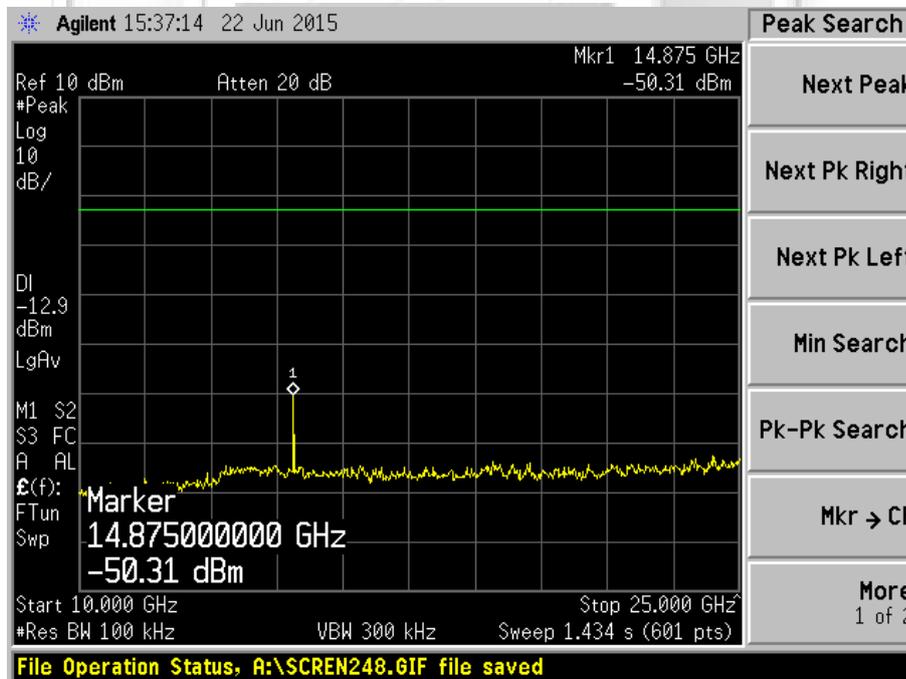


Plot 47 – Channel 78 (upper ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

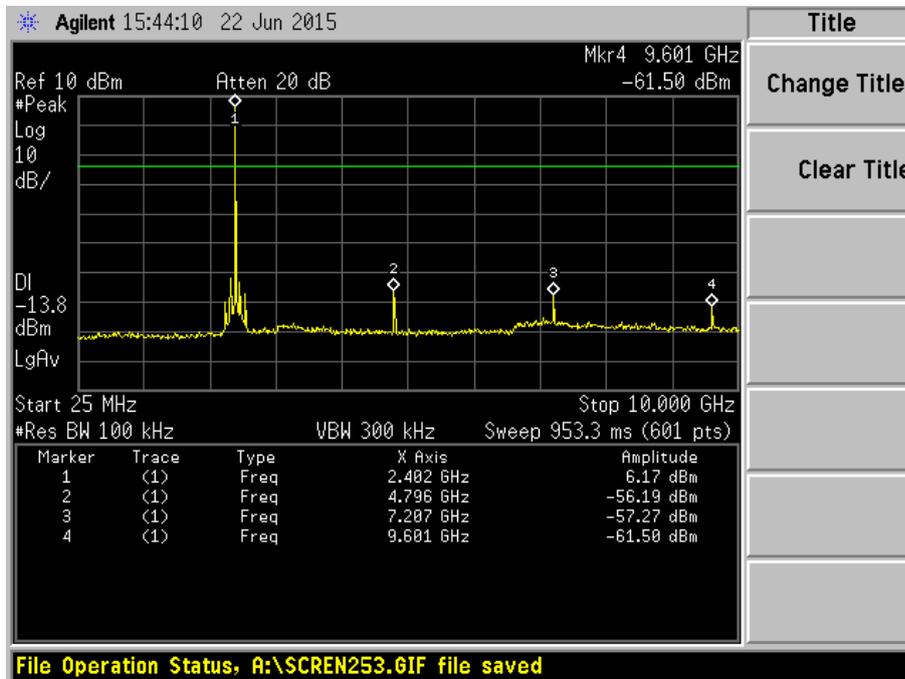

Plot 48 – Channel 0 (lower ch)

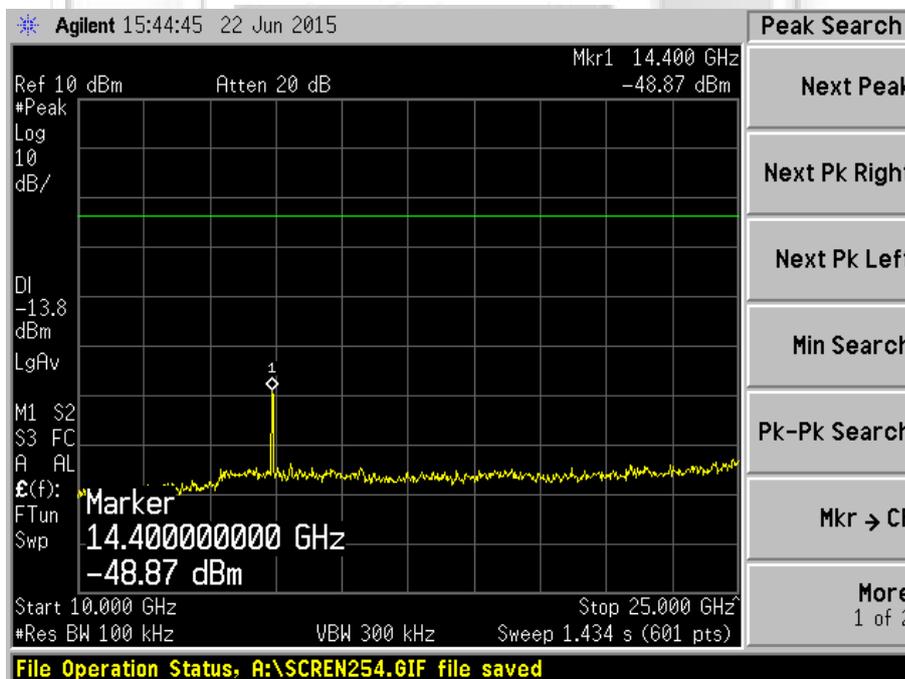


Plot 49 – Channel 0 (lower ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

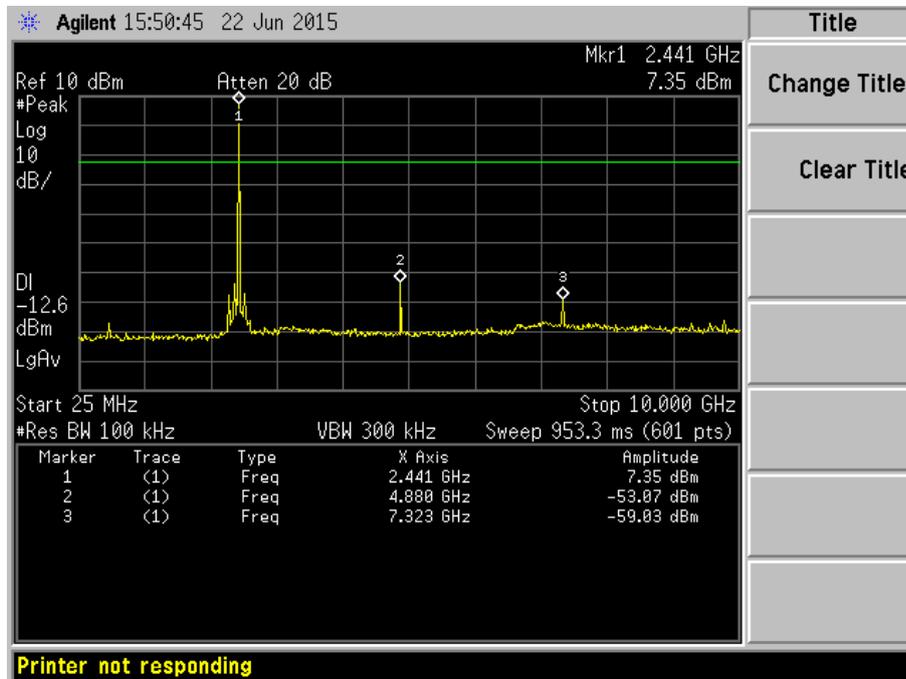

Plot 50 – Channel 39 (mid ch)

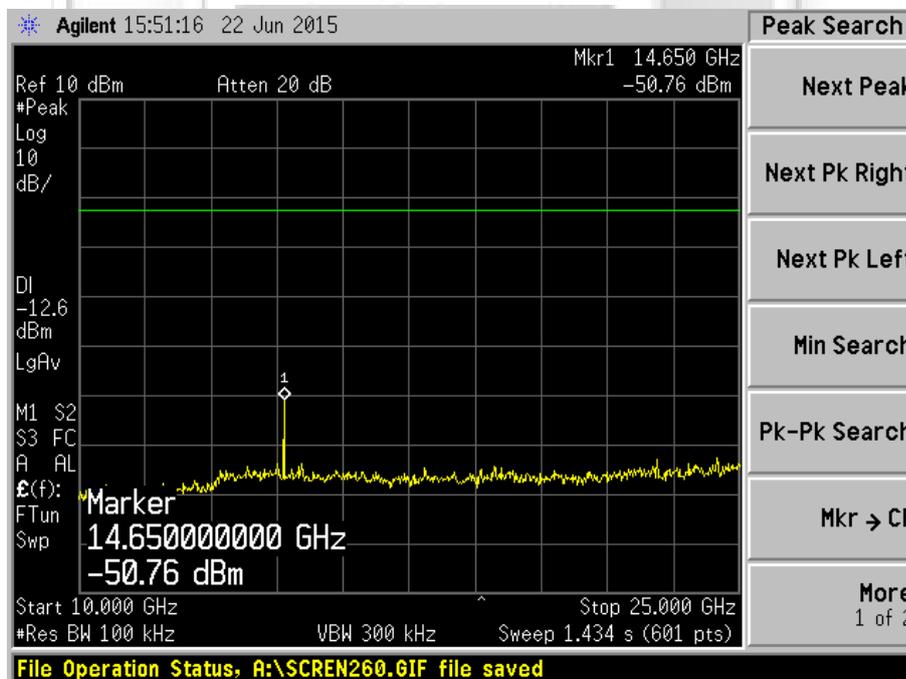


Plot 51 – Channel 39 (mid ch)




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 8DPSK

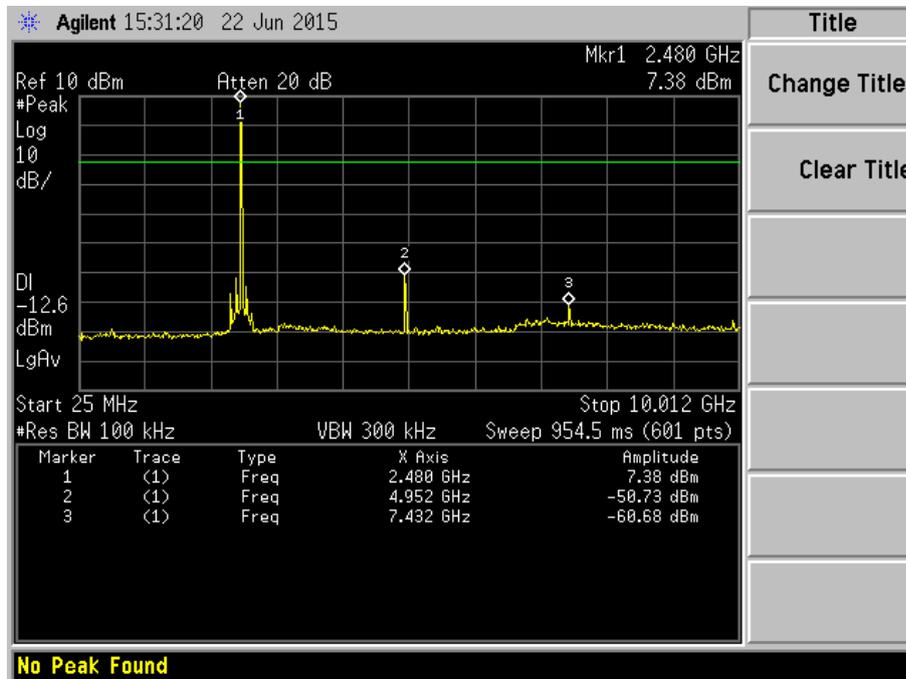

Plot 52 – Channel 78 (upper ch)

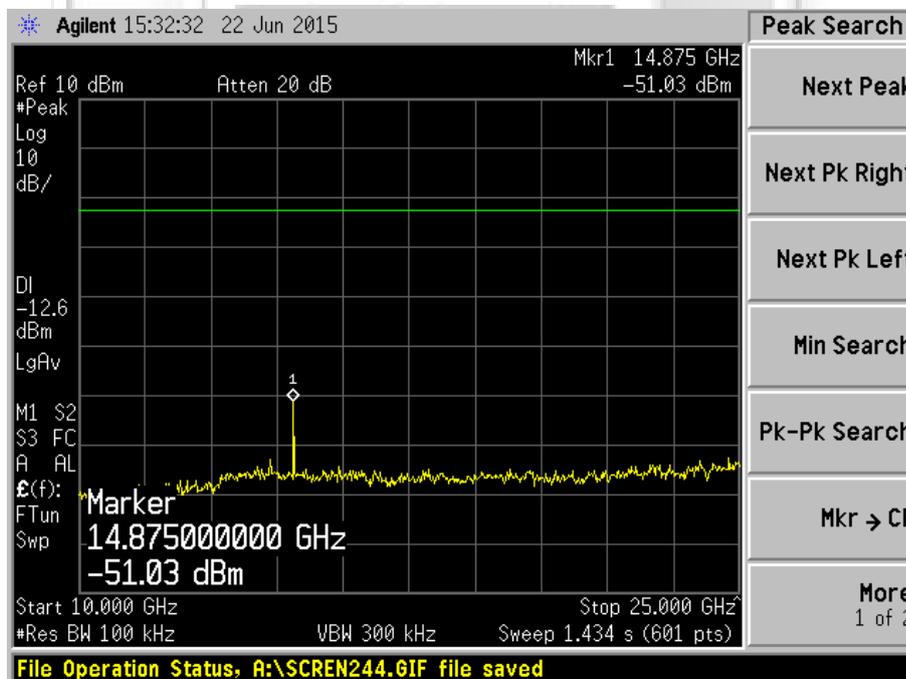

Plot 53 – Channel 78 (upper ch)



**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Conducted) Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Conducted) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Conducted) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Conducted) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping off.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.
5. The steps 2 to 4 were repeated with the EUT configured to operate in the test mode with frequency hopping on.



**BAND EDGE COMPLIANCE (CONDUCTED) TEST**


**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Conducted) Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	54 – 55 (GFSK) 56 – 57 (( $\pi/4$ ) DQPSK) 58 – 59 (8DPSK)	Relative Humidity	60%
Remark	Non-Hopping	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

No significant signal was found and they were below the specified limit.

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	60 – 61 (GFSK) 62 – 63 (( $\pi/4$ ) DQPSK) 64 – 65 (8DPSK)	Relative Humidity	60%
Remark	Hopping	Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin


No significant signal was found and they were below the specified limit.

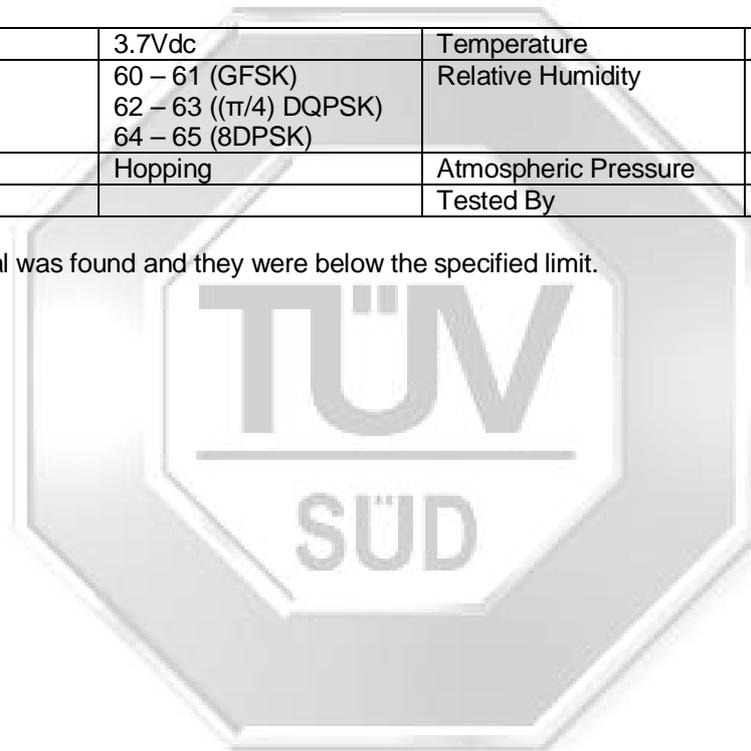




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – GFSK (Non-Hopping)**

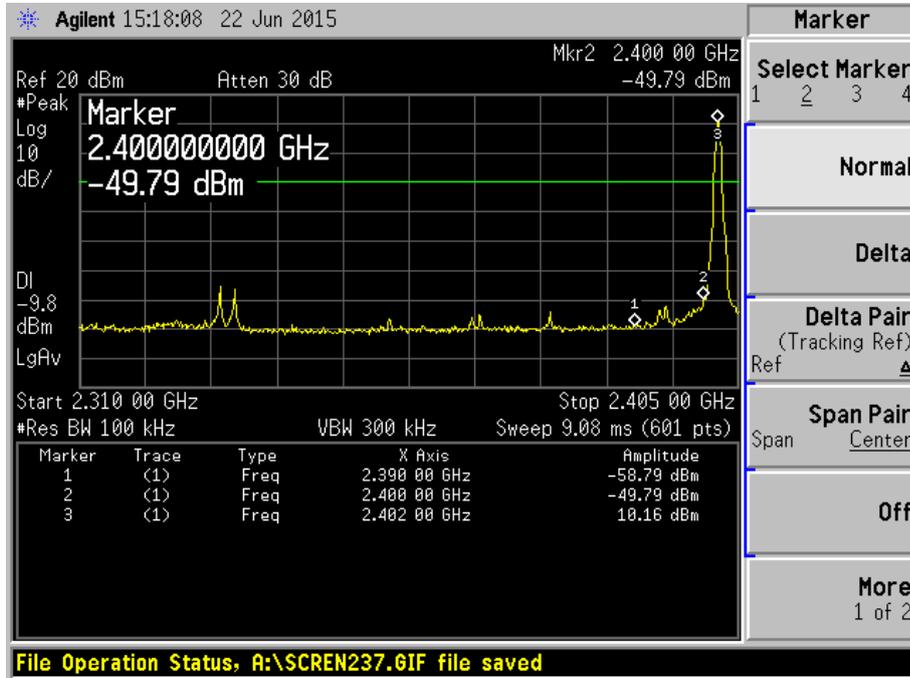

Plot 54 – Lower Band Edge at 2.4000GHz

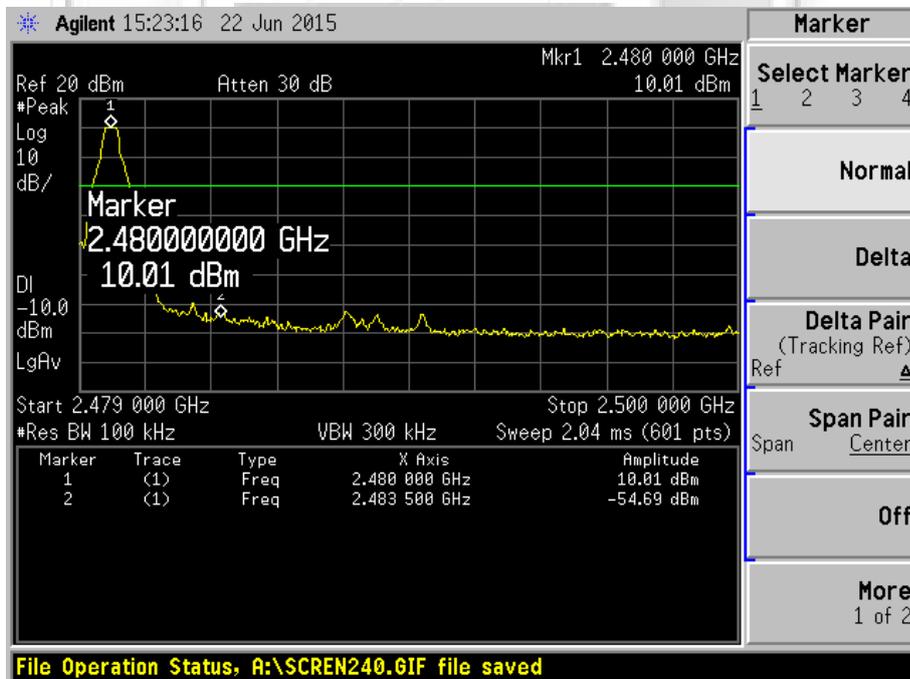


Plot 55 – Upper Band Edge at 2.4835GHz




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – ( $\pi/4$ )DQPSK (Non-Hopping)**

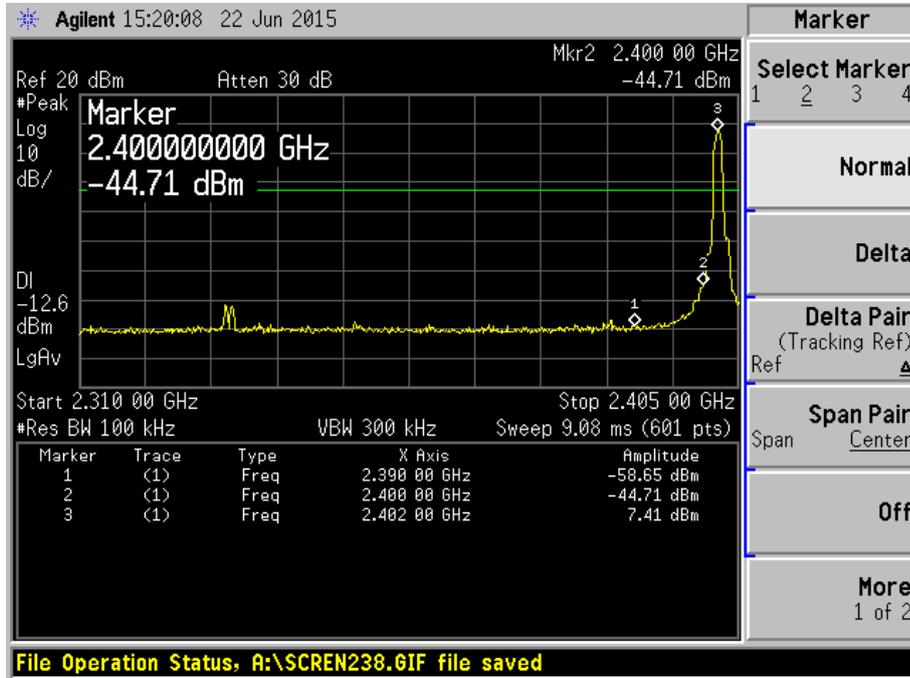

**Plot 56 – Lower Band Edge at 2.4000GHz**

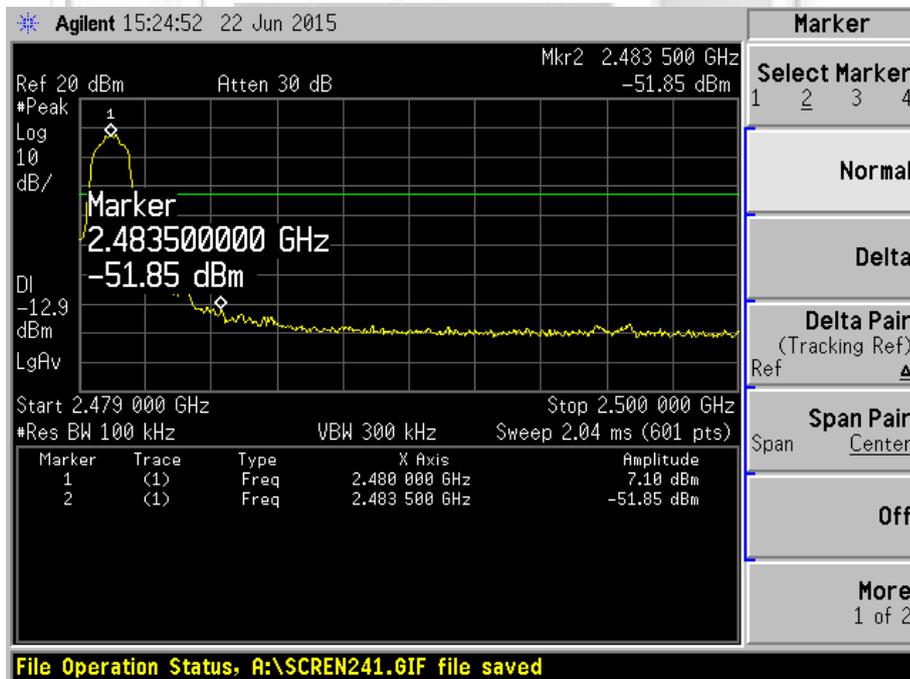


**Plot 57 – Upper Band Edge at 2.4835GHz**




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – 8DPSK (Non-Hopping)**

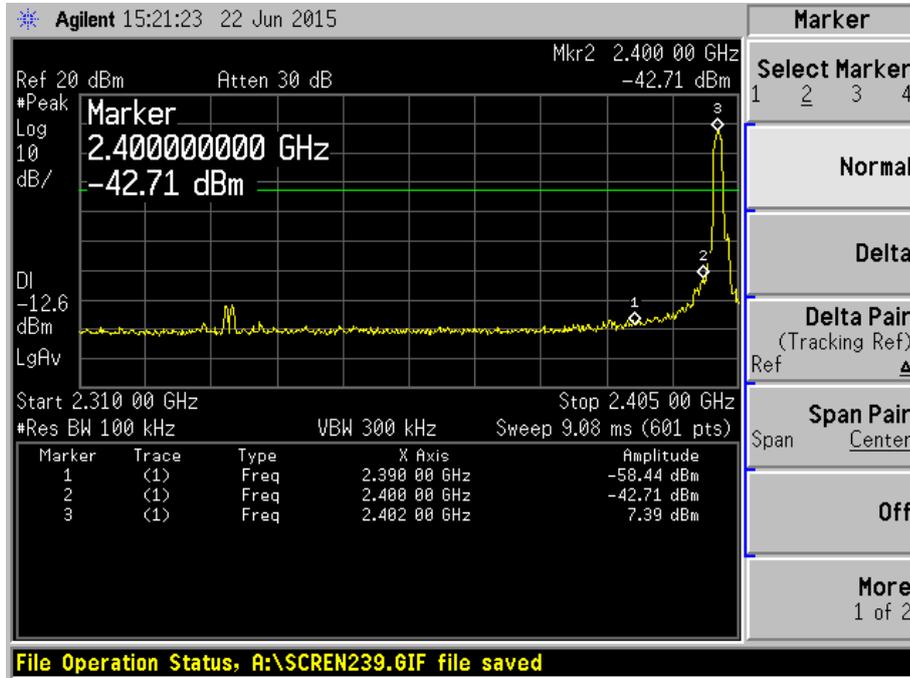

**Plot 58 – Lower Band Edge at 2.4000GHz**

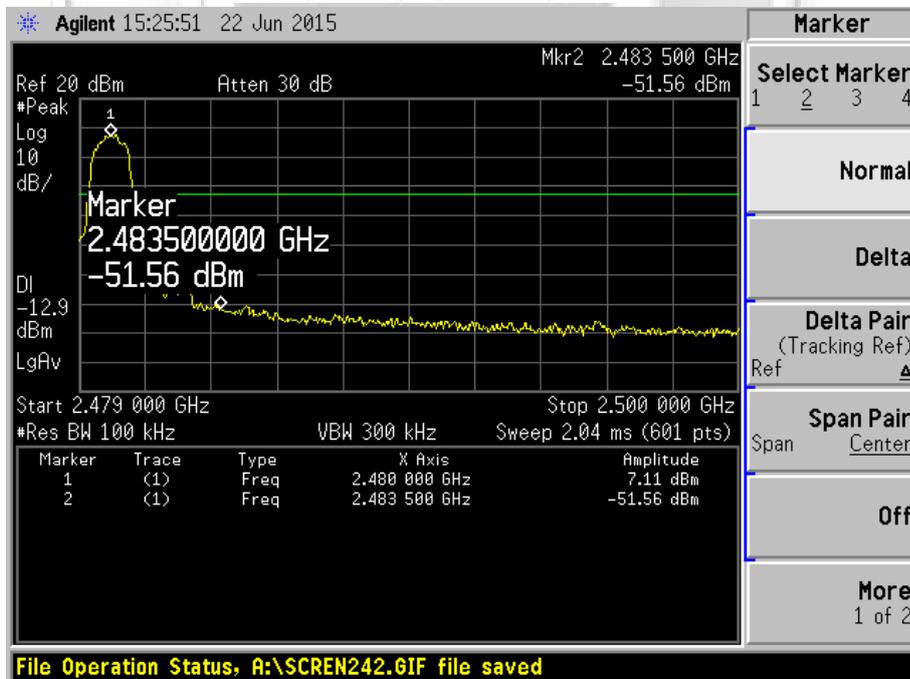


**Plot 59 – Upper Band Edge at 2.4835GHz**




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – GFSK (Hopping)**

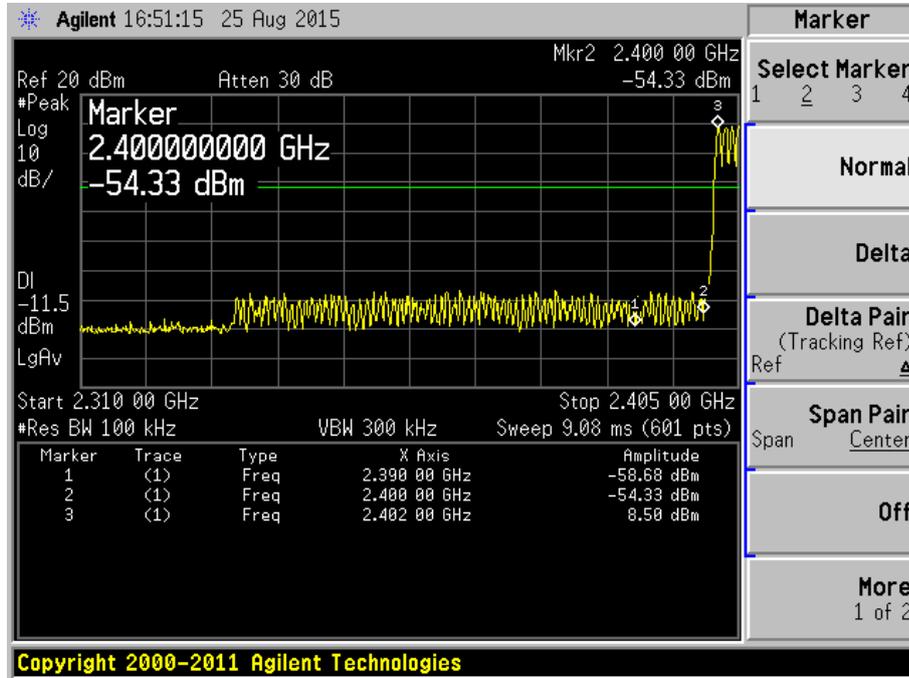

**Plot 60 – Lower Band Edge at 2.4000GHz**

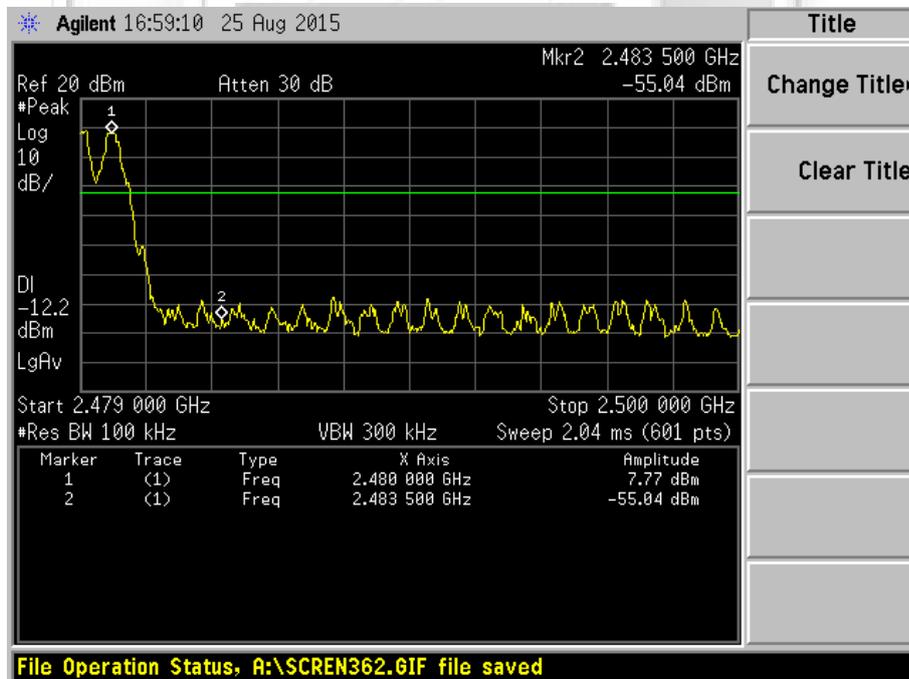


**Plot 61 – Upper Band Edge at 2.4835GHz**




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – ( $\pi/4$ )DQPSK (Hopping)**

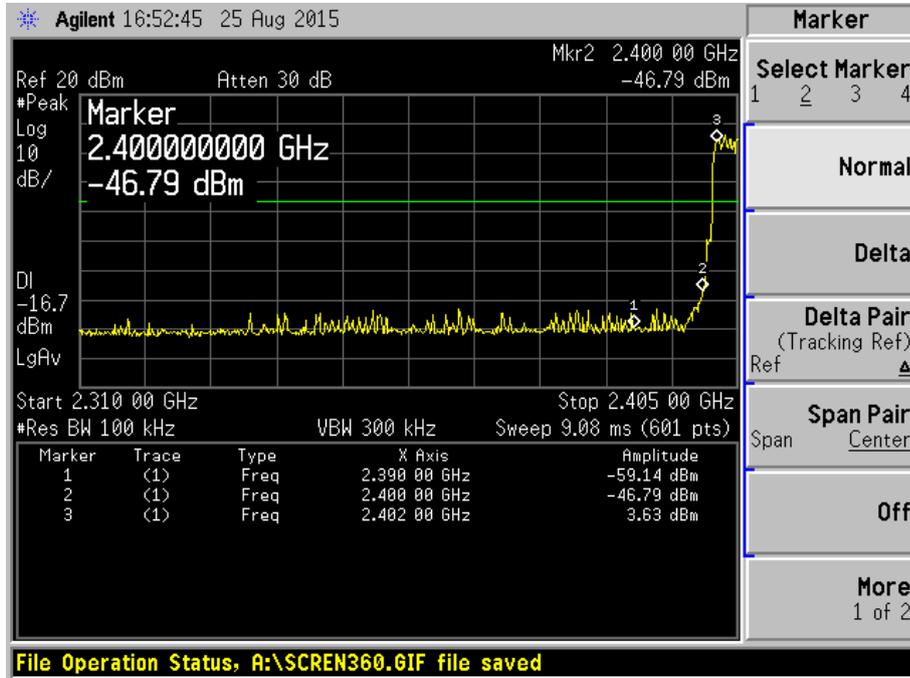

**Plot 62 – Lower Band Edge at 2.4000GHz**

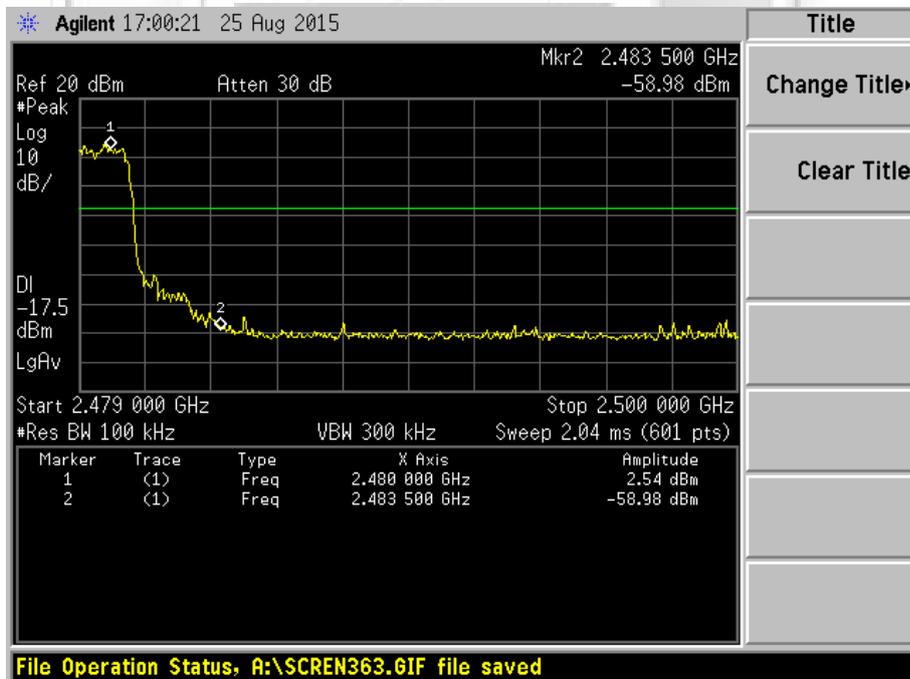


**Plot 63 – Upper Band Edge at 2.4835GHz**




**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots – 8DPSK (Hopping)**

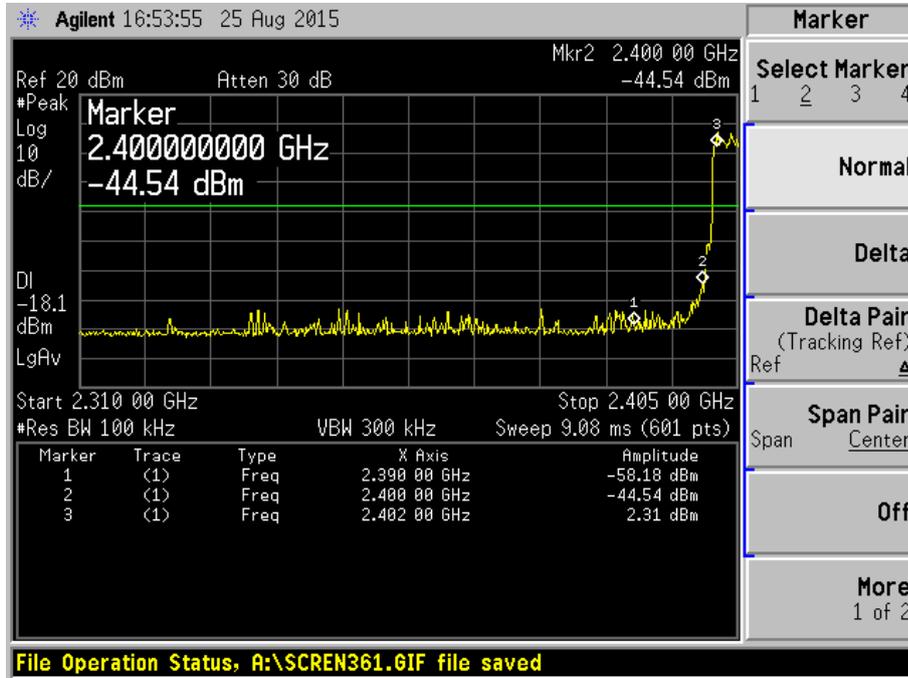

**Plot 64 – Lower Band Edge at 2.4000GHz**

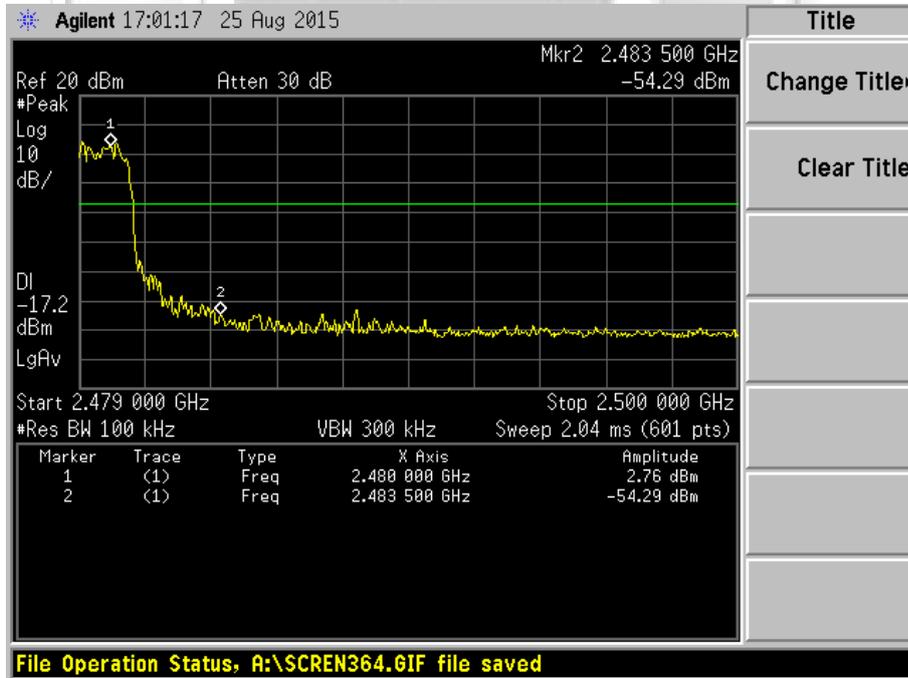

**Plot 65 – Upper Band Edge at 2.4835GHz**



**BAND EDGE COMPLIANCE (RADIATED) TEST**

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Radiated) Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Radiated) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
R&S Test Receiver – ESI1	ESI40	100010	14 Jul 2016	1 year
TDK-RF Horn Antenna	HRN-0118	130256	20 Apr 2016	1 year
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	13 Mar 2016	1 year

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Radiated) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
  - a. Peak Plot:  
RBW = 1MHz, VBW = 3MHz
  - b. Average Plot  
RBW = 1MHz, VBW = 30Hz
4. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(d) and RSS-247 5.5 Band Edge Compliance (Radiated) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected. For the average measurement, it was done via a video average mode with a reduced VBW.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.



**BAND EDGE COMPLIANCE (RADIATED) TEST**

**47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Results**


Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	66 – 71	Relative Humidity	60%
Modulation	8DPSK (Worst)	Atmospheric Pressure	1030mbar
		Tested By	Lim Kay Tak Li Chelmin

No significant signal was found and they were below the specified limit.




**BAND EDGE COMPLIANCE (RADIATED) TEST**

**Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge) – 8DPSK (Worst)**

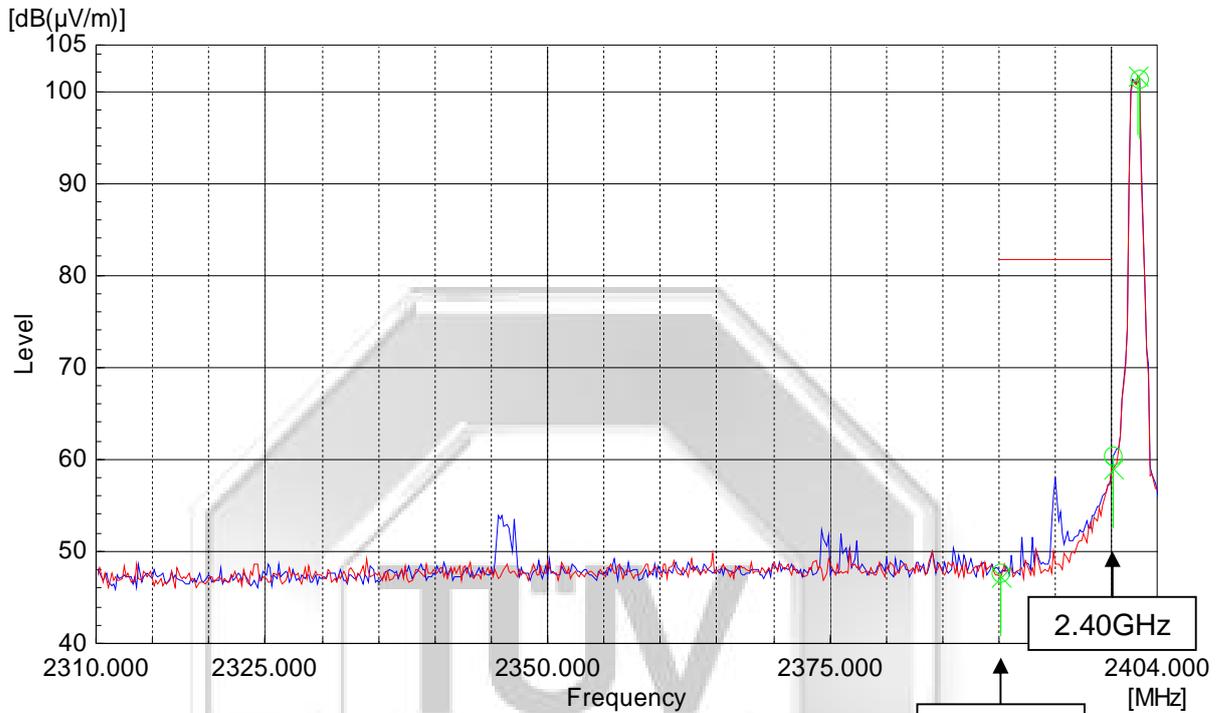


**Plot 66 – Lower Band Edge at 2.4000GHz**

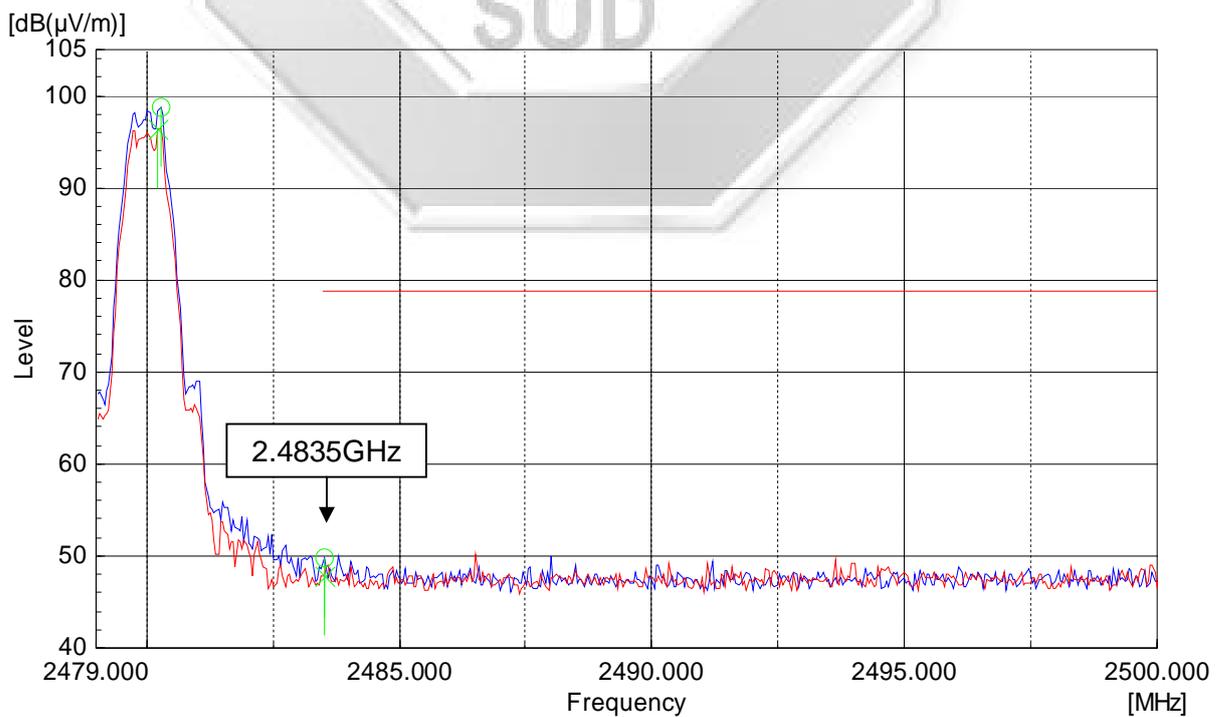


**Plot 67 – Upper Band Edge at 2.4835GHz**

**BAND EDGE COMPLIANCE (RADIATED) TEST**

**Band Edge Compliance (Radiated) Plots (Restricted Band) – 8DPSK (Worst)**

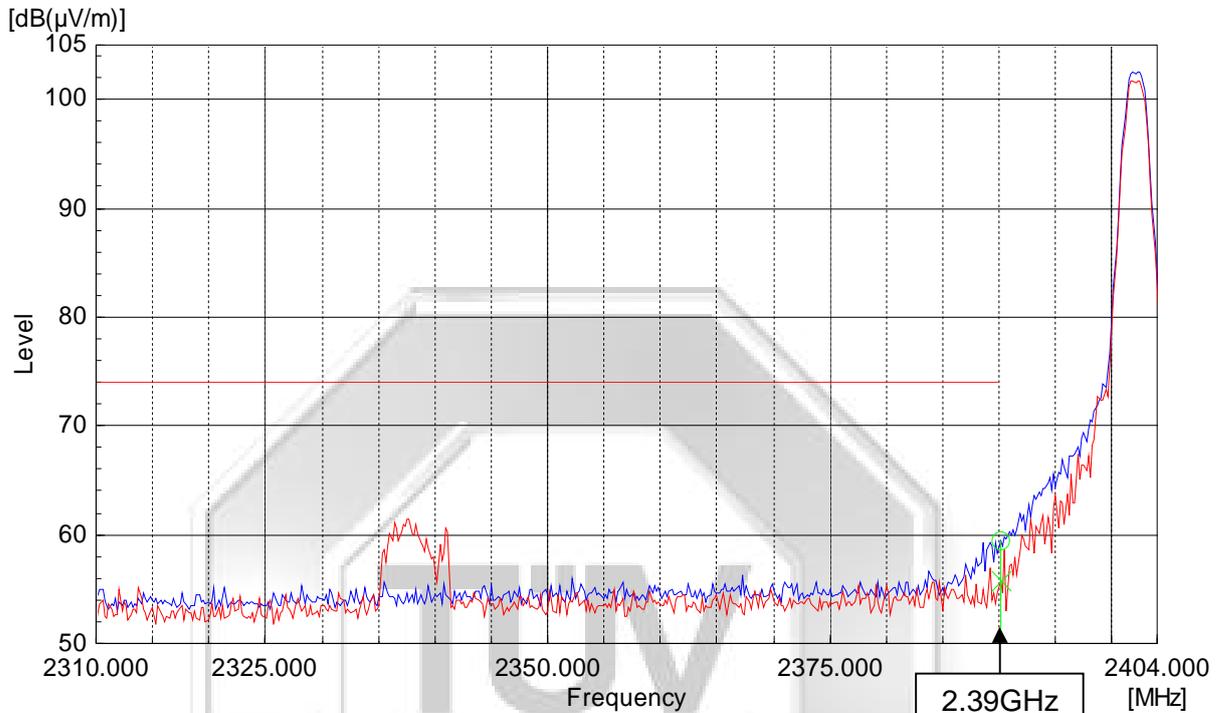


**Plot 68 – Peak Plot at Lower Band Edge at 2.4000GHz**

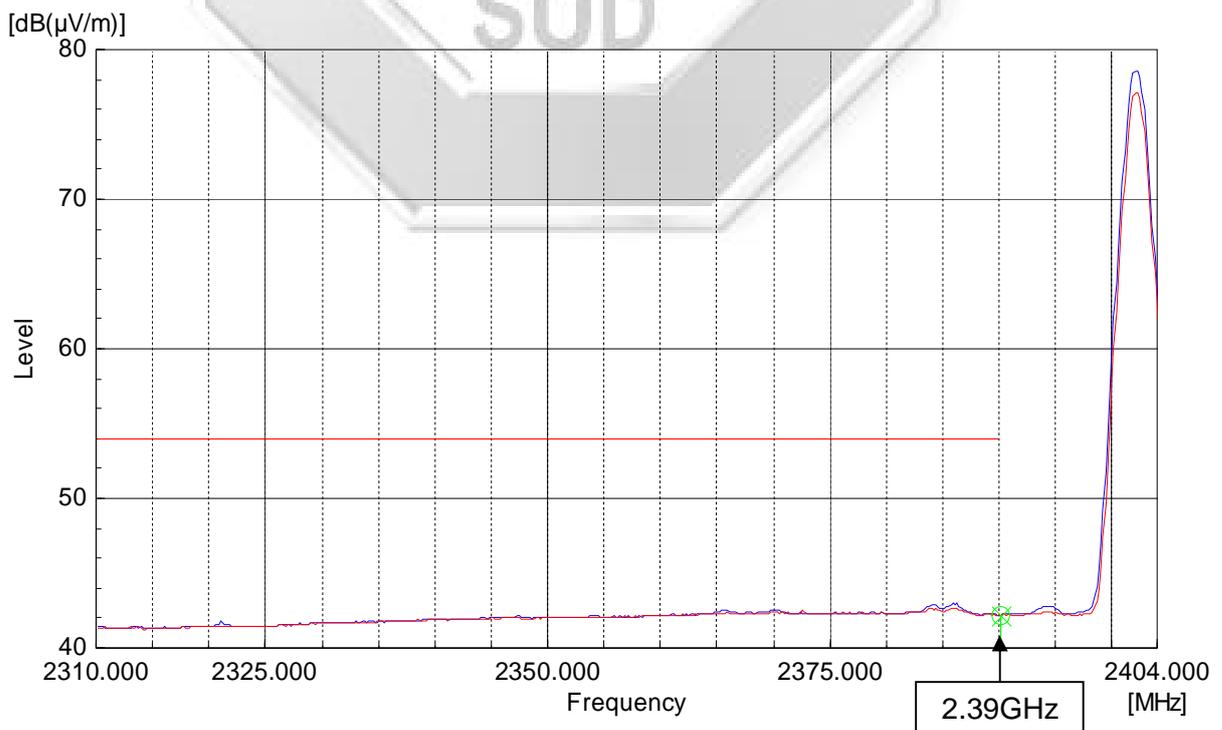


**Plot 69 – Average Plot at Lower Band Edge at 2.4000GHz**

**BAND EDGE COMPLIANCE (RADIATED) TEST**

**Band Edge Compliance (Radiated) Plots (Restricted Band) – 8DPSK (Worst)**

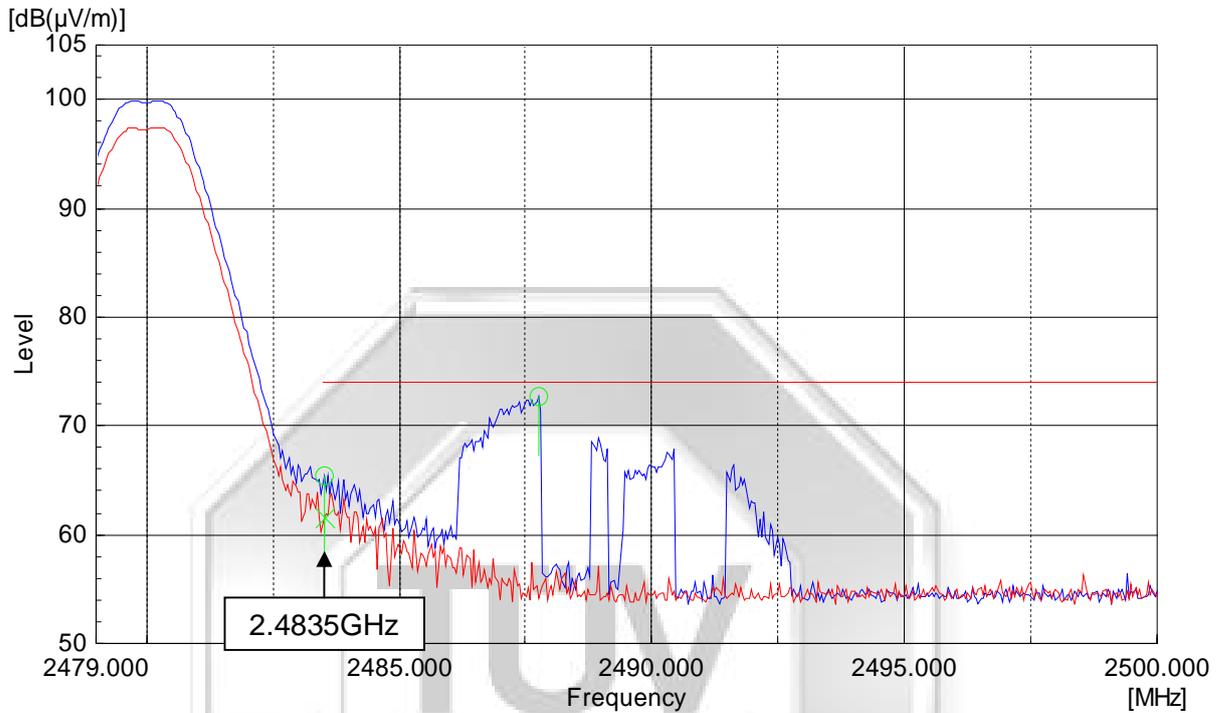

**Plot 70 – Peak Plot at Upper Band Edge at 2.4835GHz**

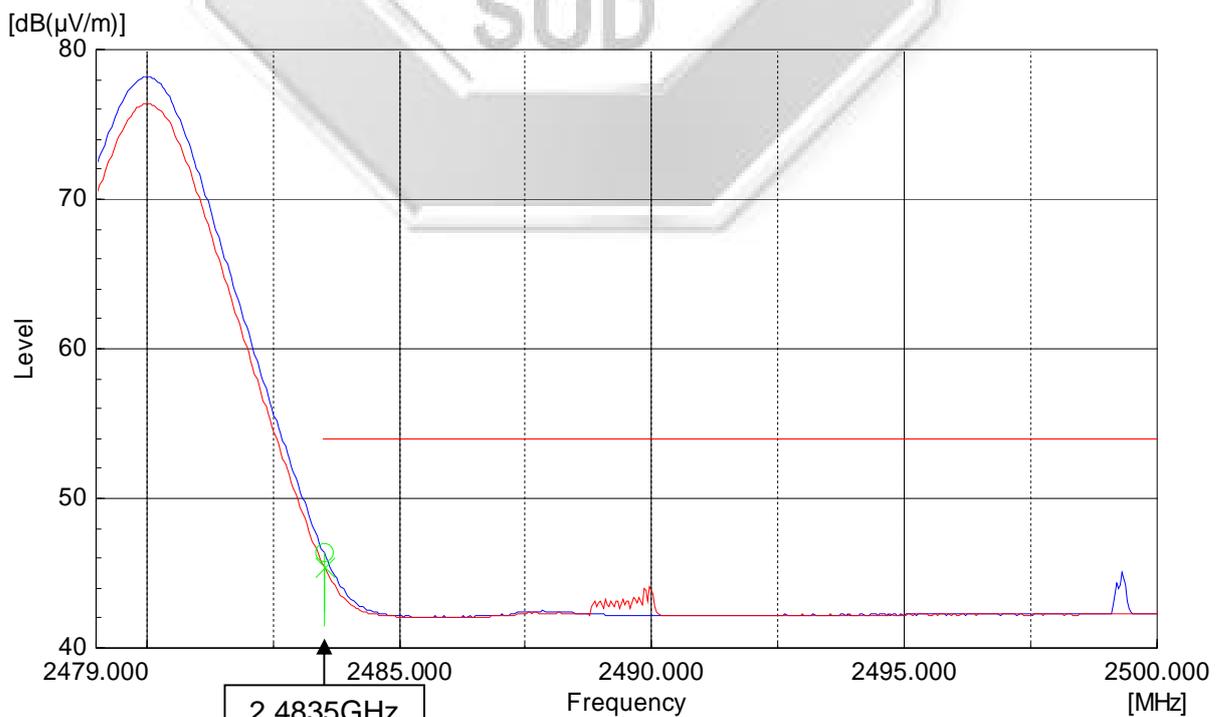

**Plot 71 – Average Plot at Upper Band Edge at 2.4835GHz**



**PEAK POWER SPECTRAL DENSITY TEST**

**47 CFR FCC Part 15.247(e) and RSS-247 5.3(2) Peak Power Spectral Density Limits**

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

**47 CFR FCC Part 15.247(e) and RSS-247 5.3(2) Peak Power Spectral Density Test Instrumentation**

Instrument	Model	S/No	Cal Due Date	Cal Interval
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015	1 year

**47 CFR FCC Part 15.247(e) and RSS-247 5.3(2) Peak Power Spectral Density Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(e) and RSS-247 5.3(2) Peak Power Spectral Density Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



**PEAK POWER SPECTRAL DENSITY TEST**

**47 CFR FCC Part 15.247(e) and RSS-247 5.3(2) Peak Power Spectral Density Results**

Test Input Power	3.7Vdc	Temperature	24°C
Attached Plots	72 – 74 (GFSK) 75 – 77 (( $\pi/4$ ) DQPSK) 78 – 80 (8DPSK)	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Liau Lee Yin

**GFSK**

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.736	6.3
39 (mid ch)	2.441	0.753	6.3
78 (upper ch)	2.480	0.694	6.3

**( $\pi/4$ )DQPSK**

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.191	6.3
39 (mid ch)	2.441	0.193	6.3
78 (upper ch)	2.480	0.174	6.3


**8DPSK**

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0 (lower ch)	2.402	0.206	6.3
39 (mid ch)	2.441	0.205	6.3
78 (upper ch)	2.480	0.184	6.3




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – GFSK

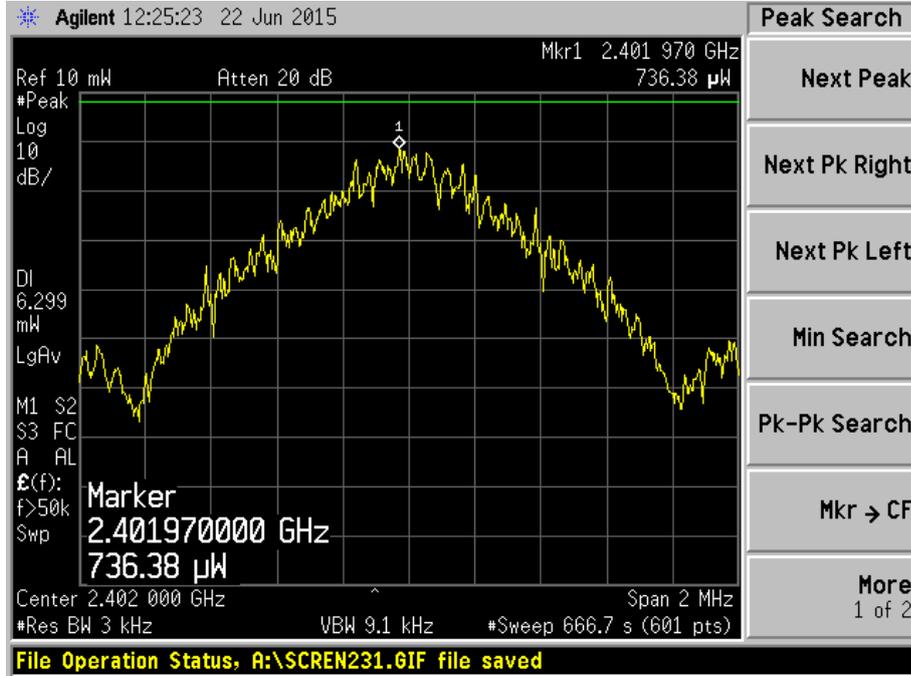

Plot 72 – Channel 0 (lower ch)

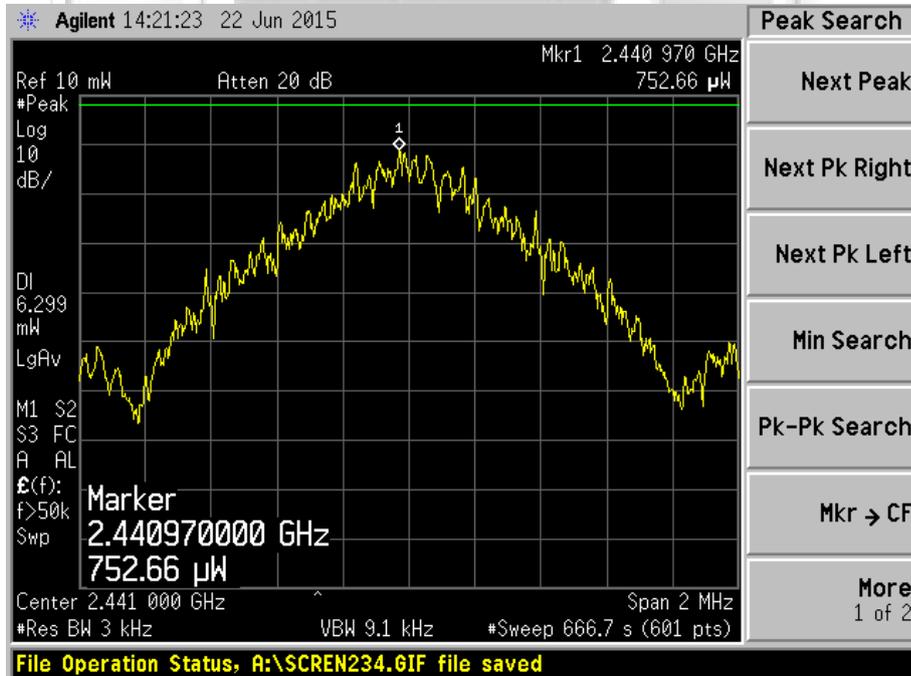


Plot 73 – Channel 39 (mid ch)



PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – GFSK

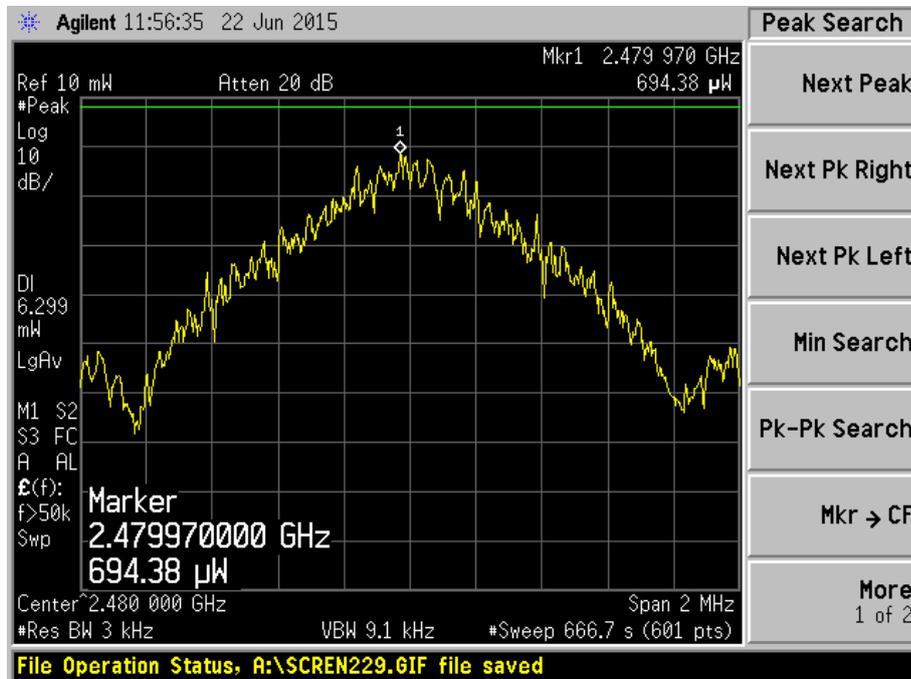


Plot 74 – Channel 78 (upper ch)






PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – ( $\pi/4$ )DQPSK

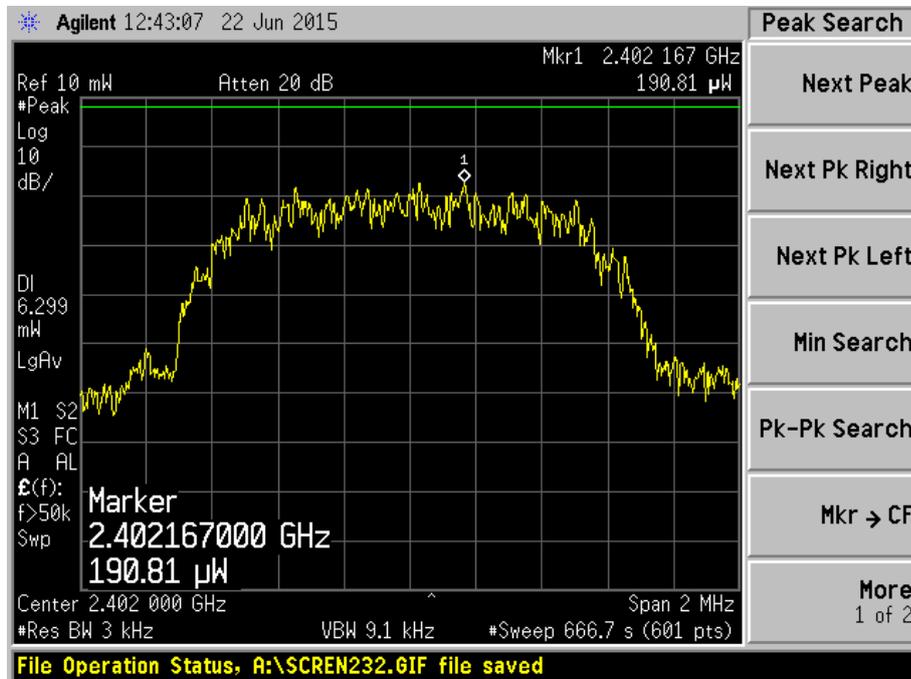

Plot 75 – Channel 0 (lower ch)

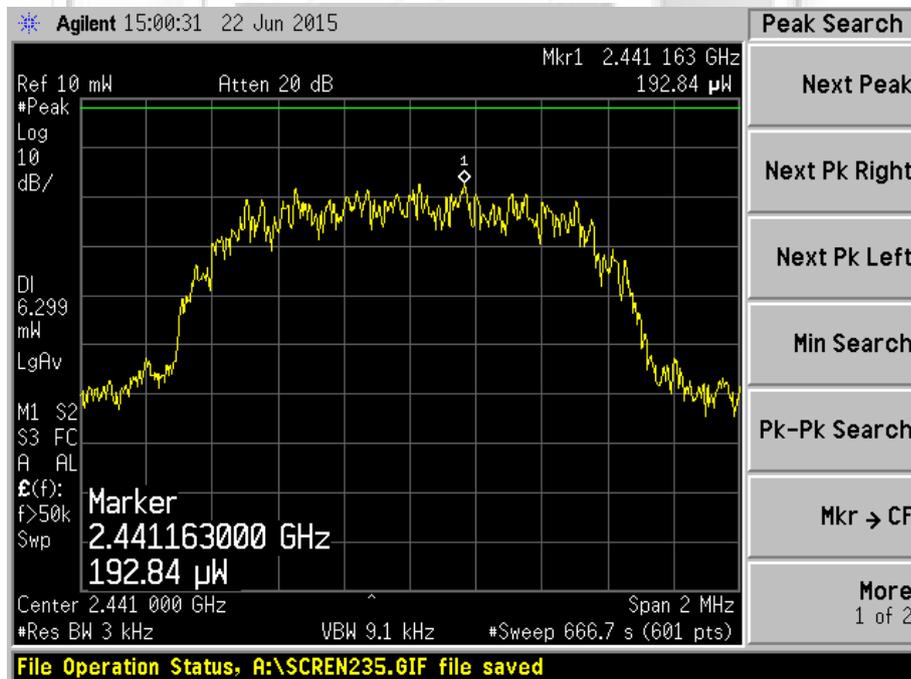


Plot 76 – Channel 39 (mid ch)



PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – ( $\pi/4$ )DQPSK

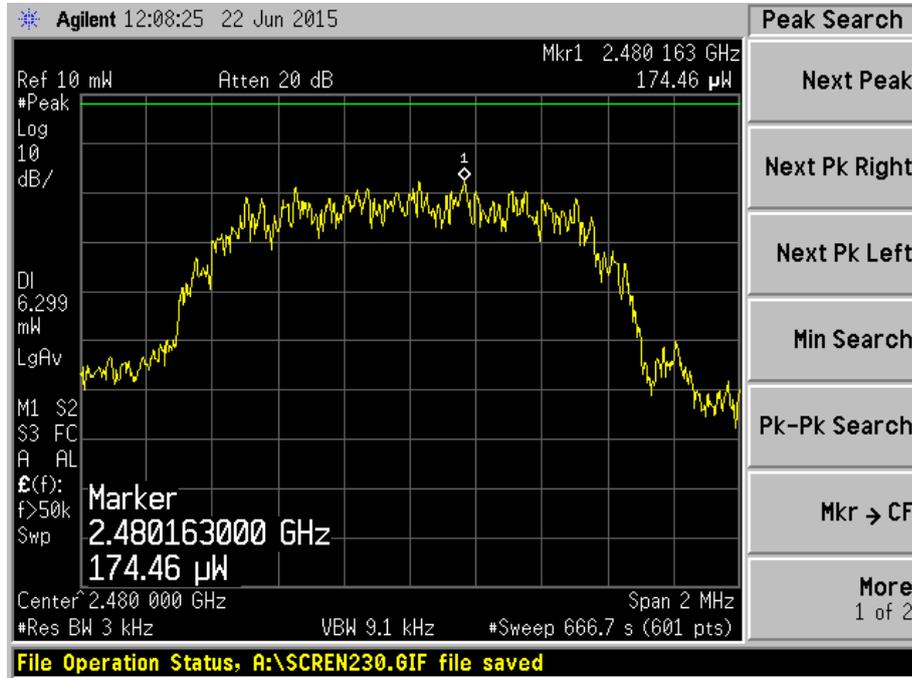


Plot 77 – Channel 78 (upper ch)






PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 8DPSK

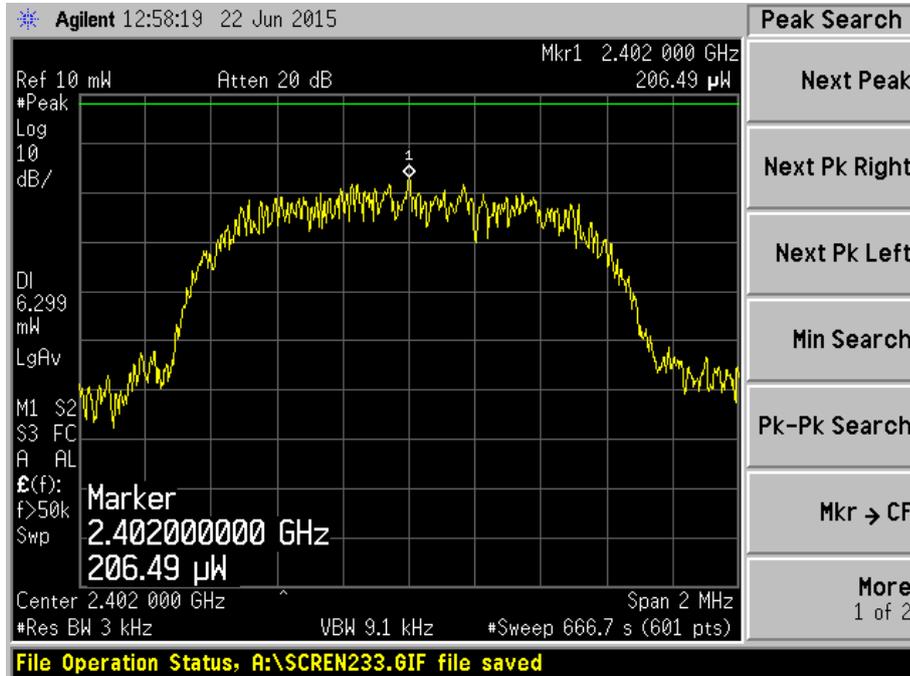

Plot 78 – Channel 0 (lower ch)

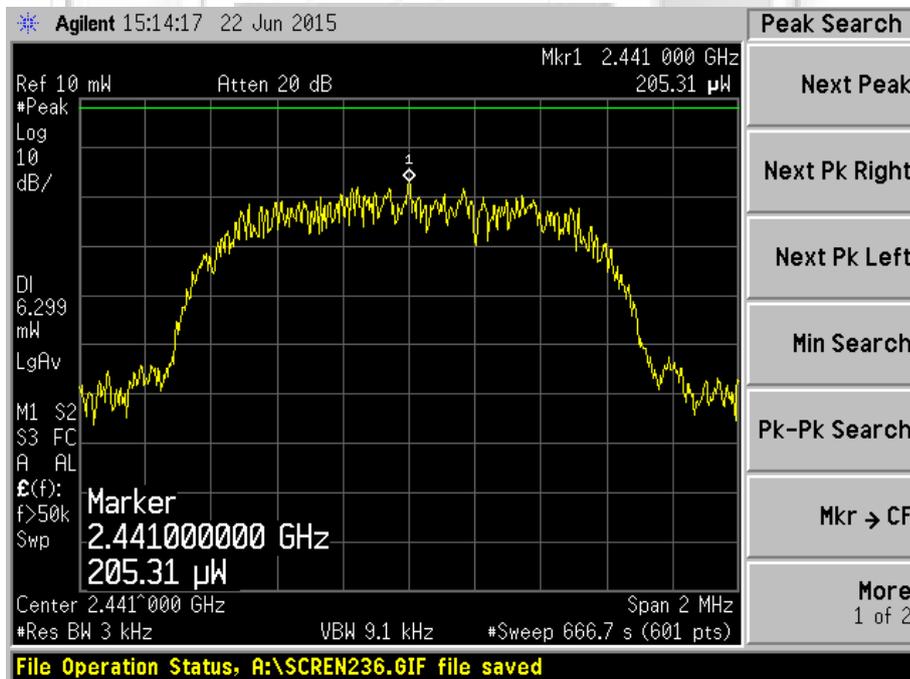


Plot 79 – Channel 39 (mid ch)




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 8DPSK

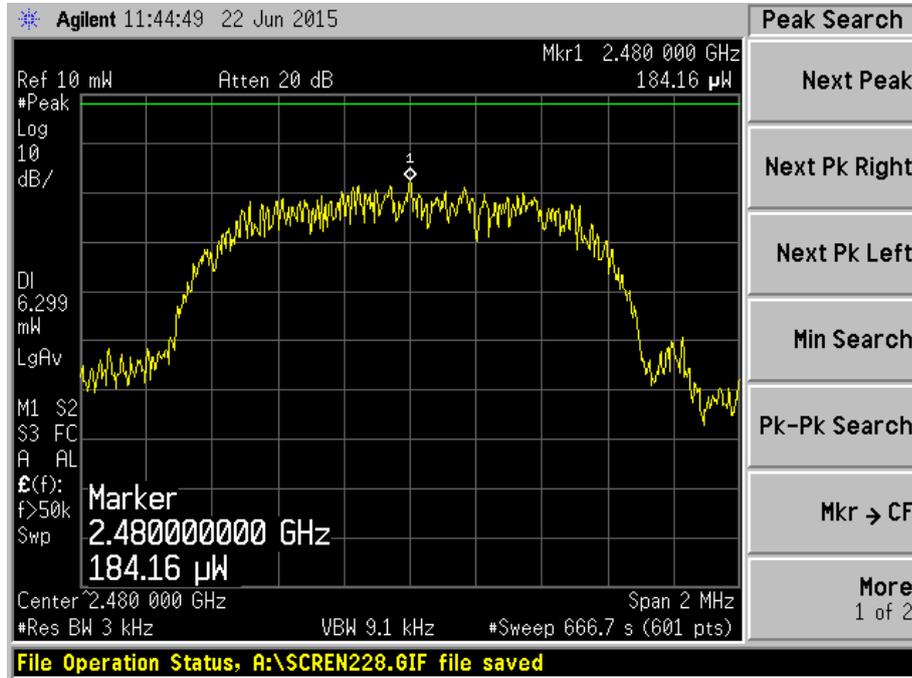

Plot 80 – Channel 78 (upper ch)

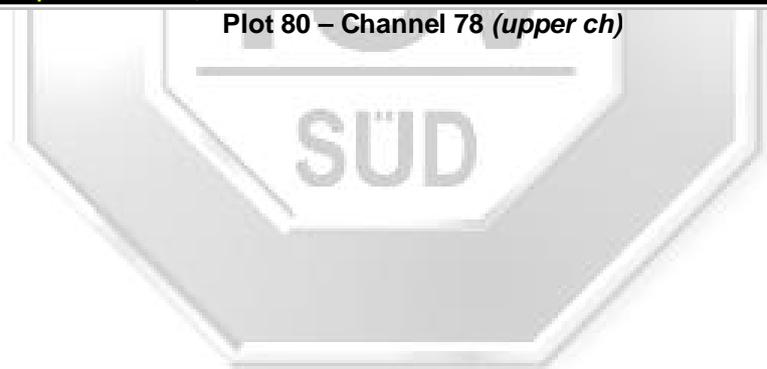



Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.


July 2011





---

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

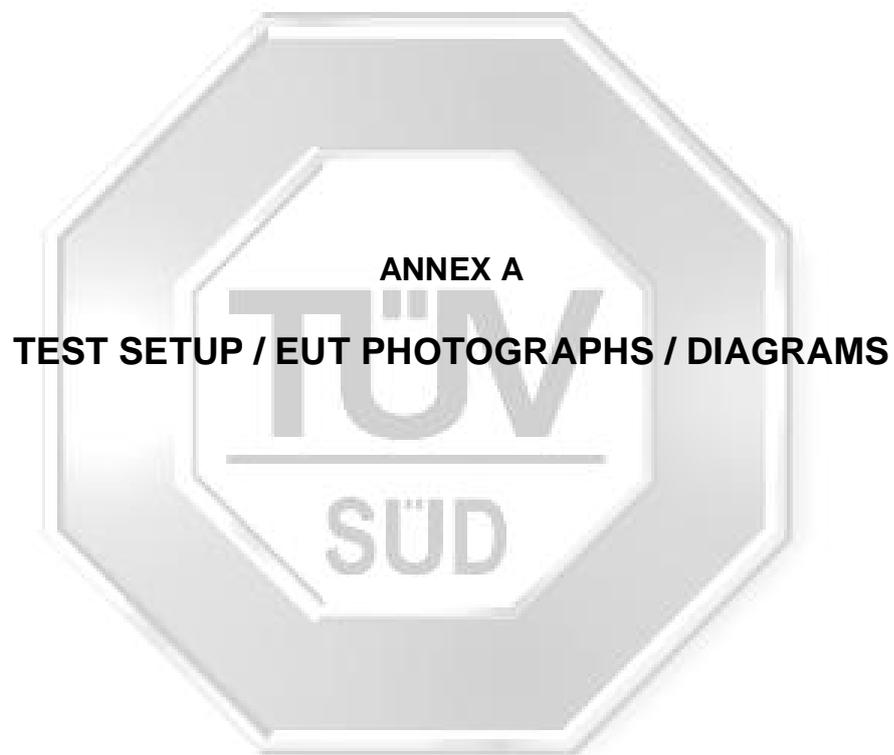


**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP (30MHz to 1GHz)**




**Radiated Emissions Test Setup (Front View)**

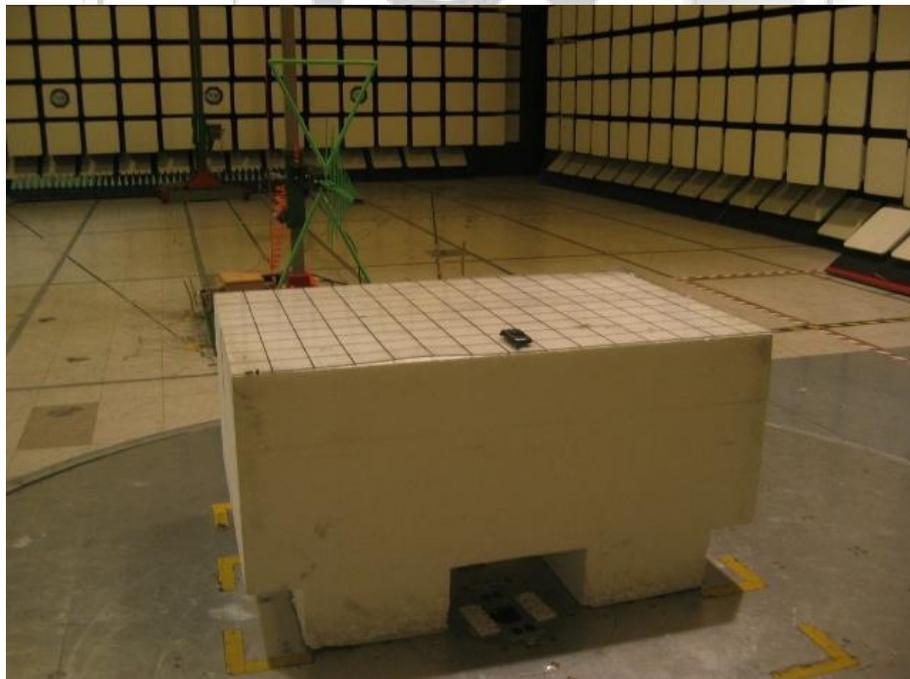


**Radiated Emissions Test Setup (Rear View)**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP (Above 1GHz)**

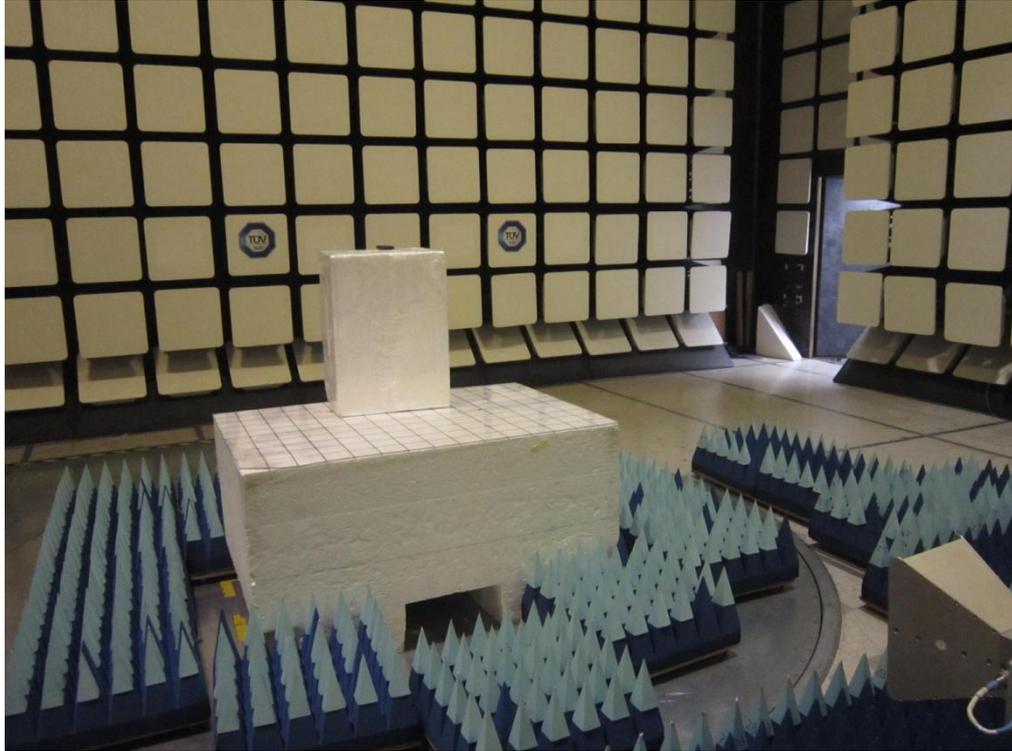

**Radiated Emissions Test Setup (Front View)**

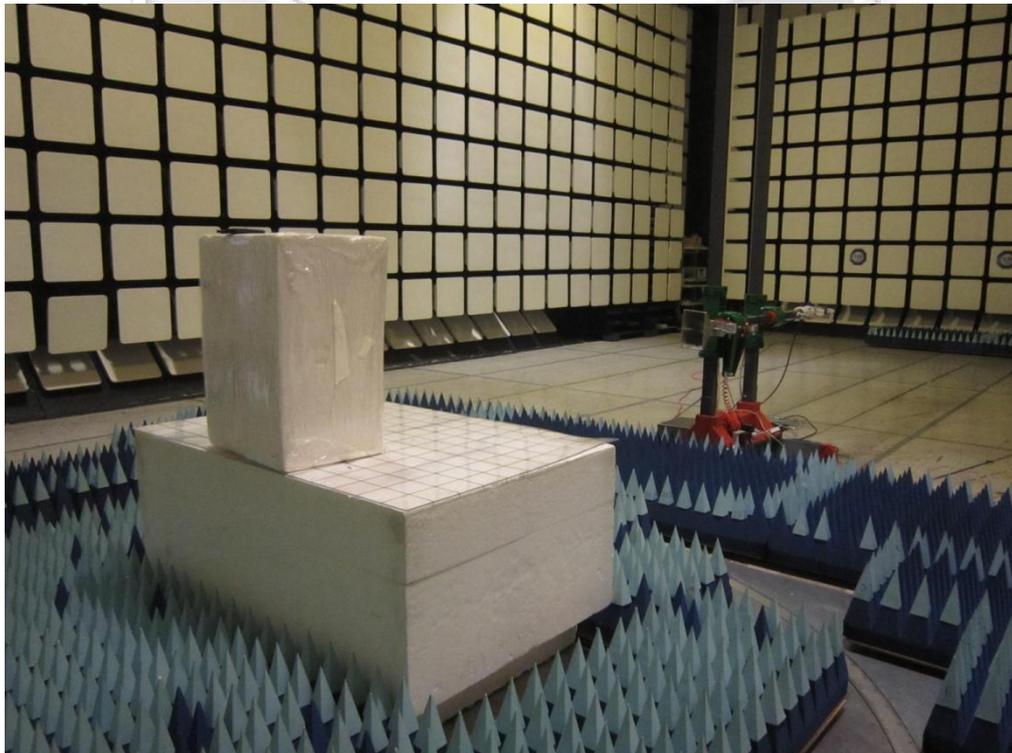

**Radiated Emissions Test Setup (Rear View)**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP**



**Carrier Frequency Separation Test Setup**



**Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP**




**Number of Hopping Frequencies Test Setup**



**Average Frequency Dwell Time Test Setup**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP**

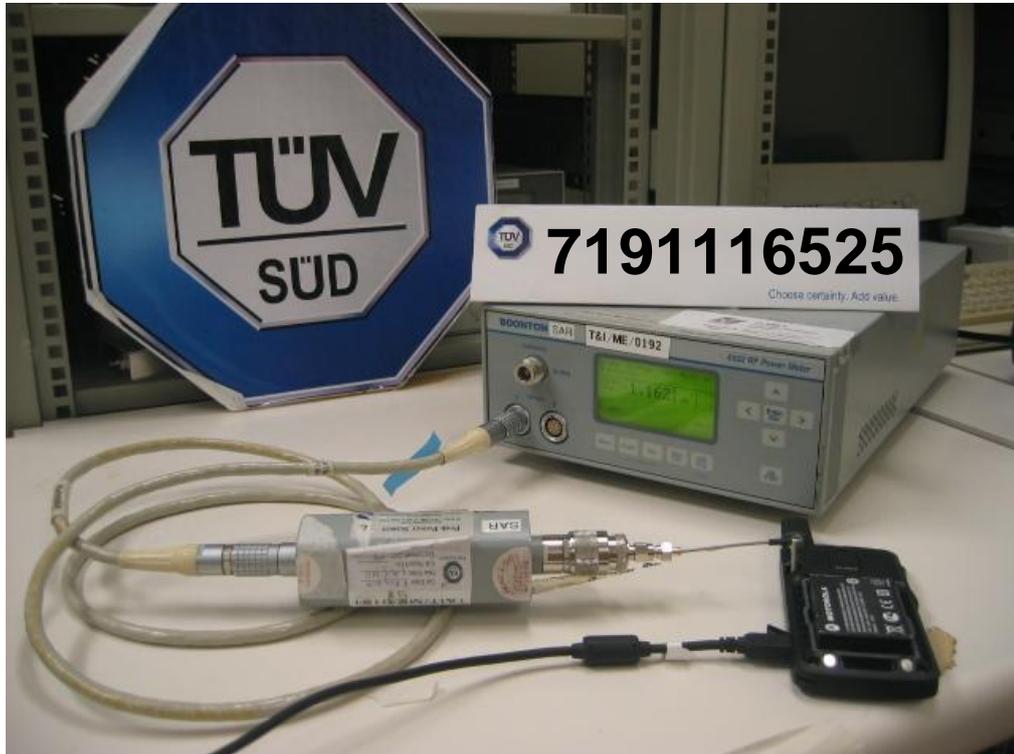

**Maximum Peak Power Test Setup**




**RF Conducted Spurious Emissions Test Setup**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP**



**Band Edge Compliance (Conducted) Test Setup**

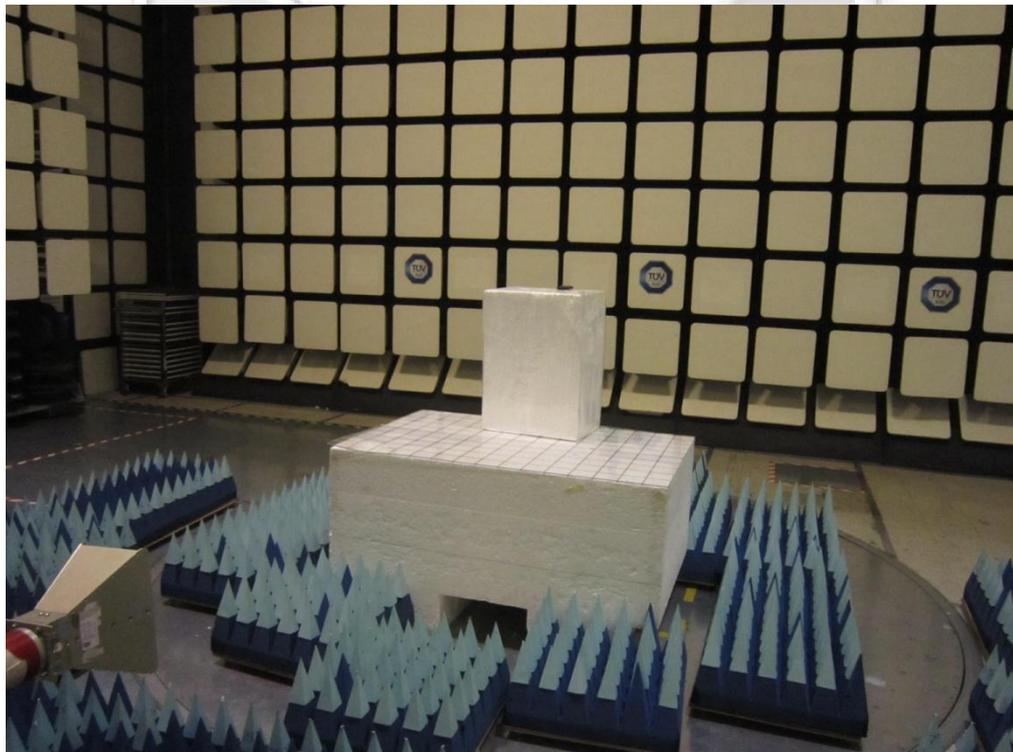

**Band Edge Compliance (Radiated) Test Setup**

**ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS**

**TEST SETUP**



**Peak Power Spectral Density Test Setup**

ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS



Front View




Rear View



---

**ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS**

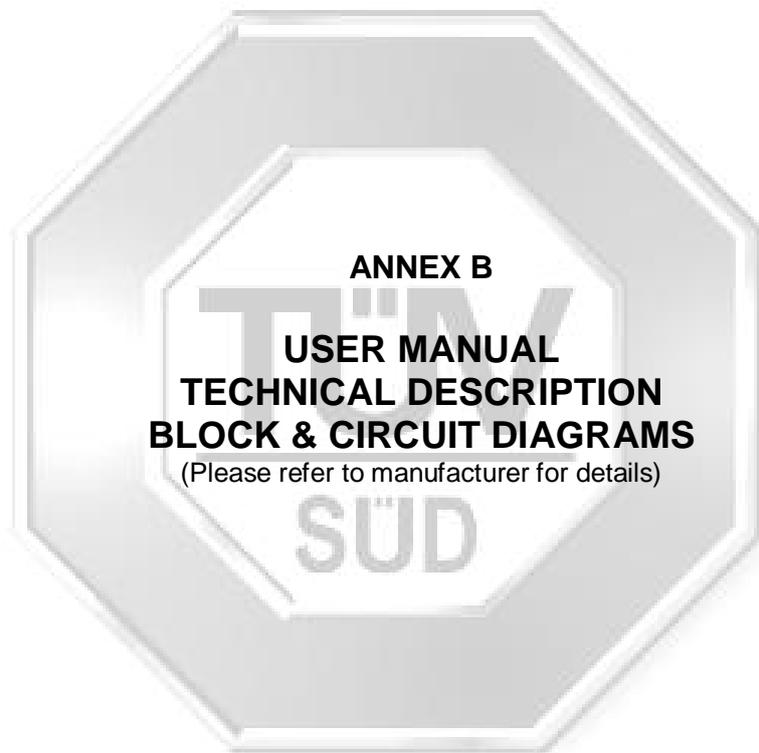



---

**ANNEX C FCC, IC LABELS & POSITION**



**ANNEX C FCC, IC LABEL & POSITION**

Labelling requirements per Section 2.925, 15.19 & per Section 8.0

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.



Sample Label



Physical Location of FCC and IC Label on EUT



**ANNEX D TEST SITE DESCRIPTION**

---



**ANNEX D TEST SITE DESCRIPTION**

Radiated Emission Test Site Description


The Radiated Emission test facility consists of a RF-shielded enclosure (Model: 04" x 07") manufactured by Lindgren whose dimensions are shown below. The exterior of the chamber is made of rigid steel panels while the interior is covered with RF absorbing panels on the 4 walls and ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is mounted flushed with the chamber floor and is driven by a pneumatic motor, which is capable of supporting 4,000 kg.

The boresight antenna mast is driven by a pneumatic motor with heights variation from 1m- 4m for both vertical and horizontal polarity and with tilt capability.

Both turntable and antenna mast in the chamber are controlled by system controller stationed outside the chamber.

The physical layout of the chamber is show below:

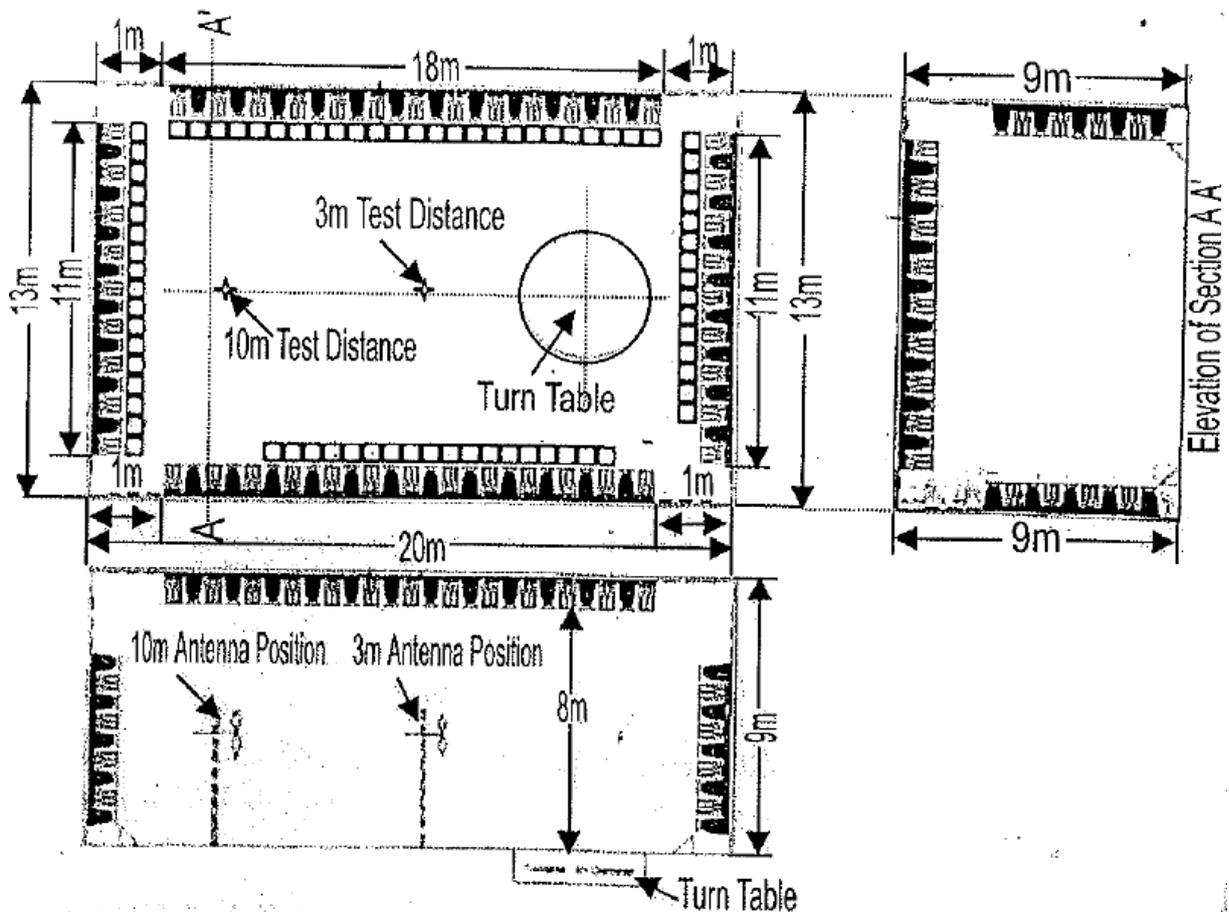

**ANNEX D TEST SITE DESCRIPTION**

Conducted Emission Test Site Description

The Conducted Emission facility consists of an RF-shielded enclosure measuring 4.3m x 3.7m x 2.45m manufactured by Universal Shielding Corporation. The Conducted Emission data were taken using two LISNs.

The physical layout of the test site is show below:

