

**MOTOROLA SOLUTIONS****DECLARATION OF COMPLIANCE SAR ASSESSMENT PCII Report Part 2 of 2**
**Motorola Solutions Inc.
EME Test Laboratory**

Motorola Solutions Malaysia Sdn Bhd (Innoplex)
Plot 2A, Medan Bayan Lepas
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.


Date of Report: 12/2/2021
Report Revision: A

Responsible Engineer: Saw Sun Hock (EME Engineer)
Report Author: Hoe Kean Loon (EME Engineer)
Date/s Tested: 11/12/2021 – 11/16/2021, 11/21/2021 – 11/22/2021
Manufacturer: Motorola Solutions Inc.
DUT Description: Handheld Portable – APX6000 and APX6000XE Refresh UHF1 380-472 MHz 5W
Test TX mode(s): CW (PTT) , Bluetooth, WLAN 802.11 b/g/n
Max. Power output: Refer Table 4
Nominal Power: Refer Table 4
Tx Frequency Bands: LMR 380-472 MHz; Bluetooth 2.402-2.480 GHz; WLAN 802.11 b/g/n 2.412-2.462 GHz
Signaling type: FM (LMR), FHSS (Bluetooth), 802.11 b/g/n (WLAN)
Model(s) Tested: H98QDD9PW5BN (PMUE4957E), H98QDD9PW5BN (PMUE4969E), H98QDH9PW7BN (PMUE4971E)
Model(s) Certified: Table 1
Serial Number(s): 755TXV0006, 756TXV0509, 756TXV0532
Classification: Occupational/Controlled
Applicant Name: Motorola Solutions Inc.
Applicant Address: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322
FCC ID: AZ489FT7077; LMR 406.1-472 MHz, Bluetooth 2.402-2.480 GHz, WLAN 802.11 b/g/n 2.412-2.462 GHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.

IC: 109U-89FT7077; LMR 406.1-430 MHz & 450-470 MHz, Bluetooth 2.402-2.480 GHz, WLAN 802.11 b/g/n 2.412-2.462 GHz
 This report contains results that are immaterial for ISSED equipment approval, which are clearly identified.
ISED Test Site registration: 24843
FCC Test Firm Registration Number: 823256

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093 and RSS-102 (Issue 5).

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.


PeiLoo Tey
 (Approved Signatory)
 Approval Date: 12/2/2021

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory
Date/Time: 11/12/2021 6:40:31 PM

Robot#: DASY5-PG-2 | Run#: MHI-SYSP-450B-211112-10
 Dipole Model#: D450V3
 Phantom#: ELI4 1040
 Tissue Temp: 21.7 (C)
 Serial#: 1054
 Test Freq: 450.0000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.110 dB
 Adjusted SAR (1W): 4.72 mW/g (1g)

Comments:

Communication System Band: Dipole 450, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 450 MHz, ConvF(11.86, 11.86, 11.86) @ 450 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (41x221x1):


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Reference Value = 42.47 V/m; Power Drift = 0.07 dB
 Fast SAR: SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.879 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.58 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
 Reference Value = 42.47 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 1.85 W/kg
 SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.784 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
 Ratio of SAR at M2 to SAR at M1 = 62.3%
 Maximum value of SAR (measured) = 1.58 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm
 Maximum value of SAR (measured) = 1.59 W/kg

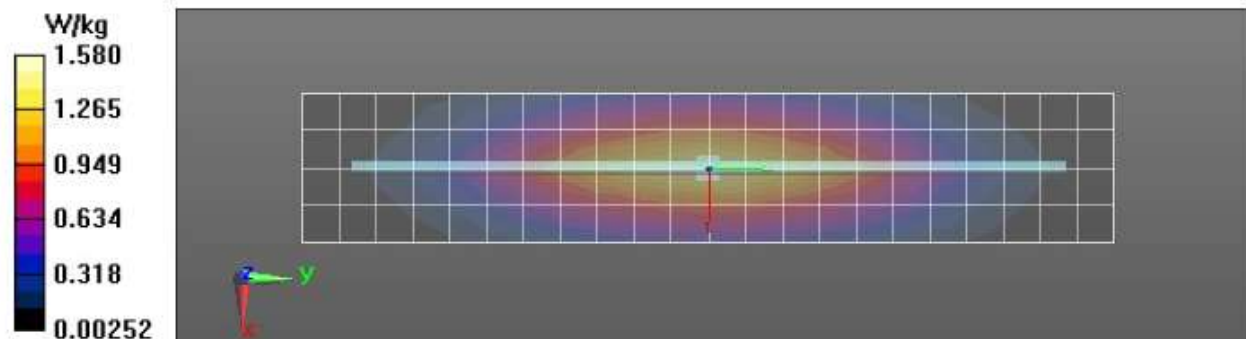

Motorola Solutions, Inc. EME Laboratory

Date/Time: 11/13/2021 9:50:01 PM

Robot#: DASY5-PG-2 | Run#: AF(SAN)-SYSP-2450H-211113-13
 Dipole Model#: D2450V2
 Phantom#: ELI4 1022
 Tissue Temp: 21.5 (C)
 Serial#: 782
 Test Freq: 2450.0000(MHz)
 Start Power: 31.6(mW)
 Rotation (1D): 0.180 dB
 Adjusted SAR (1W): 50.63 mW/g (1g)

Comments:

Communication System Band: Dipole 2450, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 35.8$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 2450 MHz, ConvF(7.63, 7.63, 7.63) @ 2450 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

2-3 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (51x91x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm


Reference Value = 41.00 V/m; Power Drift = -0.05 dB
 Fast SAR: SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.818 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 3.01 W/kg

2-3 GHz-Rev.3/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement
 grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.00 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 3.69 W/kg
 SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.732 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 44.7%
 Maximum value of SAR (measured) = 2.89 W/kg

2-3 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 2.92 W/kg

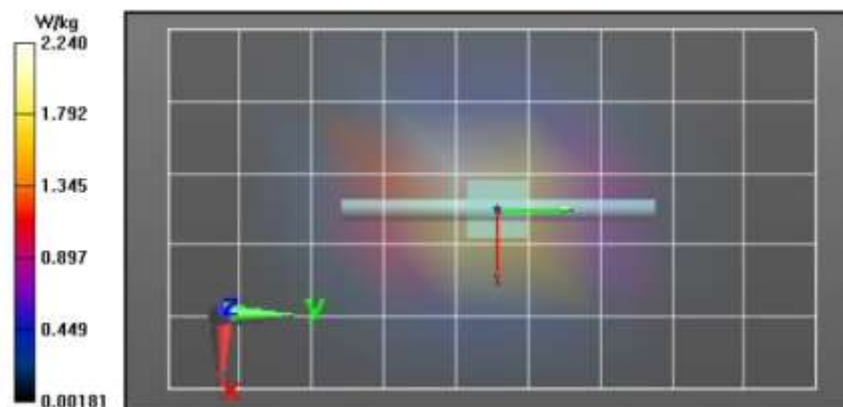

Motorola Solutions, Inc. EME Laboratory

Date/Time: 11/15/2021 4:02:01 AM

Robot#: DASY5-PG-2 | Run#: AF(SAN)-SYSP-2450B-211115-03
 Dipole Model#: D2450V2
 Phantom#: ELI4 1022
 Tissue Temp: 21.5 (C)
 Serial#: 782
 Test Freq: 2450.0000(MHz)
 Start Power: 31.6 (mW)
 Rotation (1D): 0.200 dB
 Adjusted SAR (1W): 50.00 mW/g (1g)

Comments:

Communication System Band: Dipole 2450, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 2450 MHz, ConvF(7.76, 7.76, 7.76) @ 2450 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

2-3 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (51x91x1): Interpolated grid:
 dx=1.200 mm, dy=1.200 mm

Reference Value = 39.43 V/m; Power Drift = 0.20 dB

Fast SAR: SAR(1 g) = 1.66 W/kg; SAR(10 g) = 0.756 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 2.79 W/kg

2-3 GHz-Rev.3/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement
 grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.43 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 1.58 W/kg; SAR(10 g) = 0.714 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 2.73 W/kg

2-3 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 2.68 W/kg

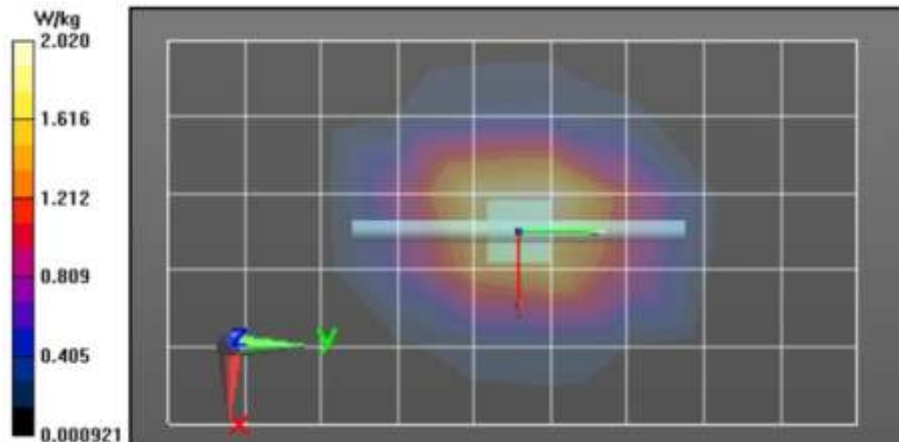

Motorola Solutions, Inc. EME Laboratory

Date/Time: 11/21/2021 11:18:25 PM

Robot#: DASY5-PG-2 | Run#: AF(SAN)-SYSP-450H-211121-11
 Dipole Model#: D450V3
 Phantom#: ELI4 1103
 Tissue Temp: 20.8 (C)
 Serial#: 1054
 Test Freq: 450.0000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.110 dB
 Adjusted SAR (1W): 4.88 mW/g (1g)

Comments:

Communication System Band: Dipole 450, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 450 MHz, ConvF(11.65, 11.65, 11.65) @ 450 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (41x221x1):


Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Reference Value = 45.38 V/m; Power Drift = -0.01 dB
 Fast SAR: SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.920 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.67 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
 Reference Value = 45.38 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.98 W/kg
 SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.807 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
 Ratio of SAR at M2 to SAR at M1 = 61.5%
 Maximum value of SAR (measured) = 1.69 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm
 Maximum value of SAR (measured) = 1.68 W/kg

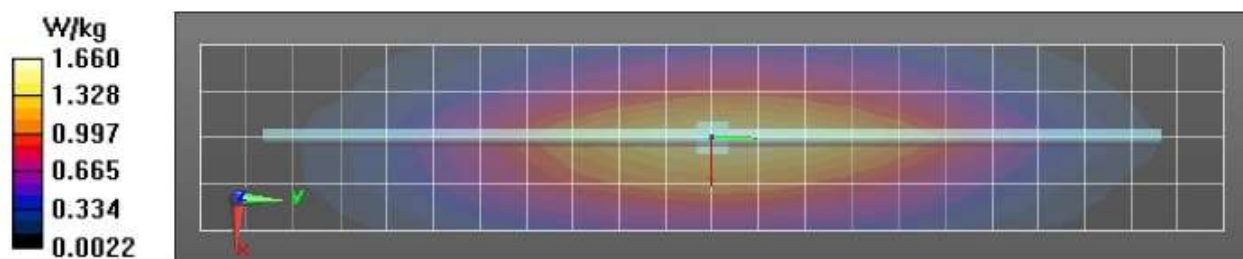

Appendix E

DUT Scans

Assessments at the Body (FCC & ISED)

Table 18 & Table 22

Motorola Solutions, Inc. EME Laboratory
Date/Time: 11/12/2021 8:45:14 PM

Robot#: DASY5-PG-2 | Run#: AF-AB-211112-11
 Model#: H98QDD9PW5BN (PMUE4969E)
 Phantom#: ELI4 1040
 Tissue Temp: 21.7 (C)
 Serial#: 756TXV0509
 Antenna: PMAE4065A
 Test Freq: 454.5000 (MHz)
 Battery: PMNN4487A
 Carry Acc: PMLN5877A w/ RLN6487A & RLN6488A
 Audio Acc: NONE
 Start Power: 5.56 (W)

Comments:

Communication System Band: APX6000 UHF, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 455$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 454.5 MHz, ConvF(11.86, 11.86, 11.86) @ 454.5 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (81x251x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 93.02 V/m; Power Drift = -0.27 dB

Fast SAR: SAR(1 g) = 6.97 W/kg; SAR(10 g) = 4.94 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 8.80 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 93.02 V/m; Power Drift = -0.38 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 6.64 W/kg; SAR(10 g) = 4.64 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 9.26 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 9.56 W/kg

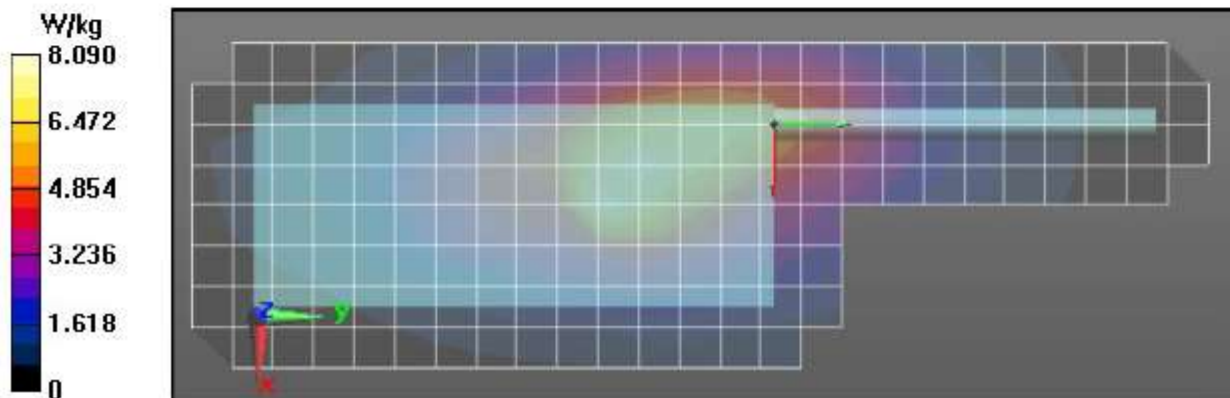

Assessment at the Face (FCC & ISED)

Table 19 & Table 22

Motorola Solutions, Inc. EME Laboratory

Date/Time: 11/22/2021 12:05:28 AM

Robot#: DASY5-PG-2 | Run#: AF(SAN)-FACE-211122-01#
 Model#: H98QDD9PW5BN (PMUE4957E)
 Phantom#: ELI4 1108
 Tissue Temp: 21.9 (C)
 Serial#: 755TXV0006
 Antenna: FAF5259A
 Test Freq: 422.1250 (MHz)
 Battery: PMNN4486A
 Carry Acc: NONE, radio at back
 Audio Acc: NONE
 Start Power: 5.66 (W)

Comments:

Communication System Band: APX6000 UHF, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 422$ MHz; $\sigma = 0.83$ S/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 422.125 MHz, ConvF(11.65, 11.65, 11.65) @ 422.125 MHz
 Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

Below 2 GHz-Rev.3/Face Scan/1-Area Scan (81x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 103.6 V/m; Power Drift = -0.24 dB

Fast SAR: SAR(1 g) = 8.93 W/kg; SAR(10 g) = 6.54 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 10.6 W/kg

Below 2 GHz-Rev.3/Face Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 103.6 V/m; Power Drift = -0.29 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 8.48 W/kg; SAR(10 g) = 6.33 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 70%

Maximum value of SAR (measured) = 10.4 W/kg

Below 2 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 10.2 W/kg

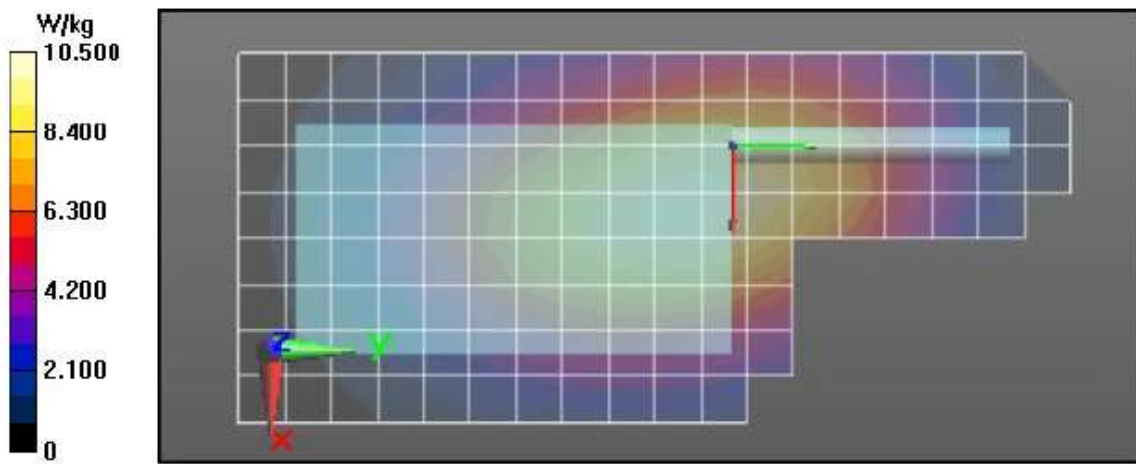

Assessment at the WLAN 2.4GHz Body (FCC & ISED)

Table 21 & Table 22

Motorola Solutions, Inc. EME Laboratory

Date/Time: 11/15/2021 11:13:44 PM

Robot#: DASY5-PG-2 | Run#: AR(SAN)-AB-211115-16
 Model#: H98QDH9PW7BN (PMUE4971E)
 Phantom#: ELI4 1028
 Tissue Temp: 22.4 (C)
 Serial#: 756TXV0532
 Antenna: 84009370002 WiFi Ant
 Test Freq: 2437.0000 (MHz)
 Battery: NNTN7573A
 Carry Acc: PMLN5879A w/ RLN6487A & RLN6488A
 Audio Acc: None
 Start Power: 0.0438 (W)

Comments:

Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz), Communication System UID: 10415 - AAA, Duty Cycle: 1:1.4243,

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 2437 MHz, ConvF(7.76, 7.76, 7.76) @ 2437 MHz

Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

2-3 GHz-Rev.3/Ab Scan/1-Area Scan (101x281x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.073 V/m; Power Drift = 0.77 dB

Fast SAR: SAR(1 g) = 0.00605 W/kg; SAR(10 g) = 0.00305 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.00974 W/kg

2-3 GHz-Rev.3/Ab Scan/3-Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.073 V/m; Power Drift = 0.29 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.006 W/kg; SAR(10 g) = 0.00374 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 0.00967 W/kg

2-3 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.00729 W/kg

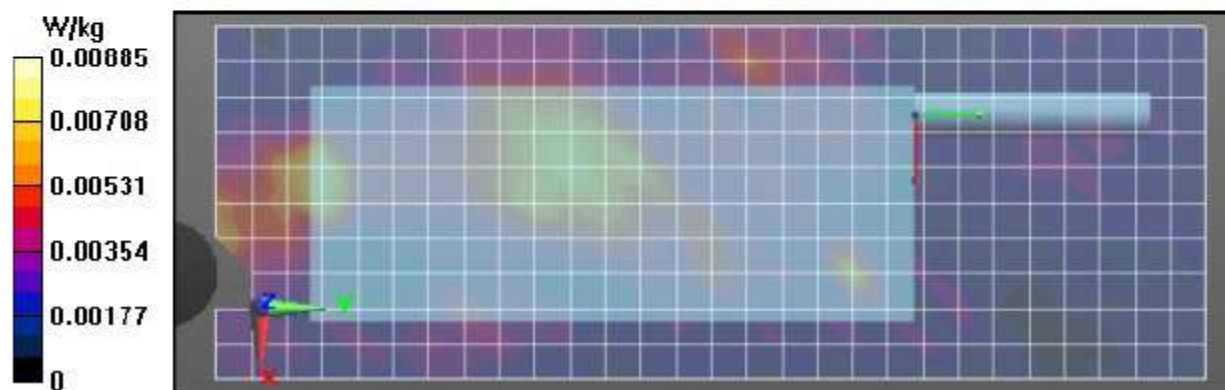

Assessment at the WLAN 2.4GHz Face (FCC & ISED)**Table 21 & Table 22****Motorola Solutions, Inc. EME Laboratory**

Date/Time: 11/14/2021 4:06:33 AM

Robot#: DASY5-PG-2 | Run#: AR(SAN)-FACE-211114-04#
 Model#: H98QDH9PW7BN (PMUE4971E)
 Phantom#: ELI4 1022
 Tissue Temp: 21.6 (C)
 Serial#: 756TXV0532
 Antenna: 84009370002 WiFi Ant
 Test Freq: 2412.0000 (MHz)
 Battery: PMNN4403B
 Carry Acc: 2.5cm @ Front
 Audio Acc: None
 Start Power: 0.0435 (W)

Comments:

Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz), Communication System UID: 10415 - AAA, Duty Cycle: 1:1.4243,

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 36$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 2412 MHz, ConvF(7.63, 7.63, 7.63) @ 2412 MHz

Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

2-3 GHz-Rev.3/Face Scan/1-Area Scan (111x341x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 10.37 V/m; Power Drift = -0.25 dB

Fast SAR: SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.083 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.209 W/kg

2-3 GHz-Rev.3/Face Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.075 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.200 W/kg

2-3 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.198 W/kg

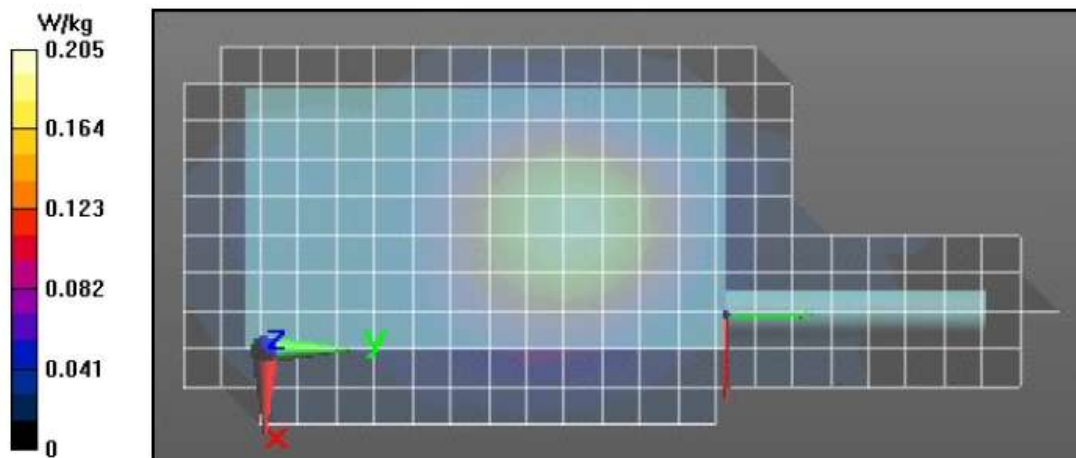

APPENDIX F

Shortened Scan of Highest SAR configuration

Shortened Scan Table 23

Motorola Solutions, Inc. EME Laboratory
Date/Time: 11/22/2021 1:00:49 AM

Robot#: DASY5-PG-2 | Run#: AF(SAN)-FACE-211122-02#
Model#: H98QDD9PW5BN (PMUE4957E)
Phantom#: ELI4 1103
Tissue Temp: 22.2 (C)
Serial#: 755TXV0006
Antenna: FAF5259A
Test Freq: 422.1250 (MHz)
Battery: PMNN4486A
Carry Acc: NONE, radio at back
Audio Acc: NONE
Start Power: 5.68 (W)

Comments: Shorten Scan

Communication System Band: APX6000 UHF, Communication System UID: 0, Duty Cycle: 1:1,
Medium parameters used: $f = 422$ MHz; $\sigma = 0.83$ S/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN7534, Calibrated: 4/19/2021, Frequency: 422.125 MHz, ConvF(11.65, 11.65, 11.65) @ 422.125 MHz
Electronics: DAE4 Sn1598, Calibrated: 4/7/2021

Below 2 GHz-Rev.3/Face Scan/1-Area Scan (81x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 106.1 V/m; Power Drift = -0.23 dB
Fast SAR: SAR(1 g) = 8.85 W/kg; SAR(10 g) = 6.5 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 10.5 W/kg

Below 2 GHz-Rev.3/Face Scan/2-Volume Scan 2D (41x41x1): Interpolated grid: dx=0.7500 mm, dy=0.7500 mm, dz=1.000 mm


Reference Value = 106.1 V/m; Power Drift = -0.24 dB
Fast SAR: SAR(1 g) = 8.77 W/kg; SAR(10 g) = 6.52 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 10.3 W/kg

Below 2 GHz-Rev.3/Face Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 118.6 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 12.2 W/kg
SAR(1 g) = 8.94 W/kg; SAR(10 g) = 6.68 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 70.9%
Maximum value of SAR (measured) = 10.9 W/kg

Below 2 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 10.3 W/kg

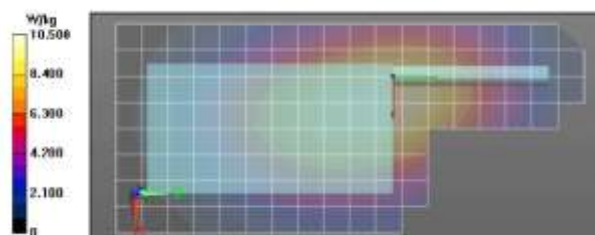

Shortened scan reflects highest SAR producing configuration and is compared to the full scan.

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)	SAR 10g (W/kg)
Shorten scan (zoom)	22	7	4.62	3.45
Full scan (area & zoom)	18	32	4.56	3.41

APPENDIX G

DUT Test Position Photos

1.0 Highest SAR Test Position per body location

1.1 Body

DUT with antenna PMAE4065A with offered battery PMNN4487A and body worn PMLN5877A w/ RLN6487A & RLN6488A against the phantom without an audio accessory attached.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
PMAE4065A	0	49	78

1.2 Face

Back of DUT with antenna FAF5259A with offered battery PMNN4486A separated 2.5cm from the phantom without an audio accessory attached.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	28	40	43