

FCC Test Report –UMTS Band 2

Report ID : 03360-RF-00098

FCC ID : AZ489FT7078

Tested Model : LEX L10i

Test Date : Jan 13, 2016 ~ Feb 20, 2016

Issued Date : 26 Feb, 2016

Applicant : Motorola Solution Malaysia Sdn Bhd

Address : Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia

Testing Lab : Motorola Penang Adv. Comm. Laboratory

Lab Address : Motorola Solutions Malaysia Sdn Bhd, Plot 2, Bayan Lepas Technoplex Industrial Park, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.

FCC Registration: 772092

Prepare By: _____, Date: 26 Feb, 2016

Chan Choon Keet / Engineer / +6048503678 / choonkeet.chan@motorolasolutions.com

Approved By: _____, Date: 26 Feb, 2016

Alex Goh / Senior Staff Engineer / +6042527292 / aikhong.goh@motorolasolutions.com

Table of Contents

1.0.	Summary of Test Results	3
1.1.	Measurement Uncertainty	3
1.2.	Equipment List.....	4
1.3.	General Information.....	4
1.4.	Channel number and frequency info.....	5
1.5.	Test Mode Applicability and Tested Channel Detail.....	6
1.6.	Conducted Output Power Measurement	7
1.6.1.	Test Setup	7
1.6.2.	Conducted RF Output Power – UMTS Band 2 (1850 – 1910MHz)	7
1.7.	Peak-to-Average Power Ratio.....	8
1.7.1.	Test Setup	8
1.7.2.	Test Limit	8
1.7.3.	Peak To Average Power Ratio – UMTS Band 2 (1850 – 1910MHz).....	8
1.8.	Occupied Bandwidth.....	9
1.8.1.	Test Setup	9
1.4.2.	Test Limit	9
1.4.3.	Occupied Bandwidth - UMTS Band 2 (1850 – 1910MHz)	9
1.9.	Frequency Stability	10
1.9.1.	Test Setup	10
1.9.2.	Test Limit	10
1.9.3.	Frequency Stability - UMTS Band 2 (1850 – 1910MHz).....	10
1.10.	Band Edge Conducted Spurious Emission	12
1.10.1.	Test Setup	12
1.10.2.	Test Limit	12
1.10.3.	Band Edge Conducted Spurious Emission - UMTS Band 2 (1850 – 1910MHz)	12
1.11.	Conducted Spurious Emission	13
1.11.1.	Test Setup	13
1.11.2.	Test Limit	13
1.11.3.	Conducted Spurious Emission - UMTS Band 2 (1850 – 1910MHz).....	13
1.12.	Radiated Spurious Emission.....	17
1.12.1.	Test Setup	17
1.12.2.	Test Limit	17
1.12.3.	Radiated Spurious Emission – UMTS Band 2 (1850 -1910MHz).....	18
1.13.	Equivalent Isotropically Radiated Power (EIRP).....	21
1.13.1.	Test Setup	21
1.13.2.	Test Limit	21
1.13.3.	Equivalent Isotropically Radiated Power (EIRP) – UMTS Band 2 (1850-1910MHz).....	22

1.0. Summary of Test Results

FCC Clause	Test Item	Results	Remark
2.1046	Conducted RF Output Power	PASS	Meet the requirement of limit
2.1046 24.232(d)	Peak-to-Average Power Ratio	PASS	Meet the requirement of limit
2.1049 24.238(b)	Occupied Bandwidth (26dBc, 99%)	PASS	Meet the requirement of limit
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit
2.1051 24.238(a)(b)	Band Edge Conducted Spurious Emission	PASS	Meet the requirement of limit
2.1051 24.238(a)(b)	Conducted Spurious Emissions	PASS	Meet the requirement of limit
2.1046 24.232(c)	Equivalent Isotropic Radiated Power (EIRP)	PASS	Meet the requirement of limit
2.1051 24.238(a)(b)	Radiated Spurious Emissions	PASS	Meet the requirement of limit

1.1. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

1.2. Equipment List

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6623A	2916A01428	3-Apr-15	3-Apr-16
Wideband Radio Communication Tester	CMW500	154550	23-Jun-15	23-Jun-16
SIGNAL ANALYZER	FSV40	101431	29-Apr-15	29-Apr-16
CHAMBER	SH-641	92002651	15-Mar-15	15-Mar-16
DRG HORN FREQ.	SAS-571	566	2-Aug-15	2-Aug-16
PREAMPLIFIER	PAM-0118P	361	NA	NA
BILOG ANTENNA	CBL6112B	2964	23-Apr-14	23-Apr-16
POWER SUPPLY	6031A	3121A02341	12-Jun-14	12-Jun-16
EMI TEST RECEIVER	ESIB26	100336	17-Jun-15	17-Jun-16
MICROWAVE SIGNAL GENERATOR	SMP04	100131	25-Jun-15	25-Jun-16
SYSTEM CONTROLLER	SC104V	050806-1	NA	NA
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	NA	NA
ANTENNA POSITIONING TOWER	TLT2	NA	NA	NA
TEST RECEIVER	ESIB26	827769/009	16-Jun-15	16-Jun-16
SIGNAL ANALYZER	FSV40	101103	25-Jun-15	25-Jun-16
5m Semi-anechoic Chamber	S800-HX	J2308	29-Apr-15	29-Apr-16
BILOG ANTENNA	CBL6112B	2863	24-Jul-15	24-Jul-16
DATA LOGGER	TM320	12249289	12-Apr-15	12-Apr-16
BILOG ANTENNA	CBL6112D	25516	23-Apr-15	23-Apr-16
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	24-Nov-15	24-Nov-16

1.3. General Information

General Description of EUT

Product	Smart phone	
Brand	Motorola Solutions	
Test Model	LEX L10i	
Power Supply Rating	3.7Vdc (Battery), 5Vdc (Adapter)	
Mode of operation	UMTS Band 2 (RMC 12kbps, HSDPA, HSUPA)	
Modulation Type	QPSK	
Operating Frequency	UMTS Band 2	1852.4MHz~1907.6MHz
Max. EIRP Power	UMTS Band 2	24.7dBm
Antenna Type	UMTS Band 2	Inverted-L Monopole with 0.8 to -0.6dBi gain
SW Version	LEXL10-INT-D17	
HW Version	Rev A	

Note:

- The EUT contains following accessory devices and data cable.

Item	Brand	Model or P/N	Specification
Rechargeable Lithium ion battery	MOTOROLA	PMNN4472A	3.7Vdc, 2340mAh, 8.7Wh
Rechargeable Lithium ion battery	MOTOROLA	PMNN4475A	3.7Vdc, 4560mAh, 16.9Wh
ITE Power Supply	MOTOROLA	HKTN4009A	I/P: 100-240Vac, 50-60Hz, 0.2A O/P: 5Vdc, 1.2A
USB cable (CABLE: LEX USB SYNC AND CHARGE)	N/A	CB000262A01	-
Holster	N/A	HKLN4618A	-

Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	Product	Brand	Model No.	Serial No.	FCC ID
1	Wideband Radio Communication Tester	R&S	CMW500	154550	NA

NO.	Signal Cable Description of The above Support Units
1	NA

Note:

1. All power cords of the above support units are non-shielded.
2. Item 1 acted as a communication partner to transfer data.

EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/-603-D

NOTE: All test items have been performed and recorded as per the above standards.

1.4. Channel number and frequency info

Band	Available Channel Number	Test Channel Number			Test Channel Frequency (MHz)		
		Low Channel	Mid Channel	High Channel	Low Channel	Mid Channel	High Channel
UMTS Band 2	9262~9538	9262	9400	9538	1852.4	1880.0	1907.6

1.5. Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The Radiated Emission and Equivalent Isotropically Radiated Power (EIRP) worst case was found when positioned on Z-Plane for UMTS Band 2.

The following channel(s) was (were) selected for the final test as listed below:

UMTS Band 2

Test Item	Available Channel	Tested Channel	Modulation	Mode
Conducted RF Output Power	9262~ 9538	9262, 9400, 9538	QPSK	All Modes
Peak to Average Power Ratio	9262~ 9538	9262, 9400, 9538	QPSK	HSUPA Subtest 5
Occupied Bandwidth	9262~ 9538	9262, 9400, 9538	QPSK	RMC 12.2kbps
Frequency Stability	9262~ 9538	9400	QPSK	RMC 12.2kbps
Band Edge Conducted Spurious Emission	9262~ 9538	9262, 9538	QPSK	RMC 12.2kbps
Conducted Spurious Emission	9262~ 9538	9262, 9400, 9538	QPSK	RMC 12.2kbps
Radiated Emission	9262~ 9538	9262, 9400, 9538	QPSK	RMC 12.2kbps
Equivalent Isotropically Radiated Power (EIRP)	9262~ 9538	9262, 9400, 9538	QPSK	RMC 12.2kbps

NOTE:


1. Pre-test was performed on Peak to Average Power ratio and HSUPA subtest 5 was selected for final Peak to Average Power ratio test because it is the worst case.
2. All other test (except Peak to average power ratio and conducted RF output power) was performed under RMC12.2kbps only because RMC12.2kbps is the worst case value from Conducted RF Output Power.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Conducted RF Output Power	25°C, 50% RH	3.7V DC	ckchan
Peak-to-Average Power Ratio	25°C, 50% RH	3.7V DC	ckchan
Occupied Bandwidth	25°C, 50% RH	3.7V DC	ckchan
Frequency Stability	25°C, 50% RH	3.7V DC	ckchan
Band Edge Conducted Spurious Emission	25°C, 50% RH	3.7V DC	ckchan
Conducted Spurious Emission	25°C, 50% RH	3.7V DC	ckchan
Radiated Spurious Emission	25°C, 63.7% RH	3.7V DC	Nazrin/Qawiman
Equivalent Isotropically Radiated Power (EIRP)	25°C, 63.7% RH	3.7V DC	Nazrin/Qawiman

1.6. Conducted Output Power Measurement

1.6.1. Test Setup

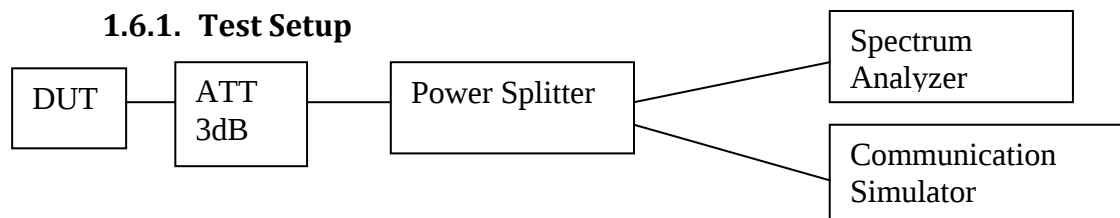


1. The DUT transmitter output port was connected to communication simulator with above setup.
2. Path loss for the measurement included.
3. Set DUT to transmit maximum power through communication simulator
4. All the measurements were done at low, mid, high channel for each band and different modulation.
5. Record the average power into the test report.

1.6.2. Conducted RF Output Power – UMTS Band 2 (1850 – 1910MHz)

	Test Mode	Conducted Output Power (dBm)		
		Low CH 9262	Mid CH 9400	High CH 9538
		1852.4 MHz	1880 MHz	1907.6 MHz
RMC 12.2kbps	RMC 12.2Kbps Test Loop 1	22.557	23.009	22.159
HSDPA	Sub-test 1	21.541	22.018	21.082
	Sub-test 2	21.830	22.185	21.303
	Sub-test 3	21.333	21.665	20.806
	Sub-test 4	21.327	21.666	20.819
HSUPA	Sub-test 1	20.924	21.245	20.449
	Sub-test 2	20.678	20.974	20.126
	Sub-test 3	20.248	20.602	19.813
	Sub-test 4	20.339	21.581	19.989
	Sub-test 5	21.518	20.712	20.995

1.7. Peak-to-Average Power Ratio

1.7.1. Test Setup

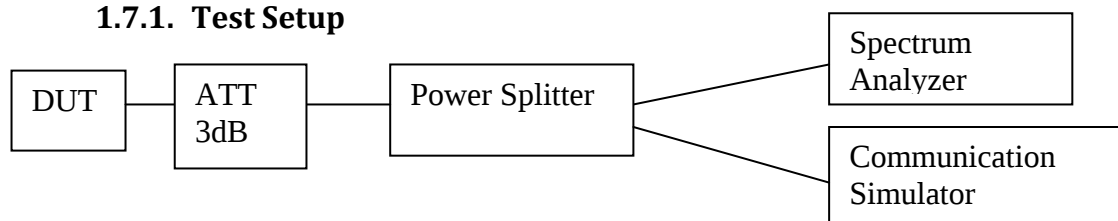


1. The DUT transmitter output port was connected to communication simulator with above setup.
2. Path loss for the measurement included.
3. Set DUT to transmit maximum power through communication simulator
4. Set the CCDF (Complementary Cumulative Distribution Function) option in the spectrum analyzer.
5. Spectrum Analyzer setting, RBW = 20MHz.
6. Recorded the maximum PAR level associated with a probability of 0.1% as Peak to Average Ratio.
7. All the measurements were done at low, mid, high channel for each band and different modulation.

1.7.2. Test Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


1.7.3. Peak To Average Power Ratio – UMTS Band 2 (1850 – 1910MHz)

Mode	Channel Number	Tx Frequency (MHz)	Peak To Average (dB)
HSUPA Subtest 5	Low CH 9262	1852.4 MHz	4.32
	Mid CH 9400	1880.0 MHz	4.32
	High CH 9538	1907.6 MHz	4.38

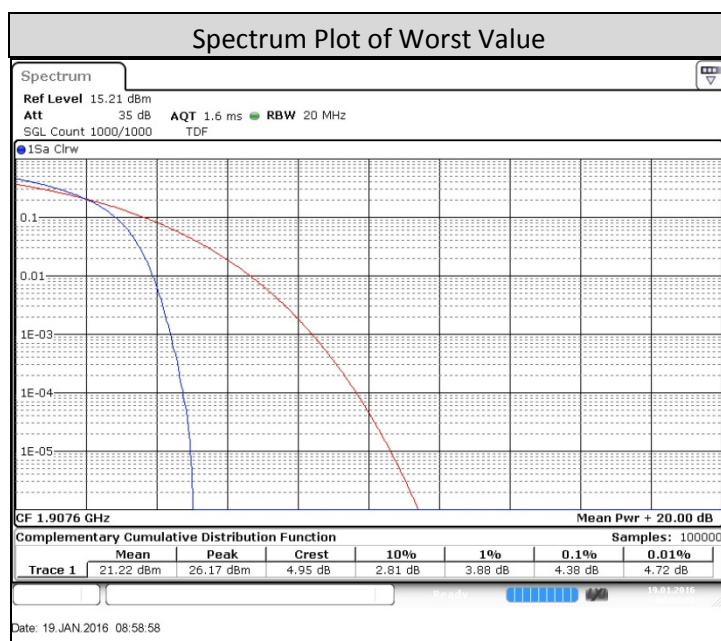

1.8. Occupied Bandwidth

1.8.1. Test Setup

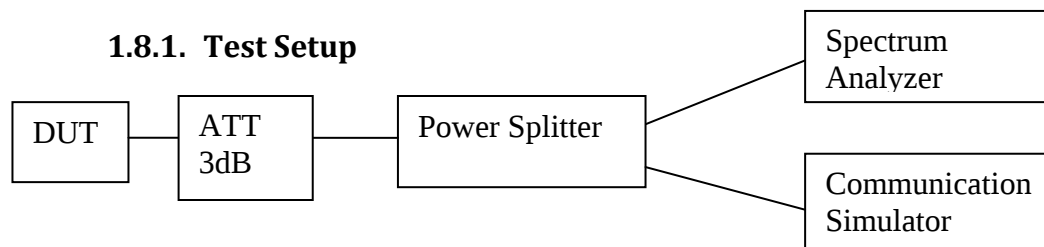


- 1) The DUT transmitter output port was connected to communication simulator with above setup.
- 2) Path loss for the measurement included.
- 3) For UMTS measurement, set DUT to transmit maximum power through communication simulator.
- 4) Spectrum Analyzer setting, RBW = 100 kHz, VBW = 300 kHz.
- 5) Measure & record -26dBc and 99% occupied bandwidth (BW).
- 6) All the measurement was done at low, mid, high channel for each band and different modulation.

1.4.2. Test Limit

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


1.4.3. Occupied Bandwidth - UMTS Band 2 (1850 – 1910MHz)

Mode	Channel Number	Tx Frequency (MHz)	-26 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
RMC 12.2kbps	Low CH 9262	1852.4 MHz	4.6293	4.1738
	Mid CH 9400	1880.0 MHz	4.6408	4.1723
	High CH 9538	1907.6 MHz	4.6438	4.1763

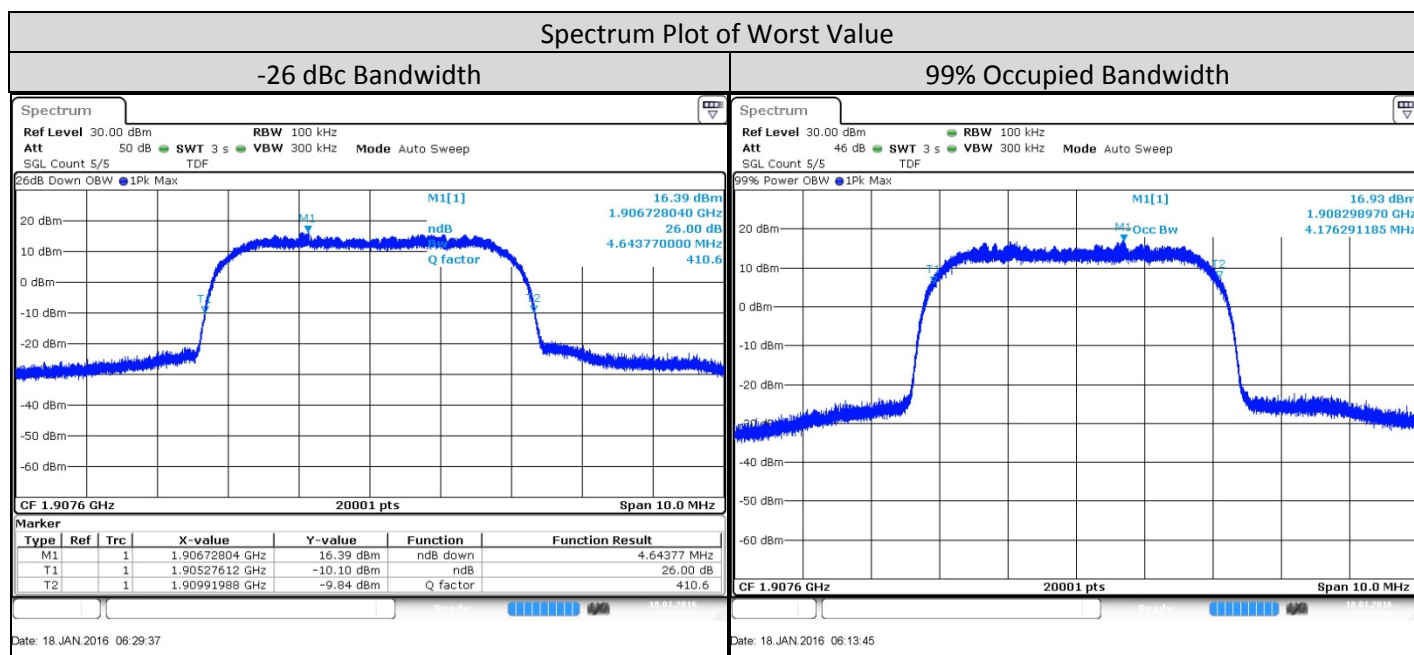

1.9. Frequency Stability

1.9.1. Test Setup

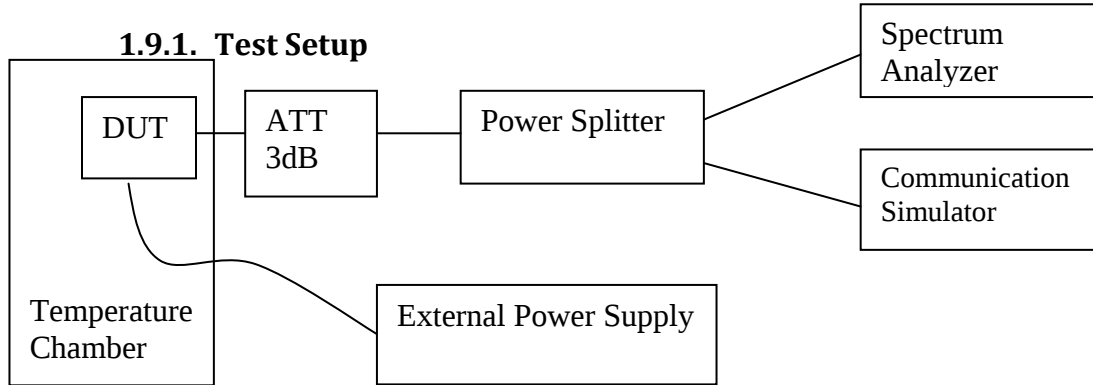

- 1) The DUT is placed in the temperature chamber and DUT is power up by external power supply to control the DC input voltage.
- 2) The temperature chamber could control the temperature and humidity and external power supply could control the test voltage range from minimum to maximum operating voltage.
- 3) Measured frequency error from the communication simulator by vary below step :
 - i. Vary temperature of the temperature chamber from -10 ~ 60 deg C (10 deg C / Step) ** and set external supply voltage constant at nominal voltage.
 - ii. Vary external supply voltage from minimum to maximum operation voltage support by DUT and set temperature chamber constant at room temp.
- 4) All the measurement was done at mid channel for each band.

1.9.2. Test Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


1.9.3. Frequency Stability - UMTS Band 2 (1850 – 1910MHz)

Band	Frequency Error VS Temperature	
	Temp (Deg C)	Frequency Error (ppm)
		RMC 12.2kbps
UMTS Band 2	60	0.0069
	50	0.0065
	40	0.0051
	30	0.0073
	20	0.0071
	10	0.0059
	0	0.0067
	-10	0.0050
	-20	0.0093
	-30	0.0069

Band	Frequency Error VS Voltage	
	Voltage (V)	Frequency Error (ppm)
		RMC 12.2kbps
UMTS Band 2	4.1	0.0049
	3.7	0.0048
	3.5	0.0065

1.10. Band Edge Conducted Spurious Emission

1.10.1. Test Setup

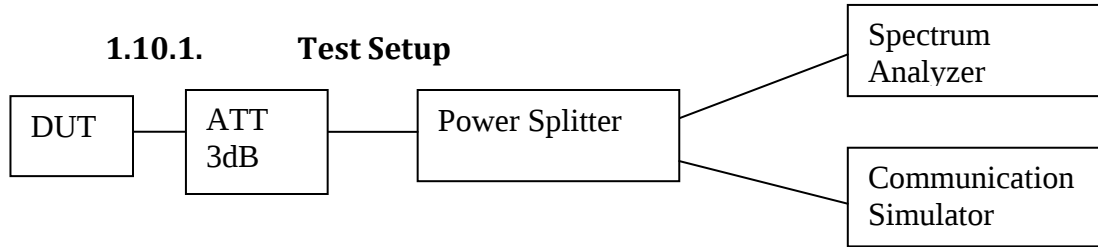


- 1) The DUT transmitter output port was connected to communication simulator with above setup.
- 2) Path loss for the measurement included.
- 3) Set DUT to transmit maximum power through communication simulator.
- 4) The band edges of lowest and highest channels with the highest RF powers were measured.
- 5) The center frequency of spectrum is the band edge frequency, span is 3MHz, RBW is 1~3% of OBW and VBW is 3 times of RBW.
- 6) Record the maximum trace plot into the test report.

1.10.2. Test Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

1.10.3. Band Edge Conducted Spurious Emission - UMTS Band 2 (1850 - 1910MHz)

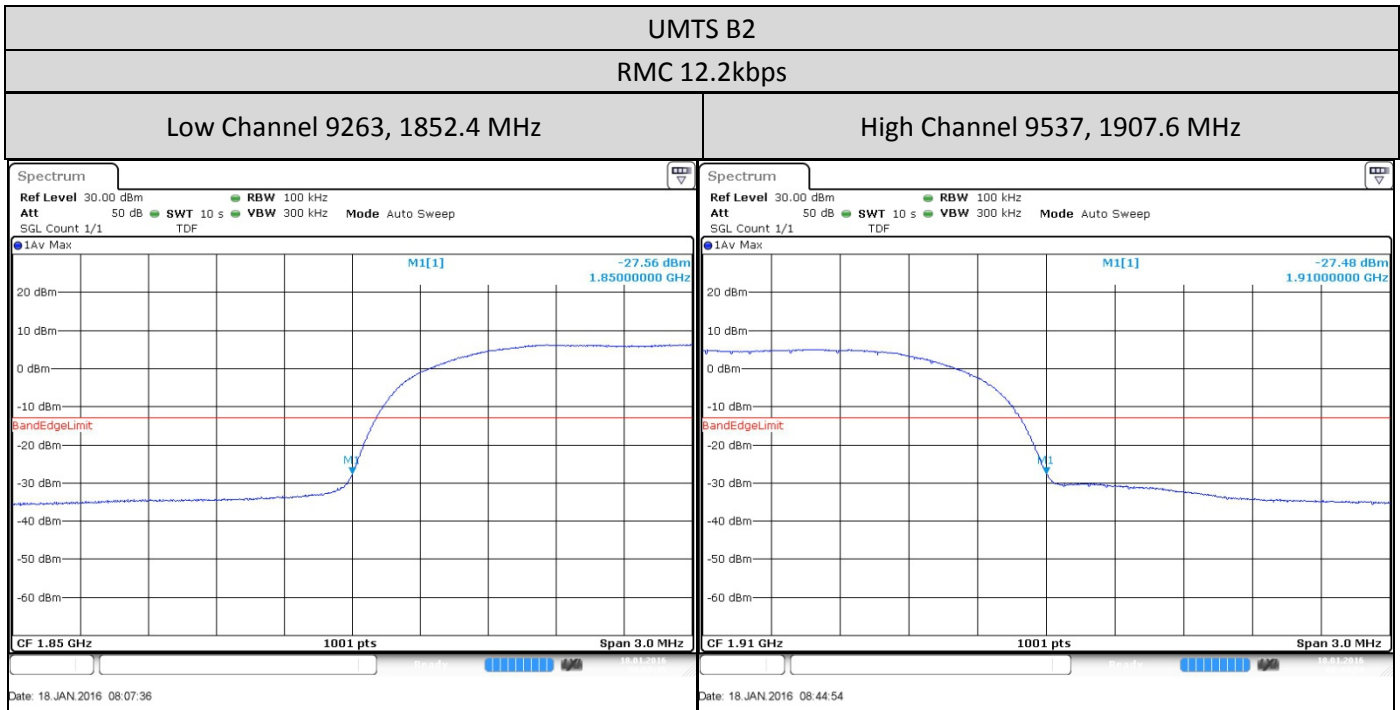

1.11. Conducted Spurious Emission

1.11.1. Test Setup

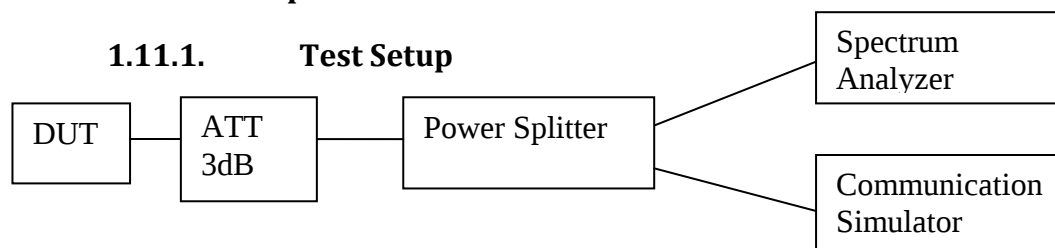




- 1) The DUT transmitter output port was connected to communication simulator with above setup.
- 2) Path loss for the measurement included.
- 3) Set DUT to transmit maximum power through communication simulator.
- 4) Spectrum Analyzer setting, RBW = 1 MHz, VBW = 3 MHz.
- 5) The spurious emission of lowest, middle and highest channels with the highest RF powers were measured.
- 6) Record the maximum trace plot into the test report.



1.11.2. Test Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

1.11.3. Conducted Spurious Emission - UMTS Band 2 (1850 - 1910MHz)

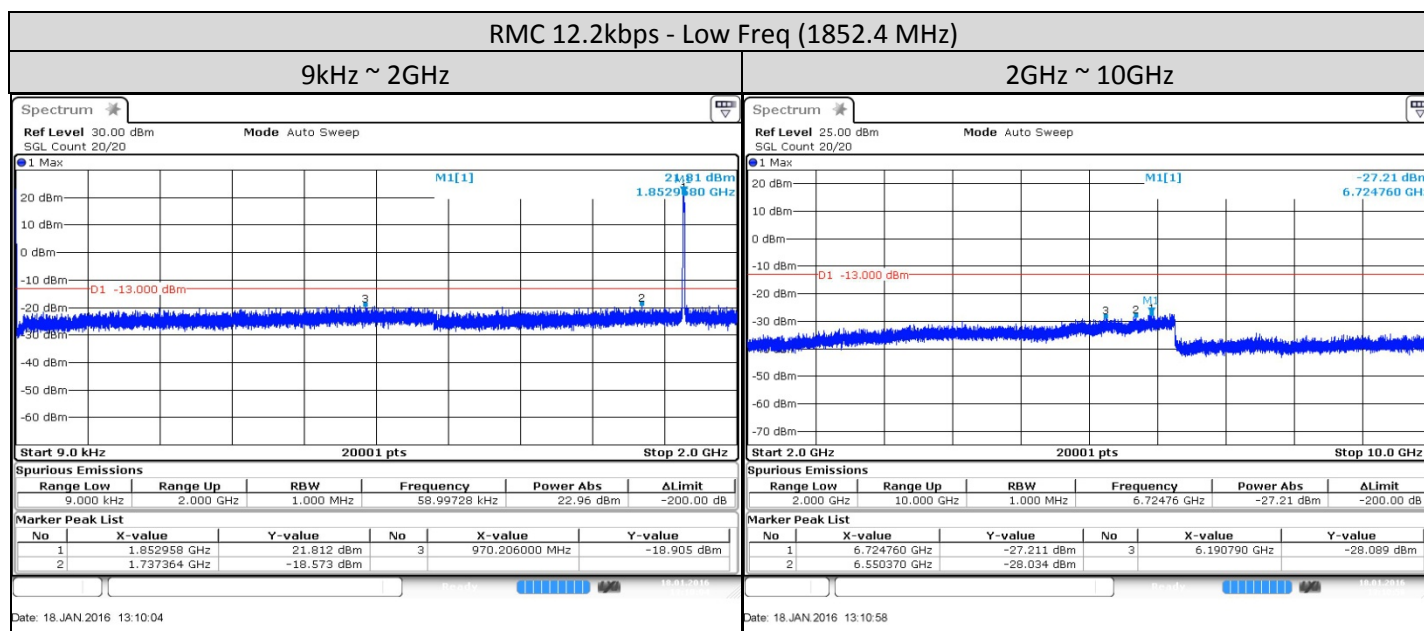

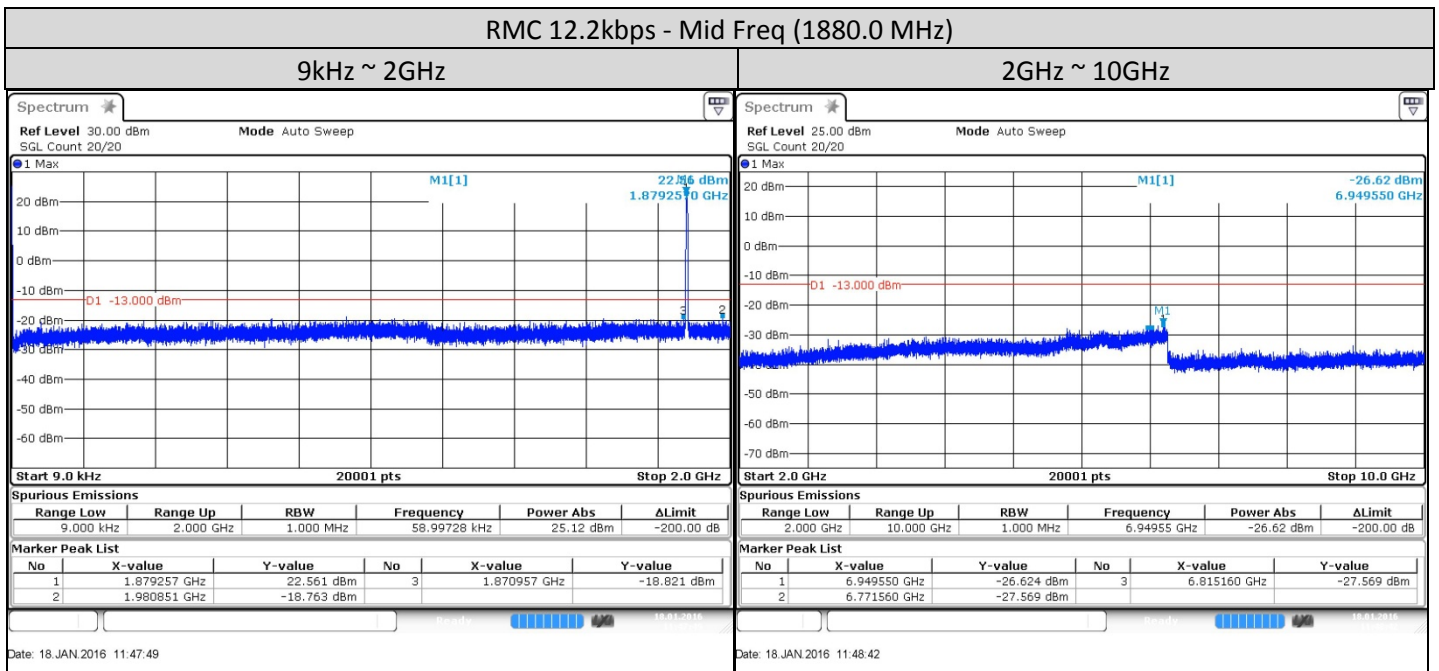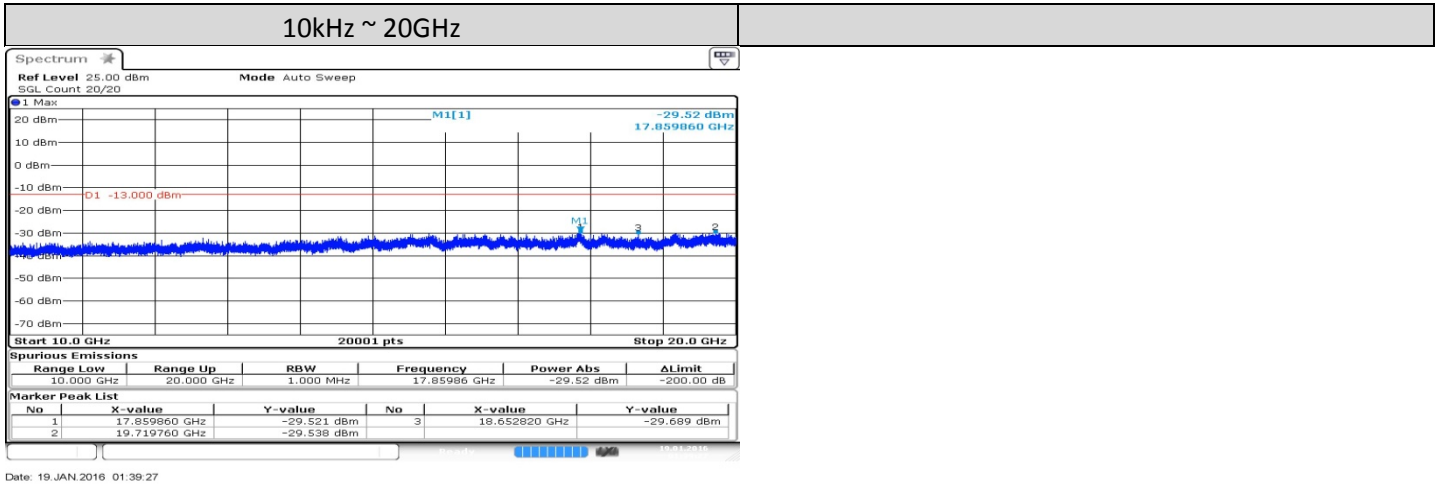


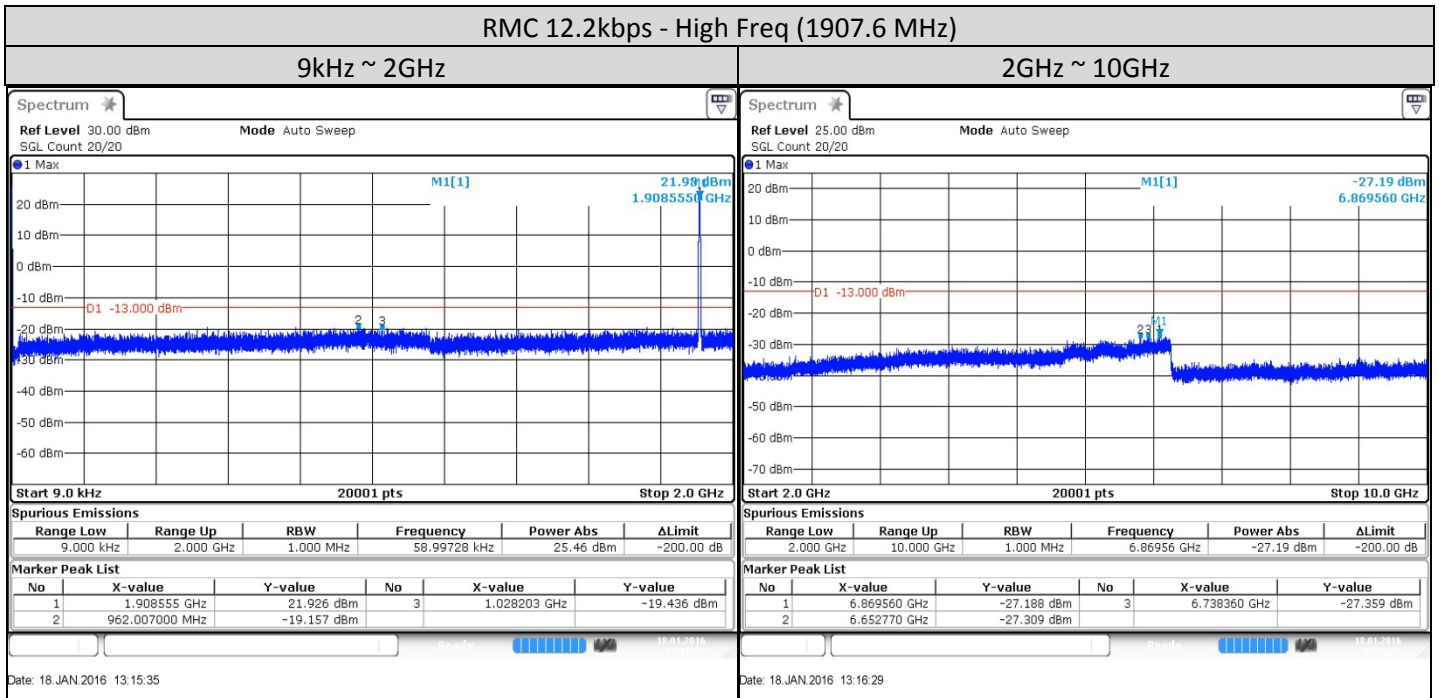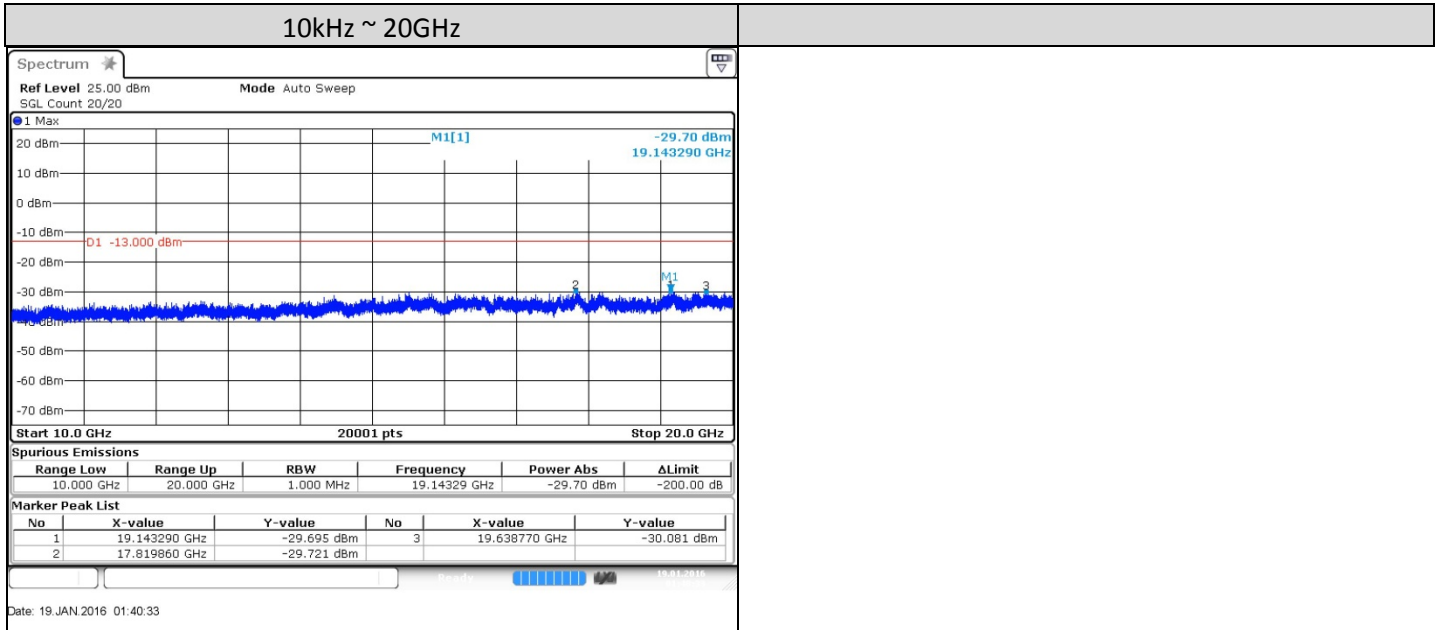

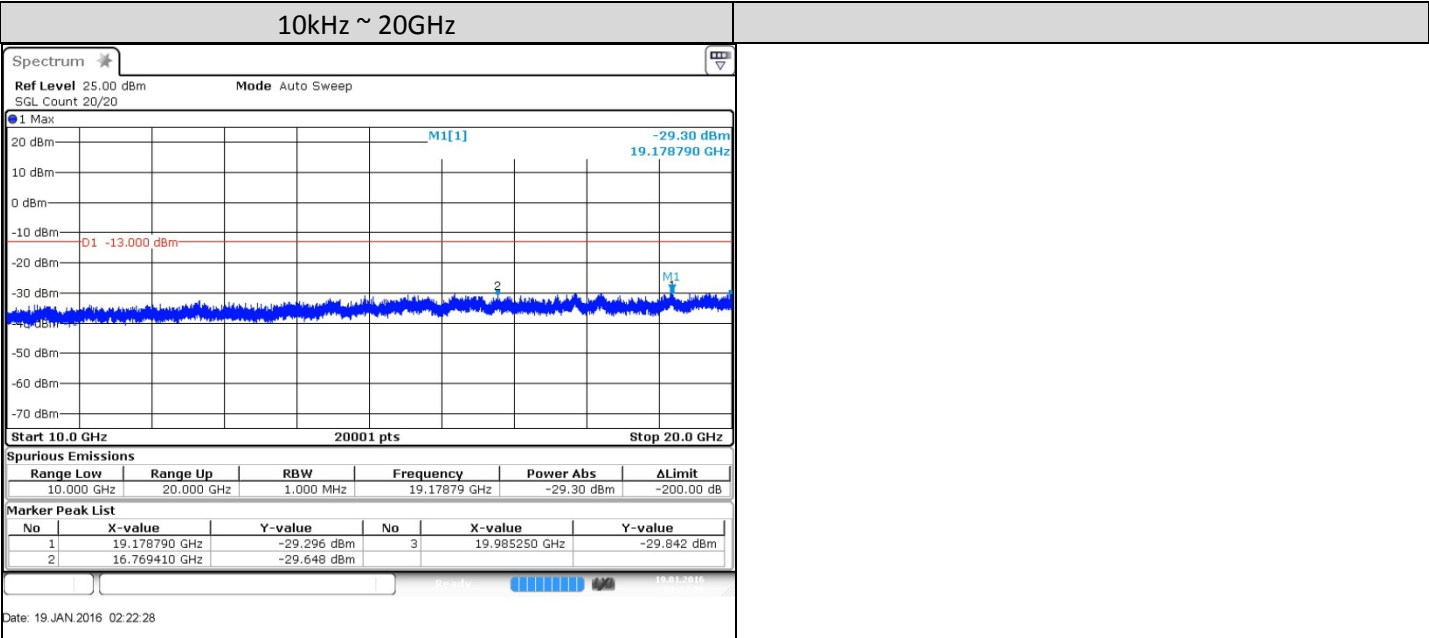

1.12. Radiated Spurious Emission

1.12.1. Test Setup

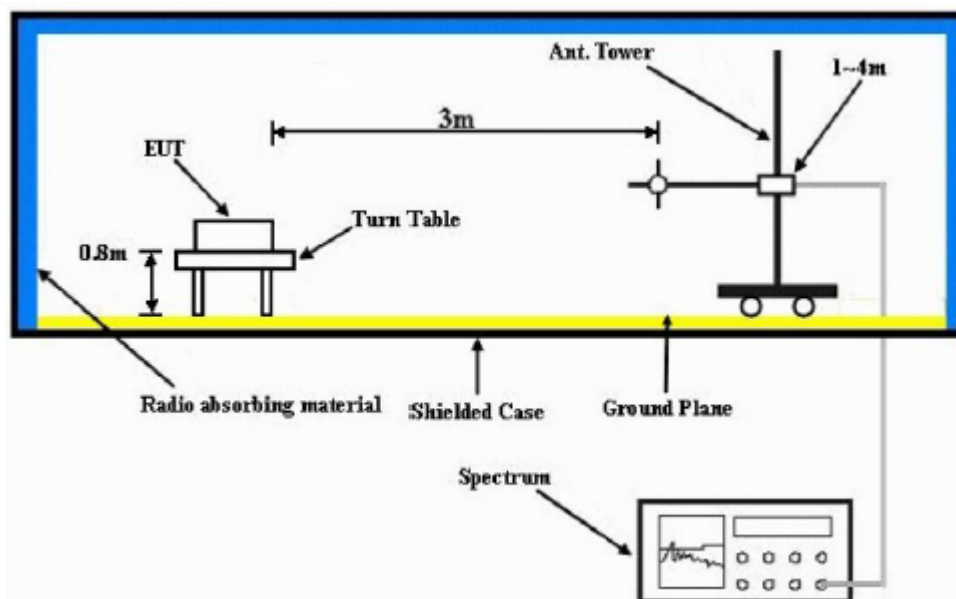

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1MHz, VBW = 3MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

1.12.2. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

MODEL #: LEX L10i


Battery : PMNN4472A, Accy : 3360-HKTN4009A-3, 3360-CB000262A01-3

Band 2 (Low)

1852.4 MHz

0.2512 Watt(s)/Max Power

S/N: 171PRQ1569

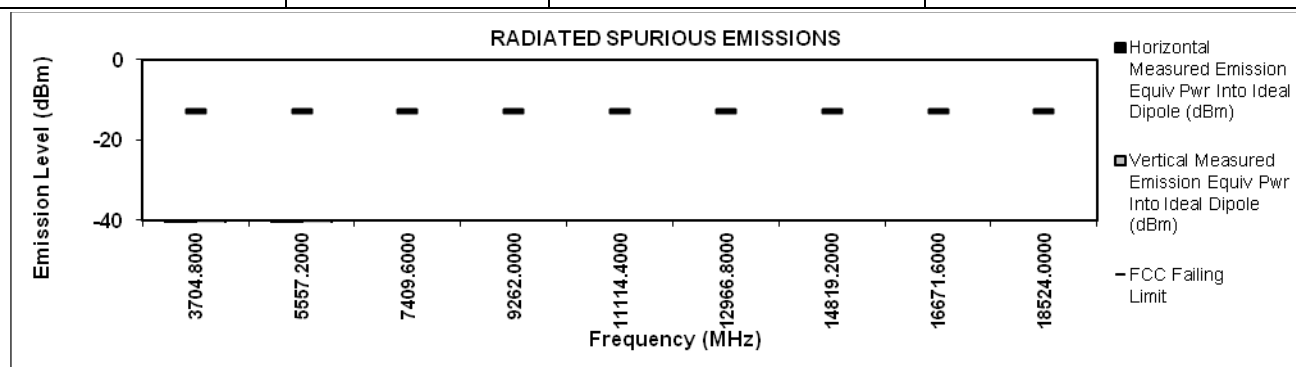[illegible]

Motorola Penang EMC Lab - Test Performed by: Qawiman/Nazrin

January 13, 2016

FCC Registration: 772092

Industry Canada: 109AK

Remarks:** Indicates the spurious emission could not be detected due to noise limitations or ambients.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 24.8 Hum(%RH): 64.9

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Battery : PMNN4472A, Accy : 3360-HKTN4009A-3, 3360-CB000262A01-3

1880 MHz

0.2512 Watt(s)/Max Power

S/N: 171PRQ1569

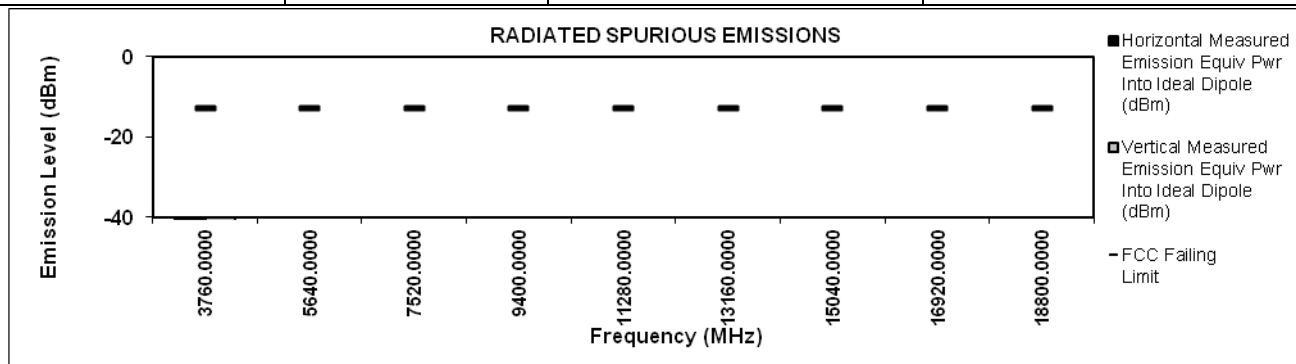

January 13, 2016

Industry Canada: 109AK

Temp(Deg): 24.8 Hum(%RH): 64.9

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


MODEL #: LEX L10i

Band 2 (High)

1907.6 MHz

0.2512 Watt(s)/Max Power

S/N: 171PRQ1569

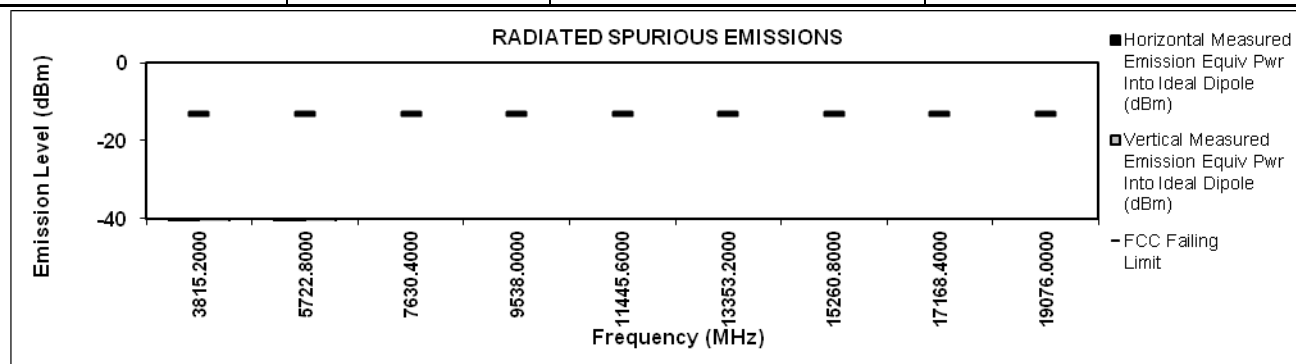[illegible]

January 13, 2016

Industry Canada: 109AK

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported


Temp(Deg): 24.8 Hum(%RH): 64.9

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

1.13. Equivalent Isotropically Radiated Power (EIRP)

1.13.1. Test Setup

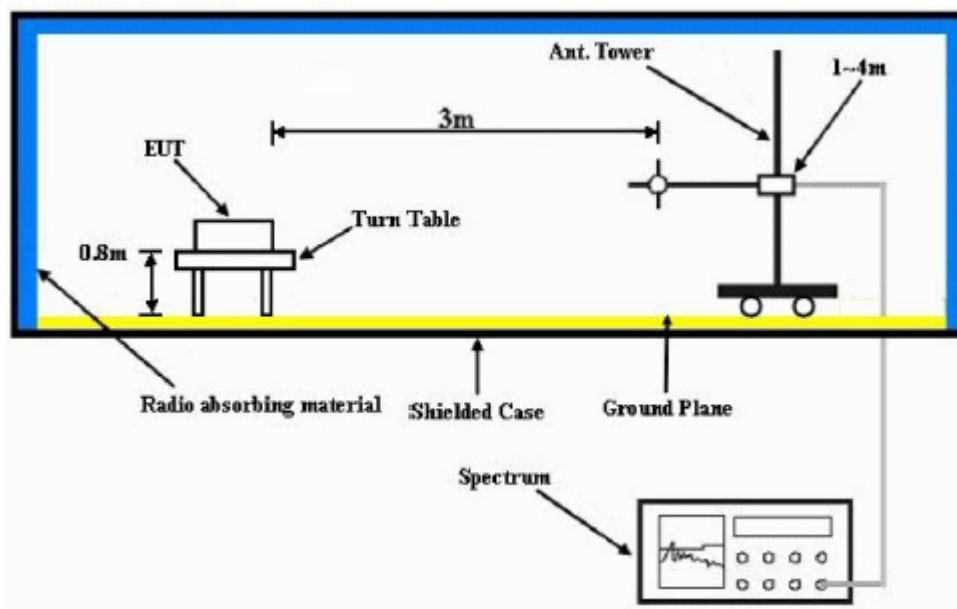

- 1) The spectrum setting for Equivalent Isotropically Radiated Power (EIRP) is RBW = 100 kHz, VBW = 300 kHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $EIRP = \text{"Read Value"} + \text{Measured substitution value} + 2.15$.

1.13.2. Test Limit

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

1.13.3. Equivalent Isotropically Radiated Power (EIRP) – UMTS Band 2 (1850-1910MHz)

RMC 12.2kbps - Low Freq (1852.4 MHz)

EIRP

S/N: 171PRQ1568 Tx Power: 0.2512 Watts
Antenna: NA
Band 2

	Frequency	Turn Table Deg.	EIRP (dBm)
Horiz.	1852.4	0	23.49
Horiz.	1852.4	45	19.03
Horiz.	1852.4	90	21.27
Horiz.	1852.4	135	24.16
Horiz.	1852.4	180	15.67
Horiz.	1852.4	225	20.4
Horiz.	1852.4	270	19.85
Horiz.	1852.4	315	24.7
Vert.	1852.4	0	15.6
Vert.	1852.4	45	19.04
Vert.	1852.4	90	10.88
Vert.	1852.4	135	12.12
Vert.	1852.4	180	19.34
Vert.	1852.4	225	17.04
Vert.	1852.4	270	9.5
Vert.	1852.4	315	15.87

RMC 12.2kbps - Mid Freq (1880.0 MHz)

EIRP

S/N: 171PRQ1568
Antenna: NA
Band 2

Tx Power: 0.2512 Watts

	Frequency	Turn Table Deg.	EIRP (dBm)
Horiz.	1880	0	22.18
Horiz.	1880	45	18.3
Horiz.	1880	90	18.84
Horiz.	1880	135	22.55
Horiz.	1880	180	15.52
Horiz.	1880	225	21.69
Horiz.	1880	270	19.03
Horiz.	1880	315	24.5
Vert.	1880	0	13.3
Vert.	1880	45	18.15
Vert.	1880	90	9.21
Vert.	1880	135	13.04
Vert.	1880	180	18.51
Vert.	1880	225	12.77
Vert.	1880	270	11.16
Vert.	1880	315	14.49

RMC 12.2kbps - High Freq (1907.6 MHz)

EIRP

S/N:
Antenna:

171PRQ1568
NA
Band 2

Tx Power: 0.2512 Watts

	Frequency	Turn Table Deg.	EIRP (dBm)
Horiz.	1907.6	0	21.38
Horiz.	1907.6	45	19.65
Horiz.	1907.6	90	19.89
Horiz.	1907.6	135	22.79
Horiz.	1907.6	180	16.57
Horiz.	1907.6	225	21.45
Horiz.	1907.6	270	20.5
Horiz.	1907.6	315	23.58
Vert.	1907.6	0	15.76
Vert.	1907.6	45	18.38
Vert.	1907.6	90	14.63
Vert.	1907.6	135	17.58
Vert.	1907.6	180	16.66
Vert.	1907.6	225	11.18
Vert.	1907.6	270	10.83
Vert.	1907.6	315	11.95