



DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2

Motorola Solutions Inc.
EME Test Laboratory
 Motorola Solutions Malaysia Sdn Bhd (Innoplex)
 Plot 2A, Medan Bayan Lepas
 Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 05/04/2016
Report Revision: A

Responsible Engineer: Veeramani Veerapan
Report Author: Veeramani Veerapan
Date/s Tested: 3/8/2016 – 4/6/2016
Manufacturer: Motorola Solutions Inc.
DUT Description: Handheld Portable – SRX2200 Refresh UHF1 380-472 MHz, 0.1Watt, Full Keypad and Non-Keypad models
Test TX mode(s): CW (PTT) , Bluetooth, WLAN 802.11 b/g/n
Max. Power output: 100 mW (LMR 380-472 MHz band), 10 mW (Bluetooth), 1.98 mW (Bluetooth LE), 63.1 mW (WLAN 802.11 b), 25.1 mW (WLAN 802.11g), 15.5 mW (WLAN 802.11n)
Nominal Power: 80 mW (LMR 380-472 MHz band), 8 mW (Bluetooth), 1.5 mW (Bluetooth LE), 31.6 mW (WLAN 802.11 b), 12.5 mW (WLAN 802.11g), 12.5 mW (WLAN 802.11n)
Tx Frequency Bands: LMR 380-472 MHz; Bluetooth 2.402-2.480 GHz; WLAN 802.11 b/g/n 2.412-2.462 GHz
Signaling type: FM (LMR), FHSS (Bluetooth), 802.11 b/g/n (WLAN)
Model(s) Tested: H99QDD9PW5BN (PMUE5008A) & H99QDDH9PW7BN (PMUE5009A)
Model(s) Certified: H99QDD9PW5BN (PMUE5008A) & H99QDDH9PW7BN (PMUE5009A)
Serial Number(s): 756TRX0675, 756TRX0678, 756TSB0799
Classification: Occupational/Controlled
FCC ID: AZ489FT7084; LMR 406.125-472 MHz, Bluetooth 2.402-2.480 GHz, WLAN 802.11 b/g/n 2.412-2.462 GHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.
IC: 109U-89FT7084; This report contains results that are immaterial for IC equipment approval, which are clearly identified.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Tiong
Tiong Nguk Ing
Deputy Technical Manager
Approval Date: 5/11/2016

Certification Date: 4/18/2016
Certification No.: L1160404P & L1160405P

Part 1 of 2

1.0 Introduction..... 4

2.0 FCC SAR Summary..... 4

3.0 Abbreviations / Definitions..... 4

4.0 Referenced Standards and Guidelines 5

5.0 SAR Limits 6

6.0 Description of Devices Under Test (DUT)..... 6

7.0 Optional Accessories and Test Criteria..... 8

 7.1 Antennas 8

 7.2 Batteries 8

 7.3 Body worn Accessories..... 9

 7.4 Audio Accessories 10

8.0 Description of Test System..... 13

 8.1 Descriptions of Robotics/Probes/Readout Electronics 13

 8.2 Description of Phantom(s)..... 14

 8.3 Description of Simulated Tissue..... 14

9.0 Additional Test Equipment..... 15

10.0 SAR Measurement System Validation and Verification 16

 10.1 System Validation..... 16

 10.2 System Verification 16

 10.3 Equivalent Tissue Test Results..... 17

11.0 Environmental Test Conditions 18

12.0 DUT Test Setup and Methodology..... 19

 12.1 Measurements 19

 12.2 DUT Configuration(s)..... 20

 12.3 DUT Positioning Procedures 20

 12.3.1 Body..... 20

 12.3.2 Head..... 20

 12.3.3 Face..... 20

 12.4 DUT Test Channels 20

 12.5 SAR Result Scaling Methodology 20

 12.6 DUT Test Plan 21

13.0 DUT Test Data..... 21

 13.1 LMR assessments at the Body for 406.125 – 472 MHz band..... 21

 13.2 WLAN assessment at the Body for 802.11 b/g/n..... 32

 13.3 LMR assessments at the Face for 406.125-472 MHz band 34

 13.4 WLAN assessment at the Face for 802.11 b/g/n..... 37

 13.5 Assessment for Industry Canada..... 38

 13.6 Assessment at the Bluetooth band 39

 13.6.1 FCC Requirement 39

 13.6.2 Industry Canada Requirement..... 39

 13.7 Assessment outside FCC Part 90 40

 13.8 Shortened Scan Assessment..... 40

14.0 Simultaneous Transmission Exclusion for BT 41
 15.0 Simultaneous Transmission between LMR, WLAN and BT 41
 16.0 Results Summary 42
 17.0 Variability Assessment 43
 18.0 System Uncertainty 43

APPENDICES

A Measurement Uncertainty Budget 44
 B Probe Calibration Certificates 49
 C Dipole Calibration Certificates 80

Part 2 of 2

APPENDICES

D System Verification Check Scans 2
 E DUT Scans 25
 F Shorten Scan of Highest SAR Configuration 43
 G DUT Test Position Photos 44
 H DUT, Body worn and Audio Accessories Photos 45

Report Revision History

Date	Revision	Comments
05/04/2016	A	Initial release

1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for handheld portable model number H99QDD9PW5BN (PMUE5008A) & H99QDH9PW7BN (PMUE5009A). These devices are classified as Occupational/Controlled.

2.0 FCC SAR Summary

Table 1

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
TNF	406.125 -472 MHz (LMR)	0.094	0.069	0.066	0.049
*DSS	2402-2480 MHz (Bluetooth)	NA	NA	NA	NA
DTS	2412-2462 MHz (WLAN 802.11 b/g/n)	0.053	0.029	0.190	0.106
Simultaneous Results		0.15	0.10	0.26	0.16

*Results not required per KDB (refer to sections 13.6 and 14.0)

3.0 Abbreviations / Definitions

BT: Bluetooth
 CNR: Calibration Not Required
 CW: Continuous Wave
 DSSS: Direct Sequence Spread Spectrum
 DTS: Digital Transmission System
 DUT: Device Under Test
 EME: Electromagnetic Energy
 FHSS: Frequency Hopping Spread Spectrum
 Li-ion: Lithium-Ion
 LMR: Land Mobile Radio
 NA: Not Applicable
 NiMH: Nickel Metal Hydride
 OFDM: Orthogonal Frequency Division Multiplexing
 PTT: Push to Talk
 RF: Radio Frequency
 SAR: Specific Absorption Rate
 TNF: Licensed Non-Broadcast Transmitter Held to Face
 WLAN: Wireless Local Area Network

Audio accessories: These accessories allow communication while the DUT is worn on the body.

Body worn accessories: These accessories allow the DUT to be worn on the body of the user.

Maximum Power: Defined as the upper limit of the production line final test station.

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1 (2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.: 1997.
- IEEE 1528 (2013), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2005
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard (2014)
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9 kHz and 300 GHz." and “Attachment to resolution # 303 from July 2, 2002”
- IEC62209-2 Edition 1.0 2010-03, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).

- FCC KDB – 643646 D01 SAR Test for PTT Radios v01r03
- FCC KDB – 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02
- FCC KDB – 447498 D01 General RF Exposure Guidance v06
- FCC KDB – 248227 D01 802.11 Wi-Fi SAR v02r02

5.0 SAR Limits

Table 2

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

6.0 Description of Devices Under Test (DUT)

These portable devices operate in the LMR bands using frequency modulation (FM). These devices also contain WLAN technology for data capabilities over 802.11 b/g/n wireless networks and Bluetooth technology for short range wireless devices.

The LMR bands in these devices operate in a half duplex system. A half duplex system only allows the user to transmit or receive. These devices cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

These devices also incorporate Class 1 Bluetooth Low energy (LE) device which is a Frequency Hopping Spread Spectrum (FHSS) technology and LE intended to reduce power consumption. The Bluetooth radio modem is used to wireless link audio accessories. The maximum actual transmission duty cycle is imposing by Bluetooth standard. Packet types varying duty cycles: 1-slot, 3-slots and 5-slots packets. A 5-slot packet type receives on 1-slot and transmits on 5-slots, and thus maximum duty cycle = 76.1%.

WLAN 802.11 b/g/n operate using Direct Sequence Spread Spectrum (DSSS) and Orthogonal Frequency-Division Multiplexing (OFDM) accordance with the IEEE 802.11 b/g/n. With WiFi access, the radio can receive new code plug, firmware and software feature while allow users keep talking without interruption.

Table 3 below summarizes the technologies, bands, maximum duty cycles and maximum output powers. Maximum output powers are defined as upper limit of the production line final test station.

Table 3

Technologies	Band (MHz)	Transmission	Duty Cycle (%)	Max Power (W)
LMR	380-472	FM	*50	0.100
BT	2402-2480	FHSS	76.1	0.0100
WLAN	2412-2462	802.11b	100	0.0631
WLAN	2412-2462	802.11g	100	0.0251
WLAN	2412-2462	802.11n	100	0.0155

Note - * includes 50% PTT operation

The intended operating positions are “at the face” with the DUT at least 2.5 cm from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional remote accessories that are connected to the radio. Operation at the body without an audio accessory attached is possible by means of BT accessories.

7.0 Optional Accessories and Test Criteria

These devices are offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in “SAR Test Reduction Considerations for Occupational PTT Radios” FCC KDB 643646 to assess compliance of the devices. The following sections identify the test criteria and details for each accessory category. Refer to Exhibit 7B for antenna separation distances.

7.1 Antennas

There are optional removable antennas and one internal BT/WLAN antenna offered for these products. The Table below lists their descriptions.

Table 4

Antenna Models	Description	Selected for test	Tested
FAF5259A	Stubby, 380-472 MHz and 1575 MHz, ¼ Wave, -2 dBd	Yes	Yes
PMAE4065A	Whip, 380-472 MHz, 450-520 MHz and 1575 MHz , ¼ Wave, -2 dBd	Yes	Yes
NAG4000A	GPS Stubby Antenna. 1575 MHz, ¼ Wave, -2dBd	No	No; for GPS received only
84009370002	Internal BT/WLAN, 2.4 – 2.4835 GHz, ¼ Wave, 2.58 dBi	Yes	Yes; for WLAN only

7.2 Batteries

There are optional batteries offered for these products. These batteries categorized to long batteries and short batteries. The Table below lists their descriptions.

Table 5

Battery Models	Description	Selected for test	Tested	Comments
Long Batteries				
PMNN4494A	Battery Impress standard Delta-T rugged Li-Ion 5000 mAh	Yes	Yes	Default battery for Face
NNTN7034B	Battery Delta-T 4200 mAh	Yes	Yes	
NNTN8921A	Battery Impress Li-Ion TIA4950 IP67 4100 mAh	Yes	Yes	
PMNN4487A	APX Gen 2 Impress High capacity Delta-T -30 Temperature 4400 mAh	Yes	Yes	
NNTN7573A	Battery Impress standard NiMH 2100 mAh minimum and 2300 mAh typical	Yes	Yes	
NNTN7037A	Battery Impress standard IP67 NiMH 2100 mAh minimum and 2300 mAh typical	Yes	Yes	
PMNN4439A	APX Clamshell battery pack (12xAA Alkaline batteries)	Yes	Yes	Only compatible for bodyworn PMLN6712A

Table 5 Continued

Battery Models	Description	Selected for test	Tested	Comments
Short Batteries				
PMNN4403B	Battery standard Li-Ion 2050 mAh	Yes	Yes	Default battery for Body
NNTN7038B	Battery Impress standard IP67 Li-Ion 2900 mAh minimum and 3100 mAh typical	Yes	Yes	
NNTN8930A	Battery Impress Li-Ion TIA950 standard battery 2700 mAh	Yes	Yes	
PMNN4485A	APX Gen 2 Impress slim Delta-T 2400 mAh	Yes	Yes	
PMNN4486A	APX Gen 2 Impress standard Delta-T 3400 mAh	Yes	Yes	
NNTN8182B	Battery Impress standard IP67 Li-Ion 2900 mAh minimum and 3100 mAh typical	Yes	Yes	

7.3 Body worn Accessories

All body worn accessories were considered. The Table below lists the body worn accessories, and body worn accessory descriptions.

Table 6

Body worn Models	Description	Selected for test	Tested	Comments
HLN6875A	3" belt clip	Yes	Yes	Tested with and without PMLN5709A
PMLN5709A	Basic carry holder	Yes	Yes	Tested with the belt clip HLN6875A
*PMLN5657B	Leather Carry case with D-Ring and 2.75" swivel belt loop	Yes	Yes	Tested with NTN5243A without belt loop
*PMLN5658B	Leather Carry case with 3" fixed belt loop	Yes	Yes	Tested with NTN5243A with belt loop.
**PMLN5659B	Leather carry case with D-Ring and 2.75" swivel belt loop	Yes	Yes	Tested with NTN5243A and also with RLN6486A and RLN6488A without belt loop
**PMLN5660B	Leather Carry Case with 3" Fixed Belt Loop	Yes	Yes	Tested with NTN5243A with belt loop.
NTN5243A	Adjustable Nylon Carry Strap	Yes	Yes	Tested with carry case PMLN5657B, PMLN5658B, PMLN5659B & PMLN5660B
PMLN6712A	Carry Case for APX radio with Clamshell battery	Yes	Yes	Only compatible for PMNN4439A battery
PMLN6802A	Molded Nylon Carry Case with quick disconnect swivel	Yes	Yes	
*NNTN8269A	Carry pouch	Yes	Yes	Only compatible for short batteries
4200865599	Belt	No	No	
AY000223A01	Boston leather fireman's radio strap with button back holder	No	No	By similarity to RLN6486A
AY000229A01	Boston leather fireman's radio strap with button back holder -XL	No	No	By similarity to RLN6486A
RLN6487A	Boston Leather Fireman's radio strap -XL	No	No	By similarity to RLN6486A
RLN6486A	Boston Leather Fireman's radio strap	Yes	Yes	Tested with PMLN5659B with RLN6488A

Table 6 Continued

Body worn Models	Description	Selected for test	Tested	Comments
RLN6488A	Boston leather anti-strap for Boston leather fireman's radio strap	Yes	Yes	Tested with PMLN5659B with RLN6486A
NNTN8749A	Carry accessory -Belt clip stud (pack of 5)	No	No	Secure access to RSM

Note:

* Body worn compatible for short batteries only.

** Body worn compatible for long batteries only.

7.4 Audio Accessories

All audio accessories were considered. The Table below lists the offered audio accessories and their descriptions. Exhibit 7B illustrates photos of the tested audio accessories.

Table 7

Audio Acc. Models	Description	Selected for test	Tested	Comments
PMLN5275C	Heavy-Duty Behind-the-Head Headset with Noise-Cancelling boom microphone, noise reduction = 24dB	Yes	Yes	Default audio kit
HMN4101B	IMPRES RSM no display with audio jack	No	No	By similarity to HMN4104B
HMN4103B	IMPRES RSM display with audio jack	No	No	By similarity to HMN4104B
HMN4104B	IMPRES Display remote speaker	Yes	No	Intended for test. Per KDB provisions test not required
NMN6271A	IMPRES XP RSM with dual microphone noise suppression	No	No	By similarity to NMN6274A
NMN6274A	IMPRES XP RSM for APX with dual microphone noise suppression, 3.5mm threaded jack	Yes	No	Intended for test. Per KDB provisions test not required
NNTN8235A	SRX Remote speaker microphone (IP57)	No	No	By similarity to NMN6274A
NNTN8236A	SRX IMPRES remote speaker microphone	No	No	By similarity to NMN6274A
NTN8819B	Integrated ear Microphone/Receiver	Yes	No	Intended for test. Per KDB provisions test not required
PMLN5101A	Impress Temple Transducer	Yes	No	Intended for test. Per KDB provisions test not required
PMLN5653A	IMPRES ear microphone with Bone conduction and programmable button, Black	Yes	No	Intended for test. Per KDB provisions test not required
PMLN6088A	PELTOR MT Series Over the Head Headset with Nexus connector	Yes	No	Intended for test. Per KDB provisions test not required
PMLN6095A	PELTOR PTT NEXUS adapter	Yes	No	Intended for test. Per KDB provisions test not required
PMLN6123A	IMPRES 3-Wire Surveillance Kit with translucent tube, programmable button, Black	Yes	No	Intended for test. Per KDB provisions test not required
PMLN6124A	IMPRES 3-Wire Surveillance Kit with translucent tube, programmable button, Beige	No	No	By similarity to PMLN6123A
PMLN6127A	IMPRES 2- Wire Surveillance Kit, Black	No	No	By similarity to PMLN6129A

Table 7 Continued

Audio Acc. Models	Description	Selected for test	Tested	Comments
PMLN6128A	IMPRES 2- Wire Surveillance Kit, Beige	No	No	By similarity to PMLN6129A
PMLN6129A	IMPRES 2- Wire Surveillance Kit with Translucent Tube, Black	Yes	No	Intended for test. Per KDB provisions test not required
PMLN6130A	IMPRES 2- Wire Surveillance Kit with Translucent Tube, Beige	No	No	By similarity to PMLN6129A
PMLN6766A	Tactical Boomless Temple Transducer (Requires interface module PMLN6765A OR PMLN6766A PMLN6827A)	Yes	No	Intended to test with PMLN6767A and PMLN6827A. Per KDB provisions test not required
PMLN6767A	Tactical Remote Body PTT (For use with interface module PMLN6765A OR PMLN6827A)	Yes	No	Intended to test with PMLN6766A and PMLN6827A. Per KDB provisions test not required
PMLN6827A	Tactical PTT only interface module	Yes	No	Intended to test with PMLN6766A and PMLN6767A. Per KDB provisions test not required
PMLN6829A	Tactical EAR MICROPHONE (REQUIRES INTERFACE PMLN6829A MODULE PMLN6765A OR PMLN6827A)	No	No	By similarity to PMLN6766A
PMLN6830A	Tactical Remote Ring PTT (For use with interface module PMLN6765A OR PMLN6827A)	No	No	By similarity to PMLN6767A
PMMN4062A	IMPRES RSM, Noise cancelling	Yes	No	Intended for test. Per KDB provisions test not required
PMMN4065A	IMPRES RSM, IP57	No	No	By similarity to PMMN4062A
PMMN4069A	IMPRES RSM, 3.5mm jack, IP55	No	No	By similarity to PMMN4062A
PMMN4083A	IMPRES RSM, DELTA-T	No	No	By similarity to PMMN4062A
PMMN4084A	PLUS RSM NC IP54 THRD 3.5mm, Jack Rx	Yes	No	Intended for test. Per KDB provisions test not required
PMMN4099A	Audio accessory-RSM MIC	No	No	
RLN5312B	CMFRT Earpiece with MIC & PTT, Black	Yes	No	Intended for test. Per KDB provisions test not required
RLN6480A	Integrated ear MIC/RECEIVER system with Palm PTT(Includes adapter BDN6783B)	No	No	By similarity to RLN6484A
RLN6481A	Integrated ear MIC/RECEIVER system with PTT ON ADAPTER (Includes adapter BDN6783B)	No	No	By similarity to RLN6484A
RLN6482A	Integrated ear MIC/RECEIVER system with wiring PTT(Includes adapter BDN6783B)	No	No	By similarity to RLN6484A
RLN6483A	Integrated ear MIC/RECEIVER system with SNAP-ON-SIDE PTT(Includes adapter BDN6783B)	No	No	By similarity to RLN6484A
RLN6484A	Integrated ear MIC/RECEIVER system with Body PTT(Includes adapter BDN6783B)	Yes	No	Intended to test with BDN6783B. Per KDB provisions test not required
BDN6783B	3.5mm Threaded Audio Adapter	Yes	No	Intended to test with RLN6484A. Per KDB provisions test not required
RMN4051B	PELTOR MT Series Hard Hat attached with NEXUS connector	No	No	By similarity to PMLN6088A

Table 7 Continued

Audio Acc. Models	Description	Selected for test	Tested	Comments
RMN4052B	PELTOR Tactical Pro Series Over-The-Head Headset with NEXUS connector	No	No	By similarity to PMLN6088A
RMN4053B	PELTOR Tactical Pro Series Hard Hat attached with NEXUS connector	No	No	By similarity to PMLN6088A
RMN5058A	Lightweight Over-The-Head Headset single muff with in-line push-to-talk and boom mic REX4648 - replacement foam earpad and microphone cover kit	No	No	By similarity to PMLN5275C
RLN6477A	PELTOR MT Series Neckband Headset with NEXUS Connector	No	No	By similarity to PMLN6088A
RMN5135A	PELTOR Tactical Pro Series Neckband Headset with NEXUS connector	No	No	By similarity to PMLN6088A
RMN5137A	PELTOR MT Series Over-The-Head Headset, Direct Radio connect	Yes	No	Intended for test. Per KDB provisions test not required
RMN5138A	PELTOR MT Series Neckband Headset, Direct Radio connect	No	No	By similarity to RMN5137A
RMN5139A	PELTOR MT Series Hard HAT attached Headset, Direct Radio connect	No	No	By similarity to RMN5137A
NNTN7869A	Surveillance key loader accessory adaptor	Yes	No	Intended to test with ZMN6038A and ZMN6031A. Per KDB provisions test not required
ZMN6031A	3-Wire Surveillance Kit, Beige, HIROSE connector. Requires NNTN7869A HIROSE Adapter	Yes	No	Intended for test. Per KDB provisions test not required
ZMN6039A	3-Wire Surveillance Kit, with extra loud earpiece, Beige, HIROSE connector. REQUIRES NNTN7869A HIROSE Adapter	No	No	By similarity to ZMN6031A
ZMN6038A	2-Wire Surveillance Kit with Extra Loud Earpiece, Beige, HIROSE connector. Requires NNTN7869A HIROSE Adapter	Yes	No	Intended for test. Per KDB provisions test not required
ZMN6032A	2-Wire Surveillance Kit, Beige, HIROSE connector. Requires NNTN7869A HIROSE Adapter	No	No	By similarity to ZMN6038A

8.0 Description of Test System



8.1 Descriptions of Robotics/Probes/Readout Electronics

Table 8

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.8.8.1222	DAE4	ES3DV3 EX3DV4 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

8.2 Description of Phantom(s)

Table 9

Phantom Type	Phantom(s) Used	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (wood)
Triple Flat	NA	200MHz -6GHz; Er = 3-5, Loss Tangent = ≤ 0.05	280x175x175	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA	300MHz -6GHz; Er = < 5, Loss Tangent = ≤ 0.05	Human Model			
Oval Flat	√	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤ 0.05	600x400x190			

8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 10. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

Simulated Tissue Composition (percent by mass)

Table 10

Ingredients	450 MHz		2450 MHz	
	Head	Body	Head	Body
Sugar	56.00	46.50	0	0
Diacetin	0	0	51.00	34.50
De ionized –Water	39.10	50.53	48.75	65.20
Salt	3.80	1.87	0.15	0.20
HEC	1.00	1.00	0	0
Bact.	0.10	0.10	0.10	0.10

9.0 Additional Test Equipment

The Table below lists additional test equipment used during the SAR assessment.

Table 11

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
Speag Probe	ES3DV3	3196	11/17/2015	11/17/2016
Speag Probe	EX3DV4	7364	6/23/2015	6/23/2016
Speag DAE	DAE4	1294	1/6/2016	1/6/2017
Speag DAE	DAE4	1483	6/16/2015	6/16/2016
Signal Generator	E4438C	MY47272101	8/12/2014	8/12/2016
Signal Generator	E4438C	MY45091270	7/9/2014	7/9/2016
Power Meter	E4419B	MY40330364	5/29/2015	5/29/2017
Power Sensor	8482B	3318A07392	6/3/2015	6/3/2016
Power Meter	E4418B	MY45100739	5/29/2015	5/29/2017
Power Sensor	8481B	MY41091243	6/3/2015	6/3/2016
Power Meter	E4418B	MY45100532	11/4/2015	11/04/2017
Power Sensor	8481B	SG41090248	12/14/2015	12/14/2016
Power Meter	E4418B	MY45100911	5/29/2015	5/29/2017
Power Meter	E4418B	MY45101014	11/4/2015	11/4/2017
Power Sensor	8482B	3318A07546	6/3/2015	6/3/2016
Power Sensor	8481B	SG41090258	6/3/2015	6/3/2016
Broadband Power Sensor	NRP-Z11	120907	2/11/2015	2/11/2017
Power Amplifier	10W1000C	312859	CNR	CNR
Power Amplifier	10W1000C	312858	CNR	CNR
Bi-directional Coupler	3020A	41931	7/6/2015	7/6/2016
Bi-directional Coupler	3020A	41935	8/27/2015	8/27/2016
Dickson Temperature Recorder	TM320	06153216	7/20/2015	7/20/2016
Temperature Probe	DTM3000	2964A	8/28/2015	8/28/2016
Dielectric Assessment Kit	DAK-12	1069	5/12/2015	5/12/2016
Network Analyzer	E5071B	MY42403218	8/4/2015	8/4/2016
Speag Dipole	D450V3	1053	3/17/2015	3/17/2017
Speag Dipole	D2450V2	781	3/20/2015	3/20/2017

10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system verification test results are included in appendices B, C & D respectively.

10.1 System Validation

The SAR measurement system was validated according to procedures in KDB 865664. The validation status summary Table is below.

Table 12

Dates	Probe Calibration Point		Probe SN	Measured Tissue Parameters		Validation		
				σ	ϵ_r	Sensitivity	Linearity	Isotropy
CW								
1/22/2016	Body	450	3196	0.96	54.3	Pass	Pass	Pass
1/26/2016	Head	450		0.84	44.5	Pass	Pass	Pass
9/27/2015	Body	450	7364	0.92	55.3	Pass	Pass	Pass
7/24/2015	Head	450		0.87	44.3	Pass	Pass	Pass
CW								
1/13/2016	Body	2450	3196	2.01	47.6	Pass	Pass	Pass
1/12/2016	Head	2450		1.86	35.8	Pass	Pass	Pass

10.2 System Verification

System verification checks were conducted each day during the SAR assessment. The results are normalized to 1W. Appendix D includes DASY plots for each day during the SAR assessment. The Table below summarizes the daily system check results used for the SAR assessment.

Table 13

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
7364	FCC Body	SPEAG D450V3 / 1053	4.41 +/- 10%	1.16	4.64	3/8/2016
				1.20	4.80	3/9/2016
				1.17	4.68	3/10/2016
				1.15	4.60	3/11/2016
				1.15	4.60	3/16/2016*
				1.18	4.72	3/17/2016
3196				1.19	4.76	3/15/2016*
				1.13	4.52	3/22/2016*
				1.17	4.68	3/23/2016*
				1.19	4.76	3/24/2016*
				1.08	4.32	3/31/2016
				1.08	4.32	4/1/2016
	1.10	4.40	4/4/2016			

Table 13 Continued

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
3196	IEEE/IEC Head	SPEAG D450V3 / 1053	4.45 +/- 10%	1.13	4.52	3/25/2016
				1.13	4.52	3/26/2016*
				1.16	4.64	3/28/2016
				1.13	4.52	4/6/2016
3196	FCC Body	SPEAG D2450V2 / 781	51.90 +/- 10%	12.5	50.0	3/28/2016
				12.4	49.6	3/29/2016
				13.0	52.0	3/30/2016
	IEEE/IEC Head		52.30 +/- 10%	14.2	56.8	4/5/2016
				14.1	56.4	4/6/2016

Note: * system performance check cover next testing day (within 24 hours).

10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The Table below summarizes the measured tissue parameters used for the SAR assessment.

Table 14

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
380	FCC Body	0.93 (0.88-0.98)	57.4 (54.5-60.3)	0.89	57.5	4/4/2016
				0.92	57.4	4/1/2016
	IEEE/IEC Head	0.87 (0.83-0.91)	44.3 (42.1-46.6)	0.84	46.3	3/28/2016
393	FCC Body	0.93 (0.89-0.98)	57.3 (54.4-60.1)	0.90	57.3	4/4/2016
				0.92	57.4	4/1/2016
	IEEE/IEC Head	0.87 (0.83-0.91)	44.2 (42.0-46.4)	0.85	46.0	3/28/2016
				0.84	44.0	4/6/2016
406	FCC Body	0.93 (0.89-0.98)	57.1 (54.3-60.0)	0.93	57.1	3/8/2016
				0.94	56.3	3/9/2016
				0.93	55.7	3/10/2016
				0.91	55.7	3/11/2016
				0.90	55.9	3/15/2016*
				0.90	56.5	3/16/2016*
				0.90	56.3	3/17/2016
				0.92	56.3	3/22/2016*
				0.93	56.0	3/23/2016*
				0.92	55.8	3/24/2016*
	0.89	56.8	3/31/2016			

Note: * Tissue cover next testing day (within 24 hours).

Table 14 Continued

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
406	IEEE/ IEC Head	0.87 (0.83-0.91)	44.0 (41.8-46.2)	0.87	45.0	3/25/2016
				0.84	44.4	3/26/2016*
450	FCC Body	0.94 (0.89-0.99)	56.7 (53.9-59.5)	0.96	56.5	3/8/2016
				0.97	55.7	3/9/2016
				0.96	55.1	3/10/2016
				0.94	55.1	3/11/2016
				0.94	55.2	3/15/2016*
				0.93	55.8	3/16/2016*
				0.93	55.7	3/17/2016
				0.95	55.7	3/22/2016*
				0.97	55.3	3/23/2016*
				0.96	55.1	3/24/2016*
				0.93	56.2	3/31/2016
				0.96	56.6	4/1/2016
				0.95	56.6	4/4/2016
				IEEE/ IEC Head	0.87 (0.83-0.91)	43.5 (41.3-45.7)
0.88	43.4	3/26/2016*				
0.90	44.7	3/28/2016				
0.89	42.7	4/6/2016				
2412	FCC Body	1.91 (1.82-2.01)	52.8 (47.5-58.0)	1.89	48.5	3/28/2016
				2.00	47.6	3/29/2016
				1.97	48.5	3/30/2016
	IEEE/ IEC Head	1.77 (1.68-1.86)	39.3 (35.3-43.2)	1.85	35.5	4/5/2016
2450	FCC Body	1.95 (1.85-2.05)	52.7 (47.4-58.0)	1.81	35.6	4/6/2016
				1.94	48.3	3/28/2016
				2.04	47.5	3/29/2016
	IEEE/ IEC Head	1.80 (1.71-1.89)	39.2 (35.3-43.1)	2.02	48.3	3/30/2016
				1.89	35.4	4/5/2016
1.86	35.4	4/6/2016				

Note: * Tissue cover next testing day (within 24 hours).

11.0 Environmental Test Conditions

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The Table below presents the range and average environmental conditions during the SAR tests reported herein:

Table 15

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 19.8 – 23.2°C Avg. 21.7 °C
Tissue Temperature	NA	Range: 19.5 – 21.9°C Avg. 20.7°C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

12.0 DUT Test Setup and Methodology

12.1 Measurements

SAR measurements were performed using the DASY system described in section 8.0 using zoom scans. Oval flat phantoms filled with applicable simulated tissue were used for body and face testing.

The Table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

Table 16

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: ΔxArea, ΔyArea		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: ΔxZoom, ΔyZoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: ΔzZoom(n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered when implementing the guidelines specified in KDB 643646.

12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in Appendix G.

12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory as well as with and without the offered audio accessories as applicable.

12.3.2 Head

Not applicable.

12.3.3 Face

The DUT was positioned with its' front and back sides separated 2.5cm from the phantom.

12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * roundup[10 * (f_{high} - f_{low}) / f_c] + 1$$

Where

N_c = Number of channels

F_{high} = Upper channel

F_{low} = Lower channel

F_c = Center channel

12.5 SAR Result Scaling Methodology

The calculated 1-gram and 10-gram averaged SAR results indicated as “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” in the data Tables is determined by scaling the measured SAR to account for power leveling variations and drift. Appendix F includes a shortened scan to justify SAR scaling for drift. For this device the “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” are scaled using the following formula:

$$Max_Calc = SAR_meas \cdot 10^{\frac{-Drift}{10}} \cdot \frac{P_max}{P_int} \cdot DC$$

P_{max} = Maximum Power (W)
 P_{int} = Initial Power (W)
 Drift = DASY drift results (dB)
 SAR_{meas} = Measured 1-g or 10-g Avg. SAR (W/kg)
 DC = Transmission mode duty cycle in % where applicable
 50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If $P_{int} > P_{max}$, then $P_{max}/P_{int} = 1$.

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

12.6 DUT Test Plan

The guidelines and requirements outlined in section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in CW and 50% duty cycle was applied to PTT configurations in the final results.

Standalone and simultaneous BT testing were assessed in sections 13.6 and 14.0 per the guidelines of KDB 447498.

WLAN tests were performed in 802.11b mode using a duty cycle of 99.87% with results scaled to 100% as per guidelines of KDB 248227.

13.0 DUT Test Data

13.1 LMR assessments at the Body for 406.125 – 472 MHz band

Battery PMNN4403B was selected as the default battery for assessments at the Body because it is the thinnest battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (406.125 -472 MHz) which are listed in Table 17. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios).

Table 17

Test Freq (MHz)	Power (W)
406.125	0.0988
422.000	0.0986
438.000	0.0985
454.000	0.0983
470.000	0.0980
472.000	0.0970

Assessments at the Body with Body worn HLN6875A with PMLN5709A

DUT assessment with offered antennas, default battery and, default body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 18

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4403B	HLN6875A with PMLN5709A	PMLN5275C	406.125	0.0978	0.06	0.075	0.056	0.0383	0.0286	MO-AB-160308-02
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4403B	HLN6875A with PMLN5709A	PMLN5275C	406.125	0.0978	-0.08	0.071	0.054	0.0370	0.0281	MO-AB-160308-03
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
PMAE4065A	NNTN7034B	HLN6875A with PMLN5709A	PMLN5275C	406.125	0.0979	0.09	0.057	0.043	0.0291	0.0220	MO-AB-160308-05
	NNTN7037A				0.0979	-0.04	0.082	0.035	0.0423	0.0180	AZ-AB-160308-06
	NNTN7038B				0.0979	0.04	0.081	0.061	0.0414	0.0312	AZ-AB-160308-08
	NNTN7573A				0.0978	-0.04	0.061	0.029	0.0315	0.0150	AZ-AB-160308-09
	NNTN8182B				0.0979	0.32	0.078	0.059	0.0398	0.0301	AZ-AB-160308-11
	NNTN8930A				0.0983	-0.21	0.079	0.059	0.0422	0.0315	MO-AB-160309-03
	NNTN8921A				0.0981	-0.24	0.045	0.034	0.0242	0.0183	MO-AB-160309-04
	PMNN4485A				0.0983	-0.14	0.080	0.060	0.0420	0.0315	MO-AB-160309-05
	PMNN4486A				0.0985	-0.07	0.085	0.064	0.0438	0.0330	AZ-AB-160309-06
	PMNN4487A				0.0986	-0.32	0.131	0.057	0.0715	0.0311	AZ-AB-160309-08
	PMNN4494A				0.0985	0.31	0.122	0.058	0.0619	0.0294	AZ-AB-160309-09

Assessments at the Body with Body worn PMLN5657B attached with NTN5243A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for short batteries. Optional short batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 19

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4403B	PMLN5657B with NTN5243A	PMLN5275C	406.125	0.0983	-0.13	0.106	0.075	0.0556	0.0393	MO-AB-160310-04
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4403B	PMLN5657B with NTN5243A	PMLN5275C	406.125	0.0983	-0.22	0.100	0.069	0.0535	0.0369	MO-AB-160310-06
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
PMAE4065A	NNTN7038B	PMLN5657B with NTN5243A	PMLN5275C	406.125	0.0983	-0.33	0.107	0.077	0.0587	0.0423	MO-AB-160310-07
	NNTN8182B				0.0985	-0.30	0.105	0.075	0.0571	0.0408	AZ-AB-160310-08
	NNTN8930A				0.0984	-0.12	0.106	0.076	0.0554	0.0397	AZ-AB-160310-09
	PMNN4485A				0.0986	0.13	0.107	0.076	0.0543	0.0385	AZ-AB-160310-10
	PMNN4486A				0.0985	0.47	0.111	0.080	0.0563	0.0406	AZ-AB-160310-13

Assessments at the Body with Body worn PMLN5658B attached with NTN5243A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for short batteries. Optional short batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 20

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4403B	PMLN5658B with NTN5243A	PMLN5275C	406.125	0.0984	-0.40	0.093	0.071	0.0518	0.0396	AZ-AB-160310-14
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4403B	PMLN5658B with NTN5243A	PMLN5275C	406.125	0.0985	-0.25	0.108	0.081	0.0581	0.0436	AZ-AB-160310-15
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
FAF5259A	NNTN7038B	PMLN5658B with NTN5243A	PMLN5275C	406.125	0.0988	-0.12	0.116	0.089	0.0603	0.0463	AZ-AB-160310-16
	NNTN8182B				0.0989	0.27	0.102	0.077	0.0516	0.0389	AZ-AB-160310-17
	NNTN8930A				0.0993	-0.01	0.086	0.065	0.0434	0.0328	MO-AB-160311-02
	PMNN4485A				0.0980	-0.02	0.091	0.069	0.0466	0.0354	MO-AB-160311-03
	PMNN4486A				0.0980	0.02	0.099	0.072	0.0505	0.0367	MO-AB-160311-04

Assessments at the Body with Body worn PMLN5659B attached with NTN5243A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for long batteries. Optional long batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 21

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	NNTN7034B	PMLN5659B with NTN5243A	PMLN5275C	406.125	0.0981	0.06	0.127	0.080	0.0647	0.0408	MO-AB-160311-05
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	NNTN7034B	PMLN5659B with NTN5243A	PMLN5275C	406.125	0.0979	0.00	0.104	0.066	0.0531	0.0337	MO-AB-160311-06
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
PMAE4065A	NNTN7037A	PMLN5659B with NTN5243A	PMLN5275C	406.125	0.0980	0.17	0.108	0.077	0.0551	0.0393	AZ-AB-160311-07
	NNTN7573A				0.0978	-0.19	0.104	0.071	0.0555	0.0379	FIE-AB-160315-02
	NNTN8921A				0.0980	-0.20	0.114	0.070	0.0609	0.0374	FIE-AB-160315-03
	PMNN4487A				0.0978	-0.22	0.121	0.059	0.0651	0.0317	FIE-AB-160315-04
	PMNN4494A				0.0986	-0.02	0.115	0.058	0.0586	0.0295	TLC-AB-160316-01

Assessments at the Body with Body worn PMLN5660B attached with NTN5243A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for long batteries. Optional long batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 22

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	NNTN7034B	PMLN5660B with NTN5243A	PMLN5275C	406.125	0.0976	-0.13	0.071	0.053	0.0375	0.0280	TLC-AB-160322-09
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	NNTN7034B	PMLN5660B with NTN5243A	PMLN5275C	406.125	0.0986	-0.09	0.067	0.050	0.0347	0.0259	TLC-AB-160316-03
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
PMAE4065A	NNTN7037A	PMLN5660B with NTN5243A	PMLN5275C	406.125	0.0986	0.01	0.079	0.059	0.0401	0.0299	TLC-AB-160316-04
	NNTN7573A				0.0985	-0.18	0.075	0.056	0.0397	0.0296	TLC-AB-160316-05
	NNTN8921A				0.0986	0.04	0.053	0.039	0.0269	0.0198	TLC-AB-160316-06
	PMNN4487A				0.0986	0.00	0.057	0.042	0.0289	0.0213	TLC(FD)-AB-160316-07
	PMNN4494A				0.0978	0.14	0.058	0.044	0.0297	0.0225	AZ-AB-160317-01

Assessments at the Body with Body worn PMLN5659B with RLN6486A & RLN6488A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for long batteries. Optional long batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 23

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	NNTN7034A	PMLN5659B w/ RLN6486A & RLN6488A	PMLN5275C	406.125	0.0978	-0.20	0.100	0.064	0.0535	0.0343	FIE-AB-160323-01
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	NNTN7034A	PMLN5659B w/ RLN6486A & RLN6488A	PMLN5275C	406.125	0.0971	-0.16	0.080	0.050	0.0427	0.0267	FIE-AB-160323-02
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
Assessment of Additional Batteries											
PMAE4065A	NNTN7037A	PMLN5659B w/ RLN6486A & RLN6488A	PMLN5275C	406.125	0.0977	-0.61	0.096	0.068	0.0565	0.0400	FIE(FD)-AB-160323-03
	NNTN7573A				0.0976	-0.23	0.099	0.069	0.0535	0.0373	FIE(FD)-AB-160323-04
	NNTN8921A				0.0977	-0.09	0.095	0.060	0.0496	0.0313	FIE(FD)-AB-160323-05
	PMNN4487A				0.0980	0.02	0.097	0.055	0.0495	0.0281	TLC(FD)-AB-160323-08
	PMNN4494A				0.0979	0.08	0.099	0.055	0.0506	0.0281	TLC(FD)-AB-160323-09

Assessments at the Body with Body worn PMLN6712A

DUT assessment with offered antennas and default battery accessory per KDB 643646. This body worn only compatible for PMNN4439A battery. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 24

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAE4065A	PMNN4439A	PMLN6712A	PMLN5275C	406.125	0.0981	-0.04	0.120	0.088	0.0617	0.0453	TLC(FD)-AB-160323-10	
				422.000								
				438.000								
				454.000								
				470.000								
				472.000								
FAF5259A	PMNN4439A	PMLN6712A	PMLN5275C	406.125	0.0975	-0.04	0.114	0.083	0.0590	0.0430	TLC-AB-160323-11	
				422.000								
				438.000								
				454.000								
				470.000								
				472.000								

Assessments at the Body with Body worn PMLN6802A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 25

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
PMAE4065A	NNTN7034B	PMLN6802A	PMLN5275C	406.125	0.0981	0.06	0.066	0.049	0.0336	0.0250	TLC-AB-160323-12	
				422.000								
				438.000								
				454.000								
				470.000								
				472.000								
FAF5259A	NNTN7034B	PMLN6802A	PMLN5275C	406.125	0.0985	-0.05	0.033	0.024	0.0169	0.0123	FIE-AB-160324-01	
				422.000								
				438.000								
				454.000								
				470.000								
				472.000								

Table 25 Continued

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
PMAE4065A	PMNN4403B	PMLN6802A	PMLN5275C	406.125	0.0980	-0.10	0.075	0.056	0.0392	0.0292	FIE-AB-160324-02
	NNTN7037A				0.0980	0.00	0.061	0.045	0.0311	0.0230	FIE-AB-160324-03
	NNTN7038B				0.0983	-0.12	0.085	0.063	0.0444	0.0329	FIE-AB-160324-04
	NNTN7573A				0.0982	0.05	0.056	0.042	0.0285	0.0214	FIE-AB-160324-05
	NNTN8182B				0.0985	-0.11	0.083	0.062	0.0432	0.0323	FIE(FD)-AB-160324-06
	NNTN8921A				0.0984	-0.10	0.041	0.030	0.0213	0.0156	FIE(FD)-AB-160324-07
	NNTN8930A				0.0988	-0.04	0.082	0.061	0.0419	0.0312	FIE(FD)-AB-160324-08
	PMNN4485A				0.0986	0.02	0.082	0.061	0.0416	0.0309	FIE(FD)-AB-160324-09
	PMNN4486A				0.0985	-0.17	0.088	0.066	0.0465	0.0348	TLC(FD)-AB-160324-11
	PMNN4487A				0.0983	-0.13	0.046	0.034	0.0241	0.0178	TLC(FD)-AB-160324-12
	PMNN4494A				0.0983	-0.01	0.050	0.037	0.0255	0.0189	TLC(FD)-AB-160324-13

Assessments at the Body with Body worn HLN6875A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 26

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4403B	HLN6875A	PMLN5275C	406.125	0.0985	-0.14	0.094	0.070	0.0493	0.0367	TLC(FD)-AB-160324-14
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4403B	HLN6875A	PMLN5275C	406.125	0.0987	-0.01	0.108	0.080	0.0548	0.0406	TLC(FD)-AB-160324-15
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							

Table 26 Continued

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
FAF5259A	NNTN7034B	HLN6875A	PMLN5275C	406.125	0.0979	-0.05	0.075	0.055	0.0387	0.0284	TLC-AB-160324-17
	NNTN7037A				0.0981	-0.11	0.083	0.041	0.0434	0.0214	TLC-AB-160324-18
	NNTN7038B				0.0986	-0.16	0.115	0.084	0.0605	0.0442	ZWS(FD)-AB-160325-01
	NNTN7573A				0.0981	-0.12	0.084	0.037	0.0440	0.0194	ZWS(FD)-AB-160325-02
	NNTN8182B				0.0981	0.01	0.111	0.082	0.0566	0.0418	ZWS(FD)-AB-160325-03
	NNTN8921A				0.0981	-0.51	0.062	0.045	0.0355	0.0258	ZWS(FD)-AB-160325-04
	NNTN8930A				0.0981	0.16	0.109	0.081	0.0556	0.0413	ZWS(FD)-AB-160325-05
	PMNN4485A				0.0982	0.00	0.114	0.084	0.0580	0.0428	ZWS(FD)-AB-160325-06
	PMNN4486A				0.0981	-0.03	0.116	0.086	0.0595	0.0441	ZWS(FD)-AB-160325-07
	PMNN4487A				0.0981	0.26	0.148	0.065	0.0754	0.0331	ZWS(FD)-AB-160325-08
	PMNN4494A				0.0981	-0.13	0.144	0.070	0.0756	0.0368	TLC-AB-160331-12

Assessments at the Body with Body worn NNTN8269A

DUT assessment with offered antennas, default battery and, optional body worn accessory per KDB 643646. This body worn only compatible for short batteries. Optional short batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 27

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4403B	NNTN8269A	PMLN5275C	406.125	0.0982	-0.12	0.167	0.122	0.0874	0.0639	FIE(FD)-AB-160331-02
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4403B	NNTN8269A	PMLN5275C	406.125	0.0982	-0.01	0.145	0.107	0.0740	0.0546	FIE(FD)-AB-160331-03
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							

Table 27 Continued

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
PMAE4065A	NNTN7038B	NNTN8269A	PMLN5275C	406.125	0.0981	-0.05	0.164	0.121	0.0846	0.0624	FIE(FD)-AB-160331-04
	NNTN8182B				0.0982	-0.10	0.165	0.121	0.0860	0.0630	FIE(FD)-AB-160331-05
	NNTN8930A				0.0982	-0.05	0.168	0.123	0.0865	0.0634	FIE(FD)-AB-160331-06
	NNTN4485A				0.0982	-0.11	0.164	0.121	0.0856	0.0632	FIE(FD)-AB-160331-08
	PMNN4486A				0.0982	-0.06	0.172	0.126	0.0890	0.0650	TLC(FD)-AB-160331-09

Assessment at the Body with other audio accessories

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall ≤ 4.0 W/kg, SAR tested for that audio accessory is not necessary.” This was applicable to all remaining accessories.

Assessment of wireless BT configuration

Assessment using the overall highest SAR configuration at the body from above without an audio accessory attached. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 28

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4486A	NNTN8269A	None	406.125	0.0982	-0.05	0.182	0.134	0.0937	0.0690	TLC-AB-160331-10
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							

13.2 WLAN assessment at the Body for 802.11 b/g/n

The tables below represent the output power measurements for WLAN 2.4 GHz 802.11b/g/n for assessments at the Body using battery PMNN4403B because it is the thinnest battery (refer to Exhibit 7B for battery illustration). These power measurements were used to determine the necessary modes for SAR testing according to KDB 248227 D01 SAR Measurement Procedures for 802.11a/b/g/Transmitters.

The battery was used during conducted power measurements for all test channels within FCC allocated frequency range (2.412-2.462 GHz) which are listed in Table 29. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

SAR is not required for 802.11 g/n when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2W/kg$.

Table 29

Mode	Channel #	Channel Frequency	Modulation	Battery: PMNN4403B	Antenna Max Power [mW]
				Antenna port[mW]	
802.11b (1Mbps)	1	2412	DSSS	52.5	63.1
	6	2437		51.0	
	11	2462		48.1	
802.11g (6Mbps)	1	2412	OFDM	22.5	25.1
	6	2437		21.2	
	11	2462		19.9	
802.11n (MCS0)	1	2412	OFDM	12.4	15.5
	6	2437		10.7	
	11	2462		9.9	

802.11b was chosen over 802.11 g & n for testing because it has the highest max power

Assessments at the Body with all offered Body worn

DUT assessment with WLAN internal antenna, all offered batteries without any cable accessory attachment against phantom with all offered body worn. Refer to Table 29 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 30

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
84009370002 WiFi Ant	PMNN4403B	HLN6875A w/PMLN5709A	None	2412.000	0.0524	-0.53	0.023	0.012	0.0314	0.0164	TLC-AB-160328-11
		HLN6875A			0.0524	0.00	0.017	0.0071	0.0205	0.0086	FIE-AB-160329-01
		PMLN5658B w/NTN5243A			0.0524	0.83	0.018	0.0091	0.0217	0.0110	FIE-AB-160329-03
		PMLN5657B w/NTN5243A			0.0524	0.00	0.016	0.009	0.0193	0.0105	FIE(FD)-AB-160330-07
		NNTN8269A			0.0524	0.33	0.016	0.011	0.0193	0.0133	FIE(FD)-AB-160330-08
84009370002 WiFi Ant	NNTN7034B	PMLN5659B w/NTN5243A	None	2412.000	0.0536	-0.00	0.017	0.00896	0.0201	0.0106	FIE-AB-160329-06
		PMLN5660B w/NTN5243A			0.0536	-0.14	0.0068	0.00312	0.0083	0.0038	FIE-AB-160329-05
		PMLN5659B w/RLN6486A and RLN6488A			0.0536	-0.01	0.0120	0.00475	0.0142	0.0056	TLC-AB-160329-07
		PMLN6802A			0.0536	-0.29	0.0043	0.00193	0.0054	0.0024	FIE-AB-160330-01
Assessment of additional batteries											
84009370002 WiFi Ant	NNTN7037A	HLN6875A w/PMLN5709A	None	2412.000	0.0532	0.24	0.011	0.00593	0.0131	0.0070	TLC-AB-160329-10
	NNTN8921A				0.0538	-0.15	0.015	0.00584	0.0182	0.0071	TLC-AB-160329-11
	PMNN4487A				0.0529	-0.04	0.011	0.00552	0.0133	0.0067	FIE-AB-160330-02
	PMNN4494A				0.0540	-0.20	0.013	0.00624	0.0159	0.0077	FIE(FD)-AB-160330-03
	NNTN7573A				0.0542	0.30	0.022	0.01100	0.0257	0.0128	FIE(FD)-AB-160330-04
84009370002 WiFi Ant	NNTN8182B	HLN6875A w/PMLN5709A	None	2412.000	0.0535	0.26	0.020	0.011	0.0236	0.0130	FIE(FD)-AB-160330-05
	NNTN7038B				0.0536	0.05	0.045	0.025	0.0531	0.0295	TLC(FD)-AB-160331-07
	NNTN8930A				0.0535	-0.23	0.024	0.009	0.0299	0.0106	TLC(FD)-AB-160330-10
	PMNN4485A				0.0536	0.13	0.021	0.011	0.0248	0.0130	TLC(FD)-AB-160330-11
	PMNN4486A				0.0537	-0.09	0.029	0.018	0.0349	0.0216	TLC(FD)-AB-160330-12

13.3 LMR assessments at the Face for 406.125-472 MHz band

Battery PMNN4494A was selected as the default battery for assessments at the Face because it has the highest capacity (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (406.125 – 472 MHz) which are listed in Table 31. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios).

Table 31

Test Freq (MHz)	Power (W)
406.125	0.0986
422.000	0.0986
438.000	0.0985
454.000	0.0983
470.000	0.0980
472.000	0.0970

Assessments with front of radio facing the Face

DUT assessment with offered antennas, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 31 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 32

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4494A	None, radio at front	None	406.125	0.0981	-0.03	0.082	0.062	0.0421	0.0318	TLC-FACE-160325-13
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							
FAF5259A	PMNN4494A	None, radio at front	None	406.125	0.0984	-0.02	0.092	0.068	0.0470	0.0347	ZWS-FACE-160326-01
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							

Table 32 Continued

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
FAF5259A	NNTN7034B	None, radio at front	None	406.125	0.0983	-0.05	0.061	0.045	0.0314	0.0232	ZWS-FACE-160326-02
	NNTN7037A				0.0985	-0.01	0.111	0.083	0.0565	0.0422	ZWS-FACE-160326-03
	NNTN7038B				0.0980	0.08	0.097	0.072	0.0495	0.0367	ZWS-FACE-160326-04
	NNTN7573A				0.0984	0.02	0.107	0.080	0.0544	0.0407	ZWS-FACE-160326-05
	NNTN8182B				0.0983	0.01	0.100	0.074	0.0509	0.0376	ZWS-FACE-160326-06
	NNTN8921A				0.0983	0.04	0.059	0.044	0.0300	0.0224	ZWS-FACE-160326-07
	NNTN8930A				0.0985	0.08	0.094	0.070	0.0477	0.0355	ZWS-FACE-160326-08
	PMNN4403B				0.0983	0.00	0.106	0.078	0.0539	0.0397	ZWS-FACE-160326-09
	PMNN4439B				0.1000	-0.26	0.019	0.014	0.0101	0.0074	ZWS-FACE-160326-10
	PMNN4485A				0.0977	0.04	0.129	0.095	0.066	0.049	ZWS-FACE-160327-09
	PMNN4486A				0.0991	-0.02	0.110	0.082	0.0558	0.0416	TLC-FACE-160326-12
	PMNN4487A				0.0991	0.00	0.097	0.072	0.0489	0.0363	TLC-FACE-160326-13

Assessments with back of radio facing the Face

DUT assessment with offered antennas, default battery with back of DUT positioned 2.5cm facing phantom per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 31 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 33

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4494A	None, radio at back	None	406.125	0.0997	0.01	0.068	0.051	0.0341	0.0256	TLC-FACE-160326-14
				422.000							
				438.000							
				454.000							
				470.000							
				472.000							

Table 33 Continued

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#	
FAF5259A	PMNN4494A	None, radio at back	None	406.125	0.1000	-0.15	0.081	0.060	0.0419	0.0311	TLC-FACE-160326-16	
				422.000								
				438.000								
				454.000								
				470.000								
				472.000								
Assessment of Additional Batteries												
FAF5259A	NNTN7034B	None, radio at back	None	406.125	0.1000	-0.04	0.074	0.055	0.0373	0.0278	TLC-FACE-160326-17	
	NNTN7037A				0.1000	-0.05	0.118	0.088	0.0597	0.0445	TLC-FACE-160326-18	
	NNTN7038B				0.1000	-0.06	0.103	0.076	0.0522	0.0385	TLC-FACE-160326-19	
	NNTN7573A				0.1000	-0.08	0.101	0.075	0.0514	0.0382	TLC-FACE-160326-20	
	NNTN8182B				0.0983	-0.16	0.093	0.068	0.0491	0.0359	ZWS-FACE-160327-01	
	NNTN8921A				0.0987	0.04	0.065	0.048	0.0329	0.0243	ZWS-FACE-160327-02	
	NNTN8930A				0.0983	-0.04	0.091	0.067	0.0467	0.0344	ZWS-FACE-160327-03	
	PMNN4403B				0.0983	-0.03	0.088	0.064	0.0451	0.0328	ZWS-FACE-160327-04	
	PMNN4439A				0.0983	-0.09	0.043	0.032	0.0223	0.0166	ZWS-FACE-160327-05	
	PMNN4485A				0.0983	0.19	0.097	0.072	0.0493	0.0366	ZWS-FACE-160327-06	
	PMNN4486A				0.0984	-0.07	0.092	0.068	0.0475	0.0351	ZWS-FACE-160327-07	
	PMNN4487A				0.0982	0.02	0.073	0.054	0.0372	0.0275	ZWS-FACE-160327-08	

13.4 WLAN assessment at the Face for 802.11 b/g/n

The tables below represent the output power measurements for WLAN 2.4 GHz 802.11b/g/n for assessments at the Face using battery PMNN4494A because it is has the highest capacity (refer to Exhibit 7B for battery illustration). These power measurements were used to determine the necessary modes for SAR testing according to KDB 248227 D01 SAR Measurement Procedures for 802.11a/b/g/Transmitters.

The battery was used during conducted power measurements for all test channels within FCC allocated frequency range (2.412-2.462GHz) which are listed in Table 34. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

SAR is not required for 802.11 g/n when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2W/kg$.

Table 34

Mode	Channel #	Channel Frequency	Modulation	Battery: PMNN4494A	Antenna Max Power [mW]
				Antenna port[mW]	
802.11b (1Mbps)	1	2412	DSSS	53.5	63.1
	6	2437		50.3	
	11	2462		48.7	
802.11g (6Mbps)	1	2412	OFDM	24.0	25.1
	6	2437		21.0	
	11	2462		21.4	
802.11n (MCS0)	1	2412	OFDM	12.5	15.5
	6	2437		10.7	
	11	2462		9.9	

802.11b was chosen over 802.11 g & n for testing because it has the highest max power

DUT assessment with WLAN internal antenna with front and back of the DUT 2.5 cm from phantom with all offered batteries. Refer to Table 34 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 35

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
84009370002 WiFi Ant	PMNN4494A	2.5cm @ Front	None	2412.000	0.0540	0.00	0.134	0.075	0.1569	0.0878	FIE(FD)-FACE-160405-06
		2.5cm @ Back	None	2412.000	0.0540	-0.32	0.005	0.003	0.0067	0.0034	TLC(FD)-FACE-160405-08
Assessment of Additional Batteries											
84009370002 WiFi Ant	PMNN4487A	2.5cm @ Front	None	2412.000	0.0536	-0.03	0.132	0.075	0.1568	0.0891	FIE(FD)-FACE-160405-02
					0.0538	0.01	0.139	0.078	0.1634	0.0917	FIE(FD)-FACE-160405-03
					0.0532	0.01	0.124	0.070	0.1474	0.0832	FIE(FD)-FACE-160405-04
					0.0529	-0.02	0.135	0.076	0.1621	0.0913	FIE(FD)-FACE-160405-05
					0.0397	-0.03	0.082	0.047	0.1315	0.0754	TLC-FACE-160405-09
					0.0542	0.03	0.127	0.071	0.1481	0.0828	TLC-FACE-160405-10
					0.0535	-0.02	0.124	0.070	0.1472	0.0831	TLC-FACE-160405-11
					0.0536	-0.01	0.119	0.067	0.1407	0.0792	TLC-FACE-160405-12
					0.0535	0.02	0.138	0.078	0.1631	0.0922	TLC-FACE-160405-13
					0.0524	-0.00	0.151	0.086	0.1822	0.1038	FIE-FACE-160406-02
					0.0536	0.03	0.161	0.090	0.1899	0.1062	FIE-FACE-160406-03
					0.0537	-0.02	0.124	0.071	0.1467	0.0840	FIE(FD)-FACE-160406-04

13.5 Assessment for Industry Canada

Based on the assessment results for body and face per KDB643646, additional tests were not required for Industry Canada frequency range (406.125-430 MHz) and (450-470 MHz) as testing performed is in compliance with Industry Canada frequency range.

13.6 Assessment at the Bluetooth band

13.6.1 FCC Requirement

Per guidelines in KDB 447498, the following formula was used to determine the test exclusion for standalone Bluetooth transmitter;

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{F(\text{GHz})}] = 2.4 \text{ W/kg}$, which is $\leq 3 \text{ W/kg}$ (1g)

Where:

Max. Power = 7.61mW (10mW*76.1% duty cycle)

Min. test separation distance = 5mm for actual test separation < 5mm

F(GHz) = 2.48 GHz

Per the result from the calculation above, the standalone SAR assessment was not required for Bluetooth band. Therefore, SAR results for Bluetooth are not reported herein.

13.6.2 Industry Canada Requirement

Based on RSS-102 Issue 5, exemption limits for SAR evaluation for controlled devices at Bluetooth frequency band with separation distance $\leq 5\text{mm}$ was 20 mW.

Standalone Bluetooth transmitter operates at

Maximum conducted power:

= 10 mW * 76.1%

= 7.61 mW or 8.81 dBm

Equivalent isotropically radiated power (EIRP):

= Maximum conducted power, dBm + Antenna gain, dBi

= 8.81 dBm + 2.58 dBi

= 11.39 dBm or 13.77 mW

Higher output power level, EIRP 13.77 mW was below the threshold power level 20 mW. Hence SAR test was not required for Bluetooth band.

13.7 Assessment outside FCC Part 90

Assessment of outside FCC Part 90 using highest SAR configuration from above. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 36

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Body											
FAF5259A	PMNN4486A	NNTN8269A	None	380.000	0.0978	-0.08	0.079	0.058	0.0411	0.0302	TLC-AB-160404-10
				393.000	0.0973	0.03	0.111	0.082	0.0570	0.0421	TLC-AB-160404-11
PMAE4065A				380.000	0.0978	-0.02	0.134	0.098	0.0688	0.0503	FIE(FD)-AB-160401-04
				393.000	0.0972	-0.12	0.155	0.114	0.0820	0.0603	FIE(FD)-AB-160401-05
Face											
FAF5259A	PMNN4485A	None, radio at front	None	380.000	0.0982	0.09	0.062	0.045	0.0316	0.0229	FIE(FD)-FACE-160328-03
				393.000	0.0982	0.01	0.089	0.066	0.0453	0.0336	FIE(FD)-FACE-160328-04
PMAE4065A				380.000	0.0982	0.03	0.111	0.082	0.0565	0.0418	FIE(FD)-FACE-160328-05
				393.000	0.0986	0.01	0.136	0.101	0.0690	0.0512	TLC(FD)-FACE-160406-08

13.8 Shortened Scan Assessment

A “shortened” scan using the highest SAR configuration overall from above was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in Appendix D demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR result from the Table below is provided in Appendix F.

Table 37

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
PMAE4065A	PMNN4486A	NNTN8269A	None	406.125	0.099	-0.00	0.180	0.132	0.091	0.067	TLC-AB-160331-13

14.0 Simultaneous Transmission Exclusion for BT

Per guidelines in KDB 447498, the following formula was used to determine the test exclusion to an antenna that transmits simultaneously with other antennas for test distances ≤ 50mm:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{F(\text{GHz})/X}] = 0.32 \text{ W/kg, which is } \leq 0.4 \text{ W/kg (1g)}$$

Where:

- X = 7.5 for 1g-SAR; 18.75 for 10g
- Max. Power = 7.61mW (10mW*76.1% duty cycle)
- Min. test separation distance = 5mm for actual test separation < 5mm
- F(GHz) = 2.48 GHz

Per the result from the calculation above, simultaneous exclusion is applied and therefore SAR results are not reported herein.

15.0 Simultaneous Transmission between LMR, WLAN and BT

These devices use a single transmitter module and antenna for both WLAN and BT. WLAN and BT cannot transmit simultaneously. Simultaneous transmission for BT had been excluded as mentioned in section 14.0. The maximum sourced-based-time-averaged output power for 802.11 b is 63.1mW while BT is 7.61mW. Therefore the measured SAR from 802.11b is used in conjunction with LMR for simultaneous results.

The Table below summarizes the simultaneous transmissions between LMR and WLAN bands.

Table 38

		LMR Bands
	Freq. (MHz)	UHF (406.125-472 MHz)
WLAN Band	2412 - 2462	√

16.0 Results Summary

Based on the test guidelines from section 4.0 and satisfying frequencies within FCC bands and Industry Canada Frequency bands, the highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for this filing:

Table 39

Technologies	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
FCC					
LMR	406.125-472	0.094	0.069	0.066	0.049
WLAN	2412-2462	0.053	0.029	0.190	0.106
Industry Canada					
LMR	406.125-430; 450-470	0.094	0.069	0.066	0.049
WLAN	2412-2462	0.053	0.029	0.190	0.106
Overall					
LMR	380-472	0.094	0.069	0.069	0.051
WLAN	2412-2462	0.053	0.029	0.190	0.106

All results are scaled to the maximum output power.

The highest combined 1g-SAR results for simultaneous is indicated in the following Table:

Table 40

Designator	Frequency bands	Combined 1g-SAR (W/kg)	Combined 10g-SAR (W/kg)
Body			
FCC	LMR (406.125-472 MHz) and WLAN band	0.15	0.10
Industry Canada	LMR (406.125-430 MHz; 450-470 MHz) and WLAN band	0.15	0.10
Overall	LMR (380-472 MHz) and WLAN band	0.15	0.10
Face			
FCC	LMR (406.125-472 MHz) and WLAN band	0.26	0.16
Industry Canada	LMR (406.125-430 MHz; 450-470 MHz) and WLAN band	0.26	0.16
Overall	LMR (380-472 MHz) and WLAN band	0.26	0.16

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing.

17.0 Variability Assessment

Per the guidelines in KDB 865664 SAR variability assessment is not required because SAR results are below 4.0W/kg (Occupational).

18.0 System Uncertainty

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value Occupational exposure is less than 7.5W/kg.

Per the guidelines of ISO 17025 a reported system uncertainty is required and therefore measurement uncertainty budget is included in Appendix A.

Appendix A

Measurement Uncertainty Budget

Table A.1: Uncertainty Budget for Device Under Test, for 450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty							11	11	477
Expanded Uncertainty (95% CONFIDENCE LEVEL)							23	22	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Table A.2: Uncertainty Budget for Device Under Test, for 2450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	ci (1 g)	ci (10 g)	1 g u_i (±%)	10 g u_i (±%)	v_i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1.00	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11	11	419
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				22	22	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *ci* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *ui* – SAR uncertainty
- h) *vi* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Table A.3: Uncertainty Budget for System Validation (dipole & flat phantom) for 450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>U_i</i> (±%)	10 g <i>U_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				10	9	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				19	18	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Table A.4: Uncertainty Budget for System Validation (dipole & flat phantom) for 2450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>U_i</i> (±%)	10 g <i>U_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	6.0	N	1.00	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				9	9	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				18	17	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Appendix B

Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SA5)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **EX3-7364_Jun15**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:7364**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**


Calibration date: **June 23, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration):

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DVZ	SN: 3013	30-Dec-14 (No. ES3-3013, Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-15)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Claudio Leuter** (Name), **Laboratory Technician** (Function),  (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function),  (Signature)

Issued: June 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaugghausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters.
Polarization φ	α rotation around probe axis
Polarization θ	β rotation around an axis that is in the plane normal to probe axis (at measurement center) i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe lip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:7364

June 23, 2015

Probe EX3DV4

SN:7364

Manufactured: February 5, 2015

Calibrated: June 23, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 systems)

EX3DV4- SN:7364

June 23, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc. (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.48	0.46	0.59	$\pm 10.1\%$
DCP (mV) ^B	97.7	96.3	97.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc. (k=2)
0	CW	X	0.0	0.0	1.0	0.00	115.0	$\pm 3.5\%$
		Y	0.0	0.0	1.0		110.5	
		Z	0.0	0.0	1.0		124.6	
10011-CAB	UMTS-FDD (WCDMA)	X	3.42	67.2	18.6	2.91	122.6	$\pm 0.5\%$
		Y	3.14	64.8	18.9		117.5	
		Z	3.46	67.3	18.5		135.3	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.86	68.1	18.5	1.87	122.4	$\pm 0.5\%$
		Y	2.39	63.9	15.8		117.3	
		Z	3.01	69.0	18.8		135.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	10.47	68.7	22.2	9.46	115.4	$\pm 2.7\%$
		Y	10.30	68.1	21.6		107.3	
		Z	10.58	69.3	22.6		126.2	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	3.03	69.0	19.0	2.12	120.5	$\pm 0.5\%$
		Y	2.58	65.1	16.6		115.0	
		Z	2.93	66.2	18.4		133.3	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	3.74	77.3	22.8	2.83	148.9	$\pm 0.5\%$
		Y	2.75	70.3	19.2		141.7	
		Z	3.40	75.1	21.8		118.6	
10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	3.83	73.4	21.4	3.60	145.6	$\pm 0.7\%$
		Y	3.06	66.2	18.5		139.1	
		Z	3.96	74.0	21.7		117.9	
10062-CAB	IEEE 802.11a/b WiFi 5 GHz (OFDM, 6 Mbps)	X	10.17	66.5	21.5	8.68	116.8	$\pm 2.5\%$
		Y	9.91	67.6	20.8		107.4	
		Z	10.39	69.3	22.0		132.5	
10063-CAB	IEEE 802.11a/b WiFi 5 GHz (OFDM, 9 Mbps)	X	10.01	68.4	21.4	8.63	116.3	$\pm 2.5\%$
		Y	9.65	67.7	20.9		108.8	
		Z	10.24	69.2	22.0		131.7	
10064-CAB	IEEE 802.11a/b WiFi 5 GHz (OFDM, 12 Mbps)	X	10.46	68.7	21.9	9.09	117.4	$\pm 2.7\%$
		Y	10.34	68.2	21.3		110.7	
		Z	10.69	69.6	22.5		132.1	
10065-CAB	IEEE 802.11a/b WiFi 5 GHz (OFDM, 18 Mbps)	X	10.10	68.4	21.7	9.00	113.5	$\pm 2.5\%$
		Y	10.01	68.0	21.2		107.5	
		Z	10.29	69.2	22.2		127.6	
10066-CAB	IEEE 802.11a/b WiFi 5 GHz (OFDM, 24 Mbps)	X	10.32	68.7	22.1	9.38	113.2	$\pm 2.5\%$
		Y	10.20	68.1	21.6		106.0	
		Z	10.49	69.4	22.6		125.8	

EX30V4-SN.7364

June 23, 2015

10067-CAB	IEEE 802.11a/n WiFi 5 GHz (OFDM, 36 Mbps)	X	10.83	69.1	22.8	10.12	111.9	±3.0 %
		Y	10.70	68.6	22.3		105.5	
		Z	11.04	70.0	23.5		125.5	
10068-CAB	IEEE 802.11a/n WiFi 5 GHz (OFDM, 48 Mbps)	X	10.64	69.0	22.9	10.24	108.5	±3.3 %
		Y	11.07	70.0	23.2		145.3	
		Z	10.83	69.9	23.5		121.7	
10069-CAB	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps)	X	10.95	69.2	23.2	10.56	109.6	±3.5 %
		Y	11.38	70.3	23.6		148.1	
		Z	11.13	70.1	23.8		122.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	10.46	68.7	22.4	9.83	110.6	±2.5 %
		Y	10.36	68.2	21.9		105.8	
		Z	10.71	69.6	23.1		124.2	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	10.01	68.4	22.2	9.62	106.7	±3.0 %
		Y	10.38	69.2	22.4		144.1	
		Z	10.18	69.1	22.7		119.4	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	10.78	70.9	23.9	9.94	149.7	±3.0 %
		Y	10.27	69.1	22.6		139.1	
		Z	10.17	69.3	23.1		115.9	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	10.82	71.0	24.2	10.30	144.0	±3.3 %
		Y	10.30	69.2	22.9		133.6	
		Z	10.22	69.5	23.4		111.6	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	10.91	71.3	24.8	10.77	138.9	±3.3 %
		Y	10.34	69.2	23.3		129.4	
		Z	10.31	69.7	23.9		108.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	10.84	71.1	24.9	10.94	134.9	±3.3 %
		Y	10.25	68.0	23.3		125.9	
		Z	10.28	69.7	24.1		106.3	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	10.61	71.1	24.9	11.00	133.2	±3.5 %
		Y	10.23	69.1	23.4		124.7	
		Z	11.06	72.3	25.8		148.3	
10097-CAB	UMTS-FDD (HSDPA)	X	4.84	66.4	18.3	3.98	129.4	±0.7 %
		Y	4.47	65.1	17.4		126.4	
		Z	4.82	67.2	18.8		144.7	
10096-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	4.66	66.5	18.4	3.98	130.1	±0.7 %
		Y	4.50	65.3	17.5		126.7	
		Z	4.78	67.0	18.7		145.5	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.58	67.6	19.7	5.67	136.1	±1.4 %
		Y	6.37	66.4	18.8		131.7	
		Z	6.14	66.0	18.9		107.5	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	7.69	67.9	20.1	6.42	146.1	±1.7 %
		Y	7.50	67.0	19.4		140.3	
		Z	7.24	66.6	19.5		115.2	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	8.00	68.2	20.4	6.60	148.5	±1.7 %
		Y	7.78	67.2	19.6		141.8	
		Z	7.54	66.9	19.7		117.4	

EX3DV4-- SN:7364

June 23, 2015

10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.41	87.0	19.5	5.80	133.0	±1.2 %
		Y	6.24	86.1	18.8		128.4	
		Z	6.04	85.7	18.9		106.2	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.40	87.6	20.0	6.43	141.0	±1.7 %
		Y	7.23	86.7	19.3		135.5	
		Z	6.98	86.3	19.4		111.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	8.05	86.5	19.2	5.75	129.1	±1.4 %
		Y	5.89	85.5	18.5		124.3	
		Z	6.26	87.4	19.9		145.9	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	7.12	87.4	20.0	6.44	136.5	±1.4 %
		Y	6.94	86.5	19.2		130.6	
		Z	6.89	86.0	19.3		107.3	
10112-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.64	87.8	20.2	6.59	142.4	±1.7 %
		Y	7.46	86.9	19.5		136.7	
		Z	7.21	86.5	19.6		111.3	
10113-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.32	87.5	20.1	6.62	137.7	±1.7 %
		Y	7.15	86.8	19.4		131.4	
		Z	6.92	86.2	19.4		108.9	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.23	88.5	21.0	8.10	124.2	±2.5 %
		Y	10.04	87.9	20.5		117.0	
		Z	10.56	89.5	21.7		142.7	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	10.80	89.1	21.5	8.46	128.6	±2.5 %
		Y	10.61	88.5	21.0		120.9	
		Z	11.08	70.0	22.1		145.6	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	10.31	88.7	21.1	8.15	125.0	±2.5 %
		Y	10.13	89.1	20.8		118.2	
		Z	10.59	89.6	21.7		142.4	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.27	88.8	21.1	8.07	125.9	±2.5 %
		Y	10.08	89.0	20.5		119.0	
		Z	10.52	89.4	21.6		142.8	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	10.91	89.2	21.7	8.59	128.3	±2.5 %
		Y	10.70	88.6	21.1		121.2	
		Z	11.21	70.2	22.3		146.3	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	10.27	88.6	21.1	8.13	125.1	±2.5 %
		Y	10.10	88.0	20.6		118.1	
		Z	10.57	89.6	21.7		142.8	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.93	88.3	20.4	6.49	147.7	±1.7 %
		Y	7.73	87.4	19.6		142.8	
		Z	7.42	86.8	19.6		116.6	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	8.04	88.2	20.3	6.53	149.1	±1.7 %
		Y	7.84	87.4	19.6		143.2	
		Z	7.56	86.9	19.7		117.6	
10142-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.83	86.2	19.1	5.73	125.7	±1.2 %
		Y	5.68	85.2	18.4		121.2	
		Z	6.04	87.0	19.6		142.9	

EX3DV4- SN:7364

June 23, 2015

10143-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.82	67.3	19.9	6.35	131.4	±1.4 %
		Y	6.65	66.3	19.1		126.5	
		Z	7.04	68.1	20.4		148.1	
10144-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	7.15	67.5	20.1	6.65	132.6	±1.4 %
		Y	6.96	66.6	19.4		127.2	
		Z	7.36	68.4	20.7		149.1	
10145-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	5.54	65.9	19.0	5.76	120.5	±1.2 %
		Y	5.42	65.1	18.3		116.1	
		Z	5.76	66.9	19.6		135.7	
10146-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	6.48	67.3	19.9	6.41	124.0	±1.4 %
		Y	6.28	66.2	19.1		119.2	
		Z	6.70	68.1	20.4		140.0	
10147-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	6.74	67.4	20.1	6.72	124.3	±1.7 %
		Y	6.55	66.4	19.4		119.3	
		Z	6.97	68.3	20.7		140.2	
10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.35	67.4	19.9	6.42	138.2	±1.4 %
		Y	7.17	66.5	19.2		133.3	
		Z	6.97	66.3	19.4		109.6	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	7.61	67.7	20.1	6.60	140.5	±1.4 %
		Y	7.45	66.9	19.5		135.0	
		Z	7.22	66.5	19.6		112.4	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.03	66.4	19.2	5.75	127.0	±1.4 %
		Y	5.85	65.3	18.4		122.3	
		Z	6.24	67.3	19.8		145.2	
10155-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	7.06	67.2	19.8	6.43	134.1	±1.4 %
		Y	6.91	66.4	19.2		128.7	
		Z	6.69	66.1	19.3		107.1	
10156-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.76	66.0	19.1	5.79	123.3	±1.2 %
		Y	5.63	65.1	18.3		118.7	
		Z	5.97	67.0	19.7		139.3	
10157-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	6.80	67.2	19.9	6.49	128.7	±1.4 %
		Y	6.62	66.3	19.2		123.2	
		Z	6.99	68.0	20.4		144.9	
10158-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.30	67.4	20.0	6.62	134.5	±1.4 %
		Y	7.12	66.5	19.3		129.0	
		Z	6.91	66.3	19.5		107.5	
10159-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	6.91	67.4	20.0	6.56	129.3	±1.4 %
		Y	6.69	66.3	19.2		123.1	
		Z	7.12	68.2	20.5		145.9	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.54	67.1	19.6	5.82	132.9	±1.4 %
		Y	6.29	65.9	18.7		126.6	
		Z	6.71	67.9	20.0		149.3	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.41	67.6	20.0	6.43	139.7	±1.7 %
		Y	7.22	66.6	19.3		133.2	
		Z	6.97	66.2	19.3		110.0	

EX3DV4- SN:7364

June 23, 2015

10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.66	67.9	20.2	6.58	141.5	±1.7 %
		Y	7.48	67.0	19.5		134.6	
		Z	7.18	66.4	19.5		112.1	
10165-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.96	65.8	18.8	5.46	115.4	±0.9 %
		Y	4.78	64.5	17.9		110.2	
		Z	5.13	66.5	19.3		130.4	
10167-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.82	66.9	19.6	6.21	117.4	±1.2 %
		Y	5.60	65.7	18.8		109.9	
		Z	6.07	67.9	20.3		132.7	
10168-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.28	67.1	20.0	6.79	117.2	±1.4 %
		Y	6.06	66.0	19.2		111.0	
		Z	6.49	67.9	20.6		132.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.78	65.9	19.1	5.73	109.6	±1.2 %
		Y	4.92	66.1	19.0		145.5	
		Z	4.94	66.5	19.6		123.2	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.36	66.3	19.7	6.52	107.4	±1.4 %
		Y	5.59	67.0	19.8		142.7	
		Z	5.61	67.4	20.4		121.7	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.38	66.5	19.7	6.49	107.3	±1.4 %
		Y	5.55	67.1	19.8		144.6	
		Z	5.64	67.6	20.4		121.5	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.71	65.4	18.6	5.72	107.7	±1.2 %
		Y	4.91	66.0	18.9		144.8	
		Z	4.91	66.3	19.4		122.3	
10176-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.78	66.1	20.6	6.52	149.6	±1.4 %
		Y	5.57	66.9	19.7		142.9	
		Z	5.66	67.6	20.5		121.7	
10177-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.05	67.1	19.7	5.73	150.0	±1.2 %
		Y	4.91	66.0	18.9		144.6	
		Z	4.93	66.5	19.5		122.4	
10178-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.80	68.2	20.7	6.52	149.3	±1.4 %
		Y	5.59	67.0	19.8		142.5	
		Z	5.63	67.5	20.4		121.7	
10179-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.80	68.3	20.7	6.50	149.2	±1.4 %
		Y	5.62	67.2	19.8		144.9	
		Z	5.61	67.5	20.4		121.4	
10180-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.80	68.3	20.7	6.50	148.6	±1.4 %
		Y	5.60	67.1	19.9		144.4	
		Z	5.63	67.5	20.4		121.6	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	5.04	67.0	19.7	5.72	149.4	±1.2 %
		Y	4.94	66.2	19.1		145.6	
		Z	4.92	66.4	19.5		122.1	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	5.79	68.2	20.7	6.52	148.9	±1.4 %
		Y	5.57	66.9	19.7		142.2	
		Z	5.63	67.5	20.5		121.0	

EX3DV4- SN:7364

June 23, 2015

10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.81	68.4	20.8	6.50	148.4	±1.4 %
		Y	5.62	67.2	19.9		144.3	
		Z	5.62	67.5	20.4		121.1	
10184-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.06	67.1	19.8	5.73	149.2	±1.2 %
		Y	4.91	66.0	18.9		144.9	
		Z	4.94	66.5	19.5		122.0	
10185-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.77	68.1	20.6	6.51	148.4	±1.4 %
		Y	5.57	66.9	19.8		142.5	
		Z	5.62	67.5	20.4		121.5	
10186-AAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	5.81	68.4	20.8	6.50	148.0	±1.7 %
		Y	5.63	67.3	19.9		144.7	
		Z	5.60	67.5	20.3		121.0	
10187-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	5.07	67.1	19.8	5.73	149.3	±1.2 %
		Y	4.94	66.2	19.0		145.6	
		Z	4.91	66.3	19.4		122.3	
10188-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.79	68.2	20.7	6.52	148.1	±1.7 %
		Y	5.57	66.9	19.7		142.5	
		Z	5.61	67.4	20.4		121.2	
10189-AAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.83	68.5	20.8	6.50	148.1	±1.4 %
		Y	5.60	67.1	19.8		144.5	
		Z	5.64	67.6	20.4		121.5	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	9.64	67.7	20.6	8.09	112.5	±2.2 %
		Y	9.63	67.5	20.3		109.6	
		Z	10.04	68.9	21.4		132.4	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	9.78	68.0	20.9	8.12	116.1	±2.2 %
		Y	9.67	67.5	20.4		110.9	
		Z	10.06	68.9	21.5		131.8	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	9.93	68.3	21.0	8.21	117.1	±2.5 %
		Y	9.81	67.7	20.5		112.3	
		Z	10.19	69.1	21.5		134.2	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.73	68.0	20.8	8.10	116.3	±2.2 %
		Y	9.62	67.5	20.3		111.7	
		Z	10.01	68.9	21.4		132.6	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	9.77	68.0	20.8	8.13	116.4	±2.2 %
		Y	9.75	67.7	20.5		111.4	
		Z	10.10	69.0	21.5		132.9	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	9.96	68.2	21.0	8.27	117.4	±2.5 %
		Y	9.88	67.8	20.6		112.8	
		Z	10.29	69.3	21.7		135.1	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.62	67.9	20.8	8.03	116.5	±2.2 %
		Y	9.53	67.4	20.3		111.0	
		Z	9.94	68.9	21.4		132.9	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	9.81	68.1	20.9	8.13	117.2	±2.2 %
		Y	9.70	67.6	20.4		111.6	
		Z	10.10	69.0	21.5		134.0	

EX3DV4- SN:7364

June 23, 2015

10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	9.97	68.2	21.0	8.27	118.3	±2.5 %
		Y	9.89	67.8	20.6		112.7	
		Z	10.29	69.2	21.7		135.4	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	10.14	68.4	20.9	8.06	122.8	±2.5 %
		Y	10.02	67.9	20.5		116.9	
		Z	10.48	69.4	21.6		140.6	
10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	10.72	69.0	21.4	8.48	126.2	±2.5 %
		Y	10.54	68.3	20.9		119.3	
		Z	11.04	69.9	22.1		143.9	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	10.13	68.4	20.9	8.08	123.4	±2.5 %
		Y	10.01	68.0	20.5		115.7	
		Z	10.44	69.3	21.5		140.3	
10225-CAB	UMTS-FDD (HSPA+)	X	7.19	67.5	19.6	5.97	143.8	±1.4 %
		Y	7.05	66.7	19.0		138.4	
		Z	6.78	66.2	19.0		112.5	
10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	6.03	66.9	18.8	4.87	136.9	±1.2 %
		Y	5.89	66.1	18.1		131.5	
		Z	5.76	66.1	18.5		109.1	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.32	65.7	18.0	3.96	119.3	±0.9 %
		Y	4.16	64.5	17.1		112.7	
		Z	4.57	66.9	18.7		136.2	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.29	66.6	19.2	5.81	126.9	±1.4 %
		Y	6.12	65.6	18.5		120.7	
		Z	6.52	67.5	19.8		142.9	
10298-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.62	66.1	19.1	5.72	120.8	±1.2 %
		Y	5.44	65.0	18.3		115.1	
		Z	5.80	66.9	19.6		136.0	
10299-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	6.55	67.1	19.8	6.39	125.4	±1.4 %
		Y	6.35	66.1	19.0		119.2	
		Z	6.82	68.2	20.5		140.5	
10300-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	6.73	67.3	20.0	6.60	125.1	±1.4 %
		Y	6.53	66.3	19.2		118.8	
		Z	6.99	68.2	20.6		140.9	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.94	67.4	19.7	6.06	135.3	±1.4 %
		Y	6.75	66.4	19.0		129.1	
		Z	6.55	66.2	19.2		106.3	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.71	67.3	17.7	1.71	120.4	±0.5 %
		Y	2.36	64.0	15.7		114.8	
		Z	2.97	68.9	18.7		133.5	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	9.89	68.1	21.1	8.36	116.2	±2.5 %
		Y	9.75	67.5	20.5		108.9	
		Z	10.15	69.0	21.6		131.4	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	9.89	68.1	21.1	8.36	116.7	±2.5 %
		Y	9.76	67.6	20.6		110.0	
		Z	10.16	69.0	21.7		132.3	

EX3DV4- SN 7364

June 23, 2015

10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.58	66.6	17.4	1.54	122.6	±0.5 %
		Y	2.36	64.2	15.8		117.2	
		Z	2.79	68.0	18.2		136.1	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	9.83	68.1	21.0	8.23	117.6	±2.2 %
		Y	9.72	67.6	20.5		110.8	
		Z	10.12	69.0	21.6		132.8	
10417-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	9.82	68.1	20.9	8.23	117.7	±2.2 %
		Y	9.76	67.7	20.5		111.5	
		Z	10.11	68.0	21.6		133.6	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	9.89	68.0	20.9	8.14	116.8	±2.2 %
		Y	9.59	67.5	20.4		110.3	
		Z	9.85	68.8	21.4		131.4	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	9.78	68.1	20.9	8.19	117.3	±2.2 %
		Y	9.70	67.6	20.5		111.1	
		Z	10.04	68.9	21.5		132.4	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	10.03	68.4	21.1	8.32	119.6	±2.5 %
		Y	9.90	67.7	20.6		112.6	
		Z	10.29	69.2	21.7		133.6	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	10.19	68.5	21.3	8.47	120.0	±2.5 %
		Y	10.08	68.0	20.8		112.9	
		Z	10.43	69.3	21.8		134.2	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	10.08	68.4	21.2	8.40	119.5	±2.5 %
		Y	9.96	67.8	20.7		112.6	
		Z	10.33	69.2	21.8		133.7	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	10.62	68.9	21.4	8.41	126.1	±2.7 %
		Y	10.42	68.2	20.8		117.7	
		Z	10.92	69.6	22.0		142.2	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	10.68	69.0	21.5	8.45	126.5	±2.7 %
		Y	10.43	68.2	20.8		118.2	
		Z	10.95	69.8	22.0		142.5	
10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	10.65	69.0	21.4	8.41	128.9	±2.7 %
		Y	10.40	68.2	20.8		118.2	
		Z	10.92	69.8	22.0		142.7	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCCH)	X	8.04	67.7	21.1	8.60	103.3	±2.7 %
		Y	8.68	69.3	21.7		143.5	
		Z	8.37	68.8	21.8		116.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

* The uncertainties of Norm(X, Y, Z) do not affect the E²-field uncertainty inside TSI. (see Pages 12 and 16).

** Numerical linearization parameter: uncertainty not required.

† Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7364

June 23, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^d (mm)	Unct. (k=2)
150	52.3	0.76	12.95	12.95	12.95	0.00	1.00	± 13.3 %
300	45.3	0.87	11.95	11.95	11.95	0.10	1.10	± 13.3 %
450	43.5	0.87	10.72	10.72	10.72	0.15	1.10	± 13.3 %
750	41.9	0.89	10.01	10.01	10.01	0.29	1.08	± 12.0 %
900	41.5	0.97	9.26	9.26	9.26	0.24	1.23	± 12.0 %
1810	40.0	1.40	7.93	7.93	7.93	0.33	0.80	± 12.0 %
1900	40.0	1.40	7.93	7.93	7.93	0.35	0.80	± 12.0 %
2450	39.2	1.80	7.18	7.18	7.18	0.27	0.98	± 12.0 %
2600	39.0	1.96	6.93	6.93	6.93	0.34	0.93	± 12.0 %
5200	36.0	4.66	5.22	5.22	5.22	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.00	5.00	5.00	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.75	4.75	4.75	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.64	4.64	4.64	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.52	4.52	4.52	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v1.1 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^e At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if equal compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-5 GHz at any distance larger than half the probe diameter from the boundary.

EX3DV4 - SN7364

June 23, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^e	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^d (mm)	Unct. (k=2)
150	61.9	0.80	12.28	12.28	12.28	0.00	1.00	± 13.3 %
300	58.2	0.92	11.24	11.24	11.24	0.08	1.10	± 13.3 %
450	58.7	0.94	11.02	11.02	11.02	0.08	1.10	± 13.3 %
750	55.5	0.96	9.42	9.42	9.42	0.27	1.06	± 12.0 %
900	55.0	1.05	9.20	9.20	9.20	0.27	1.22	± 12.0 %
1810	53.3	1.52	7.75	7.75	7.75	0.43	0.85	± 12.0 %
1900	53.3	1.52	7.57	7.57	7.57	0.47	0.80	± 12.0 %
2450	52.7	1.95	7.33	7.33	7.33	0.35	0.90	± 12.0 %
2600	52.5	2.16	7.17	7.17	7.17	0.31	0.95	± 12.0 %
5200	49.0	5.30	4.52	4.52	4.52	0.45	1.80	± 13.1 %
5300	48.9	5.42	4.29	4.29	4.29	0.45	1.90	± 13.1 %
5500	48.6	5.65	3.92	3.92	3.92	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.74	3.74	3.74	0.50	1.80	± 13.1 %
5800	48.2	6.00	4.06	4.06	4.06	0.50	1.80	± 13.1 %

^c Frequency validity above 200 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 200 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^e At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be related to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the (probe tip) diameter from the boundary.

EX3DV4- SN:7364

June 23, 2015

Frequency Response of E-Field (TEM-Cell: IF110 EXX, Waveguide: R22)

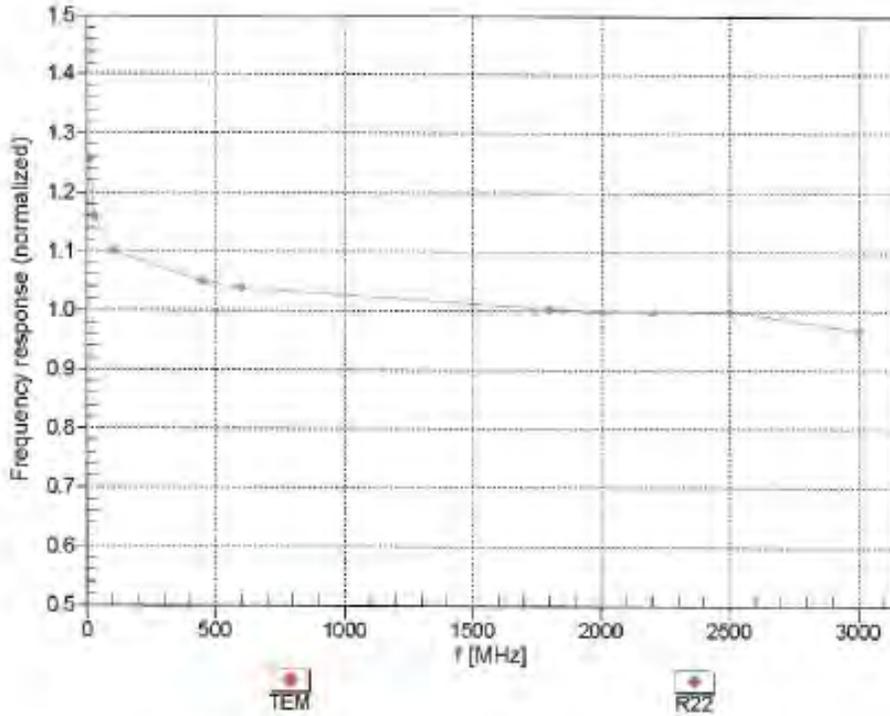

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



EX3DV4-SN:7364

June 23, 2015

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

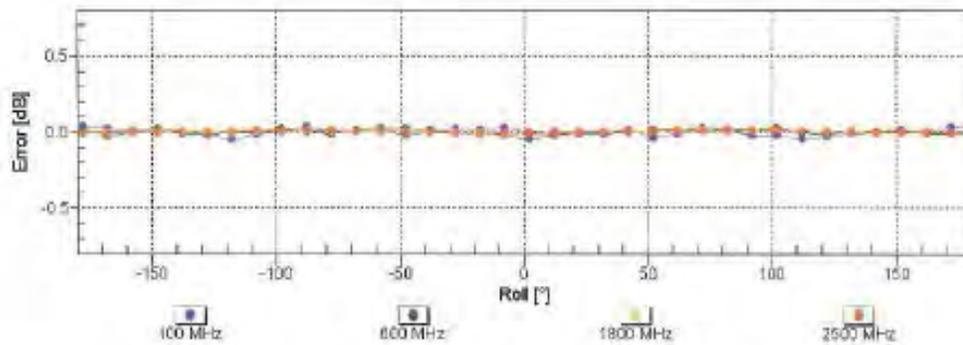
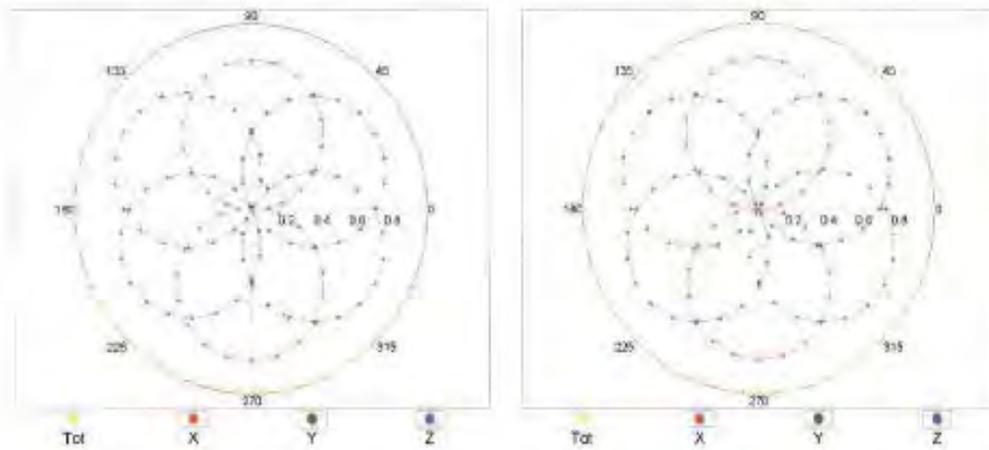


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:7364

June 23, 2015

Dynamic Range $f(SAR_{head})$ (TEM cell, $f_{eval} = 1900$ MHz)

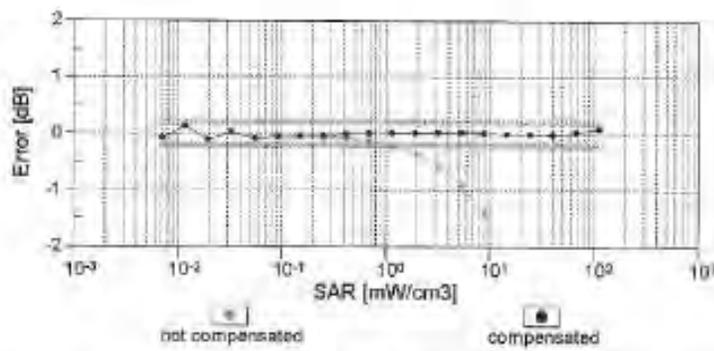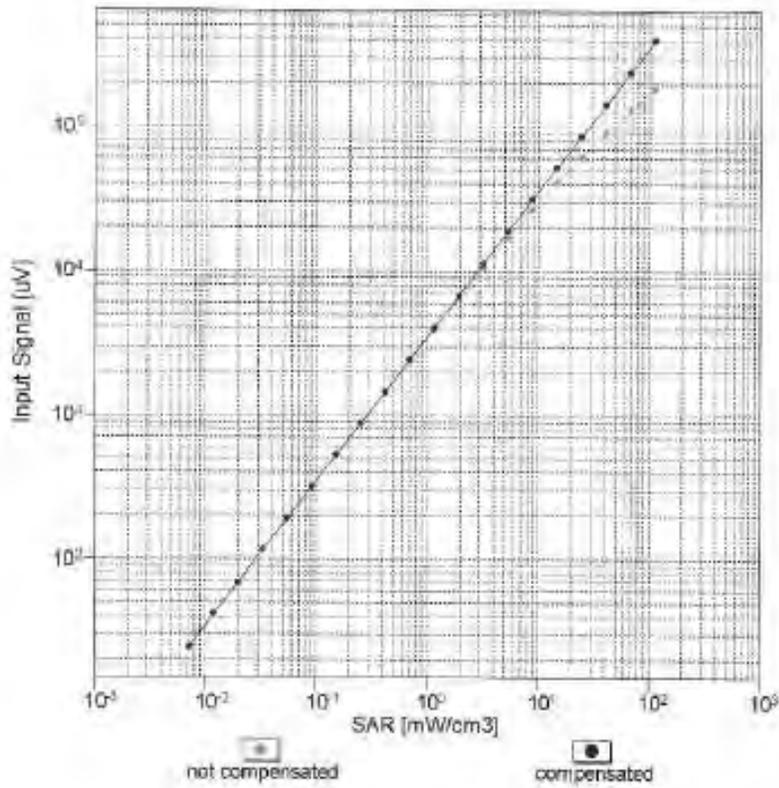


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)



EX3DV4- SN-7364

June 23, 2015

Conversion Factor Assessment

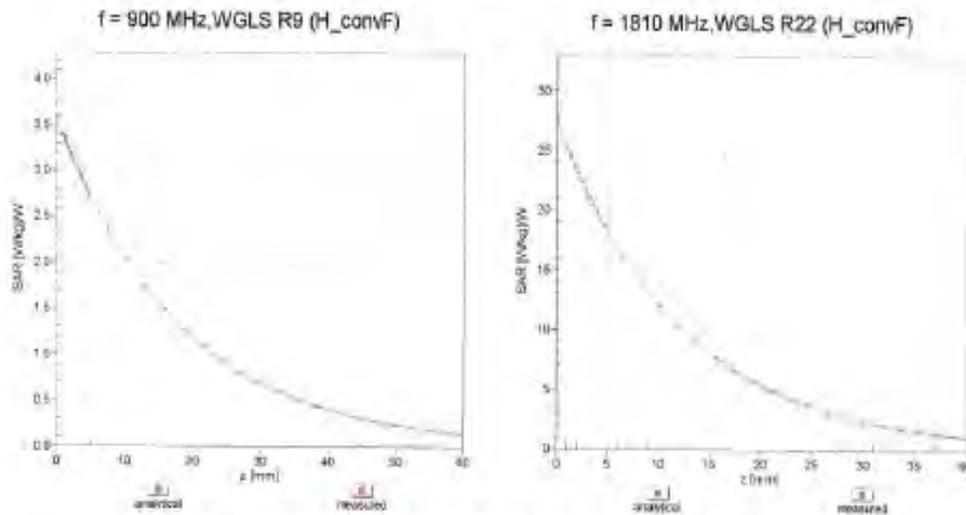

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

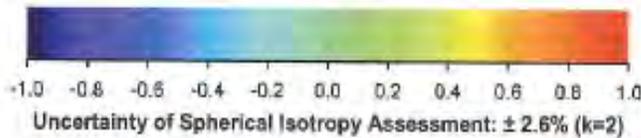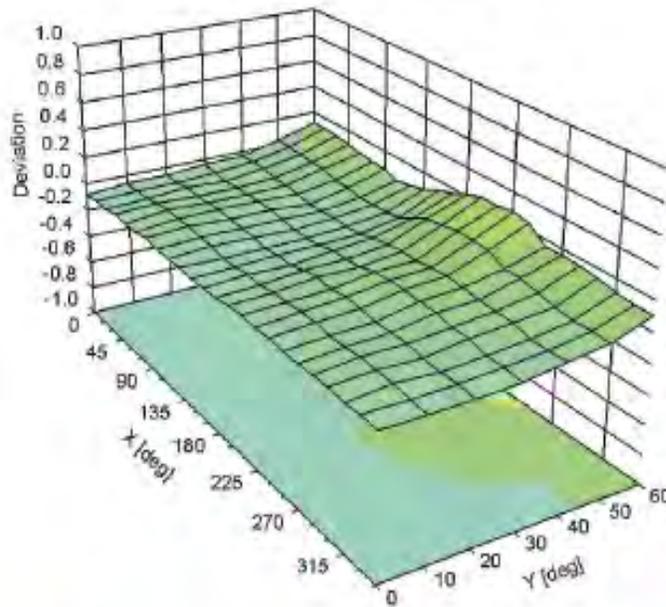

EX3DV4-SN:7364

June 23, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	132.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **Motorola Solutions MY**

Certificate No: **ES3-3196_Nov15**

CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3196**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedures for dosimetric E-field probes**

Calibration date: **November 17, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	QB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20a)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	in house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	in house check: Oct-16

Calibrated by: **Name: Claudio Leubler, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Katja Polovic, Function: Technical Manager, Signature: [Signature]**

Issued: November 17, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	Issue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDS 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

ES3DV3 - SN:3196

November 17, 2015

Probe ES3DV3

SN:3196

Manufactured: June 16, 2008
Calibrated: November 17, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV3- SN:3196

November 17, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3196

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{W}/(\text{V}/\text{m})^2$) ^A	1.27	1.29	1.33	$\pm 10.1\%$
DCP (mV) ^B	104.9	104.0	102.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	213.4	$\pm 3.3\%$
		Y	0.0	0.0	1.0		214.3	
		Z	0.0	0.0	1.0		218.9	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.95	68.6	19.1	1.87	148.8	$\pm 0.7\%$
		Y	3.00	69.4	18.9		147.7	
		Z	2.76	68.0	18.4		132.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	11.06	71.2	23.8	9.46	143.4	$\pm 3.3\%$
		Y	10.95	70.6	23.3		145.2	
		Z	10.86	70.5	23.4		124.5	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	3.25	70.7	19.7	2.12	147.8	$\pm 0.7\%$
		Y	3.55	72.1	20.2		147.4	
		Z	3.08	69.5	19.2		131.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	11.24	71.6	24.3	9.83	140.4	$\pm 2.7\%$
		Y	11.13	70.9	23.7		141.2	
		Z	11.61	72.5	24.9		149.5	
10114-CAB	IEEE 802.11a (HT Greenfield, 13.5 Mbps, BPSK)	X	10.05	68.9	21.6	8.10	127.0	$\pm 2.2\%$
		Y	9.87	68.3	21.0		126.0	
		Z	10.23	69.4	21.7		134.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.01	68.8	21.3	8.07	127.5	$\pm 2.2\%$
		Y	9.87	68.3	20.9		127.2	
		Z	10.21	69.3	21.7		134.9	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	10.02	69.6	21.9	8.09	147.9	$\pm 2.5\%$
		Y	9.96	69.2	21.5		149.5	
		Z	9.84	69.0	21.8		129.1	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	10.00	69.6	21.9	8.10	147.4	$\pm 2.2\%$
		Y	9.92	69.1	21.5		147.7	
		Z	9.82	69.0	21.8		126.8	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.88	69.5	21.8	8.03	146.9	$\pm 2.5\%$
		Y	9.78	68.9	21.4		146.3	
		Z	9.73	69.0	21.6		127.8	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	10.00	68.8	21.3	8.06	127.3	$\pm 2.2\%$
		Y	9.80	69.2	20.9		126.3	
		Z	10.17	69.2	21.6		134.7	

ES3DV3- SN:3196

November 17, 2015

10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	10.28	69.9	22.2	8.32	149.2	±2.5 %
		Y	10.19	69.4	21.8		149.0	
		Z	10.09	69.3	21.9		129.5	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	10.45	69.3	21.8	8.41	129.4	±2.5 %
		Y	10.27	68.7	21.3		128.2	
		Z	10.65	69.8	22.1		135.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 6 and 7).
^b Numerical linearization parameter: uncertainty not required.
^c Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3196

November 17, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3196

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^d	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth (mm) ^h	Unc (k=2)
150	52.3	0.76	7.31	7.31	7.31	0.06	1.25	± 13.3 %
300	45.3	0.87	7.34	7.34	7.34	0.14	1.60	± 13.3 %
450	43.5	0.87	6.83	6.83	6.83	0.22	1.80	± 13.3 %
750	41.9	0.89	6.46	6.46	6.46	0.40	1.64	± 12.0 %
900	41.5	0.97	6.13	6.13	6.13	0.56	1.38	± 12.0 %
2450	39.2	1.80	4.54	4.54	4.54	0.68	1.36	± 12.0 %

^d Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), also it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3196

November 17, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3196

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^a	Conductivity (S/m) ^e	ConvF X	ConvF Y	ConvF Z	Alpha ^d	Depth (mm) ^b	Unc (k=2)
150	61.9	0.80	6.94	6.94	6.94	0.06	1.25	± 13.3 %
300	58.2	0.92	6.94	6.94	6.94	0.10	1.60	± 13.3 %
450	56.7	0.94	7.06	7.06	7.06	0.13	1.60	± 13.3 %
750	55.5	0.96	6.36	6.36	6.36	0.42	1.59	± 12.0 %
900	55.0	1.05	6.10	6.10	6.10	0.39	1.80	± 12.0 %
2450	52.7	1.95	4.43	4.43	4.43	0.71	1.26	± 12.0 %

^c Frequency validity above 300 MHz at ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 84, 125, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^a At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^d Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3196

November 17, 2015

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

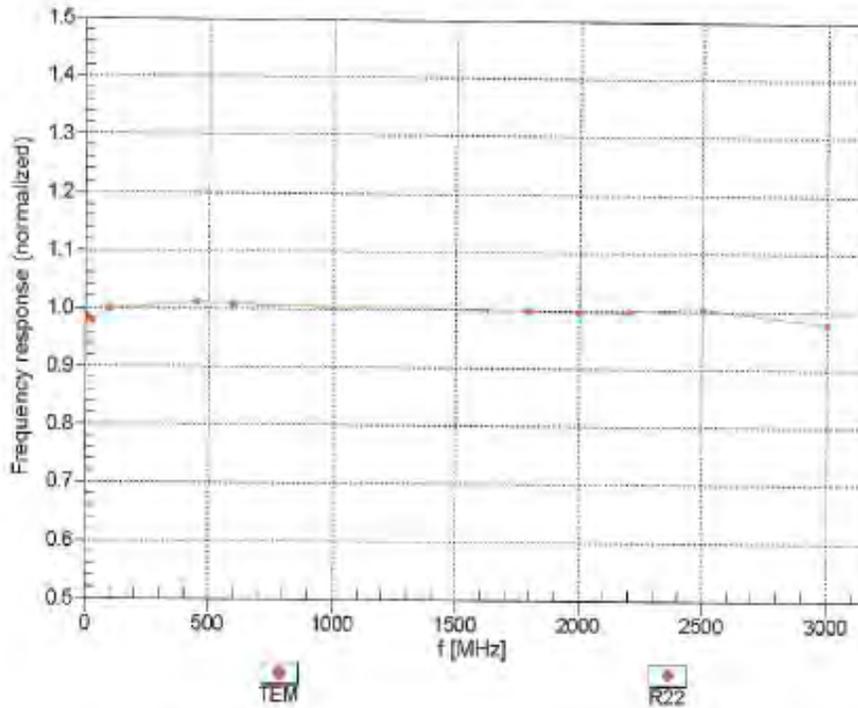

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



ES3DV3- SN:3196

November 17, 2015

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

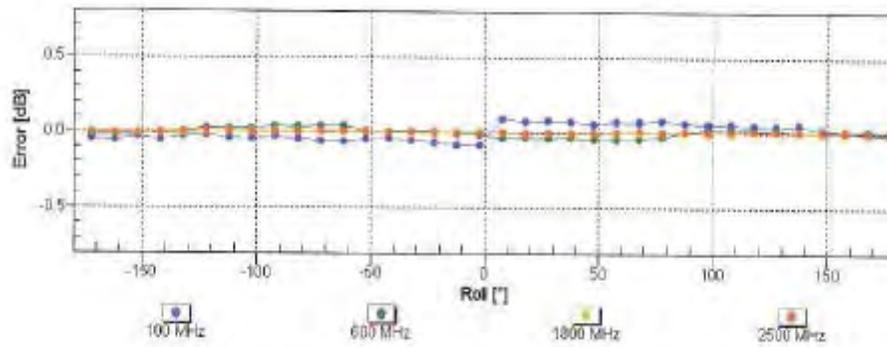
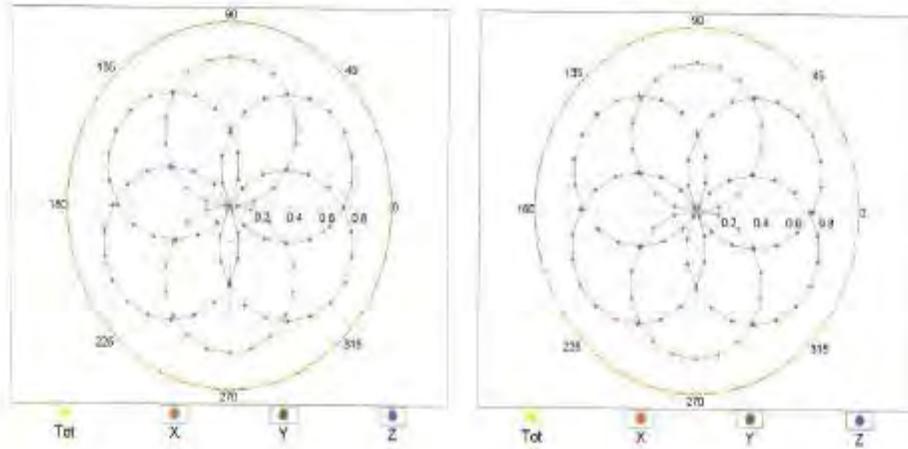


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ES3DV3-SN:3196


November 17, 2015

Dynamic Range f(SAR_{head}) (TEM cell, f_{eval} = 1900 MHz)

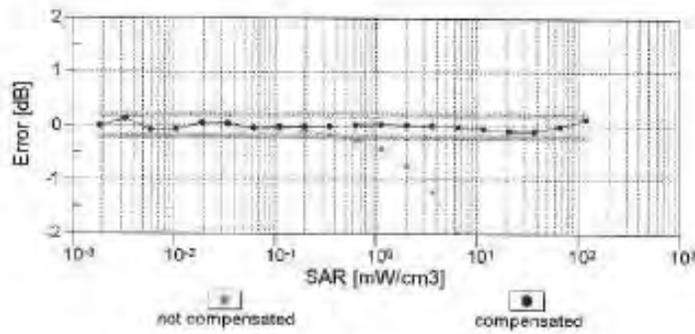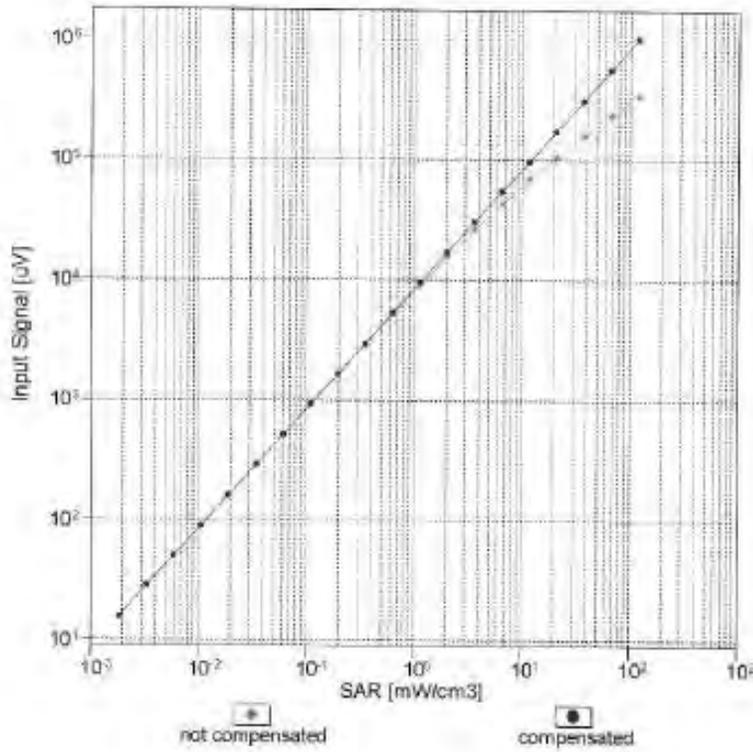


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

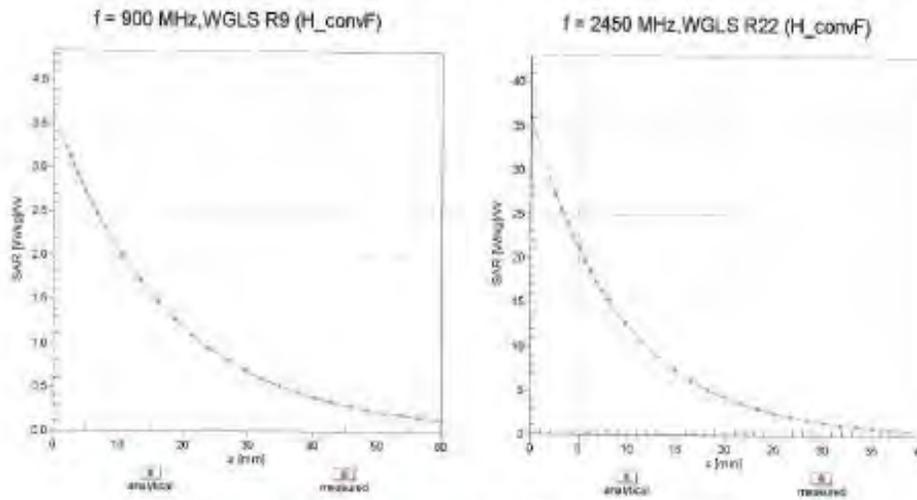

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

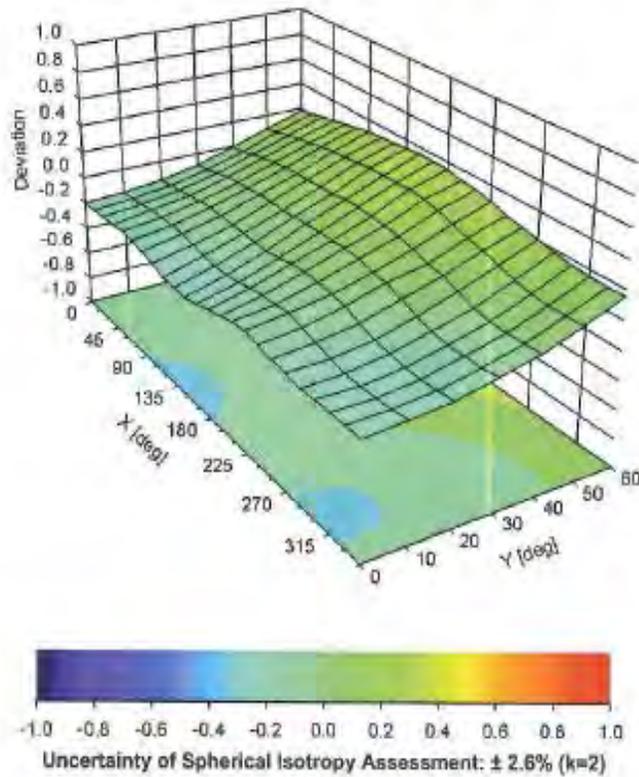

ES3DV3- SN:3196

November 17, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3196

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	7.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Appendix C

Dipole Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **D450V3-1053_Mar15**

CALIBRATION CERTIFICATE

Object: **D450V3 - SN:1053**

Calibration procedure(s): **QA CAL-15.v8
Calibration procedure for dipole validation kits below 700 MHz**

Calibration date: **March 17, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293074	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41496087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ET3DV6	SN: 1507	30-Dec-14 (No. ET3-1507_Dec14)	Dec-15
DAE4	SN: 654	30-Jun-14 (No. DAE4-654_Jun14)	Jun-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-09 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585.S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrell	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: March 17, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	43.9 ± 6 %	0.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 W input power	1.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.45 W/kg ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 W input power	0.747 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	2.97 W/kg ± 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.7 ± 6 %	0.97 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 W input power	1.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	4.41 W/kg ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 W input power	0.746 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	2.92 W/kg ± 17.6 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.2 Ω - 2.2 $\mu\Omega$
Return Loss	-23.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	55.2 Ω - 5.3 $\mu\Omega$
Return Loss	-23.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 16, 2005

DASY5 Validation Report for Head TSL

Date: 17.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1053

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.58, 6.58, 6.58); Calibrated: 30.12.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 30.06.2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.88 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.747 W/kg

Maximum value of SAR (measured) = 1.20 W/kg



Impedance Measurement Plot for Head TSL

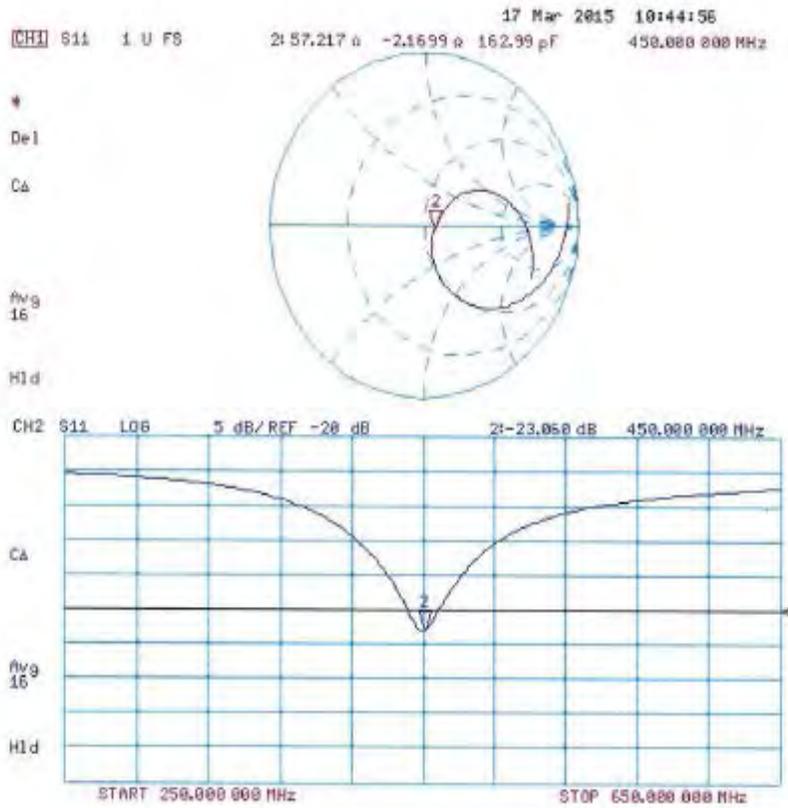

DASY5 Validation Report for Body TSL

Date: 17.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1053

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.97 \text{ S/m}$; $\epsilon_r = 56.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(7.05, 7.05, 7.05); Calibrated: 30.12.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 30.06.2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.81 W/kg


SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.746 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

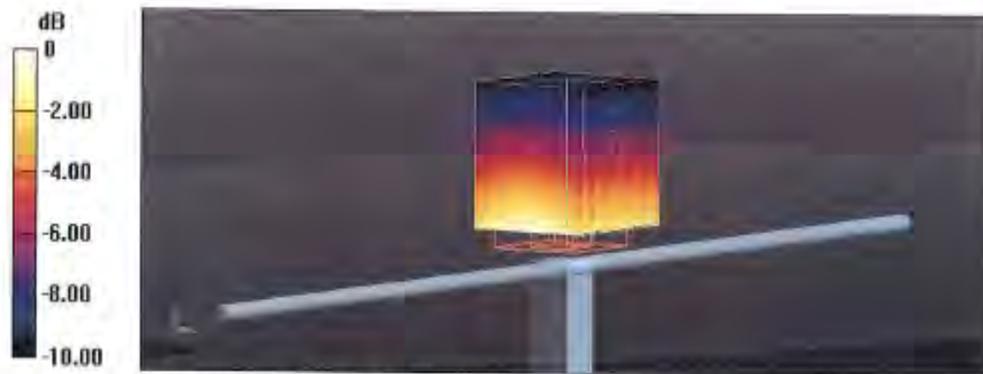

0 dB = 1.21 W/kg = 0.83 dBW/kg

Impedance Measurement Plot for Body TSL

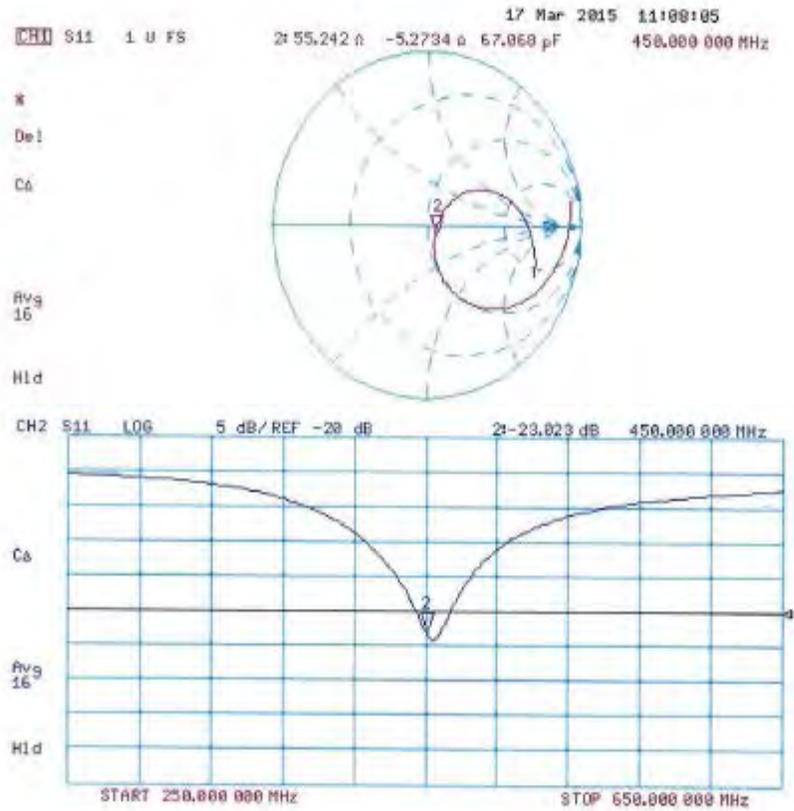

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **D2450V2-781_Mar15**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:781**

Calibration procedure(s): **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **March 20, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES30V3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-09 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Israa Elmaouq** (Name), **Laboratory Technician** (Function), *Israa Elmaouq* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *Katja Pokovic* (Signature)

Issued: March 20, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zougheustrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52,8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.8 ± 6 %	1.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.8 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.9 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.9 Ω + 1.2 jΩ
Return Loss	- 28.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.9 Ω + 3.2 jΩ
Return Loss	- 30.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.155 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 06, 2005

DASY5 Validation Report for Head TSL

Date: 20.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:781

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ S/m}$; $\epsilon_r = 37.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 101.2 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.9 W/kg


SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 17.4 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Impedance Measurement Plot for Head TSL

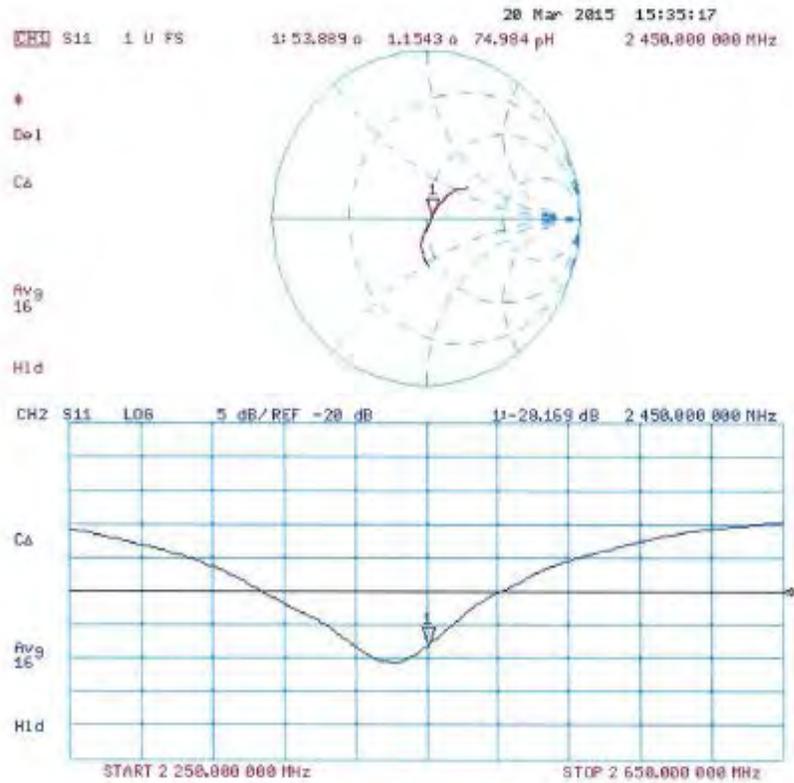

DASY5 Validation Report for Body TSL

Date: 19.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:781

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.66 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.15 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

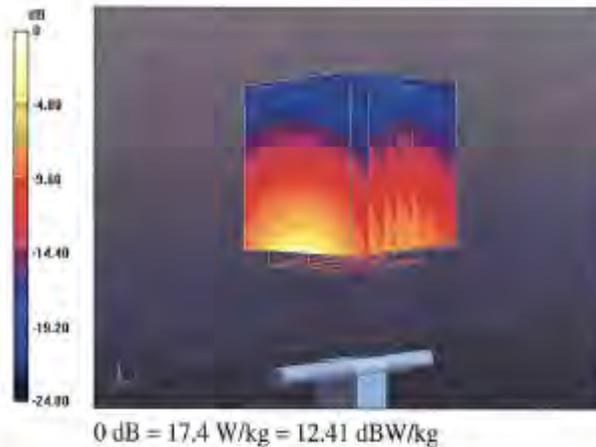

Impedance Measurement Plot for Body TSL

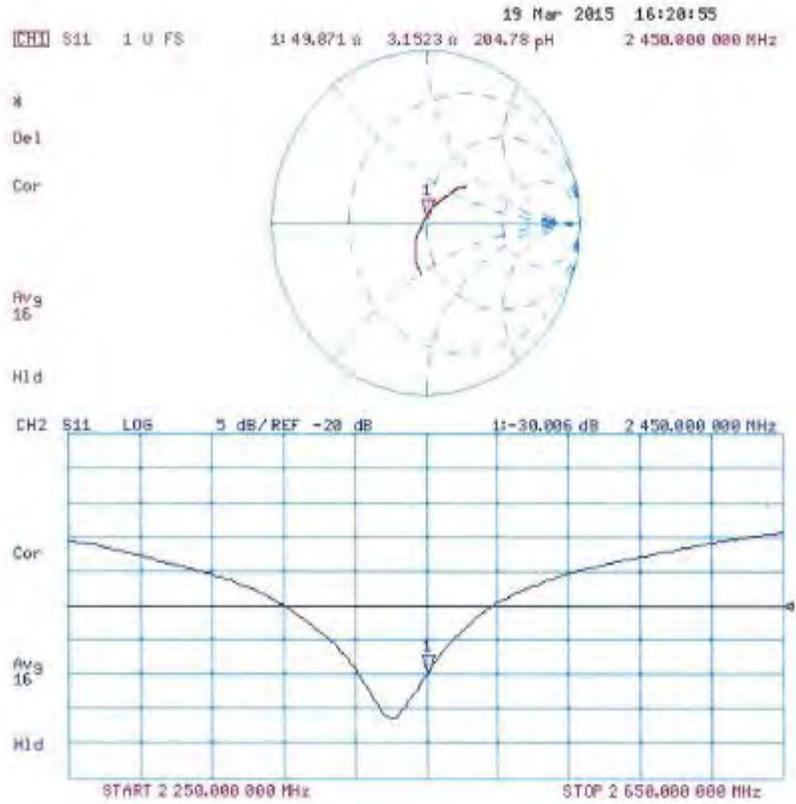

Dipole Data

As stated in KDB 865664, for dipole D450V3 (serial number 1053) and D2450V2 (serial number 781) exceed annual calibration, the test laboratory must ensure that the required supporting information and documentation are included in report to qualify for extended calibration interval.

The table below includes dipoles impedance and return loss measurement data measured by Motorola Solutions' EME lab. The results meet requirements stated in KDB 865664.

Dipole D450V3 (SN 1053)	Head			Body		
	Impedance		Return Loss	Impedance		Return Loss
Date Measured	real Ω	imag $j\Omega$	dB	real Ω	imag $j\Omega$	dB
04/14/2015	57.17	-4.06	-22.30	54.88	-3.62	-24.79
02/15/2016	53.46	-5.59	-21.02	55.30	-5.51	-22.32

Dipole D2450V2 (SN 781)	Head			Body		
	Impedance		Return Loss	Impedance		Return Loss
Date Measured	real Ω	imag $j\Omega$	dB	real Ω	imag $j\Omega$	dB
04/14/2015	53.04	3.88	-26.54	49.66	3.79	-28.55
02/15/2016	53.32	3.21	-27.02	50.38	4.72	-30.76