


Motorola Solutions.

SAC Transmitter Radiated Emission: APX6000 REFRESH 7800 764-870MHZ 3W
Model #: H98UCH9PW7BN S/N: 756TSD0458 SR:05882-EMC-00001
Battery Part No: PMNN4494A Accy Part No: PMAF4002A
Test Mode: TX Analog
799.087500 MHz 12.5 kHz 2.950 Watt(s) /Max Power

Frequency (MHz)	FCC Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
1598.1750	-13.0000	-60.3303 **	-59.6163 **
2397.2625	-13.0000	-56.0980 **	-55.5305 **
3196.3500	-13.0000	-53.6917 **	-53.3915 **
3995.4375	-13.0000	-54.4141 **	-52.7610 **
4794.5250	-13.0000	-49.9774 **	-50.4322 **
5593.6125	-13.0000	-49.0516 **	-50.0346 **
6392.7000	-13.0000	-45.9417 **	-47.2414 **
7191.7875	-13.0000	-47.2783 **	-46.9779 **
7990.8750	-13.0000	-46.5135 **	-46.1714 **

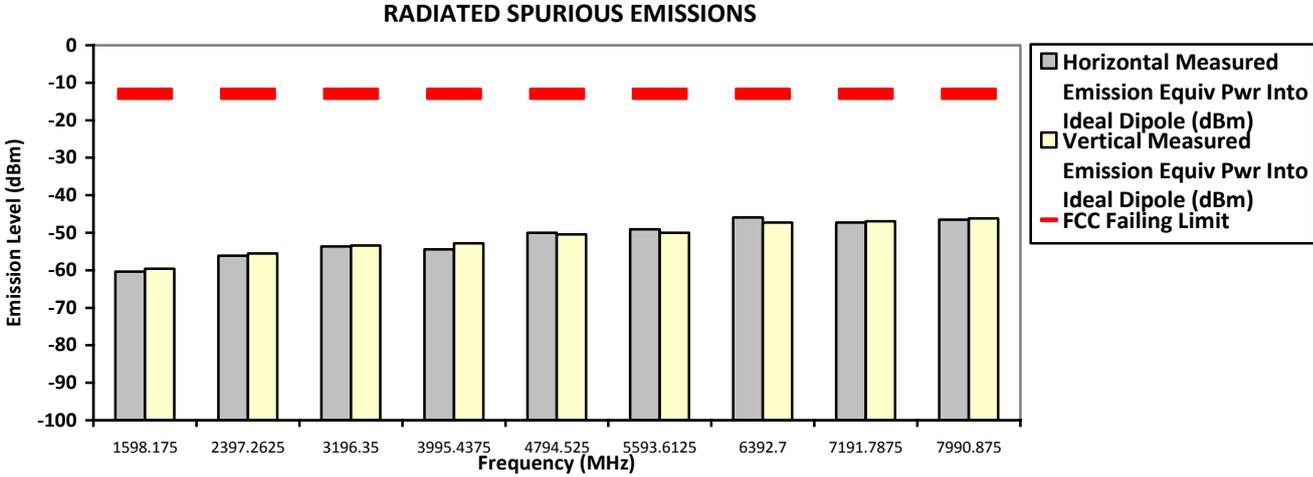

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sun, Mar 13, 2016
 FCC Registration: 772092 Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 24.3 Hum(%RH): 72.5

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

