


Motorola Solutions.

SAC Transmitter Radiated Emission: APX6000 REFRESH 7800 764-870MHZ 3W
Model #: H98UCH9PW7BN **S/N: 756TSD0458** **SR:05882-EMC-00001**
Battery Part No: PMNN4494A **Accy Part No: PMAF4002A**
Test Mode: TX Phase II Digital
860.012500 MHz **12.5 kHz** **3.6 Watt(s) /Max Power**

Frequency (MHz)	FCC Failing Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
1720.0250	-20.0000	-59.8725 **	-60.9399 **
2580.0375	-20.0000	-55.2697 **	-54.5883 **
3440.0500	-20.0000	-55.4641 **	-54.9845 **
4300.0625	-20.0000	-51.0779 **	-52.3705 **
5160.0750	-20.0000	-50.0863 **	-49.6850 **
6020.0875	-20.0000	-47.0924 **	-46.9463 **
6880.1000	-20.0000	-46.1346 **	-45.6742 **
7740.1125	-20.0000	-46.0085 **	-46.2950 **
8600.1250	-20.0000	-44.9086 **	-46.2851 **

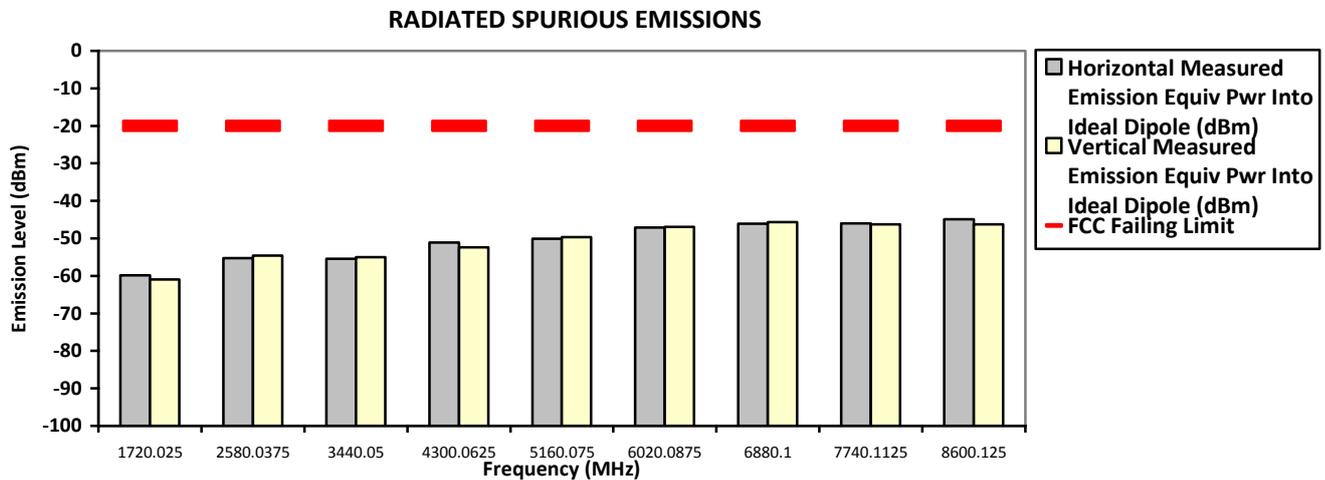

The data presented here was taken using the substitution method as found in the TIA/EIA-603D document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Tue, Mar 15, 2016
 FCC Registration: 772092 Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 24.3 Hum(%RH): 72.5

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

