


SAC Transmitter Radiated Emission: APX6000 REFRESH VHF 136-174MHZ 6W
Model #: H98KGH9PW7BN S/N: 756TSB0719 SR:05897-EMC-00042
Battery Part No: PMNN4494A Accy Part No: NA
Test Mode: TX Phase II Digital
138.012500 MHz 12.5 kHz 6.600 Watt(s) /Max Power

Frequency (MHz)	FCC Failing Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-101.4939 **	-100.4407 **
414.0375	-20.0000	-98.3981 **	-97.8927 **
552.0500	-20.0000	-94.3829 **	-93.8305 **
690.0625	-20.0000	-93.7474 **	-93.6329 **
828.0750	-20.0000	-92.4593 **	-90.0005 **
966.0875	-20.0000	-90.7804 **	-89.0289 **
1104.1000	-20.0000	-63.3428 **	-61.9888 **
1242.1125	-20.0000	-62.4087 **	-62.2560 **
1380.1250	-20.0000	-61.1722 **	-61.9929 **

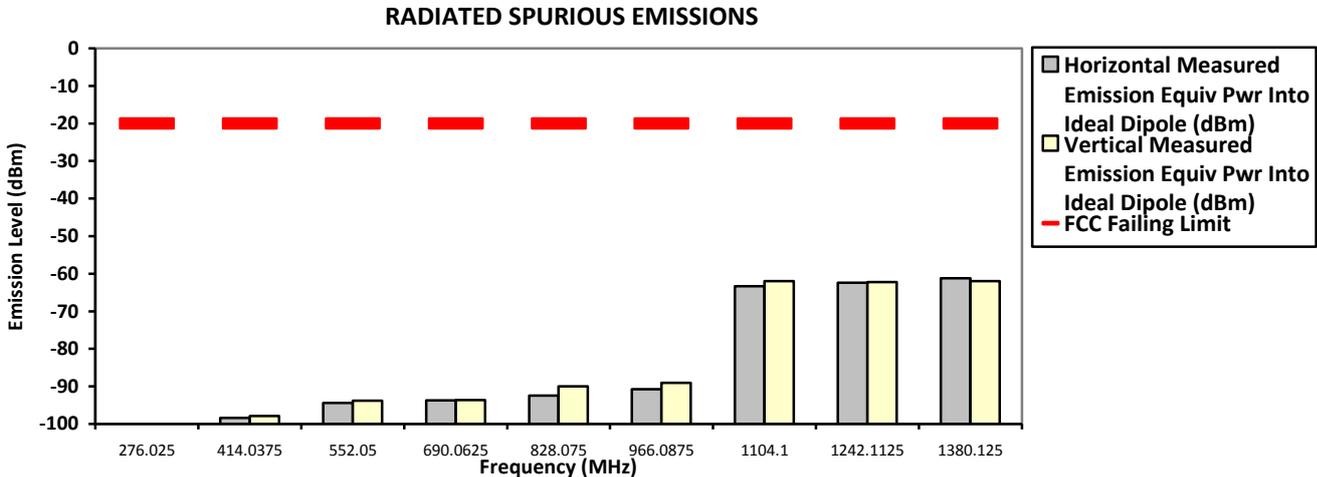

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Mon, May 02, 2016
 FCC Registration: 772092 Industry Canada: 109AK

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 71.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

