

 <b>MOTOROLA SOLUTIONS</b>	 <b>MS ISO/IEC 17025</b> <b>TESTING</b> <b>SAMM No. 0825</b>
<b>MOTOROLA PENANG ADV. COMM. LABORATORY</b> <b>Motorola Solutions Malaysia Sdn. Bhd.</b> <b>Innoplex Plot 2A Medan Bayan Lepas,</b> <b>Mukim 12, S.W.D. 11900 Bayan Lepas,</b> <b>Penang, Malaysia.</b>	<b>FCC / ISED TEST REPORT</b> <b>Report Revision : Rev.A</b>
<p> <b>Date/s Tested</b> : 21-August-2019 - 22-August-2019  <b>Report Issue Date</b> : 4-September-2019  <b>Manufacturer/Location</b> : Motorola Solutions – Penang  <b>Requestor</b> : SZE KEAT NG  <b>Product Type</b> : Portable  <b>Product Version (PMN)</b> : APX6000XE  <b>Model Number (HVIN)</b> : H98KGH9PW7BN  <b>Frequency Band</b> : 2.402 - 2.480 GHz  <b>Rated / Max RF Output Power</b> : 5 mWatts / 10 mWatts  <b>Applicant Name</b> : Motorola Solutions Malaysia Sdn Bhd  <b>Applicant Address</b> : Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D.                      11900 Bayan Lepas, Penang, Malaysia  <b>FCC Registrations</b> : 461337  <b>ISED Registrations</b> : MY0001  <b>Firmware Version (FVIN)</b> : C23.17.04B  <b>Remark</b> : Spot check base on worst case condition from test report 05882-RF-00082.                 </p> <p><b>The equipment was tested accordance to the requirement listed below:</b></p> <p> <b>2.4GHz BT) <span style="float: right;">PASS</span></b>  <b>FCC 47CFR Part 15C</b>  <b>ISED RSS 247 Issue 2,</b>  <b>February 2017</b> </p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
Prepared By:  <hr/> <b>Azil Ezzaddin Khalil</b> <b>Test Personnel</b>	Approved By:  <hr/> <b>Ho Sze Khian</b> <b>Responsible Engineer</b>

## Table of Contents

1.0. General Information.....	3
1.1. Channel number and frequency information: .....	4
2.0. Summary of Test Results .....	5
3.0. Measurement Uncertainty .....	5
4.0. Equipment List.....	6
5.0. Test Mode Applicability and Test Channel Detail .....	7
6.0. Radiated Emission within restricted Bands .....	9
6.0.1. Test Setup .....	9
6.0.2. Test Limits: .....	10
6.0.3. Test Data:.....	11
6.1. AC Powerline Conducted Emission.....	16
6.1.1. Test Setup .....	16
6.1.2. Test Limits: .....	17
6.1.3. Test Result .....	17

### REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	04-September-2019	Azil Ezzaddin Khalil

## 1.0. General Information

### EUT Description:

<b>Technologies</b>	2.4GHz BT
<b>TX Frequency range</b>	2402MHz – 2480MHz
<b>Modulation Type</b>	GFSK, Pi/4 DQPSK,8DPSK
<b>Input/Output</b>	RF Port
<b>Connector type</b>	PROGRAMMING, TEST & ALIGNMENT CABLE
<b>Antenna type</b>	INTERNAL BT/WLAN ANTENNA (RADIO ONLY),
<b>No. of Antenna</b>	1

The EUT contains following accessory devices and data cable:

<b>Item</b>	<b>Brand</b>	<b>Model or P/N</b>
BATT IMPRES 2 LIION R IP68 4850T	MOTOROLA	PMNN4487A
VHF/GPS (136-174MHZ, 1575MHZ)	MOTOROLA	NAR6593A

### 1.1. Channel number and frequency information:

79 channels are provided to this EUT:

<b>Channel</b>	<b>Freq. (MHz)</b>						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

**FCC 47 CFR Part 15 Subpart C**  
**KDB 558074 D01 15.247 Meas Guidance v05**  
**ANSI C63.10-2013**

A pigtail was soldered out of the Bluetooth/WiFi subsection to allow for conducted tests in this report.

### Deviation from standard

Not applicable as no deviation from standard test method

## 2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark	Serial number tested
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Highest Spur Level:	756TVK0280
15.207	RSS-Gen 8.8	AC Power Line Conducted Emission	NA	Not Performed.	Not Performed.
15.203	-	Antenna requirement	NA	Internal antenna is not accessible to the end-user	Not Performed.

NA → Not Available

## 3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

#### 4.0. Equipment List

##### **Radiated Emission Station (SW Version: EMC FCC RE v1.5.1)**

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY ( 0-60V / 0-50A, 1000W )	6032A	MY41001736	25-May-19	25-May-20
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
SIGNAL ANALYZER	FSV40	101103	20-Jul-19	20-Jul-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Jul-20
5m Semi-anechoic Chamber	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112D	25224	1-Aug-18	1-Nov-19
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
DATA LOGGER	SDL500	A.016800	19-Mar-19	18-Mar-20
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	21-Dec-18	21-Dec-19
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	001	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-20
LOOP ANTENNA	6502	00203479	10-Dec-18	10-Dec-19
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.5.2			

## 5.0. Test Mode Applicability and Test Channel Detail

### **Radiated Emission Test (Above 1GHz)**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

<b>EUT Configure Mode</b>	<b>Available Channel</b>	<b>Tested Channel</b>	<b>Modulation Technology</b>	<b>Modulation Type</b>	<b>Environmental Conditions</b>
<b>Test Mode</b>	<b>0 to 78</b>	<b>39</b>	<b>FHSS</b>	<b>GFSK</b>	<b>23.2°C, 70.3%RH</b>

### **Radiated Emission Test (Below 1GHz)**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

<b>EUT Configure Mode</b>	<b>Available Channel</b>	<b>Tested Channel</b>	<b>Modulation Technology</b>	<b>Modulation Type</b>	<b>Environmental Conditions</b>
<b>Test Mode</b>	<b>0 to 78</b>	<b>39</b>	<b>FHSS</b>	<b>GFSK</b>	<b>23.2°C, 70.3%RH</b>

**Power Line Conducted Emission Test**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Application Mode	0 to 78	AUTO	FHSS	AUTO	Not Performed.


**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	Not Performed.

## 6.0. Radiated Emission within restricted Bands

### 6.0.1. Test Setup

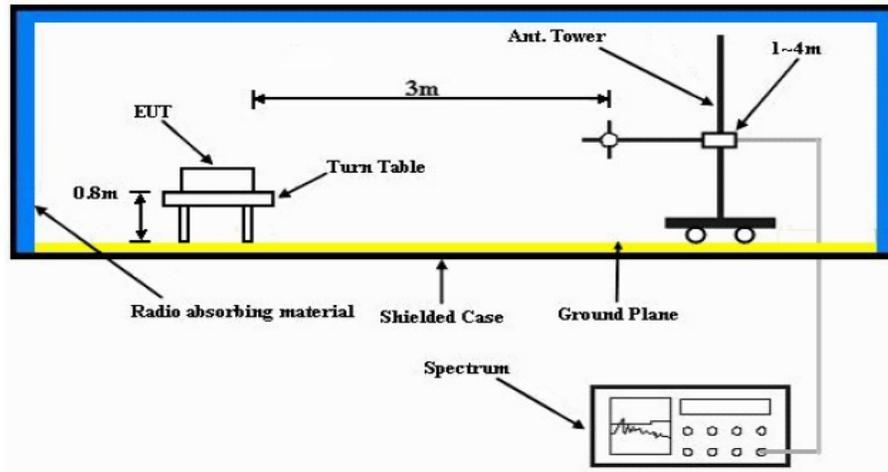

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

**NOTE:**

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- c. All modes of operation were investigated and the worst-case emissions are reported.

**6.0.2. Test Limits:**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**NOTE:**


- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.




Motorola Solutions.

FCC ID: AZ489FT7087, IC ID: 109U-89FT7087

### VERTICAL, QPK

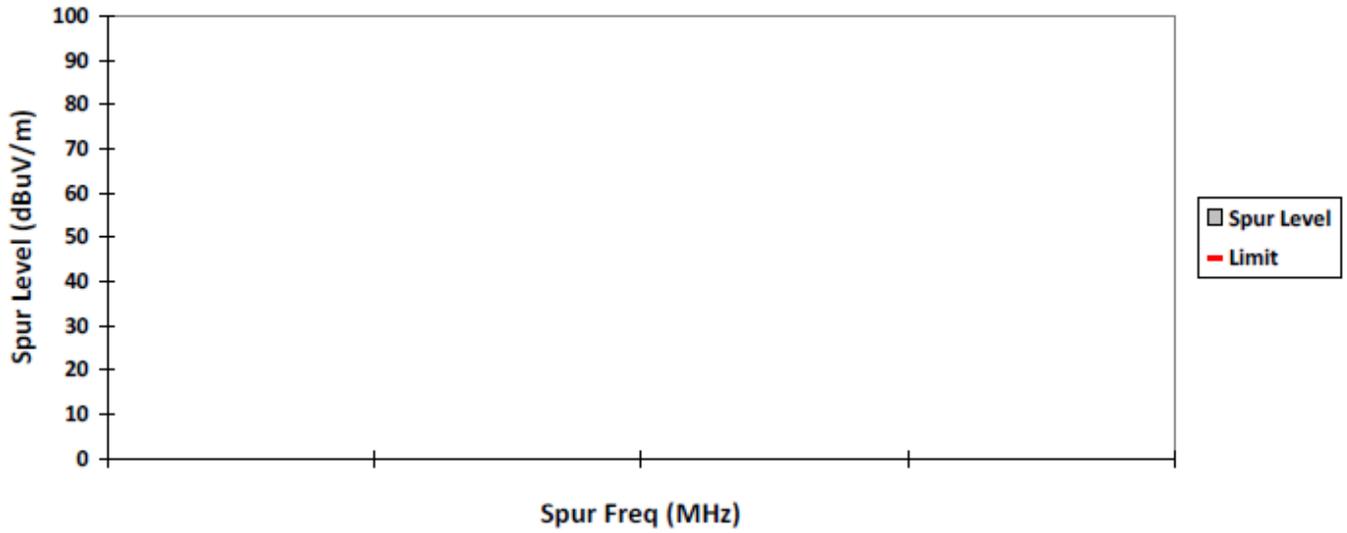


### HORIZONTAL, QPK

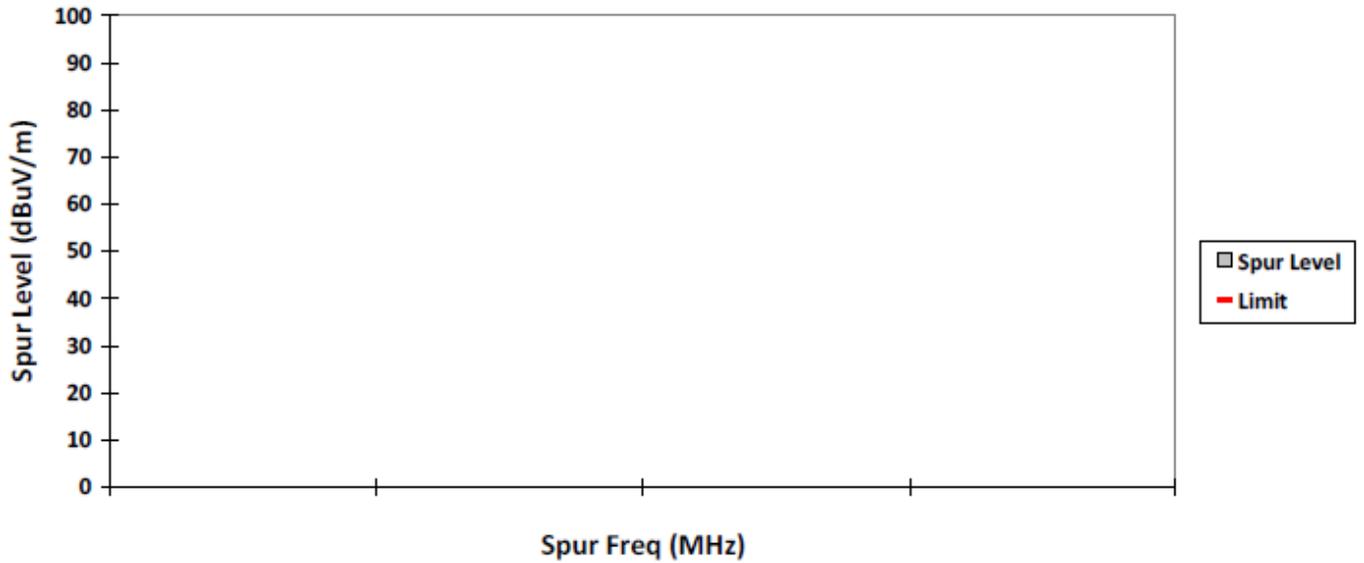


Motorola Solutions.

FCC ID: AZ489FT7087, IC ID: 109U-89FT7087

### VERTICAL, PK

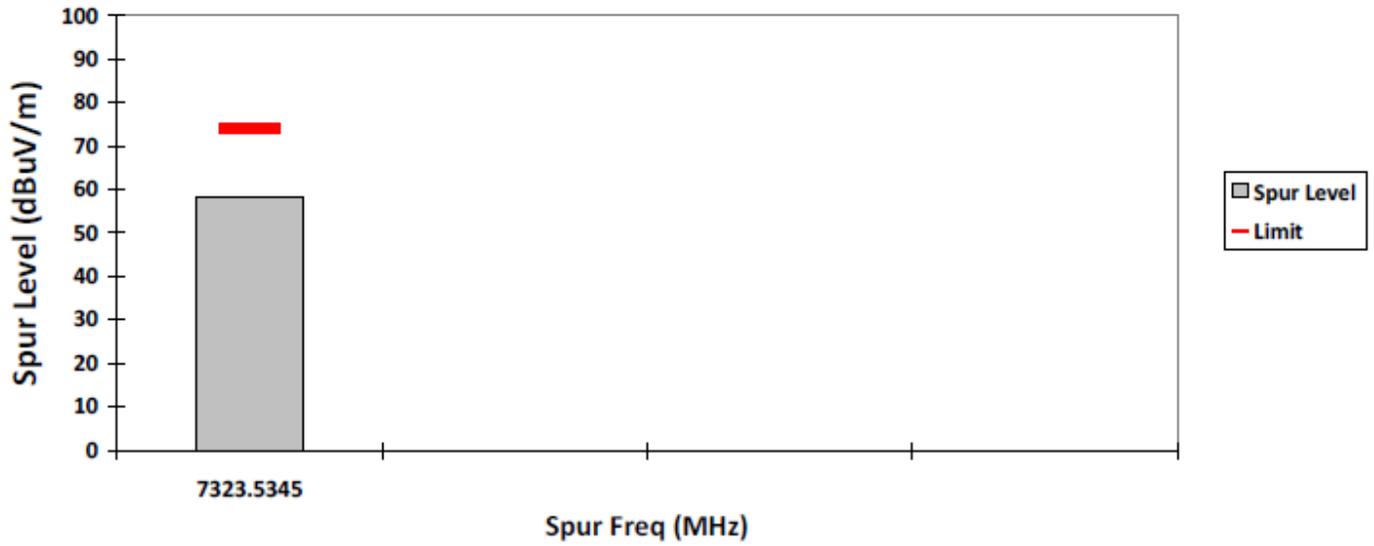


### HORIZONTAL, PK

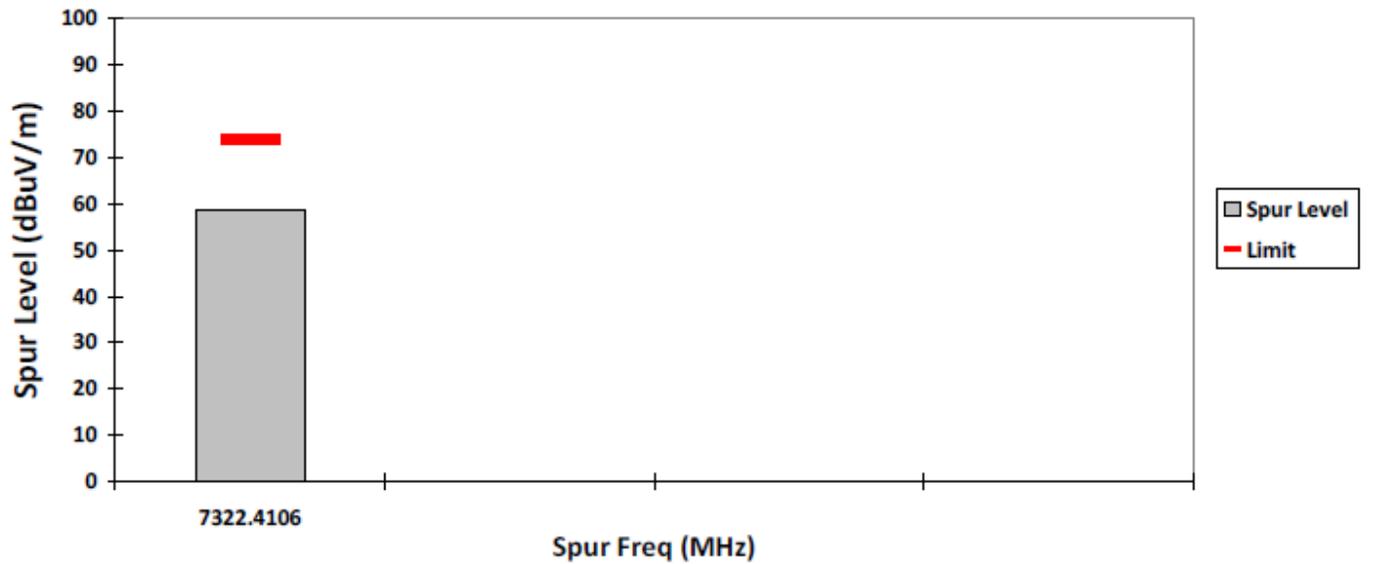


Motorola Solutions.

FCC ID: AZ489FT7087, IC ID: 109U-89FT7087

### VERTICAL, AV

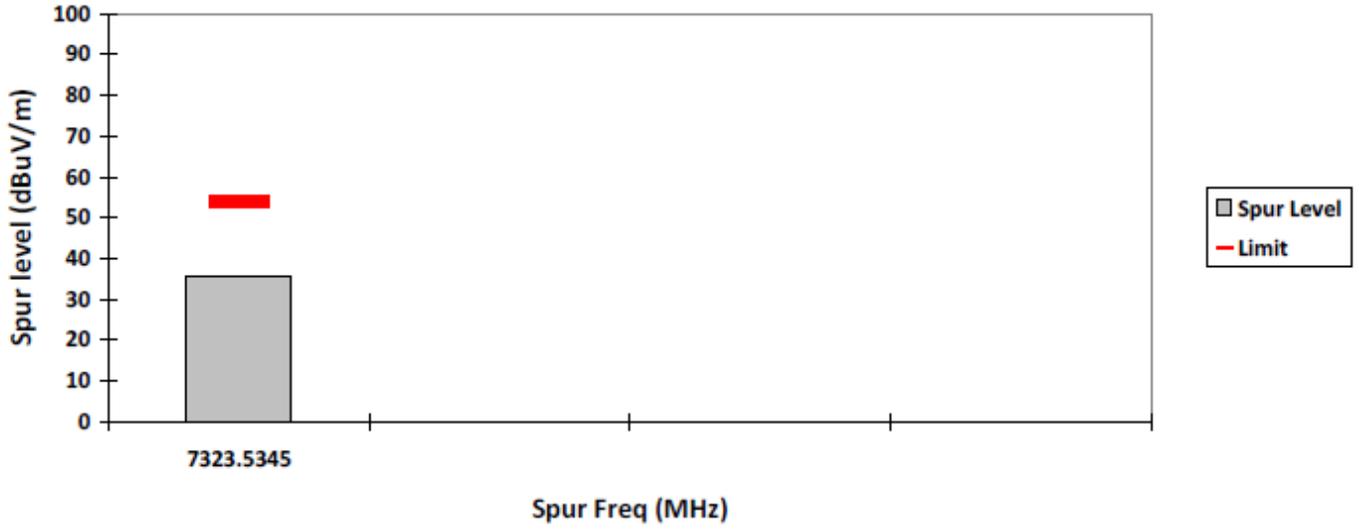

### HORIZONTAL, AV

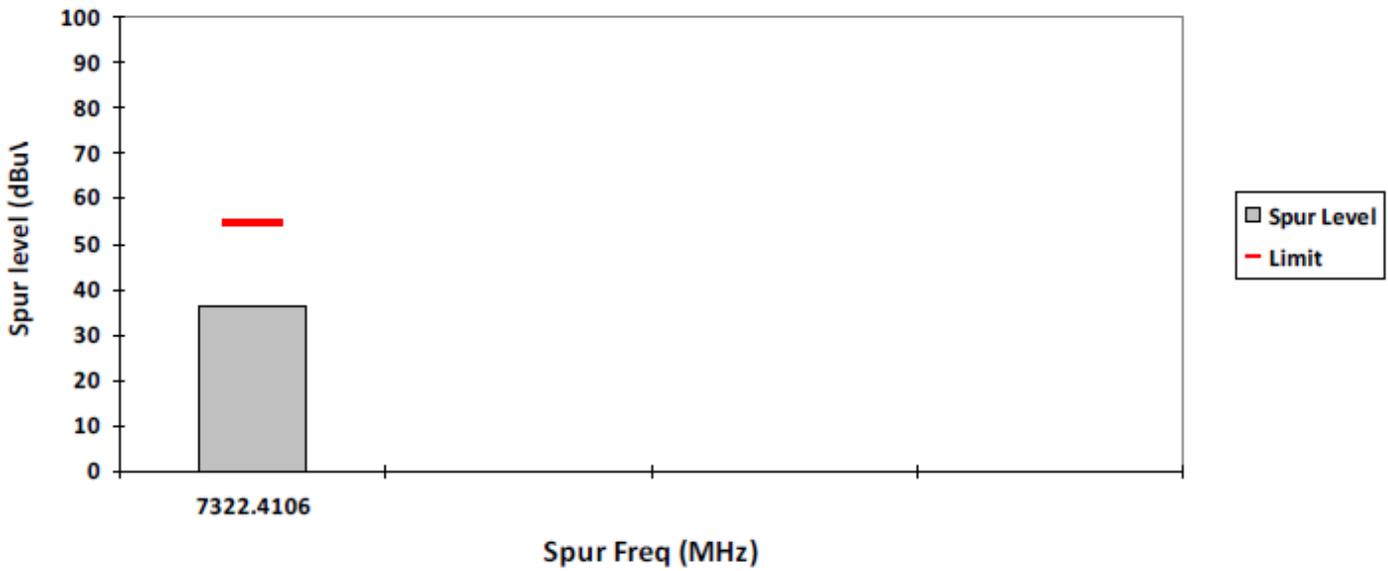

**Motorola Solutions.**

**FCC ID: AZ489FT7087, IC ID: 109U-89FT7087**

**NOTE:**

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)

Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop =  $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels =  $7.5 \times 20 \text{ channels} = 150 \text{ ms}$


Number of times transmitter hits on one channel =  $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor =  $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

## 6.1. AC Powerline Conducted Emission

### 6.1.1. Test Setup

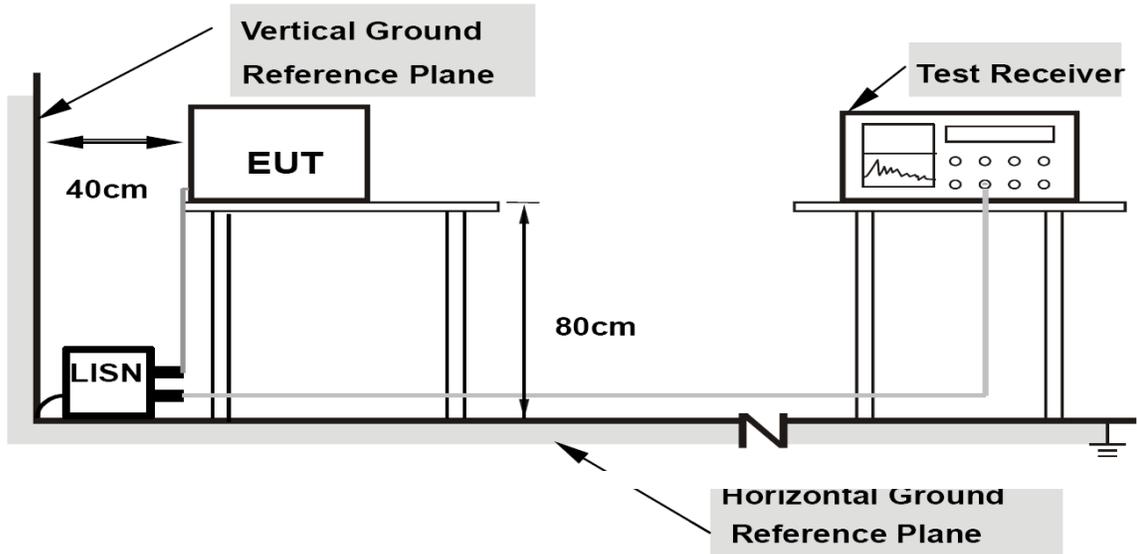

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

### 6.1.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports  
of class A ITE

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

**Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.**

Limits for conducted disturbance at the mains ports  
of class B ITE

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE**

### 6.1.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

**END OF TEST REPORT**