



TESTING CERT # 2518.01

Exhibit 7B: SAR Test Report Photographs

Motorola Solutions Inc
EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322



Tiong

Tiong Nguk Ing
Deputy Technical Manager
Approval Date: 3/10/2016

Report Revision History

Date	Revision	Comments
2/10/2016	A	Initial release
2/29/2016	B	Add in photo for display model HK2062A
3/10/2016	C	Add in the DUT separation distance.

1.0 Highest SAR Test Position per body location


1.1 Body

Back of DUT with offered standard battery PMNN4507A and body worn HW000331A02 against the phantom. Same position used for front of DUT facing phantom and other applicable offered battery. Minimum test separation distance as shown below:



1.2 Face

Back of DUT with offered standard battery PMNN4507A separated 2.5cm from the phantom. Same position used for other applicable offered battery. Minimum test separation distance as shown below:

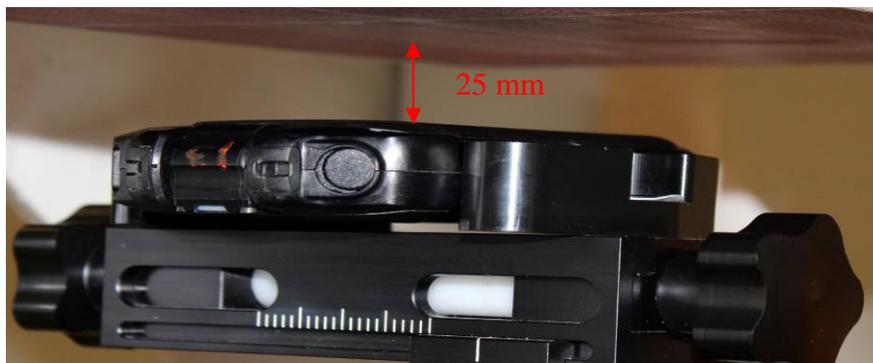

1.3 Head

Not applicable.

1.4 Hand

Not applicable

2.0 Other SAR tested positions at the body

2.1 Body worn

Back of DUT with offered standard battery PMNN4507A and body worn PMLN7414A against the phantom. Same position used for front of DUT facing phantom and other applicable offered battery. Minimum test separation distance as shown below:



Back of DUT with offered standard battery PMNN4507A and body worn HW000331A02 with shoulder strap PMLN7415A against the phantom. Same position used for front of DUT facing phantom and other applicable offered battery. Minimum test separation distance as shown below:



Back of DUT with offered standard battery PMNN4507A and body worn PMLN7414A with shoulder strap PMLN7415A against the phantom. Same position used for front of DUT facing phantom and other applicable offered battery. Minimum test separation distance as shown below:



- 2.2 **Front Side against phantom**
Not applicable.
- 2.3 **Back side against phantom**
Not applicable.
- 2.4 **Front 2.5cm separation**
Not applicable
- 2.5 **Antenna 2.5cm separation**
Not applicable
- 2.6 **Back 2.5cm separation**
Not applicable

3.0 Other SAR tested positions at the face

3.1 Back of DUT at 2.5cm separation

Refer to section 1.2.

3.2 Front of DUT at 2.5cm separation

Front of DUT with offered standard battery PMNN4507A separated 2.5cm from the phantom. Same position used for other applicable offered battery. Minimum test separation distance as shown below:



4.0 Other SAR tested positions at the head

4.1 Left ear touch

Not applicable.

4.2 Left ear tilt

Not applicable.

4.3 Right ear touch

Not applicable.

4.4 Right ear tilt

Not applicable.

5.0 Other SAR tested positions at the hand

5.1 Left side

Not applicable.

5.2 Right side

Not applicable.

5.3 Top side

Not applicable.

5.4 Bottom side
Not applicable.

5.5 Back side
Not applicable.

6.0 DUT and Accessory Photos

The purpose of these photos is to illustrate the tested accessories. Refer to Part 1 of 2, section 7.0 for additional details on the offered accessories.

6.1 Antenna dimension and photo(s):

Antenna	Description
AN000154A01	2.4 GHz Internal BT/WLAN, 3.2 dBi
AN000154A01	5 GHz Internal WLAN, 4.2 dBi

2.4/5GHZ Bluetooth/Wi-Fi
Antenna Location
(Surface mount chip antenna)



AN000154A01 antenna pointed with arrow

6.2 Body worn accessories



HW000331A02 Metal Carry Holder (Back and Side view)



PMLN7414A Carry Holder (Back and Side view)



PMLN7415A shoulder strap (Back, front and Side view)

7.0 Battery Accessory Photos



PMNN4507A (Standard Battery)



PMNN4508A (Extended Battery)