



FCC RF Test Report

APPLICANT : Motorola Solutions, Inc.
EQUIPMENT : NITRO Two-Way Radio
BRAND NAME : Motorola Solutions
MODEL NAME : SLN 1000
FCC ID : AZ489FT7123
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jan. 30, 2019 and testing was completed on Apr. 15, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT.....	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	16
3.4 Unwanted Emissions Measurement	19
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT	28
5 UNCERTAINTY OF EVALUATION	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR913001D	Rev. 01	Initial issue of report	May. 03, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 6.07 dB at 5352.300 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.53 dB at 0.491 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Solutions, Inc.

8000 West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States

1.2 Manufacturer

Motorola Solutions, Inc.

8000 West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	NITRO Two-Way Radio
Brand Name	Motorola Solutions
Model Name	SLN 1000
FCC ID	AZ489FT7123
EUT supports Radios application	LTE/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 004401680685852 Conduction: 004401680685688 Radiation: 004401680682776
HW Version	P2
SW Version	KEY_BASE_USR_D05.00.66
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.89 dBm / 0.0388 W 802.11n HT20 : 13.86 dBm / 0.0243 W 802.11n HT40 : 12.86 dBm / 0.0193 W <5260 MHz ~ 5320 MHz> 802.11a : 15.87 dBm / 0.0386 W 802.11n HT20 : 14.16 dBm / 0.0261 W 802.11n HT40 : 13.33 dBm / 0.0215 W <5500 MHz ~ 5720 MHz > 802.11a : 16.06 dBm / 0.0404 W 802.11n HT20 : 14.08 dBm / 0.0256 W 802.11n HT40 : 13.18 dBm / 0.0208 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.93 MHz 802.11n HT20 : 17.78 MHz 802.11n HT40 : 36.06 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.98 MHz 802.11n HT20 : 17.73 MHz 802.11n HT40 : 36.06 MHz <5500 MHz ~ 5720 MHz > 802.11a : 17.03 MHz 802.11n HT20 : 17.78 MHz 802.11n HT40 : 36.06 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz > Internal FPC Antenna with gain 1.49 dBi <5260 MHz ~ 5320 MHz > Internal FPC Antenna with gain 1.31 dBi <5500 MHz ~ 5720 MHz > Internal FPC Antenna with gain 0.22 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH05-KS	CN5013	630927

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	116	5580
	102*	5510	132	5660
	104	5520	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
	112	5560		

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
TDWR Channel	118*	5590	126*	5630
	120	5600	128	5640
	124	5620		

Frequency Band	Channel	Freq.(MHz)	Channel	Freq.(MHz)
Straddle Channel	142*	5710	144	5720

Note: The above Frequency and Channel in "*" were 802.11n HT40.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : LTE Band 48 Idle + Bluetooth Link + WLAN Link (5G) + Earphone 4 + Adapter 3
Remark: - For radiated test, pre-scan are performed with Adapter 1/2/3 and stand-alone mode, Earphone 5 is from Part15B worst case, and only the worst case (Adapter 1 + Earphone 5) is reported. - For AC conducted test, the Adapter 3 + Earphone 4 are from Part 15B worst case.	

Ch. #		UNII-1 : 5150-5250 MHz	UNII-2a : 5250-5350 MHz	UNII-2c : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		UNII-1 : 5150-5250 MHz	UNII-2a : 5250-5350 MHz	UNII-2c : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		UNII-1 : 5150-5250 MHz	UNII-2a : 5250-5350 MHz	UNII-2c : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	AC I/P: Unshielded, 1.8m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 6.8 dB

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

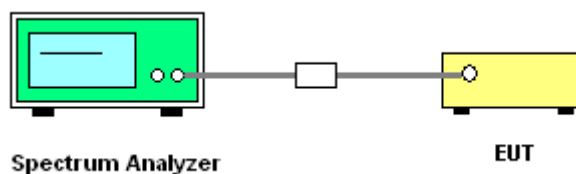

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

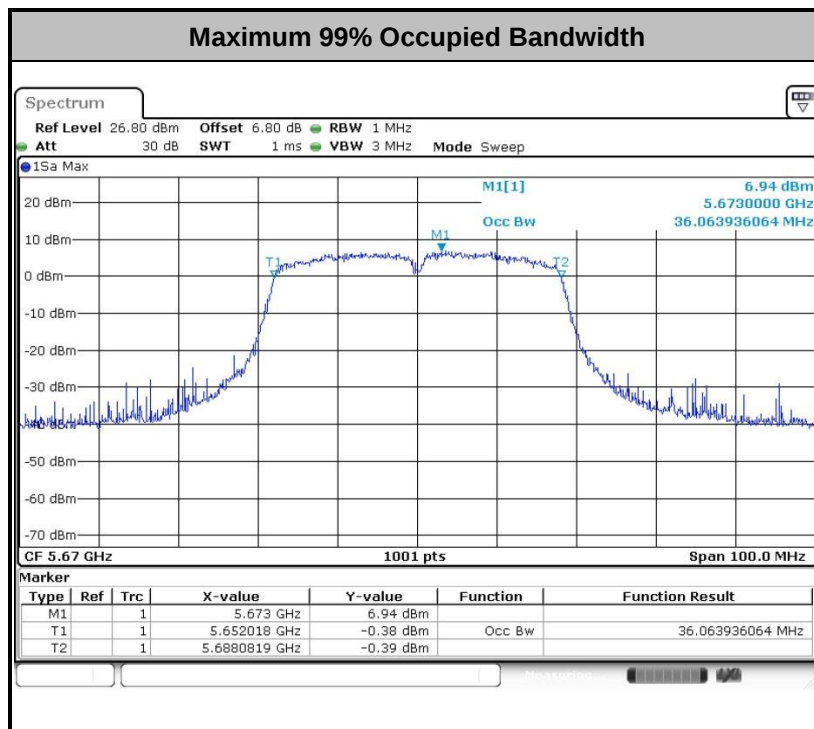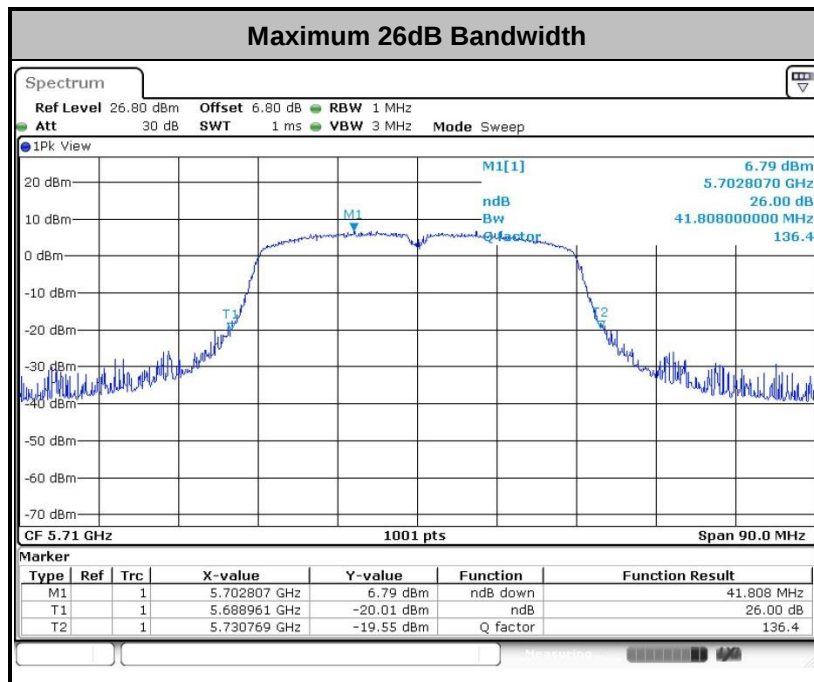

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

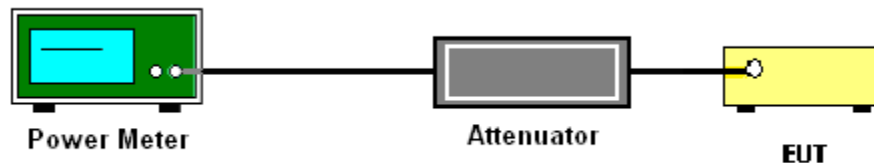

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
 -
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

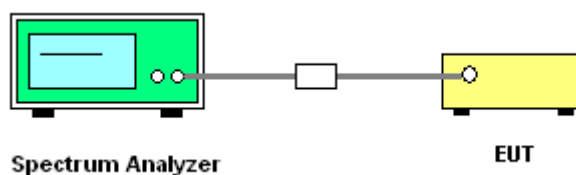

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

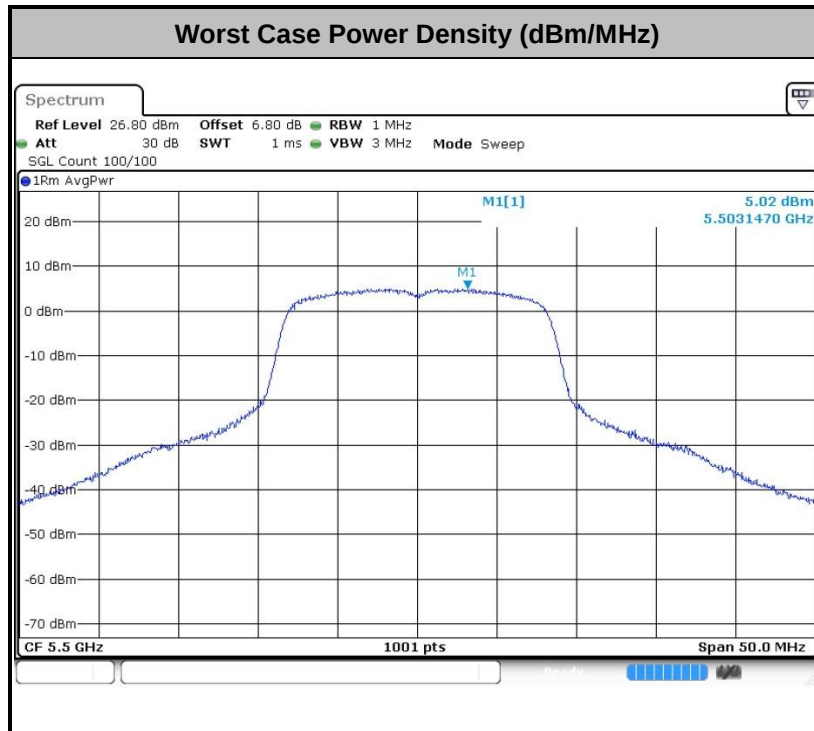

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

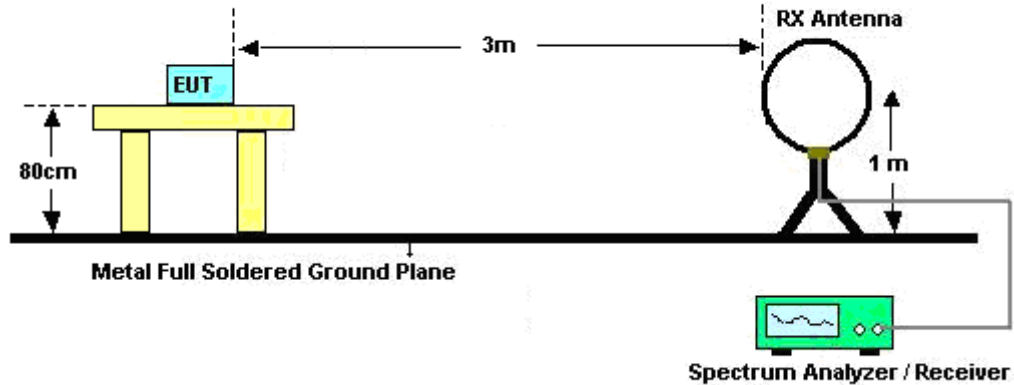

For radiated emissions from 30MHz to 1GHz

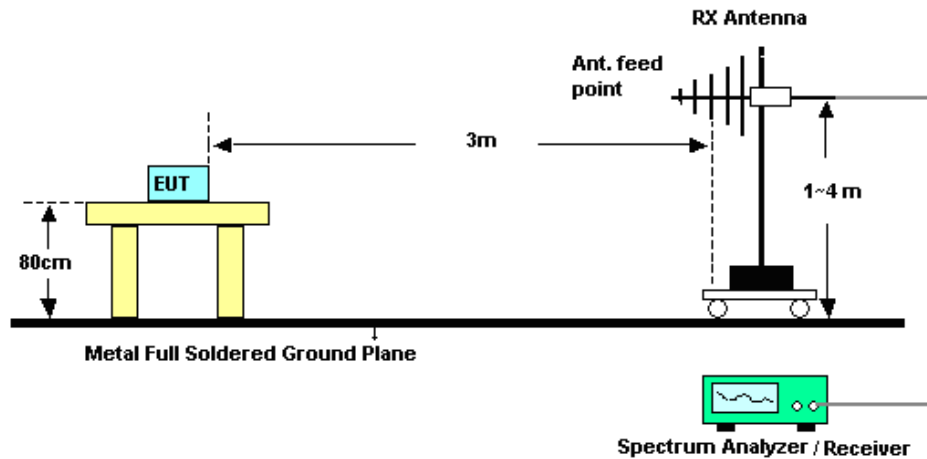

For radiated emissions above 1GHz

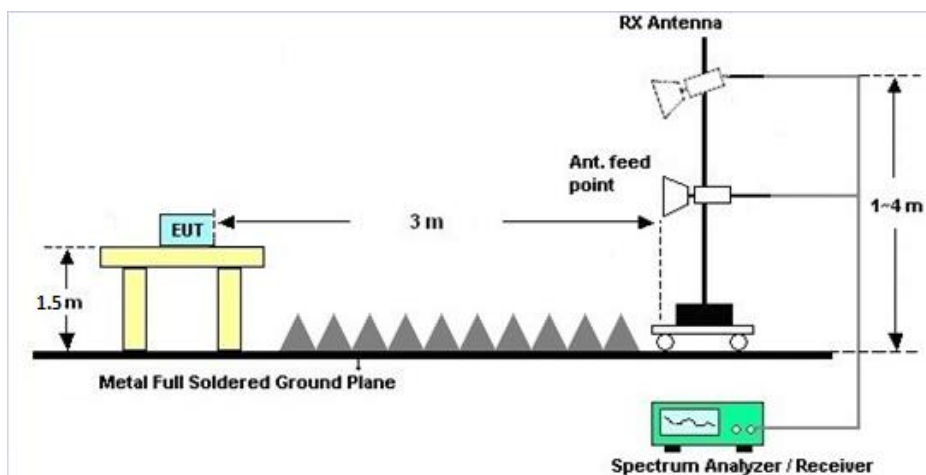



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

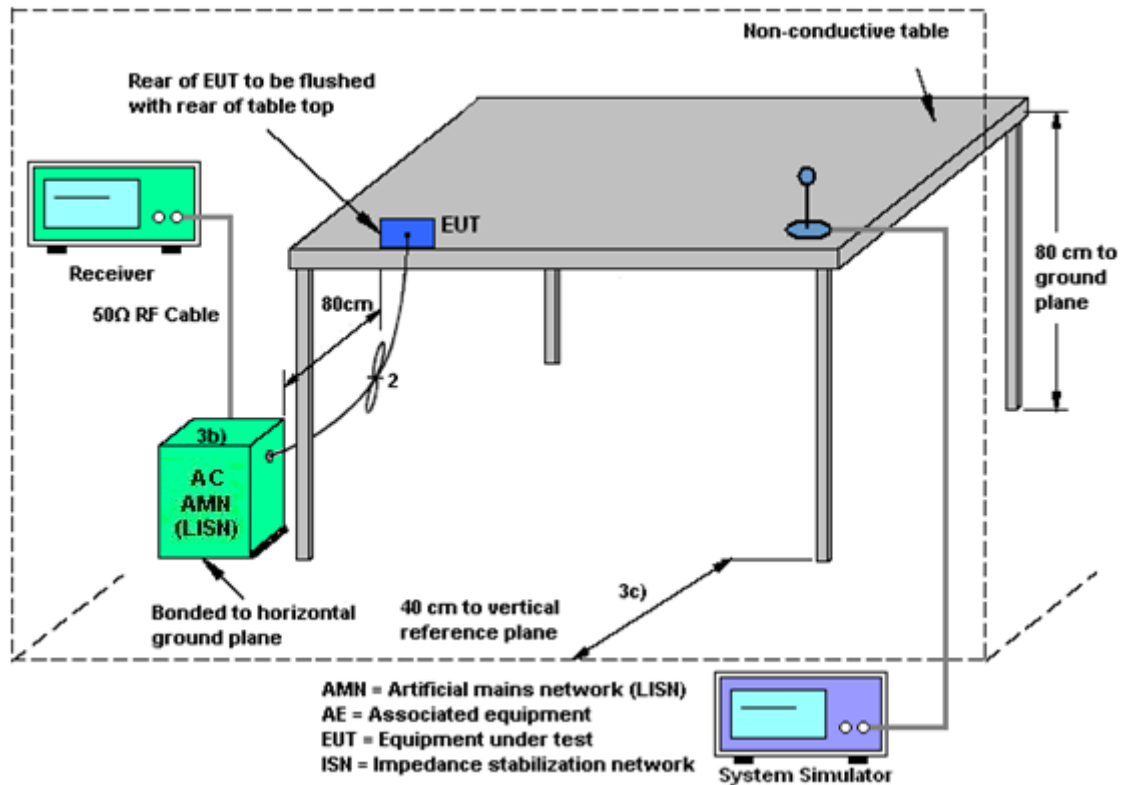

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Apr. 10, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Apr. 10, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Apr. 10, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jun. 25, 2018	Apr. 10, 2019~Apr. 11, 2019	Jun. 24, 2019	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 17, 2018	Apr. 10, 2019~Apr. 11, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Apr. 10, 2019~Apr. 11, 2019	Oct. 18, 2019	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 12, 2018	Apr. 10, 2019~Apr. 11, 2019	Jun. 11, 2019	Radiation (03CH05-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2019	Apr. 10, 2019~Apr. 11, 2019	Jan. 26, 2020	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Apr. 10, 2019~Apr. 11, 2019	Jan. 04, 2020	Radiation (03CH05-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32dB	Apr 17, 2018	Apr. 10, 2019~Apr. 11, 2019	Apr 16, 2019	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Apr. 10, 2019~Apr. 11, 2019	Jan. 13, 2020	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Apr. 10, 2019~Apr. 11, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 18, 2018	Apr. 10, 2019~Apr. 11, 2019	Apr. 17, 2019	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 10, 2019~Apr. 11, 2019	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 10, 2019~Apr. 11, 2019	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 10, 2019~Apr. 11, 2019	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Apr. 15, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Apr. 15, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Apr. 15, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Apr. 15, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------



Appendix A. Conducted Test Results

Test Engineer:	Weller Liu	Temperature:	21~25	°C
Test Date:	2019/4/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

UNII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.93	20.88	-	22.29		
11a	6Mbps	1	44	5220	16.88	20.93	-	22.27		
11a	6Mbps	1	48	5240	16.88	21.08	-	22.27		
HT20	MCS0	1	36	5180	17.78	21.53	-	22.50		
HT20	MCS0	1	44	5220	17.73	21.63	-	22.49		
HT20	MCS0	1	48	5240	17.73	21.63	-	22.49		
HT40	MCS0	1	38	5190	35.96	41.36	-	23.01		
HT40	MCS0	1	46	5230	36.06	41.45	-	23.01		

TEST RESULTS DATA
Average Power Table

UNII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	94.37	14.80	24.00	0.00		Pass
11a	6Mbps	1	44	5220	94.37	15.89	24.00	0.00		Pass
11a	6Mbps	1	48	5240	94.37	15.83	24.00	0.00		Pass
HT20	MCS0	1	36	5180	93.93	13.86	24.00	0.00		Pass
HT20	MCS0	1	44	5220	93.93	13.82	24.00	0.00		Pass
HT20	MCS0	1	48	5240	93.93	13.74	24.00	0.00		Pass
HT40	MCS0	1	38	5190	89.73	12.84	24.00	0.00		Pass
HT40	MCS0	1	46	5230	89.73	12.86	24.00	0.00		Pass

TEST RESULTS DATA
Power Spectral Density

UNII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.25	4.80	11.00	1.49		Pass
11a	6Mbps	1	44	5220	0.25	5.02	11.00	1.49		Pass
11a	6Mbps	1	48	5240	0.25	5.06	11.00	1.49		Pass
HT20	MCS0	1	36	5180	0.27	2.78	11.00	1.49		Pass
HT20	MCS0	1	44	5220	0.27	2.95	11.00	1.49		Pass
HT20	MCS0	1	48	5240	0.27	2.95	11.00	1.49		Pass
HT40	MCS0	1	38	5190	0.47	-0.69	11.00	1.49		Pass
HT40	MCS0	1	46	5230	0.47	-0.95	11.00	1.49		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2a										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.98	21.13	23.30	29.30	23.98	
11a	6M bps	1	60	5300	16.93	20.93	23.29	29.29	23.98	
11a	6M bps	1	64	5320	16.98	21.13	23.30	29.30	23.98	
HT20	MCS 0	1	52	5260	17.73	21.78	23.49	29.49	23.98	
HT20	MCS 0	1	60	5300	17.73	21.58	23.49	29.49	23.98	
HT20	MCS 0	1	64	5320	17.73	21.68	23.49	29.49	23.98	
HT40	MCS 0	1	54	5270	36.06	41.63	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.06	41.72	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

UNII-2a										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	94.37	15.87	23.98	1.31	26.99	Pass
11a	6M bps	1	60	5300	94.37	15.57	23.98	1.31	26.99	Pass
11a	6M bps	1	64	5320	94.37	15.50	23.98	1.31	26.99	Pass
HT20	MCS 0	1	52	5260	93.93	14.16	23.98	1.31	26.99	Pass
HT20	MCS 0	1	60	5300	93.93	13.92	23.98	1.31	26.99	Pass
HT20	MCS 0	1	64	5320	93.93	13.89	23.98	1.31	26.99	Pass
HT40	MCS 0	1	54	5270	89.73	13.33	23.98	1.31	26.99	Pass
HT40	MCS 0	1	62	5310	89.73	12.39	23.98	1.31	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

UNII-2a										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.25	4.98	11.00	1.31		Pass
11a	6M bps	1	60	5300	0.25	4.87	11.00	1.31		Pass
11a	6M bps	1	64	5320	0.25	4.83	11.00	1.31		Pass
HT20	MCS 0	1	52	5260	0.27	3.15	11.00	1.31		Pass
HT20	MCS 0	1	60	5300	0.27	3.06	11.00	1.31		Pass
HT20	MCS 0	1	64	5320	0.27	3.02	11.00	1.31		Pass
HT40	MCS 0	1	54	5270	0.47	-0.85	11.00	1.31		Pass
HT40	MCS 0	1	62	5310	0.47	-1.01	11.00	1.31		Pass

TEST RESULTS DATA
26dB and 99% OBW

UNII-2c										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.03	21.28	23.31	29.31	23.98	
11a	6M bps	1	116	5580	17.03	21.73	23.31	29.31	23.98	
11a	6M bps	1	140	5700	16.98	21.38	23.30	29.30	23.98	
11a	6Mbps	1	144	5720	17.03	22.18	23.31	29.31	23.98	
HT20	MCS 0	1	100	5500	17.78	21.73	23.50	29.50	23.98	
HT20	MCS 0	1	116	5580	17.73	21.63	23.49	29.49	23.98	
HT20	MCS 0	1	140	5700	17.73	21.68	23.49	29.49	23.98	
HT20	MCS0	1	144	5720	17.78	21.63	23.50	29.50	23.98	
HT40	MCS 0	1	102	5510	35.96	41.72	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	35.96	41.63	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.06	41.45	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	35.96	41.81	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


UNII-2c										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	94.37	15.92	23.98	0.22	26.99	Pass
11a	6M bps	1	116	5580	94.37	16.06	23.98	0.22	26.99	Pass
11a	6M bps	1	140	5700	94.37	15.81	23.98	0.22	26.99	Pass
11a	6Mbps	1	144	5720	94.37	15.51	23.98	0.22	26.99	Pass
HT20	MCS 0	1	100	5500	93.93	13.82	23.98	0.22	26.99	Pass
HT20	MCS 0	1	116	5580	93.93	14.08	23.98	0.22	26.99	Pass
HT20	MCS 0	1	140	5700	93.93	13.39	23.98	0.22	26.99	Pass
HT20	MCS0	1	144	5720	94.37	13.22	23.98	0.22	26.99	Pass
HT40	MCS 0	1	102	5510	89.73	12.90	23.98	0.22	26.99	Pass
HT40	MCS 0	1	110	5550	89.73	13.18	23.98	0.22	26.99	Pass
HT40	MCS 0	1	134	5670	89.73	12.96	23.98	0.22	26.99	Pass
HT40	MCS0	1	142	5710	89.73	12.89	23.98	0.22	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

UNII-2c										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.25	5.27	11.00	0.22		Pass
11a	6M bps	1	116	5580	0.25	5.20	11.00	0.22		Pass
11a	6M bps	1	140	5700	0.25	4.86	11.00	0.22		Pass
11a	6Mbps	1	144	5720	0.25	3.99	11.00	0.22		Pass
HT20	MCS 0	1	100	5500	0.27	3.30	11.00	0.22		Pass
HT20	MCS 0	1	116	5580	0.27	2.97	11.00	0.22		Pass
HT20	MCS 0	1	140	5700	0.27	2.95	11.00	0.22		Pass
HT20	MCS0	1	144	5720	0.27	1.28	11.00	0.22		Pass
HT40	MCS 0	1	102	5510	0.47	-0.79	11.00	0.22		Pass
HT40	MCS 0	1	110	5550	0.47	-0.68	11.00	0.22		Pass
HT40	MCS 0	1	134	5670	0.47	-1.72	11.00	0.22		Pass
HT40	MCS0	1	134	5710	0.47	-1.97	11.00	0.22		Pass




Appendix B. AC Conducted Emission Test Results

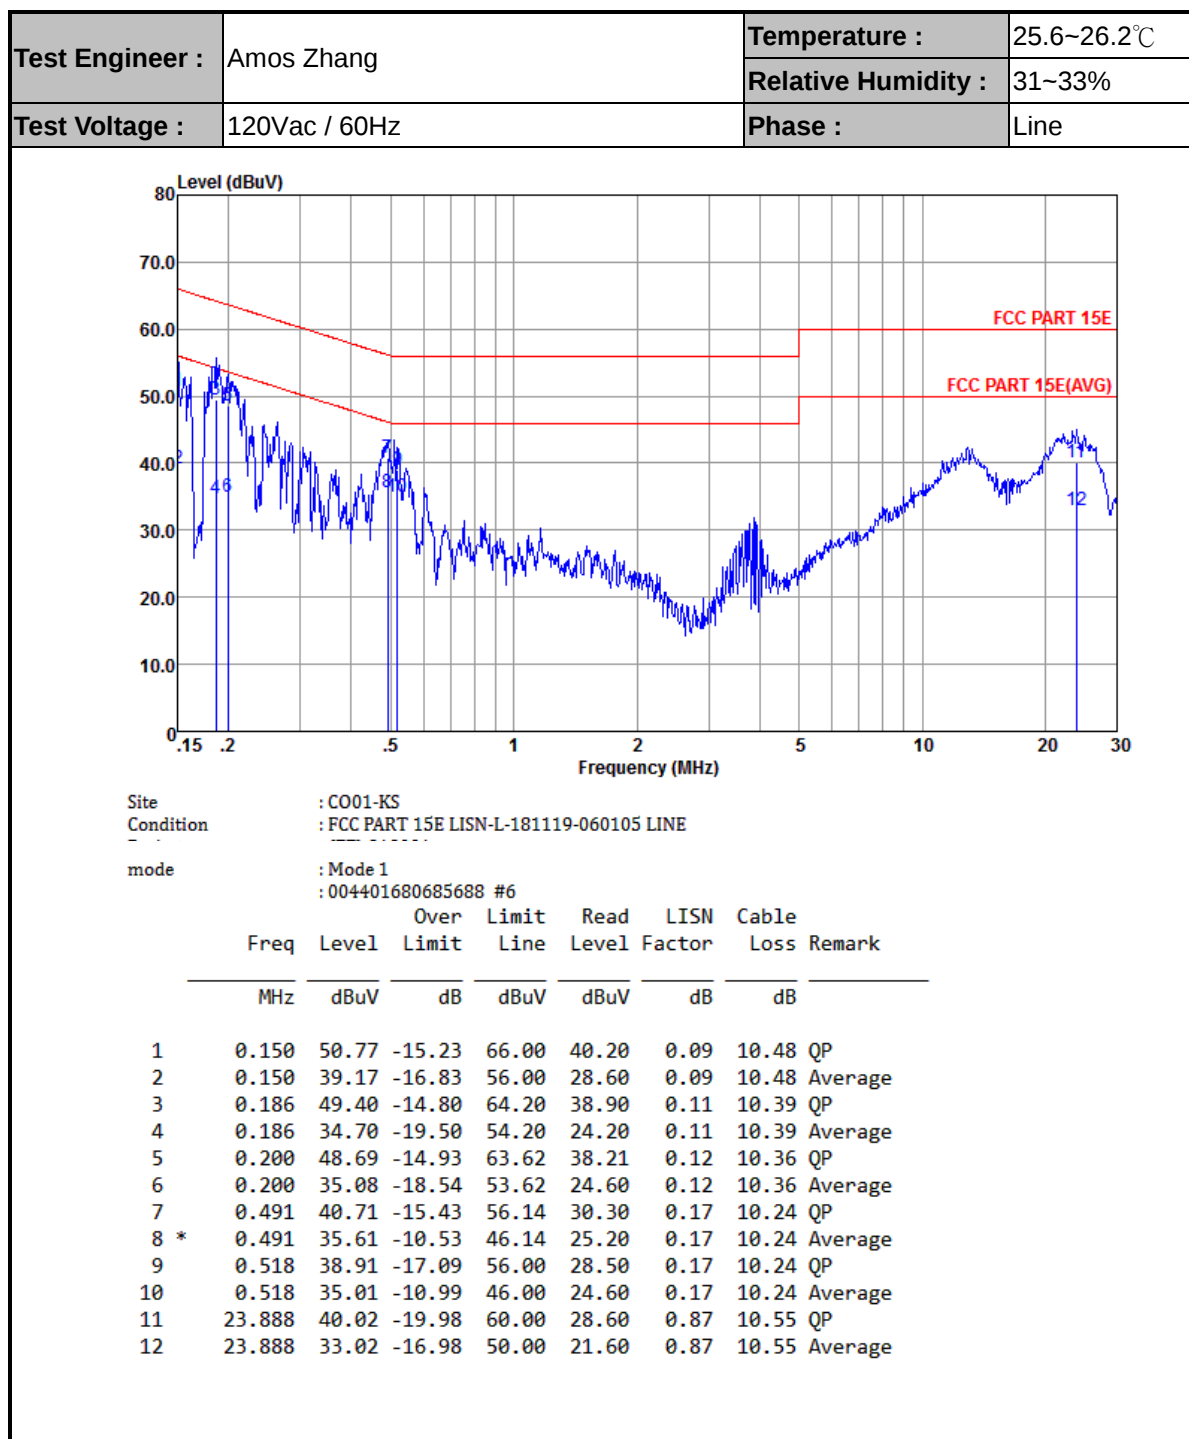



Test Engineer :	Amos Zhang	Temperature :	25.6~26.2℃
		Relative Humidity :	31~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

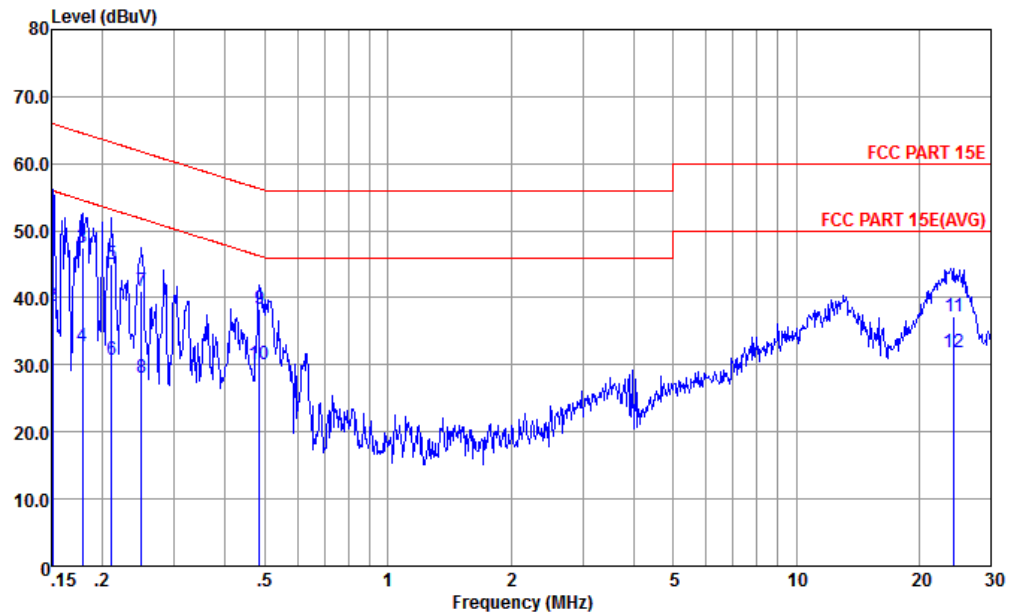

Site : CO01-KS
Condition : FCC PART 15E LISN-N-181119-060105 NEUTRAL
mode : Mode 1
: 004401680685688 #6

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	49.56	-16.40	65.96	38.90	0.18	10.48	QP
2	0.151	38.86	-17.10	55.96	28.20	0.18	10.48	Average
3	0.179	47.49	-17.06	64.55	36.90	0.18	10.41	QP
4	0.179	32.69	-21.86	54.55	22.10	0.18	10.41	Average
5	0.211	45.03	-18.15	63.18	34.50	0.17	10.36	QP
6	0.211	30.83	-22.35	53.18	20.30	0.17	10.36	Average
7	0.249	41.10	-20.68	61.78	30.60	0.17	10.33	QP
8	0.249	28.10	-23.68	51.78	17.60	0.17	10.33	Average
9	0.484	38.29	-17.98	56.27	27.90	0.15	10.24	QP
10 *	0.484	29.99	-16.28	46.27	19.60	0.15	10.24	Average
11	24.400	37.25	-22.75	60.00	25.61	1.08	10.56	QP
12	24.400	31.85	-18.15	50.00	20.21	1.08	10.56	Average



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.6	59.06	-14.94	74	45.92	35.39	8.85	31.1	100	55	P	H
	*	5149.76	47.9	-6.1	54	34.76	35.39	8.85	31.1	100	55	A	H
		5178	107.17	-	-	94.07	35.36	8.84	31.1	100	55	P	H
		5178	99.94	-	-	86.84	35.36	8.84	31.1	100	55	A	H
		5149.28	55.42	-18.58	74	42.28	35.39	8.85	31.1	146	239	P	V
		5149.92	45.89	-8.11	54	32.75	35.39	8.85	31.1	146	239	A	V
	*	5178	101.33	-	-	88.23	35.36	8.84	31.1	146	239	P	V
		5178	94.26	-	-	81.16	35.36	8.84	31.1	146	239	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	42.05	-26.25	68.3	51.94	38.47	12.63	60.99	100	360	P	H
		10360	41.1	-27.2	68.3	50.99	38.47	12.63	60.99	100	128	P	V
802.11a CH 44 5220MHz		10440	43.57	-24.73	68.3	53.33	38.52	12.7	60.98	100	204	P	H
		10440	41.65	-26.65	68.3	51.41	38.52	12.7	60.98	100	248	P	V
802.11a CH 48 5240MHz		10480	42.61	-25.69	68.3	52.27	38.56	12.75	60.97	150	295	P	H
		10480	42.45	-25.85	68.3	52.11	38.56	12.75	60.97	150	133	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5137.12	55.95	-18.05	74	42.79	35.41	8.85	31.1	100	52	P	H
		5150	47.15	-6.85	54	34.01	35.39	8.85	31.1	100	52	A	H
	*	5182	105.03	-	-	91.93	35.36	8.84	31.1	100	52	P	H
		5182	97.69	-	-	84.59	35.36	8.84	31.1	100	52	A	H
		5126.72	54.8	-19.2	74	41.64	35.41	8.85	31.1	115	238	P	V
		5150	45.37	-8.63	54	32.23	35.39	8.85	31.1	115	238	A	V
	*	5178	100.68	-	-	87.58	35.36	8.84	31.1	115	238	P	V
		5178	92.95	-	-	79.85	35.36	8.84	31.1	115	238	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	42.26	-26.04	68.3	52.15	38.47	12.63	60.99	100	360	P	H
		10360	41.46	-26.84	68.3	51.35	38.47	12.63	60.99	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	42.45	-25.85	68.3	52.21	38.52	12.7	60.98	100	360	P	H
		10440	43.55	-24.75	68.3	53.31	38.52	12.7	60.98	100	36	P	V
802.11n HT20 CH 48 5240MHz		10480	42.58	-25.72	68.3	52.24	38.56	12.75	60.97	100	126	P	H
		10480	43.19	-25.11	68.3	52.85	38.56	12.75	60.97	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5142.88	56.94	-17.06	74	43.8	35.39	8.85	31.1	100	294	P	H
		5150	47.56	-6.44	54	34.42	35.39	8.85	31.1	100	294	A	H
	*	5192	98.76	-	-	85.68	35.35	8.83	31.1	100	294	P	H
		5192	90.93	-	-	77.85	35.35	8.83	31.1	100	294	A	H
		5366.52	53.12	-20.88	74	39.68	35.22	9.32	31.1	100	294	P	H
		5386.32	43.3	-10.7	54	29.81	35.2	9.39	31.1	100	294	A	H
		5134.08	55.03	-18.97	74	41.87	35.41	8.85	31.1	317	85	P	V
		5149.92	46.54	-7.46	54	33.4	35.39	8.85	31.1	317	85	A	V
	*	5194	97.34	-	-	84.26	35.35	8.83	31.1	317	85	P	V
		5194	90.24	-	-	77.16	35.35	8.83	31.1	317	85	A	V
		5398.02	53.35	-20.65	74	39.87	35.19	9.39	31.1	317	85	P	V
		5387.4	43.37	-10.63	54	29.88	35.2	9.39	31.1	317	85	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	41.63	-26.67	68.3	51.48	38.48	12.65	60.98	100	360	P	H
		10380	42.36	-25.94	68.3	52.21	38.48	12.65	60.98	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	40.76	-27.54	68.3	50.49	38.53	12.72	60.98	150	109	P	H
		10460	42.5	-25.8	68.3	52.23	38.53	12.72	60.98	150	272	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz		5355.5	56.92	-17.08	74	43.54	35.23	9.25	31.1	100	338	P	H
		5350.5	47.89	-6.11	54	34.51	35.23	9.25	31.1	100	338	A	H
	*	5322	105.94	-	-	92.6	35.26	9.18	31.1	100	338	P	H
		5322	98.63	-	-	85.29	35.26	9.18	31.1	100	338	A	H
		5351.3	56.2	-17.8	74	42.82	35.23	9.25	31.1	148	225	P	V
		5350.3	45.68	-8.32	54	32.3	35.23	9.25	31.1	148	225	A	V
	*	5320	102.16	-	-	88.82	35.26	9.18	31.1	148	225	P	V
		5320	94.76	-	-	81.42	35.26	9.18	31.1	148	225	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52		10520	42.8	-25.5	68.3	52.4	38.58	12.79	60.97	100	360	P	H
5260MHz		10520	42.96	-25.34	68.3	52.56	38.58	12.79	60.97	100	360	P	V
802.11a CH 60		10600	41.62	-32.38	74	51.08	38.64	12.86	60.96	100	116	P	H
5300MHz		10600	41.82	-32.18	74	51.28	38.64	12.86	60.96	100	360	P	V
802.11a CH 64		10640	43.04	-30.96	74	52.41	38.67	12.91	60.95	150	94	P	H
5320MHz		10640	42.92	-31.08	74	52.29	38.67	12.91	60.95	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz		5357	56.54	-17.46	74	43.09	35.23	9.32	31.1	100	61	P	H
		5352.8	47.65	-6.35	54	34.27	35.23	9.25	31.1	100	61	A	H
	*	5316	106.83	-	-	93.49	35.26	9.18	31.1	100	61	P	H
		5316	99.45	-	-	86.11	35.26	9.18	31.1	100	61	A	H
		5384.6	54.27	-19.73	74	40.78	35.2	9.39	31.1	128	234	P	V
		5352.8	45.15	-8.85	54	31.77	35.23	9.25	31.1	128	234	A	V
	*	5318	102.54	-	-	89.2	35.26	9.18	31.1	128	234	P	V
		5318	95.07	-	-	81.73	35.26	9.18	31.1	128	234	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10520	41.26	-27.04	68.3	50.86	38.58	12.79	60.97	100	192	P	H
CH 52 5260MHz		10520	40.8	-27.5	68.3	50.4	38.58	12.79	60.97	100	4	P	V
802.11n HT20		10600	43.44	-30.56	74	52.9	38.64	12.86	60.96	150	0	P	H
CH 60 5300MHz		10600	43.12	-25.18	68.3	52.58	38.64	12.86	60.96	150	195	P	V
802.11n HT20		10640	40.34	-33.66	74	49.71	38.67	12.91	60.95	100	228	P	H
CH 64 5320MHz		10640	41.85	-32.15	74	51.22	38.67	12.91	60.95	100	82	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5139.2	54.86	-19.14	74	41.7	35.41	8.85	31.1	100	60	P	H
		5100.16	45.14	-8.86	54	31.95	35.43	8.86	31.1	100	60	A	H
	*	5314	101.72	-	-	88.38	35.26	9.18	31.1	100	60	P	H
		5314	93.92	-	-	80.58	35.26	9.18	31.1	100	60	A	H
		5351.8	65.85	-8.15	74	52.47	35.23	9.25	31.1	100	60	P	H
		5352.3	47.93	-6.07	54	34.55	35.23	9.25	31.1	100	60	A	H
		5105.92	53.83	-20.17	74	40.65	35.42	8.86	31.1	306	74	P	V
		5110.72	45.08	-8.92	54	31.9	35.42	8.86	31.1	306	74	A	V
	*	5316	97.52	-	-	84.18	35.26	9.18	31.1	306	74	P	V
		5316	88.55	-	-	75.21	35.26	9.18	31.1	306	74	A	V
		5370.9	57.26	-16.74	74	43.82	35.22	9.32	31.1	306	74	P	V
		5359	45.36	-8.64	54	31.91	35.23	9.32	31.1	306	74	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	41.24	-27.06	68.3	50.79	38.6	12.82	60.97	150	138	P	H
		10540	40.88	-27.42	68.3	50.43	38.6	12.82	60.97	150	360	P	V
802.11n HT40 CH 62 5310MHz		10620	40.66	-33.34	74	50.07	38.66	12.89	60.96	150	0	P	H
		10620	41.06	-32.94	74	50.47	38.66	12.89	60.96	150	261	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5457.84	56.28	-17.72	74	42.98	35.15	9.25	31.1	100	318	P	H
		5469.36	56.68	-11.62	68.3	43.39	35.14	9.25	31.1	100	318	P	H
		5459.44	46.5	-7.5	54	33.2	35.15	9.25	31.1	100	318	A	H
	*	5498	107.23	-	-	94.02	35.11	9.2	31.1	100	318	P	H
		5498	99.95	-	-	86.74	35.11	9.2	31.1	100	318	A	H
		5455.12	54.57	-19.43	74	41.27	35.15	9.25	31.1	100	233	P	V
		5466.64	54.5	-13.8	68.3	41.21	35.14	9.25	31.1	100	233	P	V
		5458.64	44.72	-9.28	54	31.42	35.15	9.25	31.1	100	233	A	V
	*	5502	102.38	-	-	89.21	35.11	9.16	31.1	100	233	P	V
		5502	95.01	-	-	81.84	35.11	9.16	31.1	100	233	A	V
802.11a CH 140 5700MHz		5725.24	60.65	-7.65	68.3	47.85	34.92	8.94	31.06	100	310	P	H
	*	5702	107.63	-	-	94.83	34.94	8.94	31.08	100	310	P	H
		5702	100.58	-	-	87.78	34.94	8.94	31.08	100	310	A	H
		5725.4	55.75	-12.55	68.3	42.95	34.92	8.94	31.06	109	217	P	V
	*	5696	101.92	-	-	89.11	34.95	8.94	31.08	109	217	P	V
		5696	95.06	-	-	82.25	34.95	8.94	31.08	109	217	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	41.85	-32.15	74	50.57	38.93	13.26	60.91	150	158	P	H
		11000	43.17	-30.83	74	51.89	38.93	13.26	60.91	150	0	P	V
802.11a CH 116 5580MHz		11160	43.41	-30.59	74	51.89	39.05	13.36	60.89	100	316	P	H
		11160	41.46	-32.54	74	49.94	39.05	13.36	60.89	100	152	P	V
802.11a CH 140 5700MHz		11400	43.95	-30.05	74	52.06	39.23	13.52	60.86	100	0	P	H
		11400	42.77	-31.23	74	50.88	39.23	13.52	60.86	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5458.8	55.81	-18.19	74	42.51	35.15	9.25	31.1	100	65	P	H
		5467.6	56.67	-11.63	68.3	43.38	35.14	9.25	31.1	100	65	P	H
		5459.44	46.88	-7.12	54	33.58	35.15	9.25	31.1	100	65	A	H
	*	5502	105.72	-	-	92.55	35.11	9.16	31.1	100	65	P	H
		5502	98.31	-	-	85.14	35.11	9.16	31.1	100	65	A	H
		5456.72	54.31	-19.69	74	41.01	35.15	9.25	31.1	300	89	P	V
		5467.76	54.6	-13.7	68.3	41.31	35.14	9.25	31.1	300	89	P	V
		5455.92	44.73	-9.27	54	31.43	35.15	9.25	31.1	300	89	A	V
	*	5502	102.04	-	-	88.87	35.11	9.16	31.1	300	89	P	V
		5502	94.37	-	-	81.2	35.11	9.16	31.1	300	89	A	V
802.11n HT20 CH 140 5700MHz	*	5696	104.95	-	-	92.14	34.95	8.94	31.08	100	313	P	H
	*	5696	98.06	-	-	85.25	34.95	8.94	31.08	100	313	A	H
		5726.76	58.37	-9.93	68.3	45.57	34.92	8.94	31.06	100	313	P	H
	*	5698	99.73	-	-	86.92	34.95	8.94	31.08	281	91	P	V
		5698	92.4	-	-	79.59	34.95	8.94	31.08	281	91	A	V
		5749.32	53.41	-14.89	68.3	40.62	34.91	8.93	31.05	281	91	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11000	42.91	-31.09	74	51.63	38.93	13.26	60.91	150	8	P	H
CH 100 5500MHz		11000	42.93	-31.07	74	51.65	38.93	13.26	60.91	150	118	P	V
802.11n HT20		11160	43.73	-30.27	74	52.21	39.05	13.36	60.89	150	353	P	H
CH 116 5580MHz		11160	43.2	-30.8	74	51.68	39.05	13.36	60.89	150	30	P	V
802.11n HT20		11400	42.03	-31.97	74	50.14	39.23	13.52	60.86	150	177	P	H
CH 140 5700MHz		11400	42.47	-31.53	74	50.58	39.23	13.52	60.86	150	105	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5435.76	58.65	-15.35	74	45.3	35.16	9.29	31.1	126	68	P	H
		5464.08	57.98	-10.32	68.3	44.69	35.14	9.25	31.1	126	68	P	H
		5459.44	46.95	-7.05	54	33.65	35.15	9.25	31.1	126	68	A	H
	*	5508	101.58	-	-	88.41	35.11	9.16	31.1	126	68	P	H
		5508	88.8	-	-	75.63	35.11	9.16	31.1	126	68	A	H
		5739.72	52.43	-15.87	68.3	39.63	34.91	8.94	31.05	126	68	P	H
		5454.8	57.45	-16.55	74	44.15	35.15	9.25	31.1	114	213	P	V
		5465.52	53.95	-14.35	68.3	40.66	35.14	9.25	31.1	114	213	P	V
		5456.72	44.93	-9.07	54	31.63	35.15	9.25	31.1	114	213	A	V
	*	5512	97.08	-	-	83.91	35.11	9.16	31.1	114	213	P	V
		5512	88.7	-	-	75.53	35.11	9.16	31.1	114	213	A	V
		5686.12	53.53	-14.77	68.3	40.72	34.95	8.95	31.09	114	213	P	V
802.11n HT40 CH 134 5670MHz		5457.52	53.56	-20.44	74	40.26	35.15	9.25	31.1	100	68	P	H
		5465.84	53.26	-15.04	68.3	39.97	35.14	9.25	31.1	100	68	P	H
		5455.44	44.09	-9.91	54	30.79	35.15	9.25	31.1	100	68	A	H
	*	5662	101.7	-	-	88.85	34.98	8.96	31.09	100	68	P	H
		5662	94.37	-	-	81.52	34.98	8.96	31.09	100	68	A	H
		5760.84	59.02	-9.28	68.3	46.25	34.89	8.93	31.05	100	68	P	H
		5395.44	52.73	-21.27	74	39.25	35.19	9.39	31.1	100	221	P	V
		5465.04	52.32	-15.98	68.3	39.03	35.14	9.25	31.1	100	221	P	V
		5455.92	43.57	-10.43	54	30.27	35.15	9.25	31.1	100	221	A	V
	*	5674	95.5	-	-	82.67	34.97	8.95	31.09	100	221	P	V
		5674	88.95	-	-	76.12	34.97	8.95	31.09	100	221	A	V
		5731.32	53.5	-14.8	68.3	40.7	34.92	8.94	31.06	100	221	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	42.74	-31.26	74	51.43	38.94	13.28	60.91	150	359	P	H
		11020	43.94	-30.06	74	52.63	38.94	13.28	60.91	150	110	P	V
802.11n HT40 CH 110 5550MHz		11100	41.8	-32.2	74	50.37	39	13.33	60.9	150	166	P	H
		11100	42.7	-31.3	74	51.27	39	13.33	60.9	150	239	P	V
802.11n HT40 CH 134 5670MHz		11340	43.88	-30.12	74	52.08	39.18	13.49	60.87	150	208	P	H
		11340	43.33	-30.67	74	51.53	39.18	13.49	60.87	150	283	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz	*	5718	107.39	-	-	94.59	34.92	8.94	31.06	100	310	P	H
		5718	99.96	-	-	87.16	34.92	8.94	31.06	100	310	A	H
		5470	45.94	-22.36	68.3	38.75	35.22	8.4	36.43	100	310	P	H
		5850	46.32	-21.98	68.3	38.97	35.12	8.72	36.49	100	310	P	H
	*	5724	100.68	-	-	87.88	34.92	8.94	31.06	109	214	P	V
		5724	93.93	-	-	81.13	34.92	8.94	31.06	109	214	A	V
		5470	46.64	-21.66	68.3	39.45	35.22	8.4	36.43	109	214	P	V
		5850	48.55	-19.75	68.3	41.2	35.12	8.72	36.49	109	214	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		11440	42.18	-31.82	74	50.24	39.25	13.55	60.86	100	0	P	H
		11440	41.06	-32.94	74	49.12	39.25	13.55	60.86	100	304	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 144 5720MHz	*	5718	105.09	-	-	92.29	34.92	8.94	31.06	100	308	P	H
		5718	97.77	-	-	84.97	34.92	8.94	31.06	100	308	A	H
		5470	44.74	-23.56	68.3	37.55	35.22	8.4	36.43	100	308	P	H
		5850	47.82	-20.48	68.3	40.47	35.12	8.72	36.49	100	308	P	H
	*	5718	98.77	-	-	85.97	34.92	8.94	31.06	100	216	P	V
		5718	91.39	-	-	78.59	34.92	8.94	31.06	100	216	A	V
		5470	46.36	-21.94	68.3	39.17	35.22	8.4	36.43	100	216	P	V
		5850	49.75	-18.55	68.3	42.4	35.12	8.72	36.49	100	216	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11440	42.16	-31.84	74	50.22	39.25	13.55	60.86	100	0	P	H
CH 144 5720MHz		11440	42.87	-31.13	74	50.93	39.25	13.55	60.86	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 142 5710MHz	*	5708	101.06	-	-	88.26	34.94	8.94	31.08	108	324	P	H
		5708	94.13	-	-	81.33	34.94	8.94	31.08	108	324	A	H
		5470	46.46	-21.84	68.3	39.27	35.22	8.4	36.43	108	324	P	H
		5850	48.75	-19.55	68.3	41.4	35.12	8.72	36.49	108	324	P	H
	*	5704	95.72	-	-	82.92	34.94	8.94	31.08	100	223	P	V
		5704	88.64	-	-	75.84	34.94	8.94	31.08	100	223	A	V
		5470	47.69	-20.61	68.3	40.5	35.22	8.4	36.43	100	223	P	V
		5850	46.97	-21.33	68.3	39.62	35.12	8.72	36.49	100	223	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11420	42.54	-31.46	74	50.63	39.24	13.53	60.86	100	131	P	H
CH 142 5710MHz		11420	42.61	-31.39	74	50.7	39.24	13.53	60.86	100	334	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30	24.55	-15.45	40	30.51	25.2	0.66	31.82	100	0	P	H
		109.54	22.14	-21.36	43.5	36.17	16.52	1.12	31.67	-	-	P	H
		161.92	21.55	-21.95	43.5	35.3	16.18	1.56	31.49	-	-	P	H
		223.03	20.71	-25.29	46	34.85	15.53	1.8	31.47	-	-	P	H
		359.8	27.29	-18.71	46	35.67	20.64	2.43	31.45	-	-	P	H
		580.96	26.85	-19.15	46	30.13	25.25	2.94	31.47	-	-	P	H
		30.97	29.61	-10.39	40	36.12	24.65	0.66	31.82	100	0	P	V
		107.6	20.3	-23.2	43.5	34.45	16.42	1.1	31.67	-	-	P	V
		221.09	18.39	-27.61	46	32.76	15.31	1.79	31.47	-	-	P	V
		359.8	23.21	-22.79	46	31.59	20.64	2.43	31.45	-	-	P	V
		577.08	26.41	-19.59	46	29.75	25.18	2.95	31.47	-	-	P	V
		884.57	30.15	-15.85	46	29.31	28.89	3.54	31.59	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	94.94	2.065	0.484	0.51KHz
5GHz 802.11n HT20	94.73	1.922	0.520	0.56KHz
5GHz 802.11n HT40	85.25	0.948	1.055	1.1KHz

802.11a

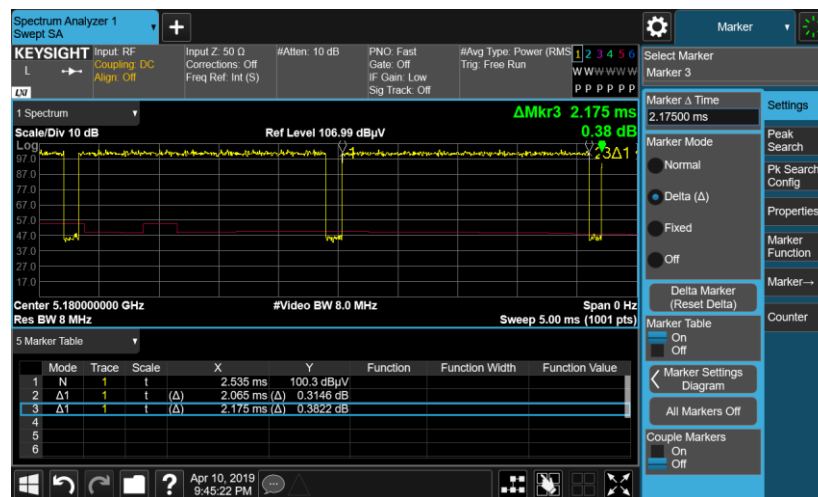



802.11n HT20

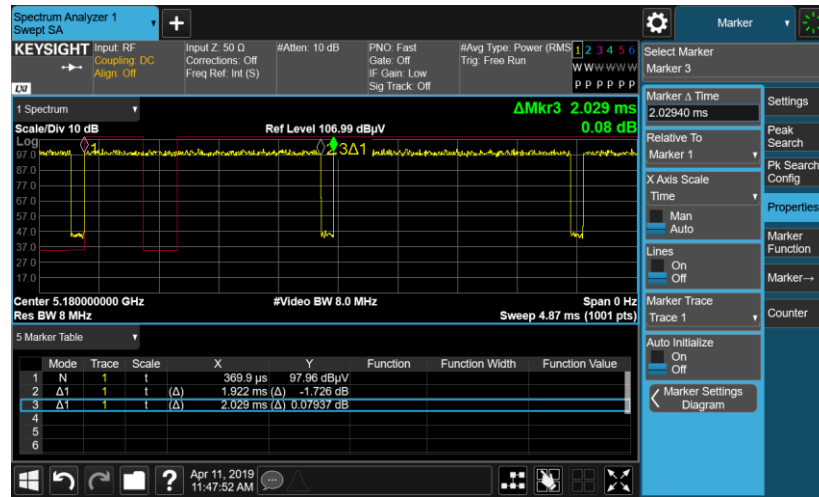

802.11n HT40

