



FCC RF Test Report

APPLICANT : Motorola Solutions Inc
EQUIPMENT : WAVE TWO-WAY RADIO
BRAND NAME : Motorola Solutions
MODEL NAME : TLK 100i
MODEL NUMBER : HK2123A
FCC ID : AZ489FT7136
STANDARD : 47 CFR Part 2, 24(E), 27(L), 27(M), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Face (PCF)

The product was completely tested on Jul. 03, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power and ERP/EIRP	15
3.5 Peak-to-Average Ratio	16
3.6 Occupied Bandwidth	17
3.7 Conducted Band Edge	18
3.8 Conducted Spurious Emission	20
3.9 Frequency Stability	21
4 RADIATED TEST ITEMS	22
4.1 Measuring Instruments	22
4.2 Test Setup	22
4.3 Test Result of Radiated Test	22
4.4 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 UNCERTAINTY OF EVALUATION	26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG8D1903-04B	Rev. 01	Initial issue of report	Oct. 07, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(c)(10)	Effective Radiated Power (Band 17)	ERP < 3 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 21.58 dB at 1410.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Solutions Inc

8000 W. Sunrise Blvd. Ft. Lauderdale FL 33322 United States Of America

1.2 Manufacturer

Motorola Solutions Malaysia Sdn. Bhd.

No. 2A, Medan Bayan Lepas, Mukim 12, S.W.D., 11900 Bayan Lepas, Penang, Malaysia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WAVE TWO-WAY RADIO
Brand Name	Motorola Solutions
Model Name	TLK 100i
Model Number	HK2123A
FCC ID	AZ489FT7136
EUT supports Radios application	WCDMA/LTE/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR / EDR/ LE
IMEI Code	Conducted: N/A Radiation: N/A
HW Version	P2.0
SW Version	BLUE_BASE_ENG_R03.01.03_APPS_R03.01.03
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 17 : 5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.59 dBm LTE Band 4 : 23.34 dBm LTE Band 7 : 23.60 dBm LTE Band 17 : 22.34 dBm
Antenna Gain	LTE Band 2 : -1.03 dBi LTE Band 4 : -1.14 dBi LTE Band 7 : -0.70 dBi LTE Band 17 : 0.20 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09G7D	-	0.1419	1M10W7D	-	0.1062
3	1851.5 ~ 1908.5	2M73G7D	-	0.1371	2M73W7D	-	0.1030
5	1852.5 ~ 1907.5	4M50G7D	-	0.1419	4M52W7D	-	0.1052
10	1855.0 ~ 1905.0	9M05G7D	0.0028	0.1406	5M13W7D	-	0.1040
15	1857.5 ~ 1902.5	13M4G7D	-	0.1413	5M06W7D	-	0.1047
20	1860.0 ~ 1900.0	18M3G7D	-	0.1432	9M43W7D	-	0.1057
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M10G7D	-	0.1614	1M10W7D	-	0.1175
3	1711.5 ~ 1753.5	2M73G7D	-	0.1607	2M72W7D	-	0.1169
5	1712.5 ~ 1752.5	4M50G7D	-	0.1652	4M50W7D	-	0.1211
10	1715.0 ~ 1750.0	9M03G7D	0.0028	0.1618	5M87W7D	-	0.1178
15	1717.5 ~ 1747.5	13M4G7D	-	0.1626	5M87W7D	-	0.1183
20	1720.0 ~ 1745.0	18M6G7D	-	0.1660	5M95W7D	-	0.1216
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (Hz)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M51G7D	-	0.1945	4M49W7D	-	0.1343
10	2505.0 ~ 2565.0	9M01G7D	0.0084	0.1936	5M05W7D	-	0.1349
15	2507.5 ~ 2562.5	13M5G7D	-	0.1941	5M03W7D	-	0.1387
20	2510.0 ~ 2560.0	18M4G7D	-	0.1950	5M27W7D	-	0.1396
LTE Band 17		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	706.5 ~ 713.5	4M52G7D	-	0.1089	4M52W7D	-	0.0834
10	709.0 ~ 711.0	9M13G7D	0.0025	0.1094	5M09W7D	-	0.0828

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 24(E), 27(L), 27(M), 27(H)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v		v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v		v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v		v		v	v	v	v
	4						v	v	v		v		v	v	v	v
	7	-	-				v	v	v		v		v	v	v	v
	17	-	-		v	-	-	v	v		v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v	v
	7	-	-	v	v	v	v	v	v				v	v	v	v
	17	-	-	v	v	-	-	v	v			v	v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v		v	v	v	v		v
	4	v	v	v	v	v	v	v	v		v	v	v	v		v
	7	-	-	v	v	v	v	v	v		v		v	v		v
	17	-	-	v	v	-	-	v	v		v	v	v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
	17	-	-	v	v	-	-	v	v		v			v	v	v
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	7	-	-		v			v					v		v	
	17	-	-		v	-	-	v					v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	7	-	-	v	v	v	v	v	v		v			v	v	v
	17	-	-	v	v	-	-	v	v		v			v	v	v
Radiated Spurious Emission	2	Worst Case												v	v	v
	4	Worst Case												v	v	v
	7	Worst Case												v	v	v
	17	Worst Case												v	v	v
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

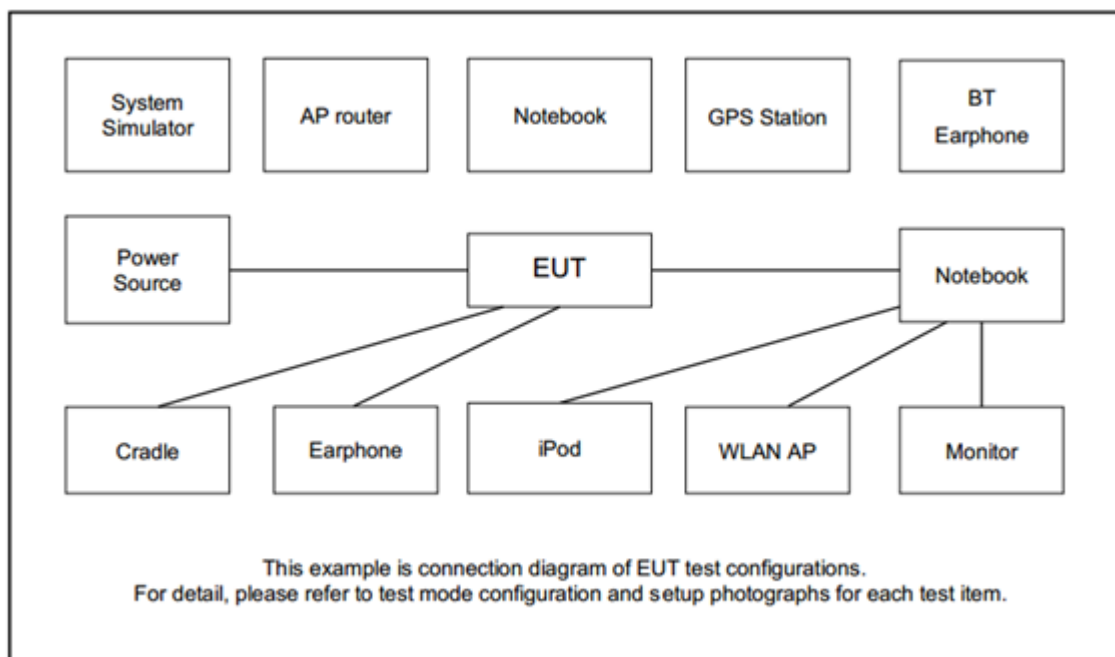

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.2 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

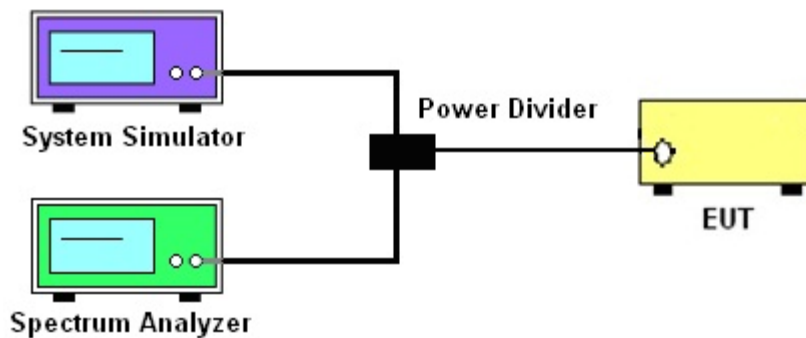

3.2.3 Frequency Stability

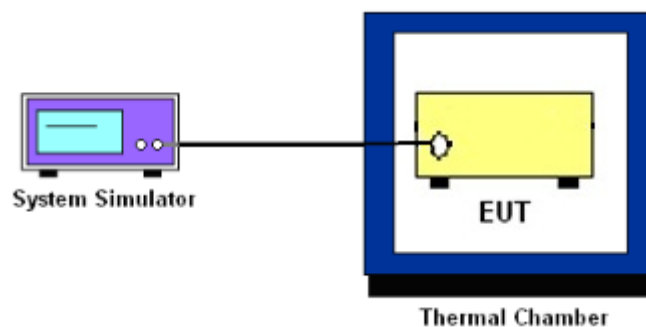

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 17.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

10. The testing follows ANSI C63.26 section 5.7
11. The EUT was connected to spectrum analyzer and system simulator via a power divider.
12. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
13. The middle channel for the highest RF power within the transmitting frequency was measured.
14. The conducted spurious emission for the whole frequency range was taken.
15. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
16. Set spectrum analyzer with RMS detector.
17. Taking the record of maximum spurious emission.
18. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
19. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
20. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

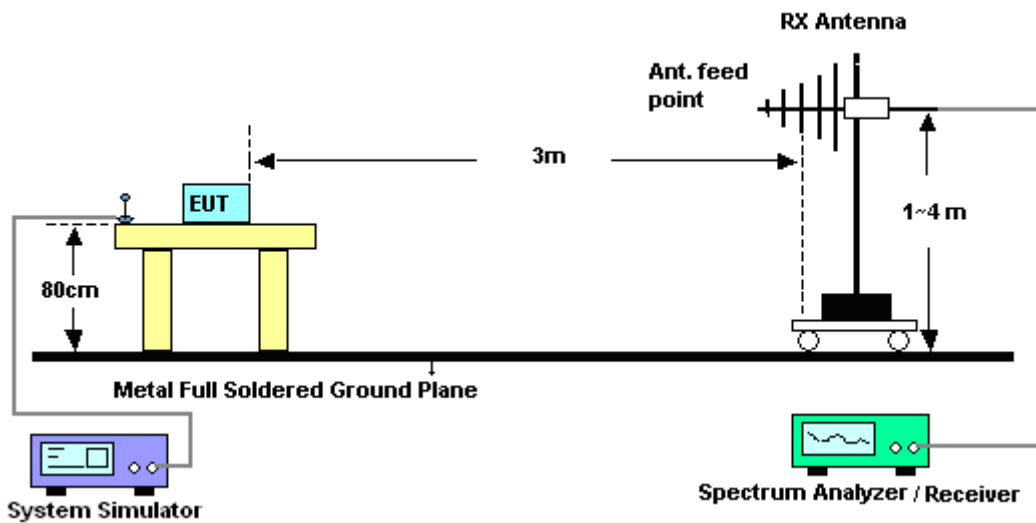

4.2.2 For radiated test above 1GHz

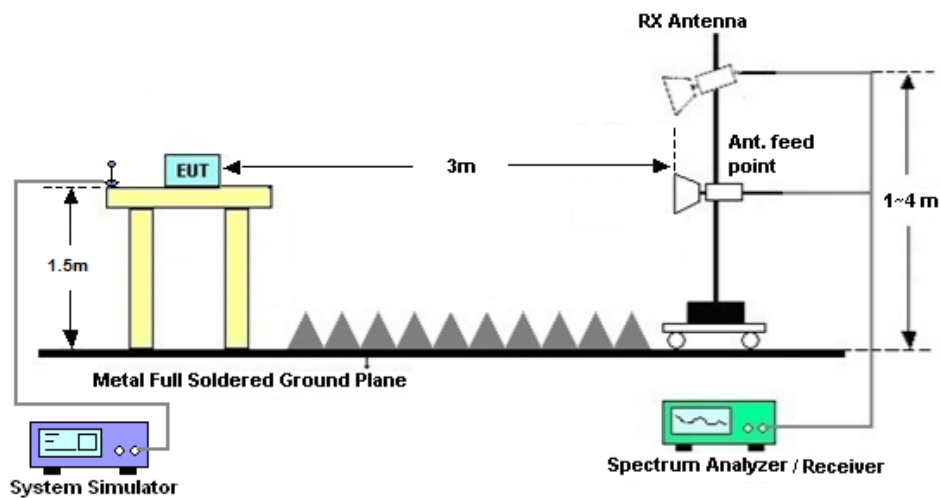

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Apr. 04, 2019~ Apr. 10, 2019	Apr. 18, 2019	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Apr. 04, 2019~ Apr. 10, 2019	Jun. 26, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS001	30Mhz-40Ghz	Jun. 08, 2018	Apr. 04, 2019~ Apr. 10, 2019	Jun. 07, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS002	30Mhz-40Ghz	Jun. 08, 2018	Apr. 04, 2019~ Apr. 10, 2019	Jun. 07, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS003	30Mhz-40Ghz	Jun. 08, 2018	Apr. 04, 2019~ Apr. 10, 2019	Jun. 07, 2019	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jun. 29, 2020~ Jul. 03, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2019	Jun. 29, 2020~ Jul. 03, 2020	Jul. 03, 2020	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS001	30Mhz-40Ghz	Jun. 11, 2020	Jun. 29, 2020~ Jul. 03, 2020	Jun. 10, 2021	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS002	30Mhz-40Ghz	Jun. 11, 2020	Jun. 29, 2020~ Jul. 03, 2020	Jun. 10, 2021	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS003	30Mhz-40Ghz	Jun. 11, 2020	Jun. 29, 2020~ Jul. 03, 2020	Jun. 10, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 12, 2018	Mar. 26, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 17, 2018	Mar. 26, 2019	Apr. 16, 2019	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Mar. 26, 2019	Oct. 17, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 28, 2018	Mar. 26, 2019	Dec. 27, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2019	Mar. 26, 2019	Jan. 26, 2020	Radiation (03CH04-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Jan. 05, 2019	Mar. 26, 2019	Jan.04, 2020	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	Mar. 26, 2019	Nov. 18, 2019	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2018	Mar. 26, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Mar. 26, 2019	Jan.13, 2020	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 26, 2019	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 26, 2019	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 26, 2019	NCR	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Jun. 29, 2020	Apr. 14, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 08, 2020	Jun. 29, 2020	Jun. 07, 2021	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 20, 2020	Jun. 29, 2020	Apr. 19, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jun. 29, 2020	Nov. 09, 2020	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jun. 29, 2020	Aug. 05, 2020	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 08, 2020	Jun. 29, 2020	Jan. 07, 2021	Radiation (03CH04-KS)



high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Aug. 16, 2019	Jun. 29, 2020	Aug. 15, 2020	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 15, 2019	Jun. 29, 2020	Oct. 14, 2020	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 29, 2020	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 29, 2020	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 29, 2020	NCR	Radiation (03CH04-KS)
RF Cable	HUBER+SUHNE R	SUCOFLEX 104	03CH01KS005	30Mhz-18Ghz	Aug. 26, 2019	Jun. 29, 2020	Aug. 25, 2020	Radiation (03CH04-KS)
RF Cable	HUBER+SUHNE R	SUCOFLEX 104	03CH01KS006	30Mhz-18Ghz	Aug. 26, 2019	Jun. 29, 2020	Aug. 25, 2020	Radiation (03CH04-KS)
Low Pass Filter	Wainwright Instruments Gmbh	WLK4-1000- 1530-8000-4 0SS	2	1G Low Pass	Jun. 17, 2020	Jun. 29, 2020	Jun. 16, 2021	Radiation (03CH04-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-93 5-1000-1500 0-40ST	2	1G High Pass	Jun. 17, 2020	Jun. 29, 2020	Jun. 16, 2021	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.17	22.12	22.27
20	1	49		22.31	22.35	22.59
20	1	99		22.11	22.10	22.09
20	50	0		21.17	21.03	21.29
20	50	24		21.15	21.00	21.19
20	50	50		21.01	21.01	21.07
20	100	0		21.02	21.03	21.13
20	1	0	16-QAM	21.03	21.04	21.17
20	1	49		21.04	21.01	21.03
20	1	99		21.01	21.03	21.02
20	50	0		21.10	20.80	21.27
20	50	24		21.05	21.15	21.18
20	50	50		20.91	20.98	20.80
20	100	0		20.20	20.34	20.33
15	1	0	QPSK	22.22	22.11	22.18
15	1	37		22.26	22.40	22.53
15	1	74		22.04	22.14	22.06
15	36	0		21.01	21.09	21.10
15	36	20		21.11	21.02	21.04
15	36	39		21.01	21.03	21.01
15	75	0		21.05	21.01	21.07
15	1	0	16-QAM	21.13	21.04	21.02
15	1	37		21.04	21.15	21.09
15	1	74		21.02	21.03	21.03
15	36	0		21.23	20.93	21.15
15	36	20		21.14	21.06	21.10
15	36	39		20.76	20.94	20.96
15	75	0		20.29	20.23	20.25



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.19	22.16	22.07
10	1	25		22.23	22.51	22.36
10	1	49		22.01	22.04	22.10
10	25	0		21.08	21.08	21.05
10	25	12		21.08	21.02	21.02
10	25	25		21.02	21.03	21.04
10	50	0		21.02	21.05	21.04
10	1	0	16-QAM	21.10	21.00	21.03
10	1	25		21.03	21.07	21.11
10	1	49		21.01	21.05	21.01
10	25	0		21.20	21.13	20.89
10	25	12		21.11	21.08	21.02
10	25	25		20.73	20.94	20.90
10	50	0		20.26	20.23	20.19
5	1	0	QPSK	22.14	22.25	22.08
5	1	12		22.28	22.55	22.31
5	1	24		22.08	22.07	22.06
5	12	0		21.14	21.27	21.01
5	12	7		21.12	21.17	21.06
5	12	13		21.02	21.05	21.03
5	25	0		21.04	21.11	21.03
5	1	0	16-QAM	21.02	21.15	21.02
5	1	12		21.01	21.01	21.01
5	1	24		21.03	21.03	21.04
5	12	0		21.07	21.25	20.76
5	12	7		21.02	21.16	21.11
5	12	13		20.88	20.78	20.94
5	25	0		20.17	20.31	20.30



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.19	22.20	22.11
3	1	8		22.34	22.24	22.40
3	1	14		22.07	22.02	22.14
3	8	0		21.11	21.01	21.09
3	8	4		21.05	21.09	21.02
3	8	7		21.02	21.03	21.05
3	15	0		21.08	21.02	21.03
3	1	0	16-QAM	21.03	21.11	21.05
3	1	8		21.10	21.13	21.13
3	1	14		21.06	21.04	21.01
3	8	0		21.16	20.91	20.91
3	8	4		21.11	21.04	21.04
3	8	7		20.97	20.92	20.92
3	15	0		20.26	20.21	20.21
1.4	1	0	QPSK	22.15	22.18	22.31
1.4	1	3		22.38	22.32	22.53
1.4	1	5		22.13	22.12	22.13
1.4	3	0		22.23	22.20	22.15
1.4	3	1		22.27	22.55	22.44
1.4	3	3		22.05	22.08	22.18
1.4	6	0		21.03	21.03	21.17
1.4	1	0	16-QAM	21.02	21.04	21.21
1.4	1	3		21.04	21.05	21.05
1.4	1	5		21.05	21.02	21.05
1.4	3	0		21.02	21.29	21.29
1.4	3	1		21.18	21.20	21.20
1.4	3	3		21.01	21.05	21.03
1.4	6	0		20.37	20.35	20.35



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.08	23.07	23.20
20	1	49		23.29	22.88	23.34
20	1	99		22.98	22.95	23.05
20	50	0		21.97	21.96	22.09
20	50	24		22.12	21.77	22.01
20	50	50		21.97	21.73	22.10
20	100	0		22.03	21.92	22.17
20	1	0	16-QAM	21.68	21.86	21.85
20	1	49		21.95	21.63	21.80
20	1	99		21.69	21.57	21.52
20	50	0		21.74	21.97	21.99
20	50	24		21.84	21.75	21.98
20	50	50		21.91	21.70	21.71
20	100	0		20.89	20.89	20.93
15	1	0	QPSK	23.04	23.08	23.04
15	1	37		23.12	23.03	23.25
15	1	74		22.97	22.83	22.94
15	36	0		21.85	21.78	21.93
15	36	20		21.85	21.65	22.08
15	36	39		21.91	21.70	21.93
15	75	0		21.99	21.78	21.99
15	1	0	16-QAM	21.56	21.70	21.64
15	1	37		21.77	21.66	21.71
15	1	74		21.55	21.34	21.65
15	36	0		21.68	21.84	21.70
15	36	20		21.76	21.72	21.80
15	36	39		21.80	21.41	21.87
15	75	0		20.86	20.87	20.85



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.00	23.02	23.04
10	1	25		23.08	23.23	22.99
10	1	49		22.93	22.92	22.79
10	25	0		21.81	21.91	21.74
10	25	12		21.81	22.06	21.61
10	25	25		21.87	21.91	21.66
10	50	0		21.95	21.97	21.74
10	1	0	16-QAM	21.52	21.62	21.76
10	1	25		21.63	21.69	21.62
10	1	49		21.51	21.63	21.30
10	25	0		21.64	21.68	21.80
10	25	12		21.72	21.78	21.68
10	25	25		21.76	21.85	21.37
10	50	0		20.82	20.83	20.83
5	1	0	QPSK	23.17	23.18	23.04
5	1	12		23.31	23.32	22.85
5	1	24		23.02	23.03	22.92
5	12	0		22.06	22.07	21.93
5	12	7		21.98	21.99	21.74
5	12	13		22.07	22.08	21.70
5	25	0		22.14	22.15	21.89
5	1	0	16-QAM	21.82	21.83	21.83
5	1	12		21.77	21.78	21.60
5	1	24		21.49	21.50	21.54
5	12	0		21.96	21.97	21.94
5	12	7		21.95	21.96	21.72
5	12	13		21.68	21.69	21.67
5	25	0		20.90	20.91	20.86



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.01	23.02	22.99
3	1	8		22.96	22.97	23.20
3	1	14		22.76	22.77	22.89
3	8	0		21.71	21.72	21.88
3	8	4		21.58	21.59	22.03
3	8	7		21.63	21.64	21.88
3	15	0		21.71	21.72	21.94
3	1	0	16-QAM	21.73	21.74	21.59
3	1	8		21.59	21.60	21.66
3	1	14		21.27	21.28	21.60
3	8	0		21.77	21.78	21.65
3	8	4		21.65	21.66	21.75
3	8	7		21.34	21.35	21.82
3	15	0		20.80	20.81	20.80
1.4	1	0	QPSK	23.01	23.07	23.06
1.4	1	3		23.22	23.15	23.01
1.4	1	5		22.91	23.00	22.81
1.4	3	0		22.96	23.04	23.00
1.4	3	1		23.17	22.99	22.95
1.4	3	3		22.86	22.79	22.75
1.4	6	0		21.96	22.02	21.76
1.4	1	0	16-QAM	21.61	21.59	21.78
1.4	1	3		21.78	21.70	21.64
1.4	1	5		21.62	21.58	21.32
1.4	3	0		21.67	21.71	21.82
1.4	3	1		21.77	21.79	21.70
1.4	3	3		21.84	21.83	21.39
1.4	6	0		20.82	20.89	20.85



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.26	23.25	23.35
20	1	49		23.58	23.33	23.60
20	1	99		23.10	23.30	23.31
20	50	0		22.07	22.13	22.24
20	50	24		22.12	22.18	22.30
20	50	50		22.12	22.15	22.17
20	100	0		22.16	22.13	22.18
20	1	0	16-QAM	22.08	21.65	22.02
20	1	49		22.15	21.68	22.00
20	1	99		22.05	21.69	22.15
20	50	0		21.83	21.92	21.98
20	50	24		21.93	21.93	21.97
20	50	50		21.98	21.93	21.95
20	100	0		20.95	21.03	21.00
15	1	0	QPSK	23.32	23.26	23.23
15	1	37		23.56	23.50	23.31
15	1	74		23.28	23.58	23.28
15	36	0		22.21	22.26	22.11
15	36	20		22.27	22.25	22.16
15	36	39		22.14	22.18	22.13
15	75	0		22.15	22.19	22.11
15	1	0	16-QAM	22.09	21.83	21.68
15	1	37		21.97	21.82	21.66
15	1	74		22.12	21.75	21.77
15	36	0		21.95	21.96	21.90
15	36	20		21.94	21.99	21.91
15	36	39		21.92	21.97	21.91
15	75	0		20.97	21.16	21.01



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.25	23.28	23.29
10	1	25		23.33	23.56	23.53
10	1	49		23.30	23.24	23.57
10	25	0		22.13	22.17	22.29
10	25	12		22.18	22.23	22.28
10	25	25		22.15	22.10	22.21
10	50	0		22.13	22.11	22.22
10	1	0	16-QAM	21.50	21.95	21.86
10	1	25		21.58	21.93	21.85
10	1	49		21.69	21.98	21.68
10	25	0		21.92	21.91	21.99
10	25	12		21.93	21.90	21.92
10	25	25		21.93	21.88	22.00
10	50	0		21.03	20.93	21.19
5	1	0	QPSK	23.31	23.21	23.31
5	1	12		23.55	23.29	23.59
5	1	24		23.52	23.26	23.27
5	12	0		22.31	22.09	22.20
5	12	7		22.30	22.14	22.26
5	12	13		22.23	22.11	22.13
5	25	0		22.24	22.09	22.14
5	1	0	16-QAM	21.88	21.56	21.98
5	1	12		21.87	21.54	21.96
5	1	24		21.70	21.65	21.91
5	12	0		21.98	21.88	21.94
5	12	7		21.94	21.89	21.93
5	12	13		21.95	21.89	21.91
5	25	0		21.21	20.99	20.96



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.17	22.21	22.00
10	1	25		22.28	22.34	22.04
10	1	49		22.14	22.01	22.06
10	25	0		21.00	21.02	21.06
10	25	12		21.12	21.18	21.07
10	25	25		21.06	21.07	21.01
10	50	0		21.01	21.01	21.03
10	1	0	16-QAM	21.02	21.05	21.03
10	1	25		21.13	21.13	21.11
10	1	49		21.01	21.02	21.03
10	25	0		20.87	20.79	20.62
10	25	12		20.94	20.98	20.94
10	25	25		20.89	20.85	20.79
10	50	0		20.01	20.03	20.12
5	1	0	QPSK	22.04	22.20	22.19
5	1	12		22.01	22.31	22.32
5	1	24		22.03	22.17	22.03
5	12	0		21.03	21.03	21.00
5	12	7		21.04	21.15	21.16
5	12	13		21.03	21.09	21.05
5	25	0		21.05	21.04	21.03
5	1	0	16-QAM	21.02	21.04	21.03
5	1	12		21.08	21.16	21.11
5	1	24		21.05	21.04	21.03
5	12	0		20.59	20.90	20.77
5	12	7		20.91	20.97	20.96
5	12	13		20.76	20.92	20.83
5	25	0		20.09	20.04	20.01

**ERP/EIRP**

LTE Band 2 (GT - LC = -1.03 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	22.27	22.55	22.44	22.34	22.24	22.40	22.28	22.55	22.31
Conducted Power (Watts)	0.1687	0.1799	0.1754	0.1714	0.1675	0.1738	0.1690	0.1799	0.1702
EIRP(dBm)	21.24	21.52	21.41	21.31	21.21	21.37	21.25	21.52	21.28
EIRP(Watts)	0.1330	0.1419	0.1384	0.1352	0.1321	0.1371	0.1334	0.1419	0.1343

LTE Band 2 (GT - LC = -1.03 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	22.23	22.51	22.36	22.26	22.40	22.53	22.31	22.35	22.59
Conducted Power (Watts)	0.1671	0.1782	0.1722	0.1683	0.1738	0.1791	0.1702	0.1718	0.1816
EIRP(dBm)	21.20	21.48	21.33	21.23	21.37	21.50	21.28	21.32	21.56
EIRP(Watts)	0.1318	0.1406	0.1358	0.1327	0.1371	0.1413	0.1343	0.1355	0.1432



LTE Band 2 (GT - LC = -1.03 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	21.02	21.29	21.29	21.16	20.91	20.91	21.07	21.25	20.76
Conducted Power (Watts)	0.1265	0.1346	0.1346	0.1306	0.1233	0.1233	0.1279	0.1334	0.1191
EIRP(dBm)	19.99	20.26	20.26	20.13	19.88	19.88	20.04	20.22	19.73
EIRP(Watts)	0.0998	0.1062	0.1062	0.1030	0.0973	0.0973	0.1009	0.1052	0.0940

LTE Band 2 (GT - LC = -1.03 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	21.20	21.13	20.89	21.23	20.93	21.15	21.10	20.80	21.27
Conducted Power (Watts)	0.1318	0.1297	0.1227	0.1327	0.1239	0.1303	0.1288	0.1202	0.1340
EIRP(dBm)	20.17	20.10	19.86	20.20	19.90	20.12	20.07	19.77	20.24
EIRP(Watts)	0.1040	0.1023	0.0968	0.1047	0.0977	0.1028	0.1016	0.0948	0.1057



LTE Band 4 (GT - LC = -1.14 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	23.22	23.15	23.01	22.96	22.97	23.20	23.31	23.32	22.85
Conducted Power (Watts)	0.2099	0.2065	0.2000	0.1977	0.1982	0.2089	0.2143	0.2148	0.1928
EIRP(dBm)	22.08	22.01	21.87	21.82	21.83	22.06	22.17	22.18	21.71
EIRP(Watts)	0.1614	0.1589	0.1538	0.1521	0.1524	0.1607	0.1648	0.1652	0.1483

LTE Band 4 (GT - LC = -1.14 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	23.08	23.23	22.99	23.12	23.03	23.25	23.29	22.88	23.34
Conducted Power (Watts)	0.2032	0.2104	0.1991	0.2051	0.2009	0.2113	0.2133	0.1941	0.2158
EIRP(dBm)	21.94	22.09	21.85	21.98	21.89	22.11	22.15	21.74	22.20
EIRP(Watts)	0.1563	0.1618	0.1531	0.1578	0.1545	0.1626	0.1641	0.1493	0.1660



LTE Band 4 (GT - LC = -1.14 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	21.84	21.83	21.39	21.34	21.35	21.82	21.96	21.97	21.94
Conducted Power (Watts)	0.1528	0.1524	0.1377	0.1361	0.1365	0.1521	0.1570	0.1574	0.1563
EIRP(dBm)	20.70	20.69	20.25	20.20	20.21	20.68	20.82	20.83	20.80
EIRP(Watts)	0.1175	0.1172	0.1059	0.1047	0.1050	0.1169	0.1208	0.1211	0.1202

LTE Band 4 (GT - LC = -1.14 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	21.76	21.85	21.37	21.80	21.41	21.87	21.74	21.97	21.99
Conducted Power (Watts)	0.1500	0.1531	0.1371	0.1514	0.1384	0.1538	0.1493	0.1574	0.1581
EIRP(dBm)	20.62	20.71	20.23	20.66	20.27	20.73	20.60	20.83	20.85
EIRP(Watts)	0.1153	0.1178	0.1054	0.1164	0.1064	0.1183	0.1148	0.1211	0.1216



LTE Band 7 (GT - LC = -0.70 dB) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	23.55	23.29	23.59
Conducted Power (Watts)	0.2265	0.2133	0.2286
EIRP(dBm)	22.85	22.59	22.89
EIRP(Watts)	0.1928	0.1816	0.1945

LTE Band 7 (GT - LC = -0.70 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	23.30	23.24	23.57	23.28	23.58	23.28	23.58	23.33	23.60
Conducted Power (Watts)	0.2138	0.2109	0.2275	0.2128	0.2280	0.2128	0.2280	0.2153	0.2291
EIRP(dBm)	22.60	22.54	22.87	22.58	22.88	22.58	22.88	22.63	22.90
EIRP(Watts)	0.1820	0.1795	0.1936	0.1811	0.1941	0.1811	0.1941	0.1832	0.1950



LTE Band 7 (GT - LC = -0.70 dB) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	21.88	21.56	21.98
Conducted Power (Watts)	0.1542	0.1432	0.1578
EIRP(dBm)	21.18	20.86	21.28
EIRP(Watts)	0.1312	0.1219	0.1343

LTE Band 7 (GT - LC = -0.70 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	21.93	21.88	22.00	22.12	21.75	21.77	22.15	21.68	22.00
Conducted Power (Watts)	0.1560	0.1542	0.1585	0.1629	0.1496	0.1503	0.1641	0.1472	0.1585
EIRP(dBm)	21.23	21.18	21.30	21.42	21.05	21.07	21.45	20.98	21.30
EIRP(Watts)	0.1327	0.1312	0.1349	0.1387	0.1274	0.1279	0.1396	0.1253	0.1349



LTE Band 17 (GT - LC = 0.20 dB) QPSK						
Bandwidth	5M			10M		
Channel	23755	23790	23825	23780	23790	23800
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	706.5	710	713.5	709	710	711
(MHz)						
Conducted Power (dBm)	22.01	22.31	22.32	22.28	22.34	22.04
Conducted Power (Watts)	0.1589	0.1702	0.1706	0.1690	0.1714	0.1600
ERP(dBm)	20.06	20.36	20.37	20.33	20.39	20.09
ERP(Watts)	0.1014	0.1086	0.1089	0.1079	0.1094	0.1021

LTE Band 17 (GT - LC = 0.20 dB) 16QAM						
Bandwidth	5M			10M		
Channel	23755	23790	23825	23780	23790	23800
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	706.5	710	713.5	709	710	711
(MHz)						
Conducted Power (dBm)	21.08	21.16	21.11	21.13	21.13	21.11
Conducted Power (Watts)	0.1282	0.1306	0.1291	0.1297	0.1297	0.1291
ERP(dBm)	19.13	19.21	19.16	19.18	19.18	19.16
ERP(Watts)	0.0818	0.0834	0.0824	0.0828	0.0828	0.0824

Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	2.99	4.38	3.71	4.55	PASS
Middle CH	3.36	4.17	3.88	4.58	
Highest CH	3.28	4.43	4.06	4.72	


Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.81	4.43	5.45	6.00	PASS
Middle CH	3.80	4.96	5.36	5.22	
Highest CH	4.75	4.55	5.77	6.09	

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.42	3.65	4.46	4.29	PASS
Middle CH	3.30	3.97	4.38	4.93	
Highest CH	3.68	4.29	4.29	5.36	

Mode	LTE Band 17 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.46	5.19	5.01	5.91	PASS
Middle CH	4.38	5.22	5.01	6.00	
Highest CH	4.41	5.22	4.99	6.14	

LTE Band 2 / 20MHz / QPSK
Lowest Channel / 1RB


Date: 5 APR 2019 02:09:14

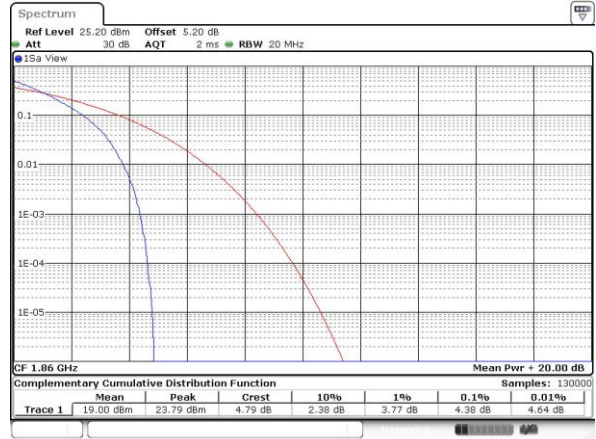Lowest Channel / Full RB


Date: 5 APR 2019 02:10:50

Middle Channel / 1RB


Date: 5 APR 2019 02:09:29

Middle Channel / Full RB


Date: 5 APR 2019 02:10:34

Highest Channel / 1RB


Date: 5 APR 2019 02:09:44

Highest Channel / Full RB


Date: 5 APR 2019 02:10:20




LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB




Lowest Channel / Full RB

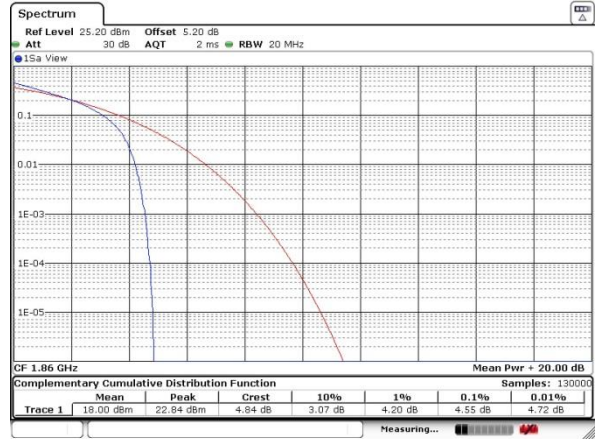

Middle Channel / 1RB




Middle Channel / Full RB

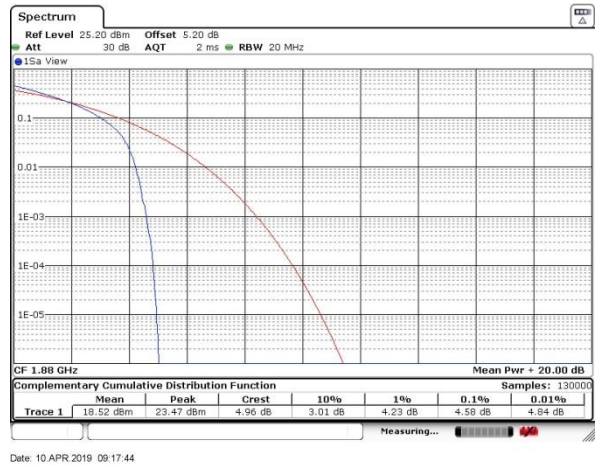

Highest Channel / 1RB




Highest Channel / Full RB

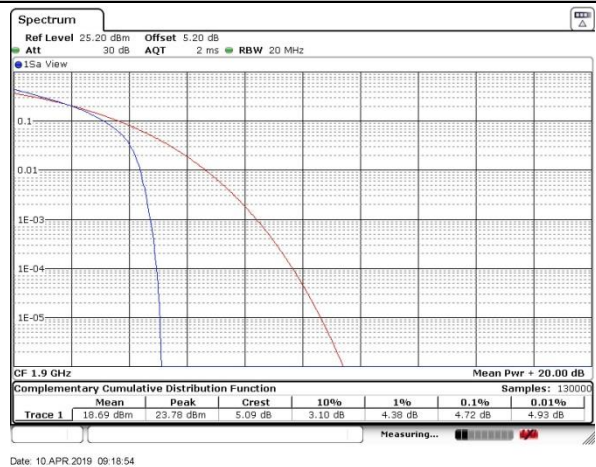



LTE Band 4 / 20MHz / QPSK


Lowest Channel / 1RB

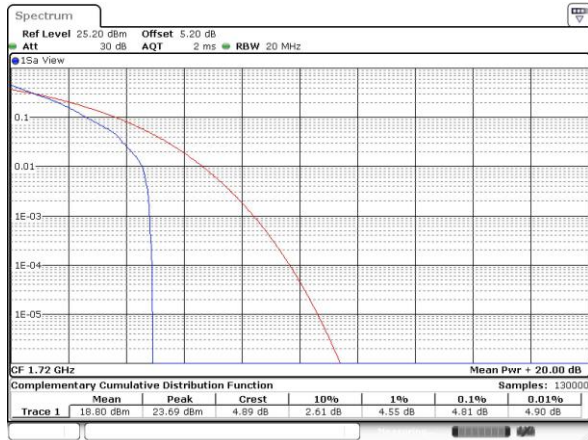


Lowest Channel / Full RB




Middle Channel / 1RB

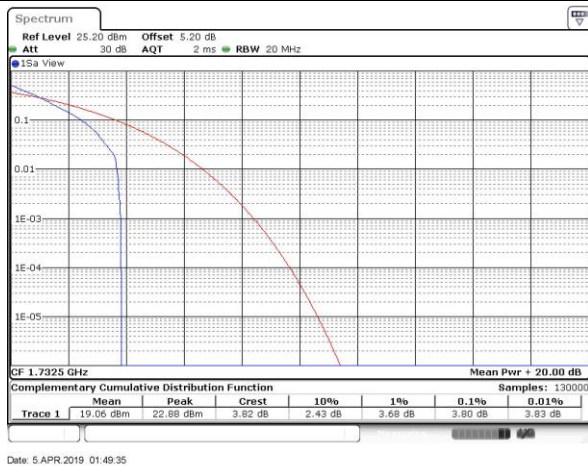


Middle Channel / Full RB

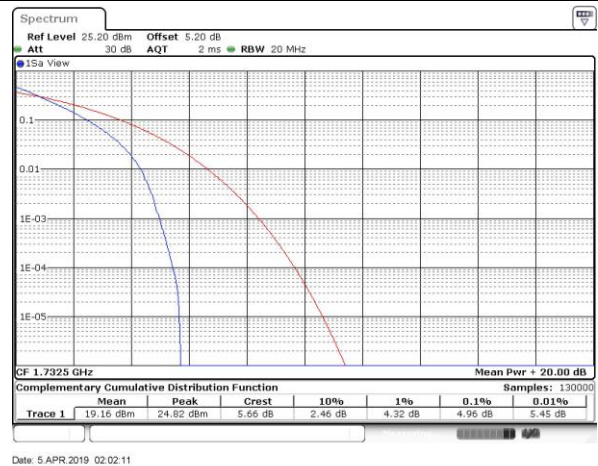

Highest Channel / 1RB

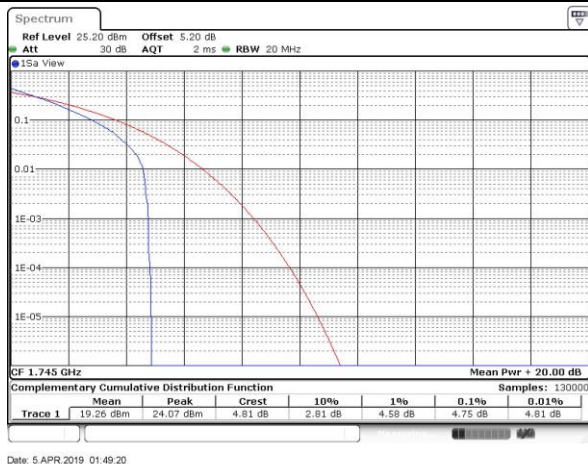


Highest Channel / Full RB

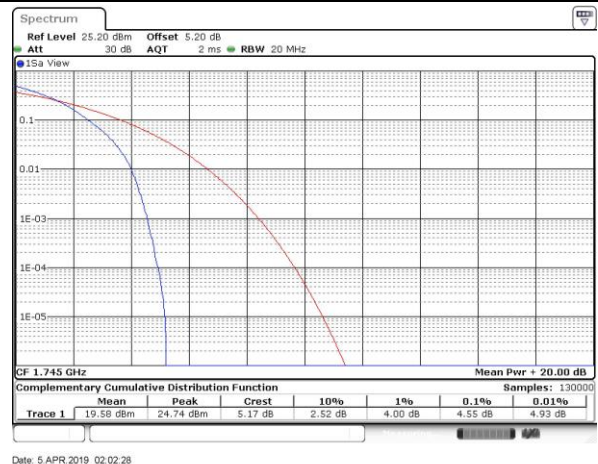




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

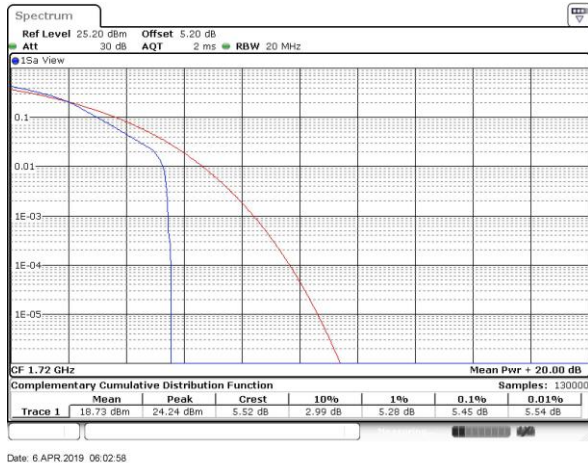

Lowest Channel / Full RB

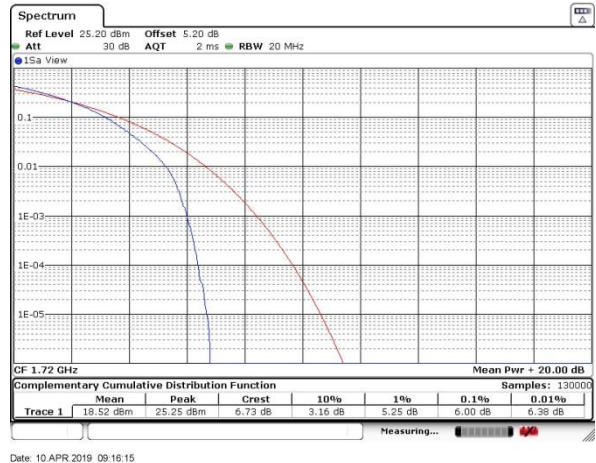


Middle Channel / 1RB




Middle Channel / Full RB




Highest Channel / 1RB

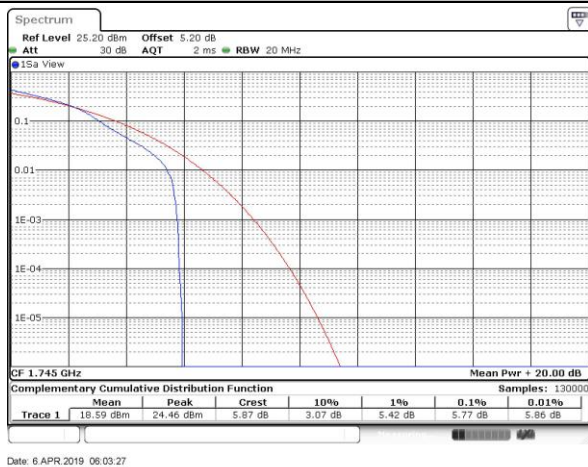


Highest Channel / Full RB

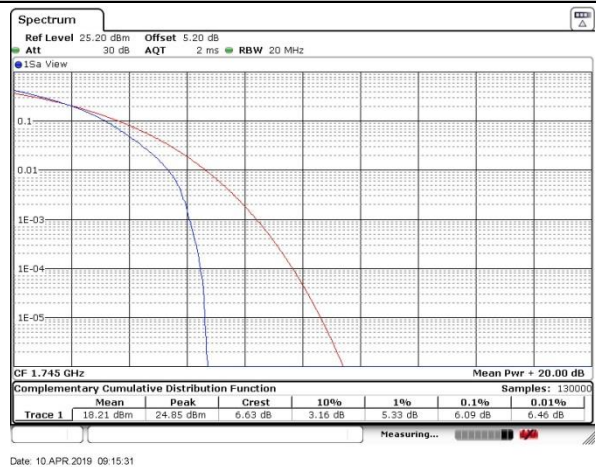


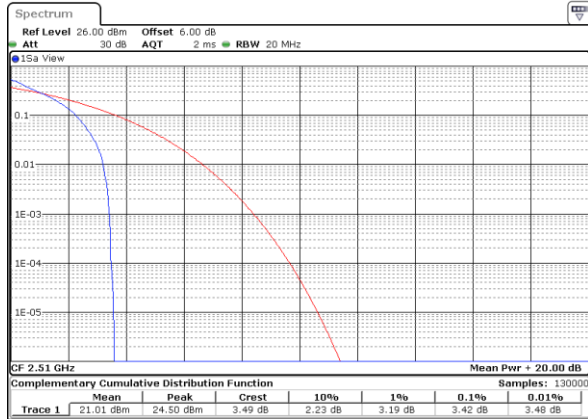LTE Band 7 / 20MHz / QPSK
Lowest Channel / 1RB


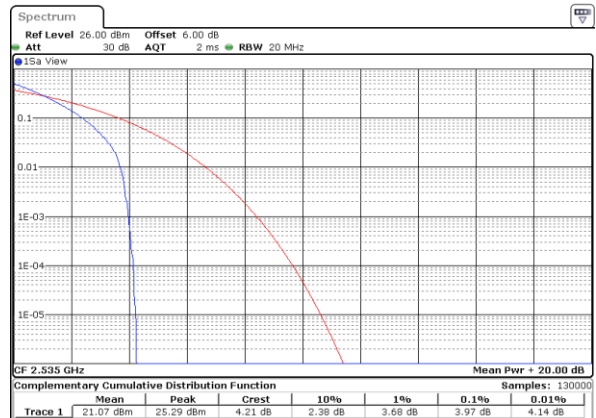
Date: 3 JUL 2020 06:45:30

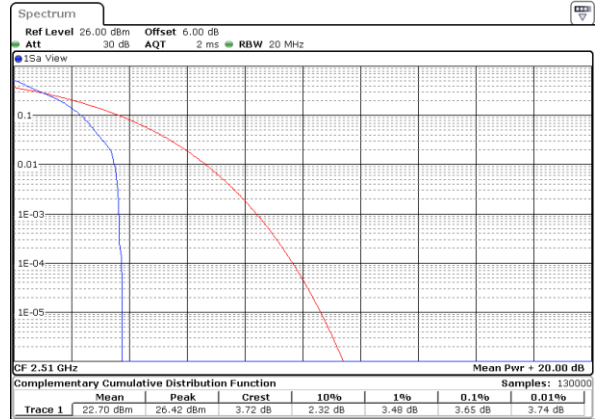Lowest Channel / Full RB


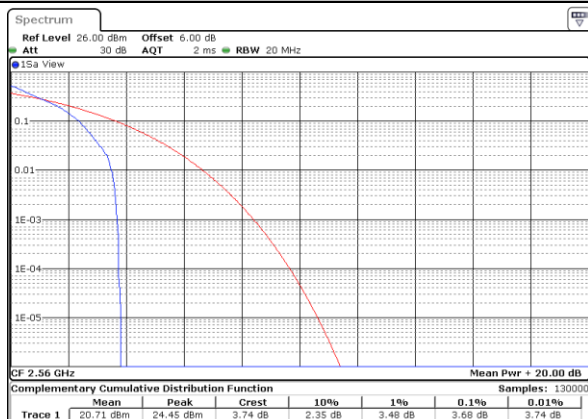
Date: 3 JUL 2020 06:47:20

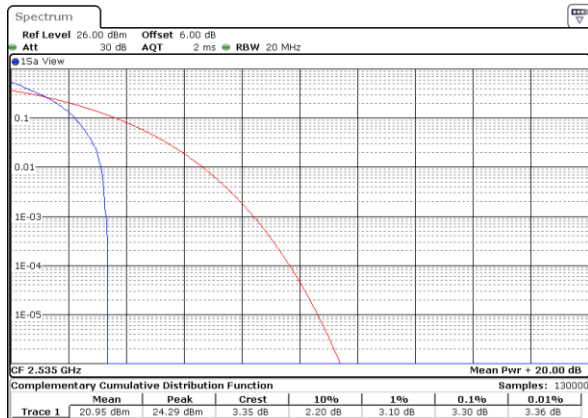Middle Channel / 1RB


Date: 3 JUL 2020 06:44:32

Middle Channel / Full RB


Date: 3 JUL 2020 06:43:21

Highest Channel / 1RB


Date: 3 JUL 2020 06:41:10


Highest Channel / Full RB


Date: 3 JUL 2020 06:42:39




LTE Band 7 / 20MHz / 16QAM


Lowest Channel / 1RB

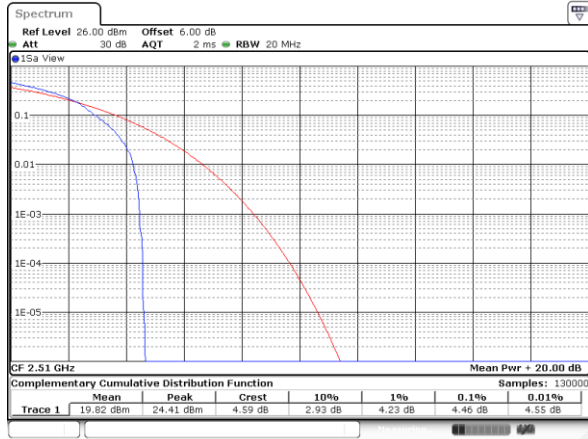


Lowest Channel / Full RB

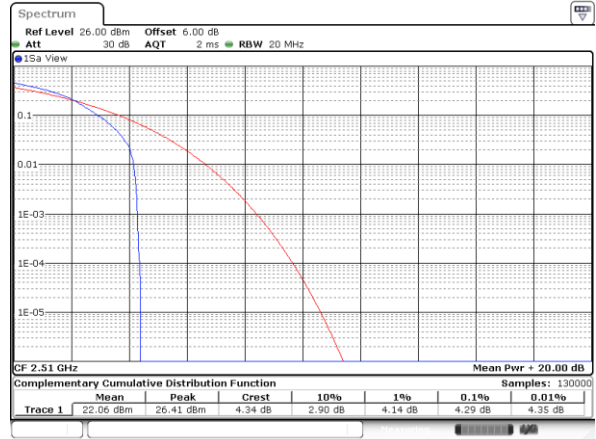


Middle Channel / 1RB

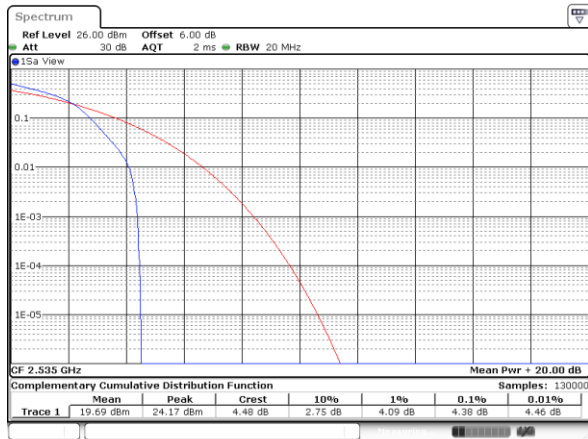


Middle Channel / Full RB

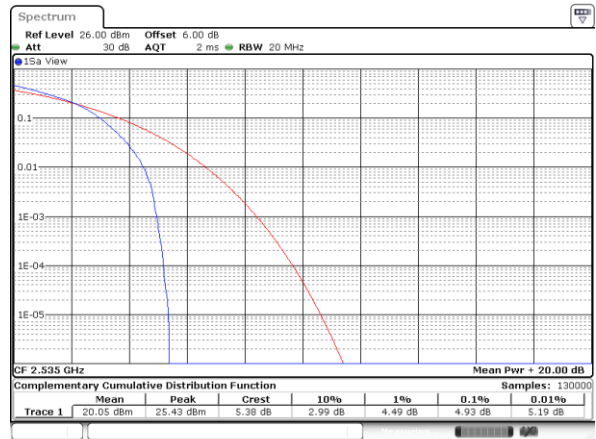

Highest Channel / 1RB

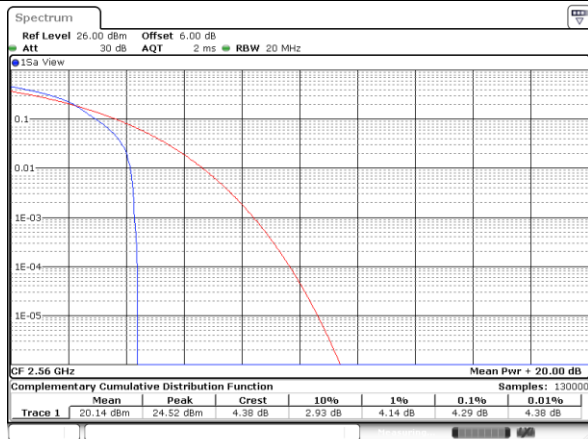

Highest Channel / Full RB

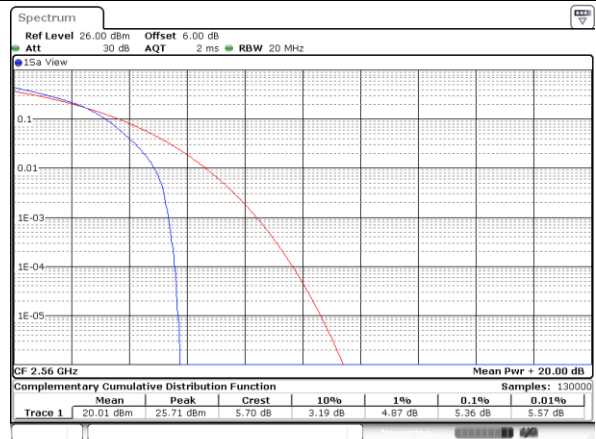



LTE Band 17 / 10MHz / QPSK

Lowest Channel / 1RB



Lowest Channel / Full RB



Middle Channel / 1RB



Middle Channel / Full RB



Highest Channel / 1RB



Highest Channel / Full RB





LTE Band 17 / 10MHz / 16QAM

Lowest Channel / 1RB



Date: 6 APR 2019 06:10:34

Lowest Channel / Full RB




Date: 10 APR 2019 09:12:01

Middle Channel / 1RB



Date: 6 APR 2019 06:10:46

Middle Channel / Full RB

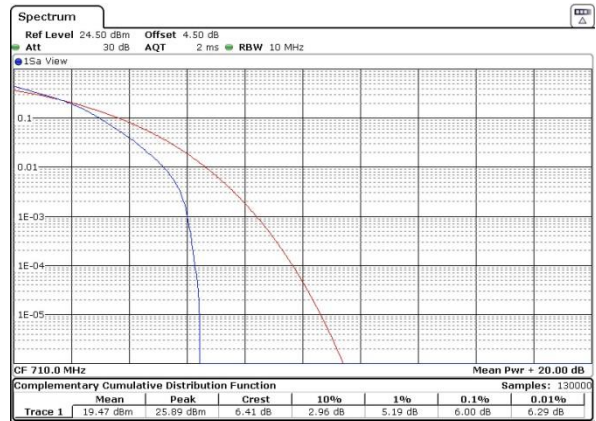


Date: 10 APR 2019 09:11:24

Highest Channel / 1RB



Date: 6 APR 2019 06:11:03

Highest Channel / Full RB

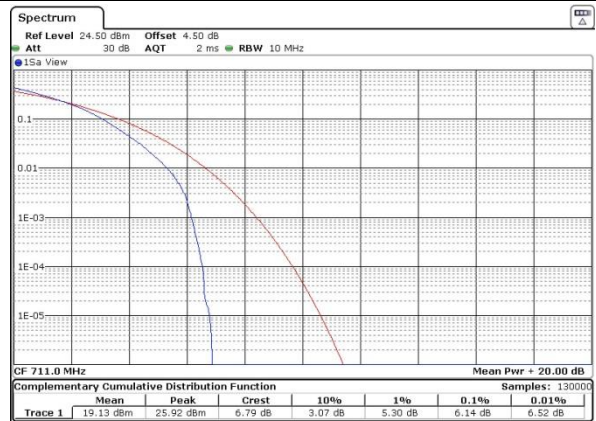

Date: 10 APR 2019 09:10:08

**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.267	1.371	3.003	3.009	4.955	4.995	9.93	6.69	14.60	6.86	20.22	9.75
Middle CH	1.267	1.312	2.991	3.039	4.975	4.895	9.79	7.27	14.36	6.74	20.22	8.711
Highest CH	1.278	1.278	3.021	3.081	4.935	4.865	9.81	5.69	14.33	5.93	20.14	8.67

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.264	1.278	3.045	3.021	4.885	4.885	9.77	5.874	14.386	5.874	19.94	7.27
Middle CH	1.292	1.290	3.039	2.997	4.855	4.905	9.73	5.814	14.595	5.844	20.26	7.43
Highest CH	1.306	1.323	2.991	3.015	4.915	4.925	9.77	5.774	14.326	5.514	19.98	7.35


Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.87	4.94	9.75	5.69	14.36	5.87	20.18	5.67
Middle CH	-	-	-	-	4.99	4.83	9.81	5.91	14.45	5.93	20.22	6.11
Highest CH	-	-	-	-	4.98	4.91	9.71	5.63	14.15	5.69	20.22	6.27

Mode	LTE Band 17 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.975	4.985	9.93	6.074	-	-	-	-
Middle CH	-	-	-	-	4.845	4.935	9.85	5.974	-	-	-	-
Highest CH	-	-	-	-	4.905	4.905	9.79	6.054	-	-	-	-




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

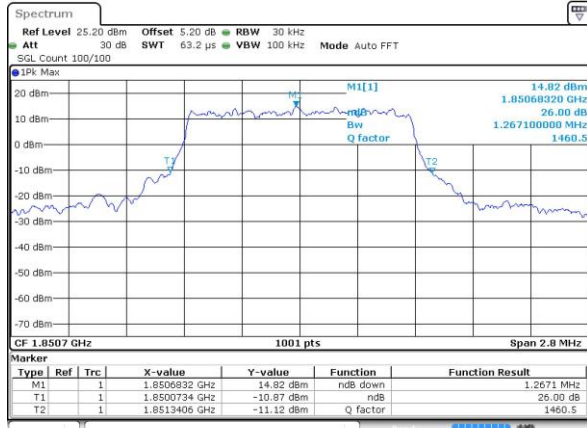


Date: 4 APR 2019 06:01:56

Lowest Channel / 1.4MHz / 16QAM

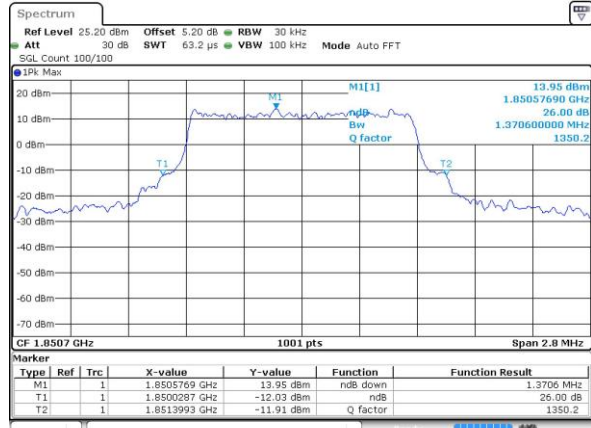


Date: 4 APR 2019 06:02:07

Middle Channel / 1.4MHz / QPSK

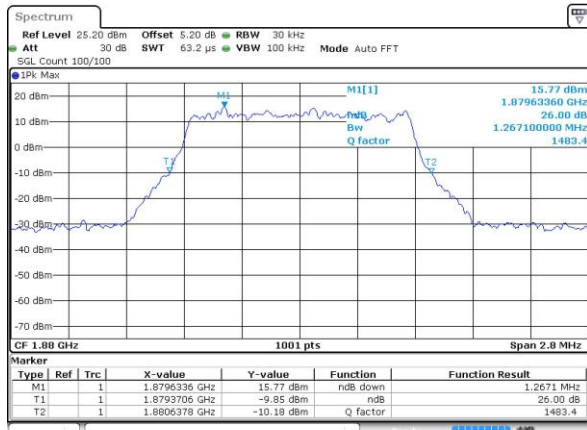


Date: 4 APR 2019 06:06:50

Middle Channel / 1.4MHz / 16QAM

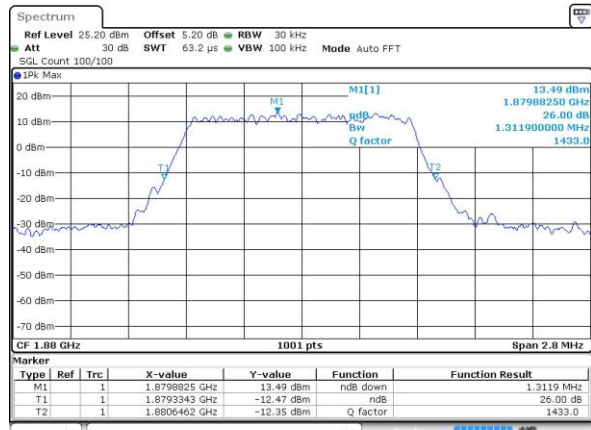


Date: 4 APR 2019 06:07:01

Highest Channel / 1.4MHz / QPSK

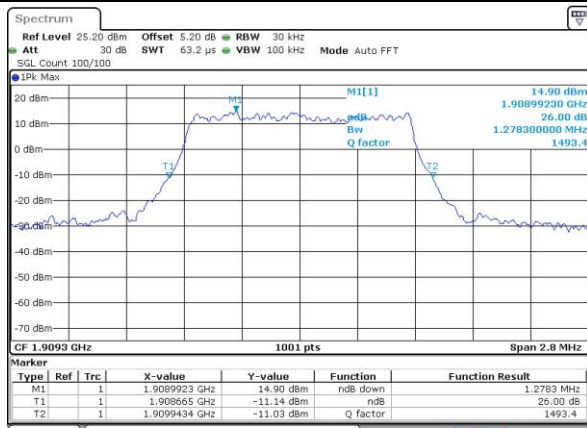

Date: 4 APR 2019 06:07:35

Highest Channel / 1.4MHz / 16QAM

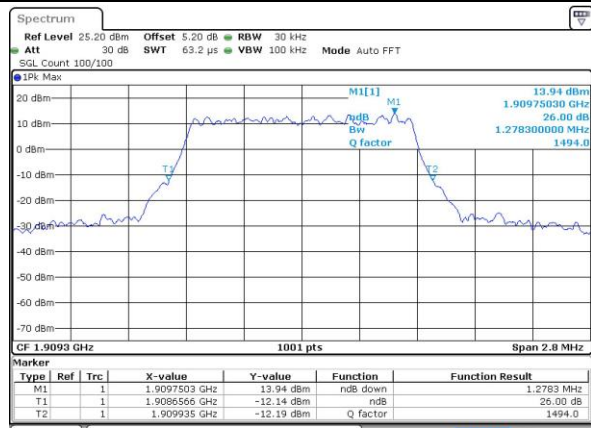


Date: 4 APR 2019 06:07:46




LTE Band 2


Lowest Channel / 3MHz / QPSK

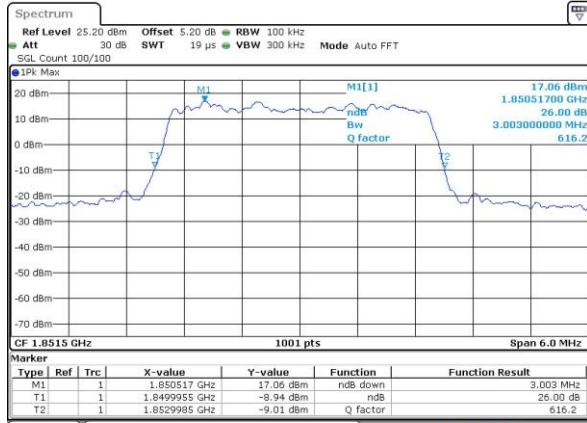


Lowest Channel / 3MHz / 16QAM

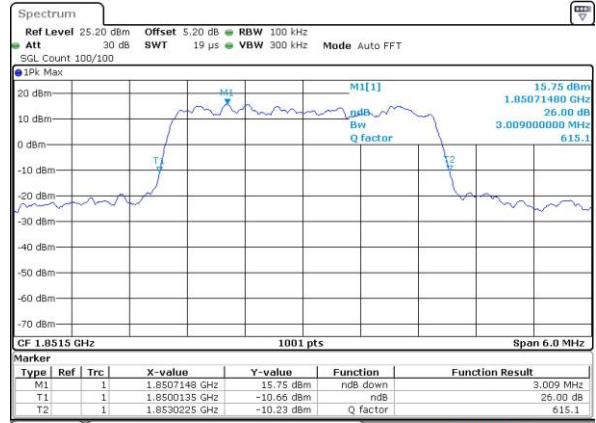


Middle Channel / 3MHz / QPSK

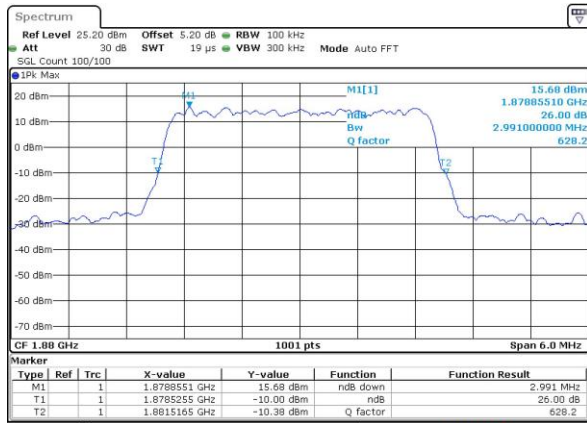


Middle Channel / 3MHz / 16QAM

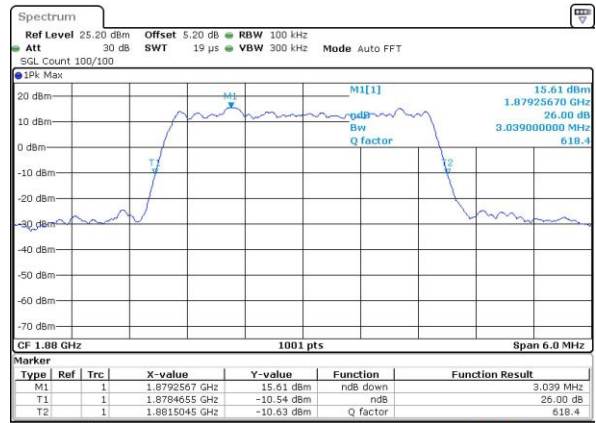

Highest Channel / 3MHz / QPSK

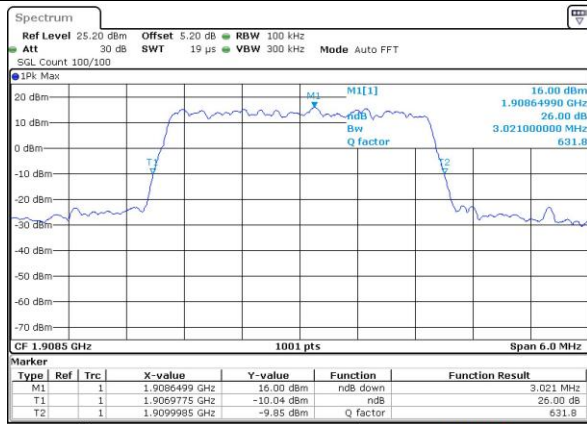


Highest Channel / 3MHz / 16QAM

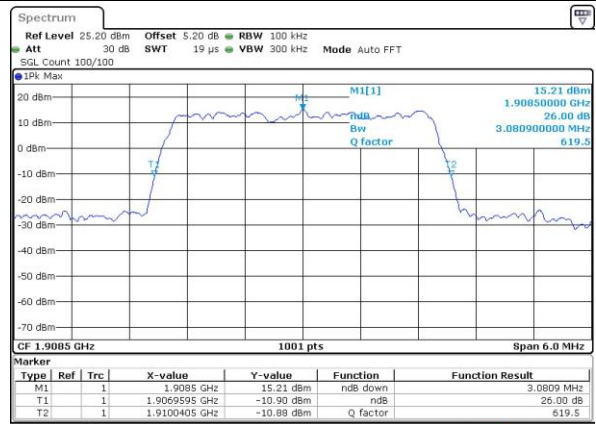




LTE Band 2


Lowest Channel / 5MHz / QPSK

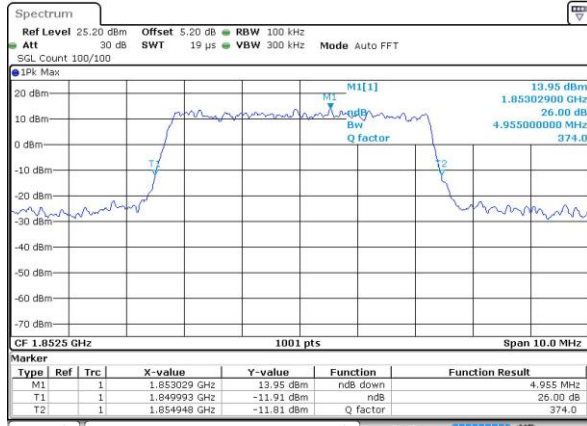


Lowest Channel / 5MHz / 16QAM

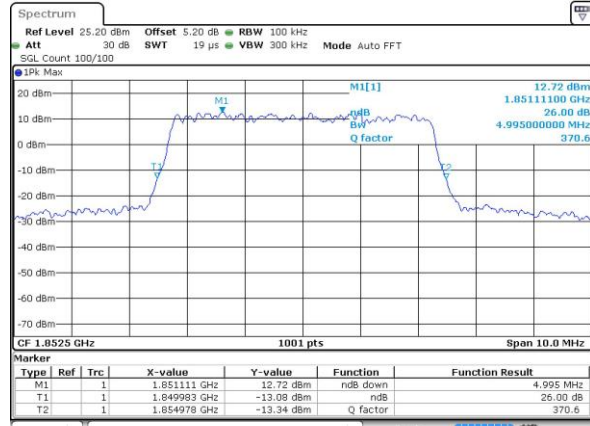


Middle Channel / 5MHz / QPSK

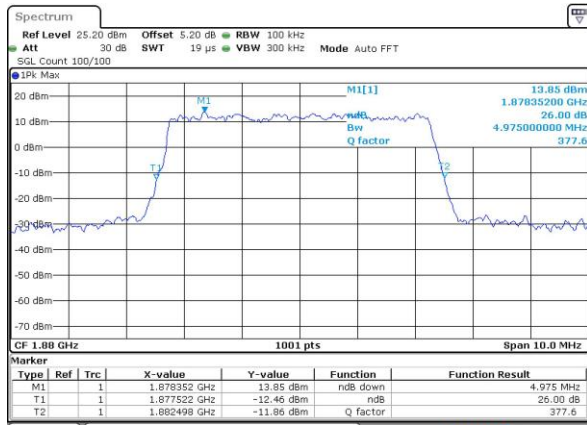


Middle Channel / 5MHz / 16QAM

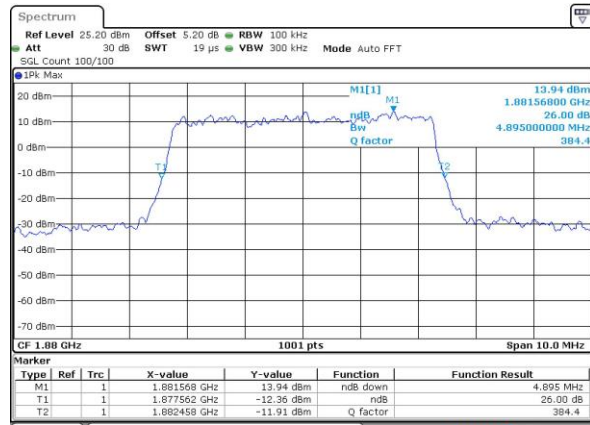

Highest Channel / 5MHz / QPSK

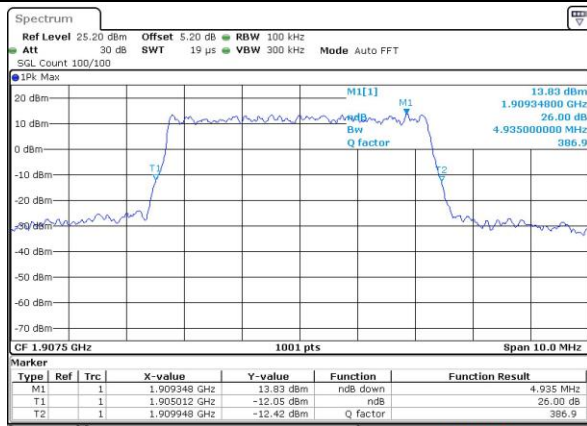


Highest Channel / 5MHz / 16QAM

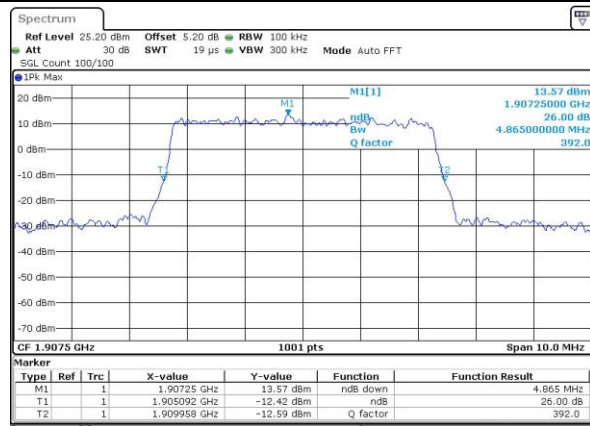




LTE Band 2


Lowest Channel / 10MHz / QPSK

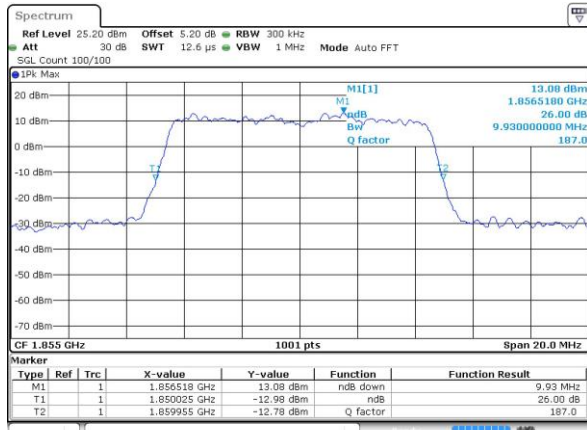


Lowest Channel / 10MHz / 16QAM

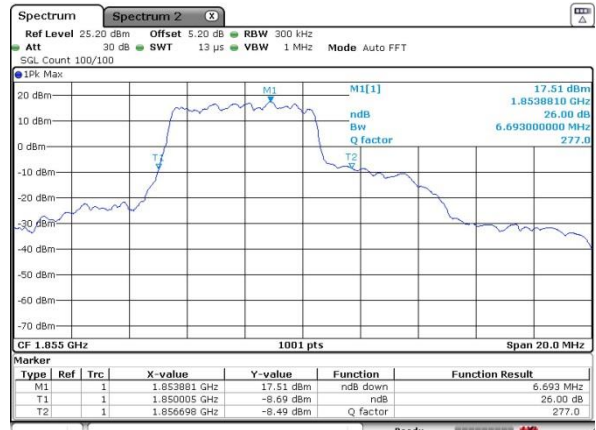


Middle Channel / 10MHz / QPSK

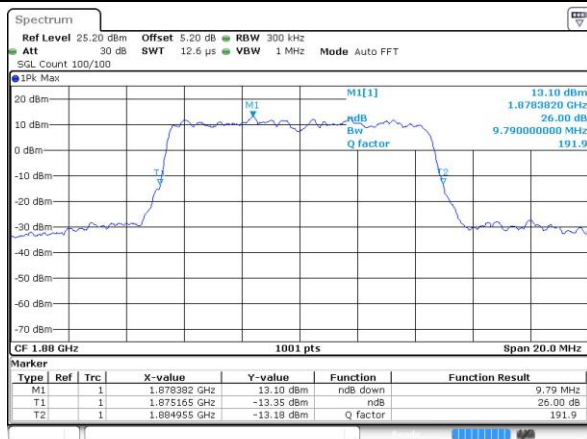

Middle Channel / 10MHz / 16QAM

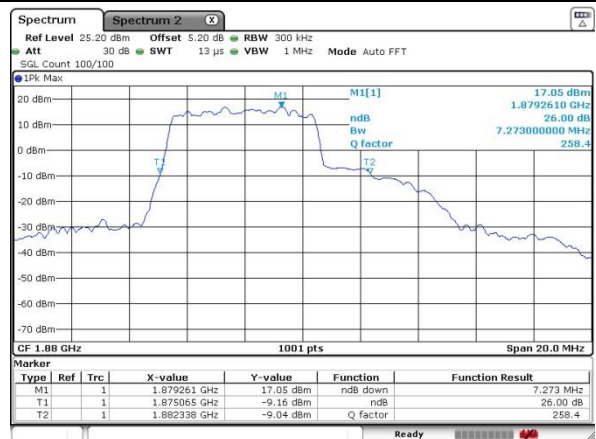

Highest Channel / 10MHz / QPSK

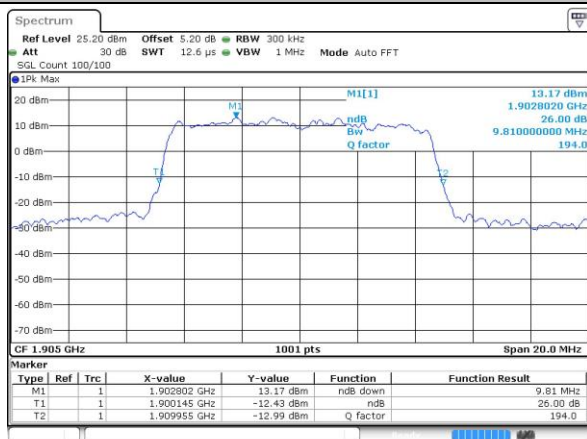

Highest Channel / 10MHz / 16QAM

