

**INDEX OF SUBMITTED MEASURED DATA**

**EXHIBIT 6F (Revised) – Conducted Spurious Emissions (12 Tables):**

- 6F-1: Hi-Power Harmonic of Carrier 438.025 MHz, 25 kHz Channel Spacing
- 6F-2: Hi-Power Harmonic of Carrier 454.025 MHz, 25 kHz Channel Spacing
- 6F-3: Hi-Power Harmonic of Carrier 469.975 MHz, 25 kHz Channel Spacing
- 6F-4: Lo-Power Harmonic of Carrier 438.025 MHz, 25 kHz Channel Spacing
- 6F-5: Lo-Power Harmonic of Carrier 454.025 MHz, 25 kHz Channel Spacing
- 6F-6: Lo-Power Harmonic of Carrier 469.975 MHz, 25 kHz Channel Spacing
- 6F-7: Hi-Power Harmonic of Carrier 438.025 MHz, 12.5 kHz Channel Spacing
- 6F-8: Hi-Power Harmonic of Carrier 454.025 MHz, 12.5 kHz Channel Spacing
- 6F-9: Hi-Power Harmonic of Carrier 469.975 MHz, 12.5 kHz Channel Spacing
- 6F-10: Lo-Power Harmonic of Carrier 438.025 MHz, 12.5 kHz Channel Spacing
- 6F-11: Lo-Power Harmonic of Carrier 454.025 MHz, 12.5 kHz Channel Spacing
- 6F-12: Lo-Power Harmonic of Carrier 469.975 MHz, 12.5 kHz Channel Spacing

**EXHIBIT 6G (Revised) – Radiated Spurious Emissions (12 Graphs):**

- 6G-1: Hi-Power, 438.025 MHz, 25 kHz Channel Spacing  
& Hi-Power, 454.025 MHz, 25 kHz Channel Spacing
- 6G-2: Hi-Power, 469.975 MHz, 25 kHz Channel Spacing
- 6G-3: Lo-Power, 438.025 MHz, 25 kHz Channel Spacing  
& Lo-Power, 454.025 MHz, 25 kHz Channel Spacing
- 6G-4: Lo-Power, 469.975 MHz, 25 kHz Channel Spacing
- 6G-5: Hi-Power, 438.025 MHz, 12.5 kHz Channel Spacing  
& Hi-Power, 454.025 MHz, 12.5 kHz Channel Spacing
- 6G-6: Hi-Power, 469.975 MHz, 12.5 kHz Channel Spacing
- 6G-7: Lo-Power, 438.025 MHz, 12.5 kHz Channel Spacing  
& Lo-Power, 454.025 MHz, 12.5 kHz Channel Spacing
- 6G-8: Lo-Power, 469.975 MHz, 12.5 kHz Channel Spacing

**EXHIBIT 6F (Revised)**  
**Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)**

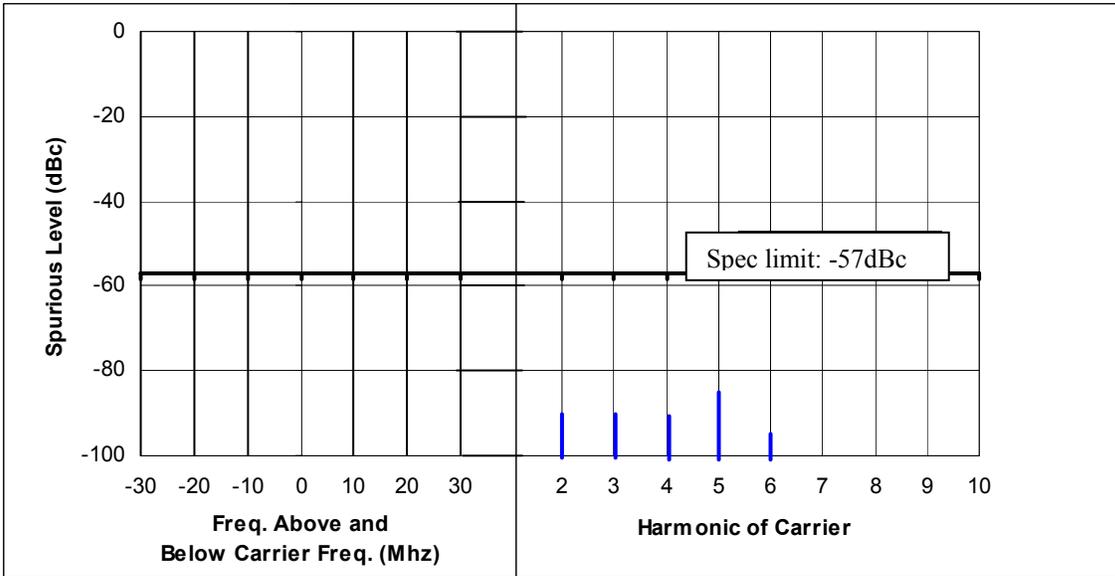


Table 6F-1: Hi-Power Harmonic of Carrier 438.025 MHz, 25 kHz Channel Spacing

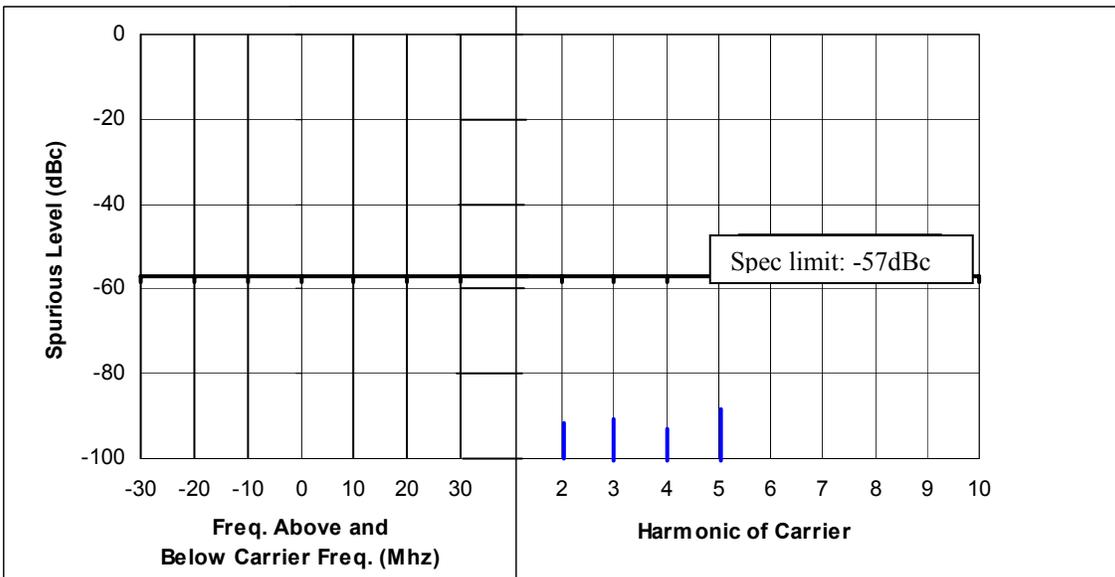


Table 6F-2: Hi-Power Harmonic of Carrier 454.025 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

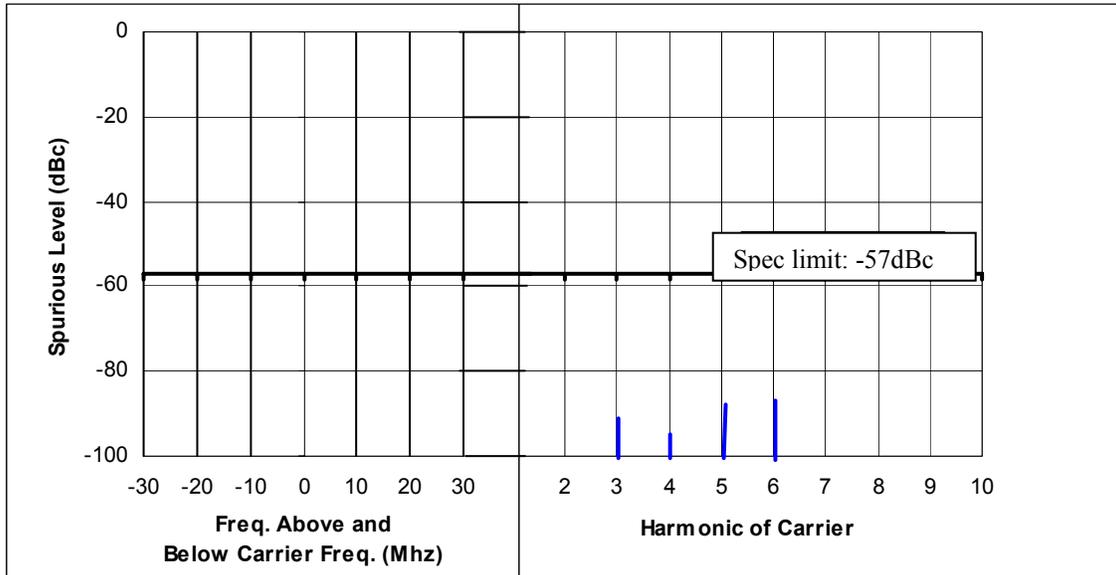


Table 6F-3: Hi-Power Harmonic of Carrier 469.975 MHz, 25 kHz Channel Spacing

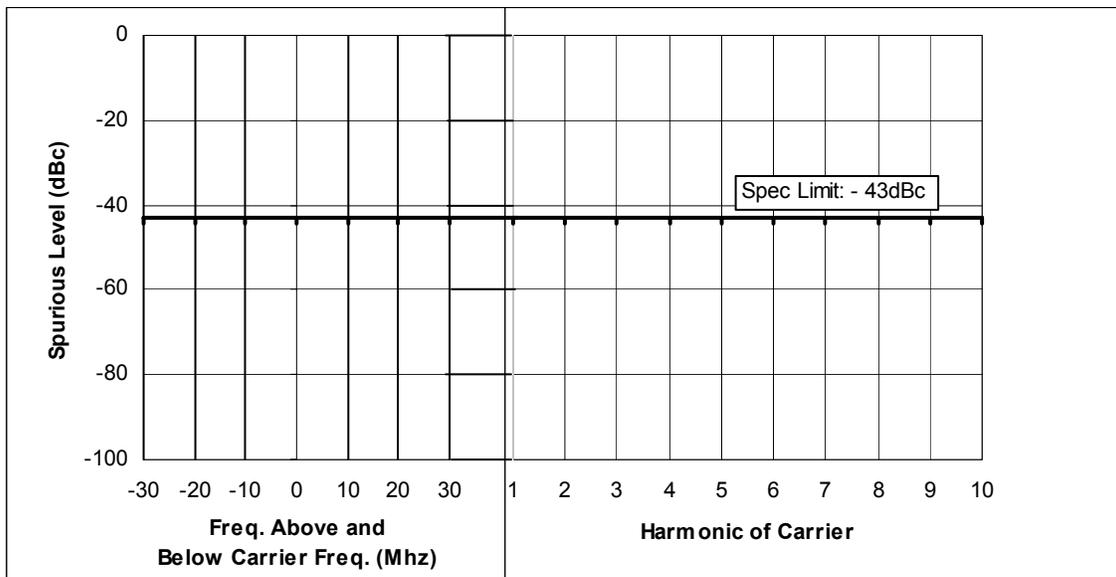


Table 6F-4: Lo-Power Harmonic of Carrier 438.025 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

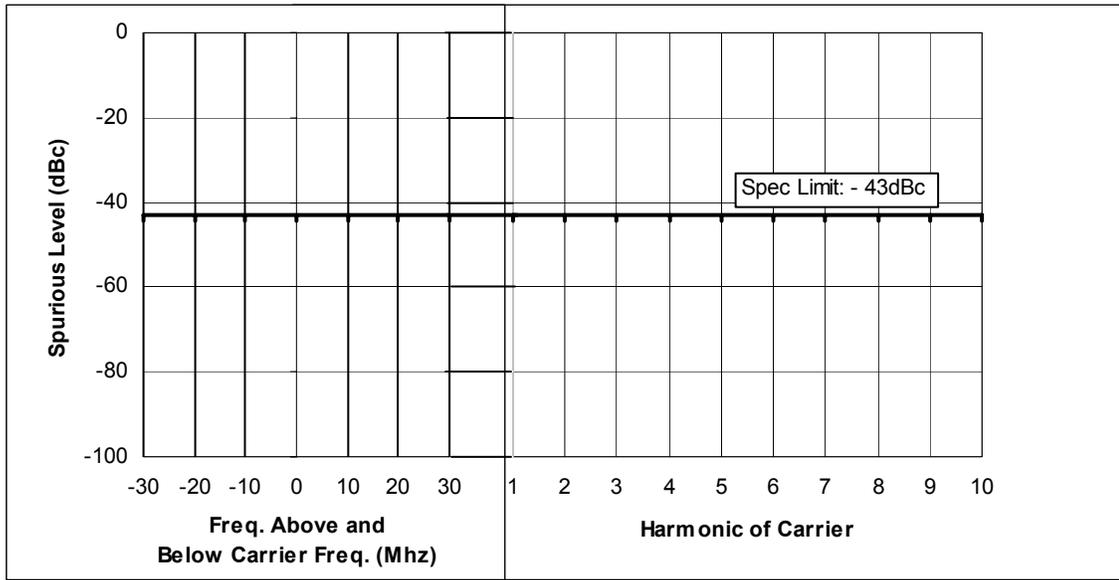


Table 6F-5: Lo-Power Harmonic of Carrier 454.025 MHz, 25 kHz Channel Spacing

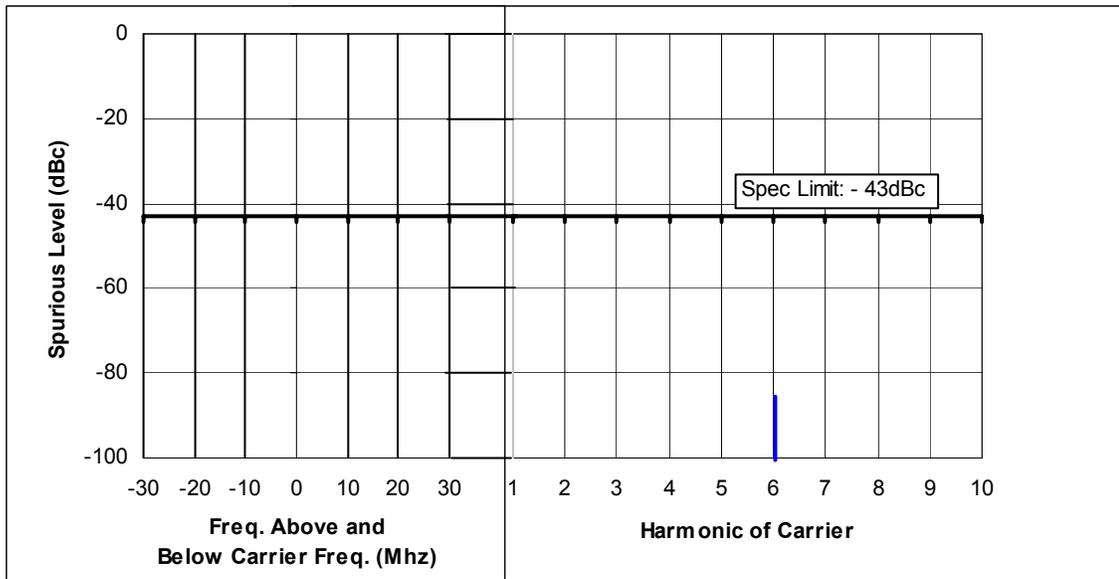


Table 6F-6: Lo-Power Harmonic of Carrier 469.975 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

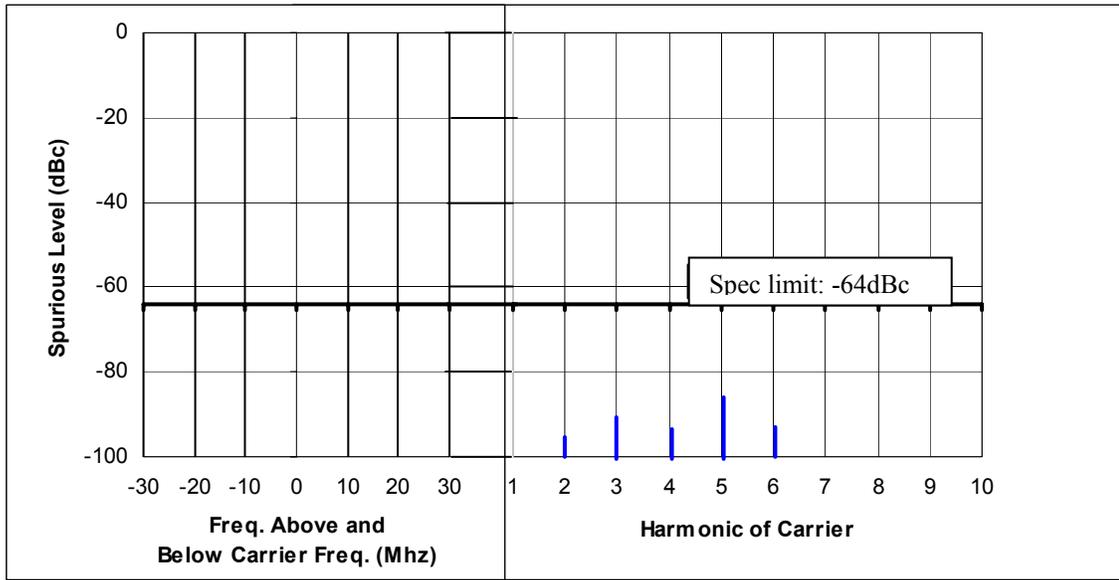


Table 6F-7: Hi-Power Harmonic of Carrier 438.025 MHz, 12.5 kHz Channel Spacing

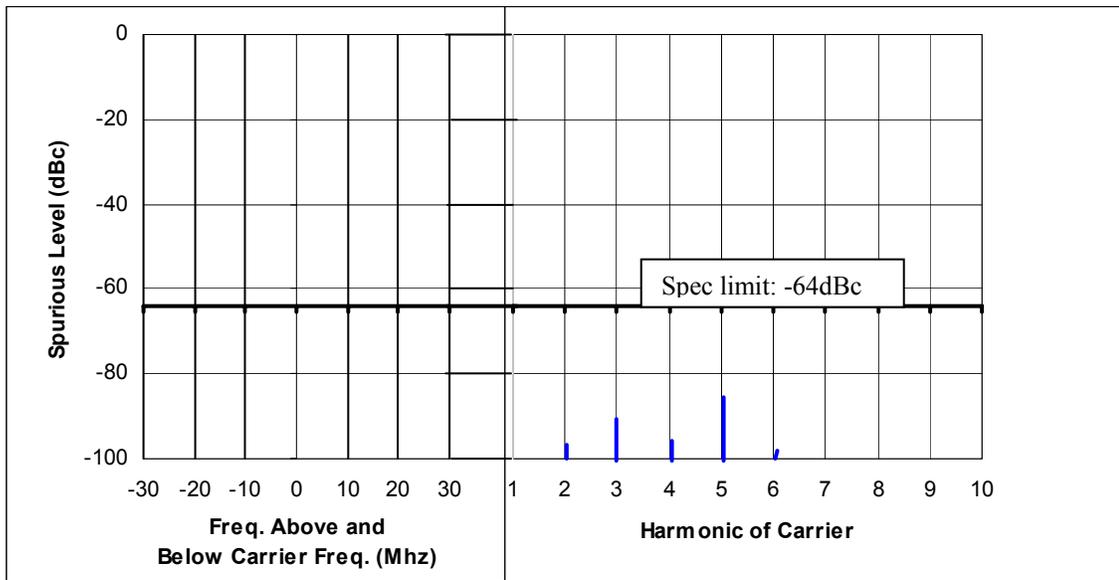


Table 6F-8: Hi-Power Harmonic of Carrier 454.025 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

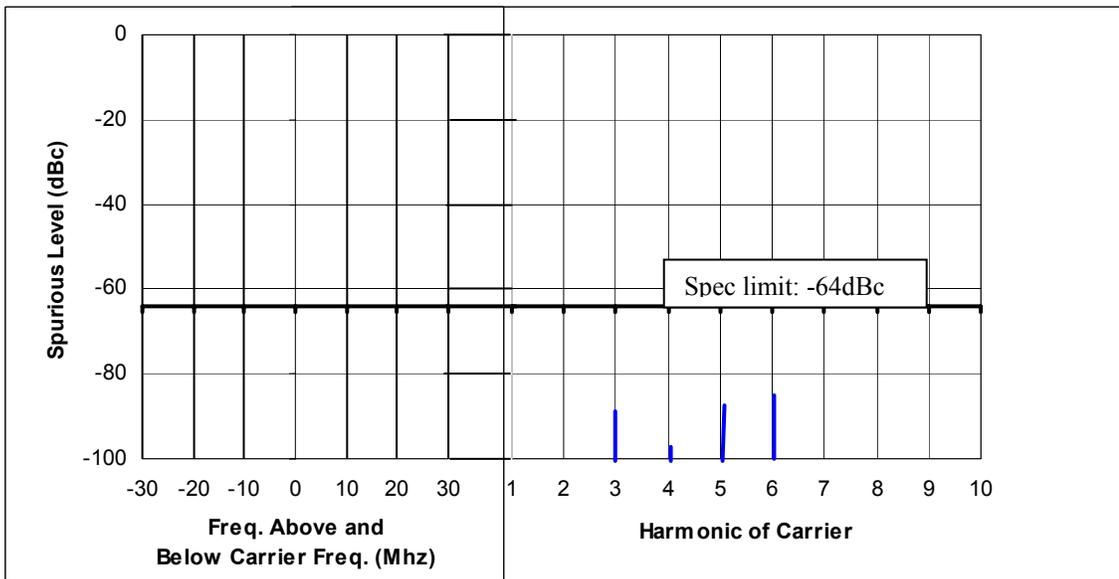


Table 6F-9: Hi-Power Harmonic of Carrier 469.975 MHz, 12.5 kHz Channel Spacing

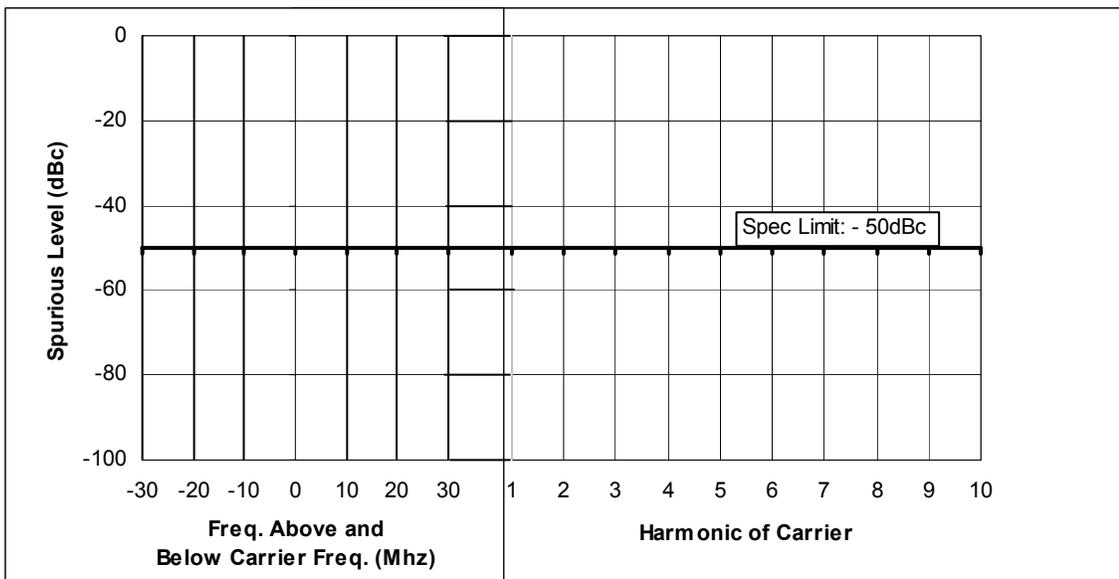


Table 6F-10: Lo-Power Harmonic of Carrier 438.025 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

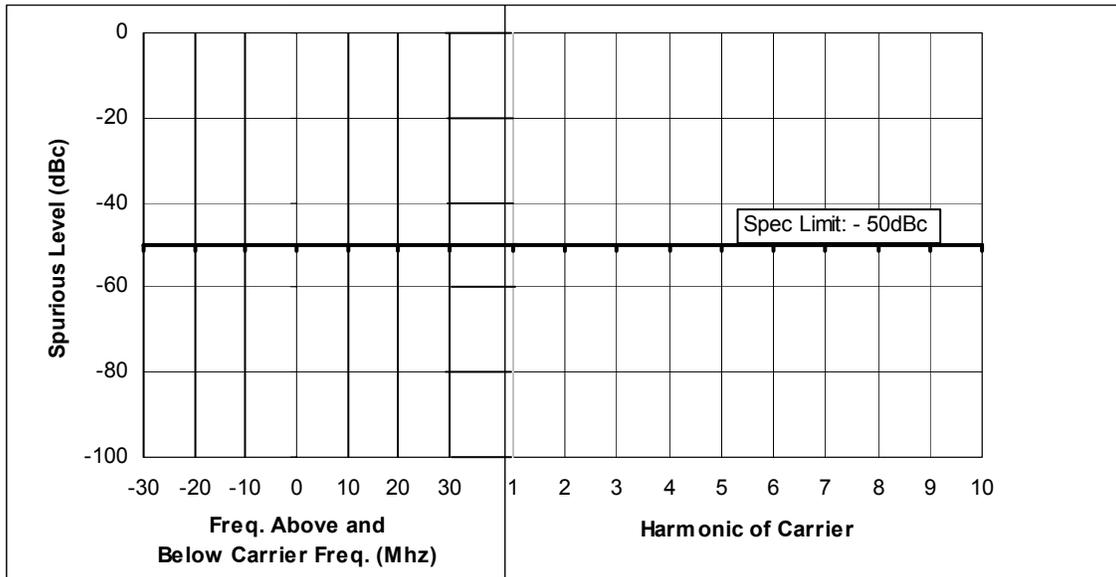


Table 6F-11: Lo-Power Harmonic of Carrier 454.025 MHz, 12.5 kHz Channel Spacing

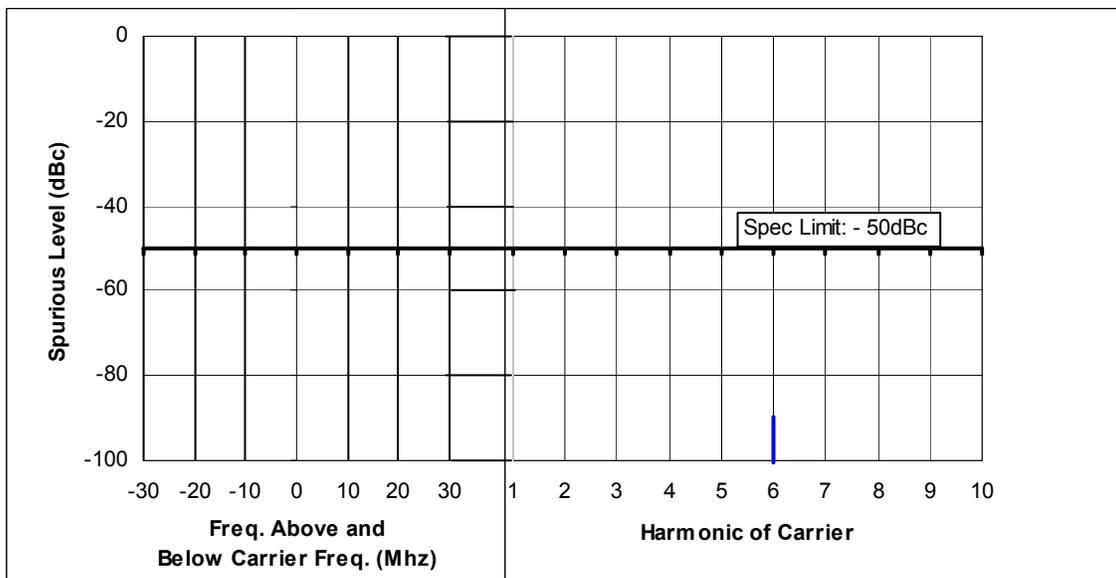


Table 6F-12: Lo-Power Harmonic of Carrier 469.975 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

Exhibit 6-G (Revised)


Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

Tx Power: 28 Watts

438.025 MHz

Channel Spacing 25kHz | S/N X4ECL80E

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
876.0500	-13	*	*
1314.0750	-13	-43.82	-42.49
1752.1000	-13	-62.19	-58.66
2190.1250	-13	-53.21	-46.40
2628.1500	-13	-52.56	-51.03
3066.1750	-13	-59.97	-57.06
3504.2000	-13	-59.69	-58.17
3942.2250	-13	-61.00	-56.98
4380.2500	-13	-58.42	-58.40

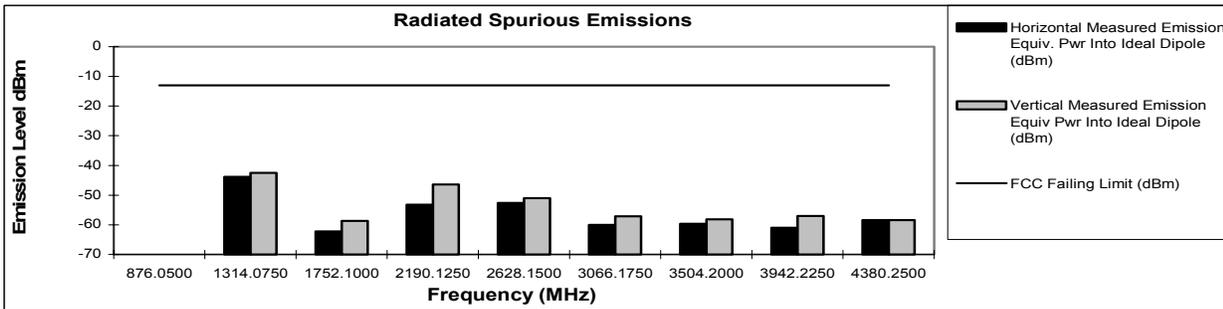


Transmit Radiated Spurious Emissions: ELM GM3688

Tx Power: 28 Watts

454.025 MHz

Channel Spacing 25kHz | S/N X4ECL80E

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0500	-13	-64.26	*
1362.0750	-13	-37.19	-29.80
1816.1000	-13	-67.56	-56.86
2270.1250	-13	-54.78	-52.15
2724.1500	-13	-48.82	-48.22
3178.1750	-13	-59.11	-55.99
3632.2000	-13	-59.49	-61.27
4086.2250	-13	-60.93	-62.17
4540.2500	-13	*	*

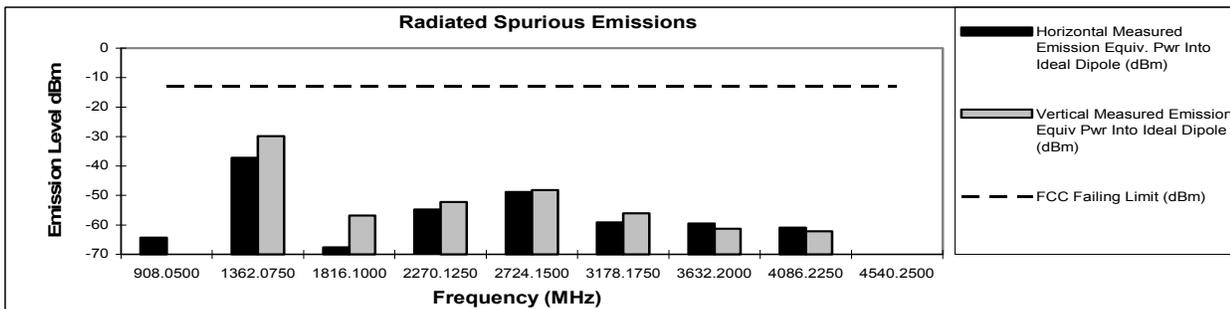

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


6G-1: Hi-Power, 438.025 MHz, 25 kHz Channel Spacing  
& Hi-Power, 454.025 MHz, 25 kHz Channel Spacing

**Tx Power: 28 Watts**

**469.975 MHz**

**Channel Spacing 25kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-13	-67.94	-64.87
1409.9250	-13	-44.56	-33.62
1879.9000	-13	-69.55	-53.40
2349.8750	-13	-52.55	-50.48
2819.8500	-13	-52.33	-50.64
3289.8250	-13	-62.34	-60.40
3759.8000	-13	-56.01	-61.34
4229.7750	-13	-61.60	-61.34
4699.7500	-13	*	*

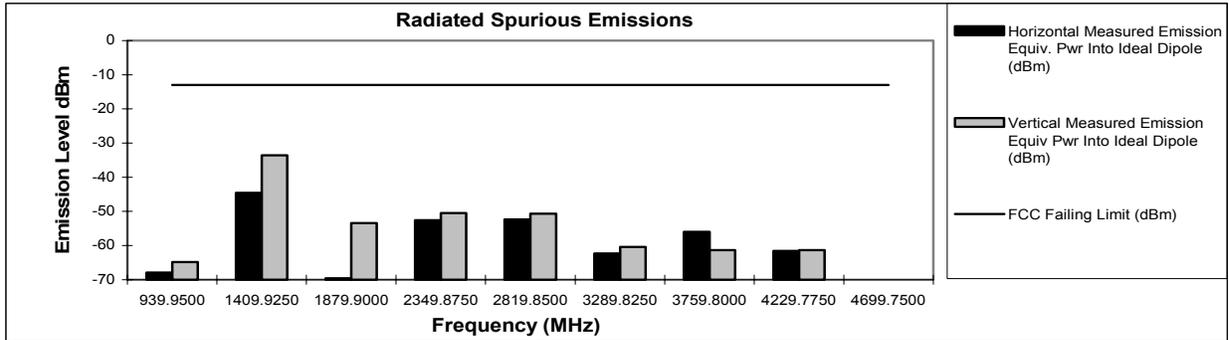


6G-2: Hi-Power, 469.975 MHz, 25 kHz Channel Spacing

Tx Power: 1 Watts

438.025 MHz

Channel Spacing 25kHz | S/N X4ECL80E

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
876.0500	-13	*	*
1314.0750	-13	-73.45	-72.87
1752.1000	-13	-72.93	-65.58
2190.1250	-13	-70.93	-68.30
2628.1500	-13	*	*
3066.1750	-13	*	*
3504.2000	-13	*	*
3942.2250	-13	*	*
4380.2500	-13	*	*

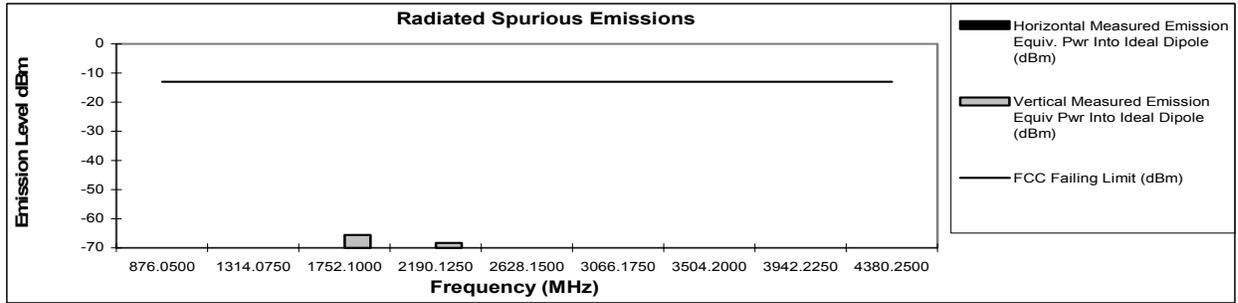


Transmit Radiated Spurious Emissions: ELM GM3688

Tx Power: 1 Watts

454.025 MHz

Channel Spacing 25kHz | S/N X4ECL80E

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0500	-13	-68.94	*
1362.0750	-13	-67.61	-65.82
1816.1000	-13	-72.26	-70.83
2270.1250	-13	-69.83	-68.49
2724.1500	-13	-64.41	-60.17
3178.1750	-13	*	*
3632.2000	-13	*	*
4086.2250	-13	*	*
4540.2500	-13	*	*

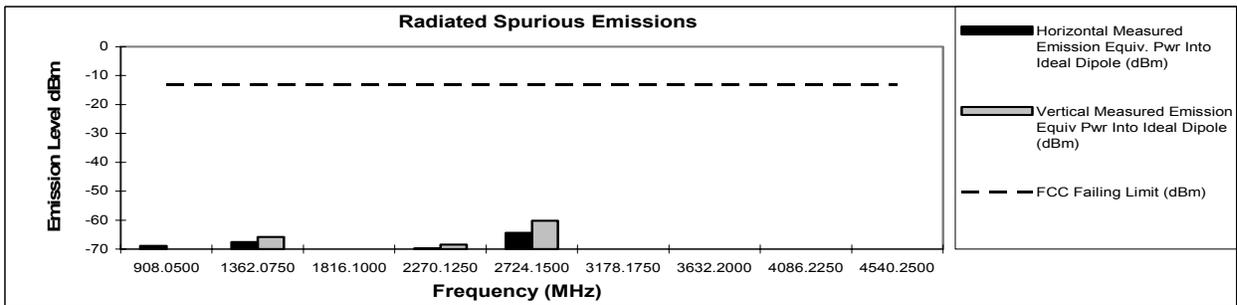

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


6G-3: Lo-Power, 438.025 MHz, 25 kHz Channel Spacing  
& Lo-Power, 454.025 MHz, 25 kHz Channel Spacing

**Tx Power: 1 Watts**

**469.975 MHz**

**Channel Spacing 25kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-13	-67.54	*
1409.9250	-13	-61.73	-64.11
1879.9000	-13	*	*
2349.8750	-13	-67.51	-66.46
2819.8500	-13	-57.17	-58.58
3289.8250	-13	*	*
3759.8000	-13	*	*
4229.7750	-13	*	*
4699.7500	-13	*	*

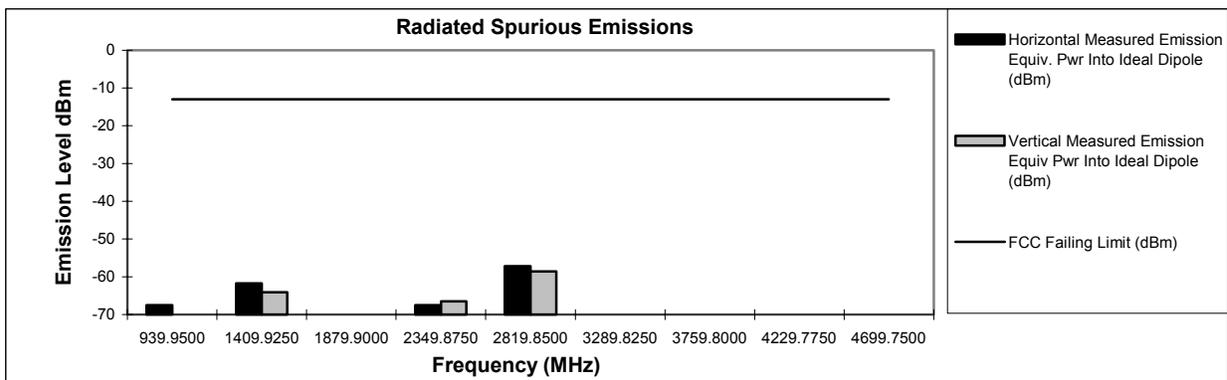

6G-4: Lo-Power, 469.975 MHz, 25 kHz Channel Spacing


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 28 Watts**

**438.025 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
876.0500	-20	*	*
1314.0750	-20	-35.58	-29.71
1752.1000	-20	-55.21	-50.44
2190.1250	-20	-49.70	-44.05
2628.1500	-20	-54.10	-48.98
3066.1750	-20	-59.64	-57.20
3504.2000	-20	-59.37	-56.98
3942.2250	-20	-58.49	-52.68
4380.2500	-20	-56.27	-51.65

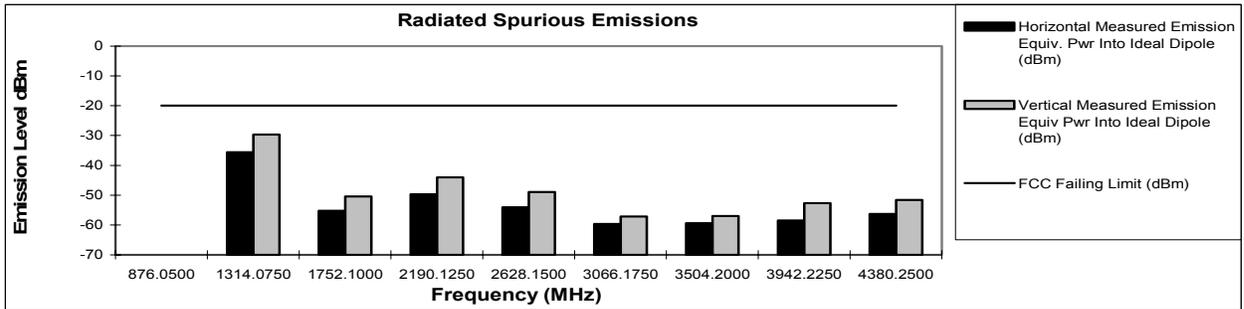


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 28 Watts**

**454.025 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0500	-20	-69.08	*
1362.0750	-20	-34.48	-34.31
1816.1000	-20	-64.09	-57.00
2270.1250	-20	-62.63	-54.33
2724.1500	-20	-64.23	-59.75
3178.1750	-20	-64.51	-59.49
3632.2000	-20	*	*
4086.2250	-20	*	*
4540.2500	-20	*	*

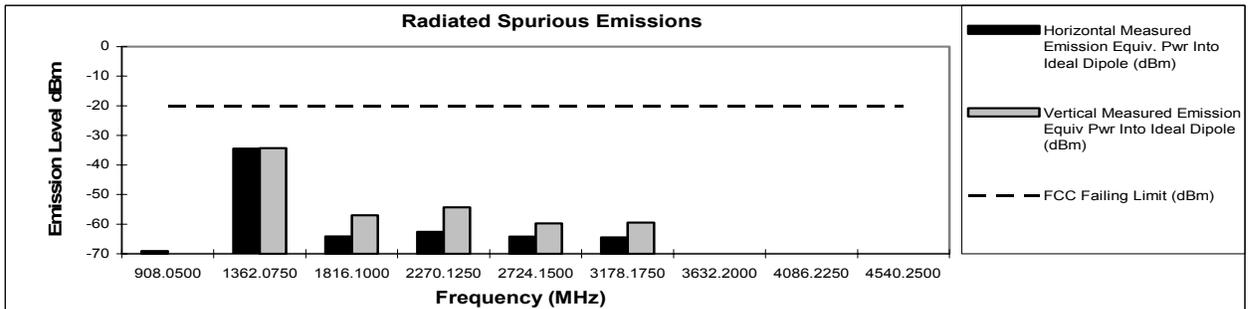

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Frank Baeder

June 26, 2005

6G-5: Hi-Power, 438.025 MHz, 12.5 kHz Channel Spacing  
& Hi-Power, 454.025 MHz, 12.5 kHz Channel Spacing


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 28 Watts**

**469.975 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-20	*	*
1409.9250	-20	-40.62	-39.73
1879.9000	-20	-61.52	-55.95
2349.8750	-20	-58.74	-53.86
2819.8500	-20	-61.86	-60.04
3289.8250	-20	*	*
3759.8000	-20	*	*
4229.7750	-20	*	*
4699.7500	-20	*	*

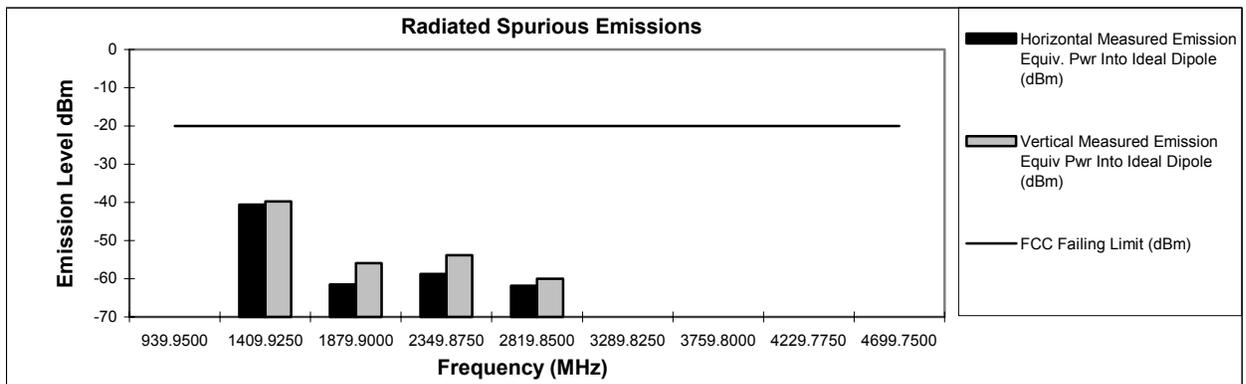

6G-6: Hi-Power, 469.975 MHz, 12.5 kHz Channel Spacing


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 1 Watts**

**438.025 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
876.0500	-20	*	*
1314.0750	-20	-65.38	-67.01
1752.1000	-20	*	*
2190.1250	-20	*	*
2628.1500	-20	*	*
3066.1750	-20	*	*
3504.2000	-20	*	*
3942.2250	-20	*	*
4380.2500	-20	*	*

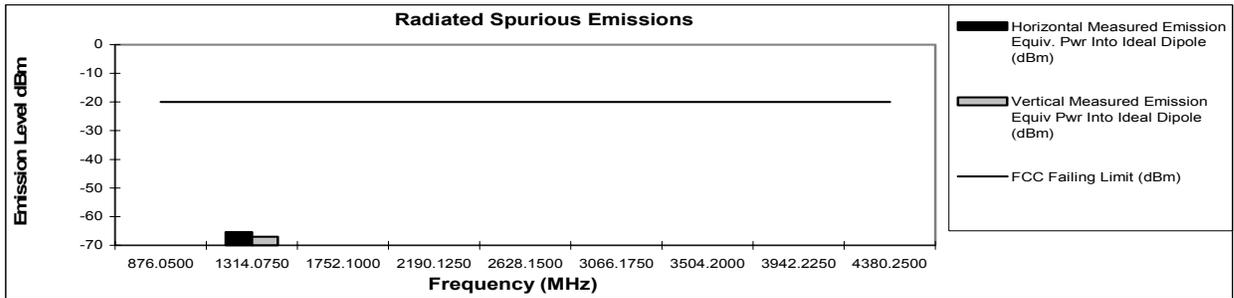


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 1 Watts**

**454.025 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
908.0500	-20	-67.27	*
1362.0750	-20	-59.37	-60.63
1816.1000	-20	-69.82	-65.93
2270.1250	-20	*	*
2724.1500	-20	*	*
3178.1750	-20	*	*
3632.2000	-20	*	*
4086.2250	-20	*	*
4540.2500	-20	*	*

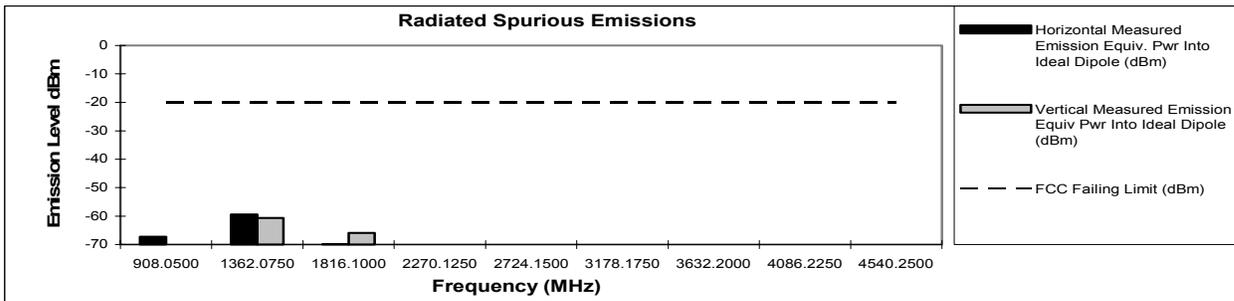

\* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

**Motorola Plantation EMC Lab – Test Performed by: Frank Baader**  
**FCC Registration: 91932 / Industry Canada: IC3679**

**June 26, 2005**

6G-7: Lo-Power, 438.025 MHz, 12.5 kHz Channel Spacing  
 & Lo-Power, 454.025 MHz, 12.5 kHz Channel Spacing


**Transmit Radiated Spurious Emissions: ELM UHF 2 LP**

**Tx Power: 1 Watts**

**469.975 MHz**

**Channel Spacing 12.5kHz | S/N X4ECL80E**

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-20	*	*
1409.9250	-20	-65.36	-63.57
1879.9000	-20	*	*
2349.8750	-20	*	*
2819.8500	-20	-58.26	-51.09
3289.8250	-20	*	*
3759.8000	-20	*	*
4229.7750	-20	*	*
4699.7500	-20	*	*

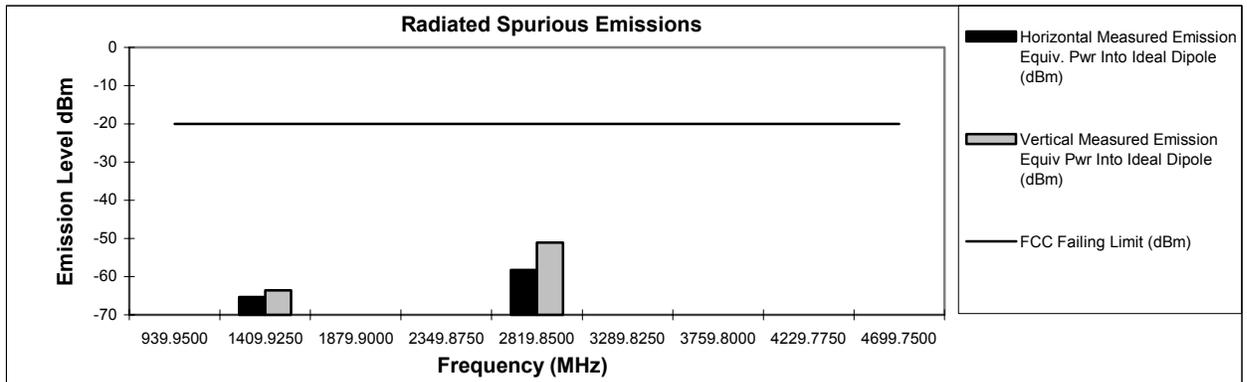

6G-8: Lo-Power, 469.975 MHz, 12.5 kHz Channel Spacing