


MOTOROLA


TESTING CERT # 2518.01

DECLARATION OF COMPLIANCE: MPE ASSESSMENT

Enterprise Mobility Solutions
EME Test Laboratory
 8000 West Sunrise Blvd
 Fort Lauderdale, FL. 33322

Date of Report: August 6, 2010
Report Revision: 0
Report ID: SR8369_MPE rpt_APX7500_UHFR1_100W
 Mobile_Rev O_100806

Responsible Engineer: Stephen C. Whalen (Principal Staff EME Test Engineer)
Report author: Kim Uong ((Principal Staff EME Test Engineer)
Date/s Tested: 5/26/2010, 6/2/2010 & 6/3/2010; 6/25/2010; 7/14/2010
Manufacturer/Location: Motorola, Schaumburg, IL
Date submitted for test: 5/18/2010
DUT Description: APX7500 Single Band UHF R1 100W, 380 - 470 MHz
Test TX mode(s): CW
Max. Power output: 120 Watts
TX Frequency Bands: 380-470MHz
Signaling type: Analog, APCO 25, and TDMA 1:2 (F2)
Model(s) Tested M30QTS9PW1AN
Model(s) Certified: M30QTS9PW1AN
Serial Number(s): 123ABC4567
Classification: Occupational/Controlled Environment

Regulatory Identifications:

FCC ID: AZ492FT4897 – Part 22 & 90 (406.1-470 MHz), MPE results outside of Part 90 are not applicable for FCC compliance demonstration.

Approved Accessories:

Antenna(s):
 HAE4003A (Vehicular Roof Mount, 450-470 MHz, ¼ Wave, 2.15dBi)
 HAE6012A (Vehicular Roof Mount, 380-433 MHz, ¼ Wave, 2.15dBi)
 HAE4011A (Vehicular Mount, 450-470 MHz, ½ Wave, 5.65dBi)
 HAE6010A (Vehicular Mount, 380-433 MHz, ½ Wave, 5.65dBi)
 HAE6013A (Vehicular Mount, 380-470 MHz, ½ Wave, 4.15dBi)
 HAE6031A (Vehicular Mount, 380-520 MHz, ½ Wave, 4.15dBi)
 HAE6011A (Vehicular Roof Mount, 380-433 MHz, 5/8 Wave, 7.15dBi)
 RAE4014ARB (Vehicular Mount, 445-470 MHz, 5/8 Wave, 7.15dBi)

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.

This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006

The results and statements contained in this report pertain only to the device(s) evaluated herein.

Signature on file – Kim Uong
 Deanna Zakharia EMS EME Lab Senior Resource Manager,
 Laboratory Director,

Approval Date: 8/6/2010

Certification Date: 8/6/2010

Certification No.: L1100820P

TABLE OF CONTENTS

- 1.0 Product and System Description
- 2.0 Abbreviations / Definitions
- 3.0 Additional Options and Accessories
- 4.0 Measurement and Limit Standards
- 5.0 Measurement System Uncertainty Levels
- 6.0 Method of Measurement
 - 6.1 EME measurements made with trunk mounted antenna(s)
 - 6.1.1 External/Bystander vehicle EME measurement
 - 6.1.2 Internal/Passenger vehicle EME measurement
 - 6.2 EME measurements made with roof mounted antenna(s)
 - 6.2.1 External/Bystander vehicle EME measurement
 - 6.2.2 Internal/Passenger vehicle EME measurement
- 7.0 Test Site
- 8.0 Measurement System/Equipment
- 9.0 DUT Output Power
- 10.0 Test Set-Up Description
- 11.0 Test Results Summary
- 12.0 Conclusion

- APPENDIX A: Illustration of Antenna Location and Test Distances
- APPENDIX B: Meter/Probe Calibration Certificates
- APPENDIX C: Photo of Assessed Antennas
- APPENDIX D: SAR Simulation Report

REVISION HISTORY

Date	Revision	Comments
8/6/2010	O	Initial release

1.0 Product and System Description

Model M30QTS9PW1AN is a mobile transceiver that utilizes analog, APCO 25 & F2 digital two-way radio communications. The analog modulation scheme uses Frequency Modulation (FM). APCO 25 & F2 digital modes use C4FM of CQPSK family of modulation (Compatible 4-Level Frequency Modulation of Compatible Quadrature Phase Shift Keying). F2 is a TDMA 1:2 protocol that allocates portions of the RF signal by dividing time into two slots (2 slots TDMA). Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. This product supports voice in analog mode, and both voice and data modes in digital mode.

The maximum duty cycle for TDMA is 1:2 (50%) and is controlled by software. The FM signal is continuous. However, because of hand shaking or Push-To-Talk (PTT) between users and/or base stations a conservative 50% duty cycle is applied. The TDMA mode was not tested because its duty cycle is inherently 50% and would include an additional 50% duty cycle for PTT.

The intended use of the radio is PTT while the device is properly installed in a vehicle with an external antenna mounted at the center of the roof or trunk.

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the passengers inside the vehicle and the bystanders external to the vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that "Bystanders" as used herein mean people other than operator)

2.0 Abbreviations / Definitions

APCO: Association of Public-Safety Communications Officials

C4FM: Compatible 4-Level Frequency Modulation

CNR: Calibration Not Required

CQPSK: Compatible Quadrature Phase Shift Keying

CW: Continues Wave

DUT: Device Under Test

F2: 2 slot Time Division Multiple Access

FM: Frequency Modulation

NA: Not Applicable

PTT: Push to Talk

TDMA: Time Division Multiple Access

MPE: Maximum Permissible Exposure

EME: Electromagnetic Energy

3.0 Additional Options and Accessories

Refer to previous MPE reports for additional offered antennas.

4.0 Measurement and Limit Standards

Measurements were performed according to the recommended guidelines in ICNIRP, IEEE/ANSI C95.3-2002 and compared to FCC Limits Per 47 CFR 2.1091 (d) for General Population/ Uncontrolled RF Exposure.

For test frequencies ranging from 380 - 470 MHz the MPE (Maximum Permissible Exposure) limits to electromagnetic energy in equivalent plane wave free-space power density are 0.20 – 0.24mW/cm² (ICNIRP) and 0.25 – 0.31mW/cm² (FCC) for General Population, and 1.0 – 1.18mW/cm² (ICNIRP) and 1.27 – 1.57mW/cm² (FCC) for Occupational.

5.0 Measurement System Uncertainty Levels

Uncertainty Budget for Near Field Probe Measurements

	Tol. (± %)	Prob Dist.	Divisor	u_i (±%)	v_i
Measurement System					
Probe Calibration	6.0	N	1.00	6.0	∞
Survey Meter Calibration	3.0	N	1.00	3.0	∞
Hemispherical Isotropy	8.0	R	1.73	4.6	∞
Linearity	5.0	R	1.73	2.9	∞
Pulse Response	1.0	R	1.73	0.6	∞
RF Ambient Noise	3.0	R	1.73	1.7	∞
RF Reflections	8.0	R	1.73	4.6	∞
Probe Positioning	10.0	R	1.73	5.8	∞
Test sample Related					
Antenna Positioning	3.0	N	1.00	3.0	∞
Power drift	5.0	R	1.73	2.9	∞
Combined Standard Uncertainty					
		RSS		12.2	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)					
		$k=2$		24	

6.0 Method of Measurement

6.1 EME measurements made with trunk mounted antenna(s) (Refer to APPENDIX A for antenna location and test distances)

6.1.1 External/Bystander vehicle EME measurement

(Antenna mounted at trunk center)

MPE measurements for bystander conditions are determined by taking the average of (10) measurements in a 2m vertical line for each of the (3) test locations indicated in appendix A with 20cm increments at the test distance of 90cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Each of the offered antennas mounted at the center of the trunk were assessed at the rear of the vehicle while maintaining a twenty (20) centimeter separation distance between the probe sensor and vehicle body. The worst case antenna was then tested at a 45° radial at the corner of the trunk, and 90° radial at the side of the trunk.

For the current test vehicle, the antenna to probe sensor separation distance is 90cm (directly behind vehicle), 104 cm (45 degree radial) and 110.5 cm (90 degree radial).

Note: The distance from the trunk-mounted antenna to the edge of the vehicle is 42cm and the distance from the edge of the vehicle's trunk to the Survey Probe Sensor is 48cm.

6.1.2 Internal/Passenger vehicle EME measurement

(Antenna mounted at trunk center)

MPE measurements for passenger conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna), and aimed directly at the antenna's axis while the antenna is at 85cm from the back of the backseat passenger's head. These measurements are representative of operator and passengers sitting in the front and back seat of the vehicle.

6.2 EME measurements made with roof mounted antenna(s)

(Refer to APPENDIX A for antenna location and test distances)

6.2.1 External/Bystander vehicle EME measurement

(Antenna mounted at roof center)

MPE measurements for bystander conditions are determined by taking the average of (10) measurements in a 2m vertical line for the test location indicated in APPENDIX A with 20cm increments at the test distance of 90cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Note: Actual test distance was approximately 117cm from antenna to probe element (97cm from antenna to edge of car door; 20cm vertical test line to car door); this is the closest distance that can be achieved to an antenna mounted to the center of the vehicle used for MPE compliance assessment.

6.2.2 Internal/Passenger vehicle EME measurement

(Antenna mounted at roof center)

MPE measurements for passenger conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of operator and passengers sitting in the front and back seat of the vehicle.

7.0 Test Site

The test site is the Motorola open area test site located at 8000 W. Sunrise Blvd., Plantation, FL. 33322.

8.0 Measurement System/Equipment

Equipment Type	Model #	SN	Calibration Date
Automobile	2003 Ford Crown Victoria, 4-Door	NA	NA
Survey Meter / Probe – E-Field (Electric Field)	ETS Model HI-2200 / ETS Model E100	00086316 / 00109011	10/22/09

ETS equipments measured for E-field is in mW/cm² for E-field.

9.0 DUT Output Power

Power density measurements were performed with the test frequencies and associated power levels presented in the table below.

Test Frequencies (MHz)	Measured Initial Power (W)
380.0125	120
406.5	120
425.0125	120
432.9875	120
445.0125	120
450.0125	120
457.5	120
460.0125	120
469.9875	120

10.0 Test Set-Up Description

All antennas listed on the cover page of this report were considered in order to develop the test plan for this product.

a) All antennas listed on the cover page were assessed while mounted at the center of the roof of the test vehicle.

b) The ½ wave 4.15dBi gain antennas (HAE6013A & HAE6031A), 5.65dBi gain antenna (HAE4011A and HAE6010A) and 5/8 wave 7.15dBi gain antenna (HAE6011A & RAE4014ARB) were assessed while mounted at the center of the trunk of the test vehicle.

Assessments were performed with DUT (Device Under Test) installed on a test vehicle, while engine was at idle, at the specified distances and test locations indicated in section 5.0 and APPENDIX A.

11.0 Test Results Summary

The tables below summarized the MPE measurement results for each test configuration: antenna (model and description), antenna gain, TX frequency, maximum output power, initial power, E/H field measurements, probe frequency cal factor, test positions (BS-Bystander, PB-Passenger Back, PF-Passenger Front), average over body results, calculated power density results, max calculated power density results, % of the applicable specification limit, and applicable ICNIRP/IEEE/FCC specification limits.

MPE results for this mobile radio are based on 50% duty cycle which is in accordance with the User Manual instructions.

Below is an explanation of how the MPE results are calculated.

External to vehicle (Bystander) - 10 measurements are averaged over the body (*body_avg*).

Internal to vehicle (Passengers) - 3 measurements are averaged over the body (*body_avg*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

$$Pwr_density_calc = body_avg * (probe_frequency_cal_factor)^2 * duty_cycle$$

$$Pwr_density_max_calc = pwr_density_calc * \frac{max_output_power}{initial_output_power}$$

Note1: For initial output power > max_output_power; max_output_power / initial output power = 1

Note2: The probe frequency cal factors used for MPE evaluation of this product are based on the worse case.

Note 3: The calibration certificate's frequency cal factors were determined by measuring V/m for E-field probe and A/m for H-field probe. The results presented herein are power density (mW/cm²) and therefore the cal factors were squared as indicated in the formula above.

*Note 4: The H-field measurements were done in A/m. Therefore the calculated power density results were converted to mW/cm² using the formula: mW/cm² = (A/m)²*37.699.*

Table 1: E-field - MPE assessment data with antenna mounted on the trunk

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
HAE6010A Antenna												
*HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	BS	0.468	0.220	0.220	110	0.25	0.20
*HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	PB	1.130	0.531	0.531	266	0.25	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	PF	0.283	0.133	0.133	67	0.25	0.20
*HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	BS	0.456	0.214	0.214	105	0.27	0.20
*HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	PB	1.280	0.602	0.602	296	0.27	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	PF	0.273	0.128	0.128	63	0.27	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	BS	0.390	0.185	0.185	86	0.29	0.22
*HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	PB	0.510	0.242	0.242	112	0.29	0.22
HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	PF	0.113	0.054	0.054	25	0.29	0.22
HAE6011A Antenna												
*HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	BS	0.480	0.226	0.226	113	0.25	0.20
*HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	PB	0.717	0.337	0.337	168	0.25	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	PF	0.183	0.086	0.086	43	0.25	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	BS	0.393	0.185	0.185	91	0.27	0.20
*HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	PB	0.803	0.378	0.378	186	0.27	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	PF	0.183	0.086	0.086	42	0.27	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	BS	0.125	0.059	0.059	27	0.29	0.22
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	PB	0.083	0.040	0.040	18	0.29	0.22
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	PF	0.017	0.008	0.008	4	0.29	0.22
HAE4011A Antenna												
HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	BS	0.460	0.221	0.221	98	0.30	0.23
*HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	PB	0.960	0.461	0.461	205	0.30	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	PF	0.273	0.131	0.131	58	0.30	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	BS	0.419	0.201	0.201	87	0.31	0.23
*HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	PB	0.933	0.448	0.448	195	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	PF	0.223	0.107	0.107	47	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	BS	0.253	0.123	0.123	52	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	PB	0.380	0.184	0.184	78	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	PF	0.123	0.060	0.060	25	0.31	0.23

Table 1 (continued): E-field - MPE assessment data with antenna mounted on the trunk

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
RAE4014ARB Antenna												
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	BS	0.338	0.162	0.162	73	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	PB	0.330	0.158	0.158	71	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	PF	0.070	0.034	0.034	15	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	BS	0.268	0.129	0.129	56	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	PB	0.123	0.059	0.059	26	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	PF	0.043	0.021	0.021	9	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	BS	0.084	0.041	0.041	17	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	PB	0.010	0.005	0.005	2	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	PF	0.003	0.002	0.002	1	0.31	0.23
HAE6013A Antenna												
*HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	BS	0.708	0.333	0.333	166	0.25	0.20
*HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	PB	1.617	0.760	0.760	380	0.25	0.20
*HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	PF	0.490	0.230	0.230	115	0.25	0.20
*HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	BS	0.710	0.337	0.337	159	0.28	0.21
*HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	PB	1.153	0.548	0.548	258	0.28	0.21
HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	PF	0.340	0.162	0.162	76	0.28	0.21
HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	BS	0.455	0.221	0.221	94	0.31	0.23
*HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	PB	0.740	0.359	0.359	153	0.31	0.23
HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	PF	0.430	0.209	0.209	89	0.31	0.23

Table 1 (continued): E-field - MPE assessment data with antenna mounted on the trunk

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
HAE6031A Antenna												
*HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	BS	0.617	0.290	0.290	145	0.25	0.20
*HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	PB	1.713	0.805	0.805	403	0.25	0.20
*HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	PF	0.470	0.221	0.221	110	0.25	0.20
*HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	BS	0.766	0.364	0.364	171	0.28	0.21
*HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	PB	1.123	0.534	0.534	251	0.28	0.21
HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	PF	0.183	0.087	0.087	41	0.28	0.21
*HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	BS	0.608	0.295	0.295	125	0.31	0.23
*HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	PB	1.030	0.500	0.500	213	0.31	0.23
HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	PF	0.457	0.221	0.221	94	0.31	0.23
45 degree												
*HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	BS	0.539	0.256	0.256	120	0.28	0.21
90 degree												
*HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	BS	0.607	0.288	0.288	136	0.28	0.21

Table 2: E-field - MPE assessment data with antenna mounted on the roof

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
HAE6012A Antenna												
HAE6012A, 1/4W (380-433MHz)	2.15	380.0125	120	120	E	BS	0.290	0.136	0.136	68	0.25	0.20
HAE6012A, 1/4W (380-433MHz)	2.15	380.0125	120	120	E	PB	0.257	0.121	0.121	60	0.25	0.20
HAE6012A, 1/4W (380-433MHz)	2.15	380.0125	120	120	E	PF	0.077	0.036	0.036	18	0.25	0.20
HAE6012A, 1/4W (380-433MHz)	2.15	406.5	120	120	E	BS	0.340	0.160	0.160	79	0.27	0.20
*HAE6012A, 1/4W (380-433MHz)	2.15	406.5	120	120	E	PB	0.557	0.262	0.262	129	0.27	0.20
HAE6012A, 1/4W (380-433MHz)	2.15	406.5	120	120	E	PF	0.143	0.067	0.067	33	0.27	0.20
HAE6012A, 1/4W (380-433MHz)	2.15	432.9875	120	120	E	BS	0.268	0.127	0.127	59	0.29	0.22
HAE6012A, 1/4W (380-433MHz)	2.15	432.9875	120	120	E	PB	0.147	0.070	0.070	32	0.29	0.22
HAE6012A, 1/4W (380-433MHz)	2.15	432.9875	120	120	E	PF	0.077	0.036	0.036	17	0.29	0.22
HAE4003A Antenna												
HAE4003A, 1/4W (450-470MHz)	2.15	450.0125	120	120	E	BS	0.313	0.150	0.150	67	0.30	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	450.0125	120	120	E	PB	0.197	0.094	0.094	42	0.30	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	450.0125	120	120	E	PF	0.117	0.056	0.056	25	0.30	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	460.0125	120	120	E	BS	0.317	0.152	0.152	66	0.31	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	460.0125	120	120	E	PB	0.123	0.059	0.059	26	0.31	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	460.0125	120	120	E	PF	0.197	0.094	0.094	41	0.31	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	469.9875	120	120	E	BS	0.305	0.148	0.148	63	0.31	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	469.9875	120	120	E	PB	0.120	0.058	0.058	25	0.31	0.23
HAE4003A, 1/4W (450-470MHz)	2.15	469.9875	120	120	E	PF	0.127	0.061	0.061	26	0.31	0.23
HAE6010A Antenna												
HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	BS	0.136	0.064	0.064	32	0.25	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	PB	0.193	0.091	0.091	45	0.25	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	380.0125	120	120	E	PF	0.073	0.034	0.034	17	0.25	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	BS	0.190	0.089	0.089	44	0.27	0.20
*HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	PB	0.643	0.302	0.302	149	0.27	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	406.5	120	120	E	PF	0.167	0.078	0.078	39	0.27	0.20
HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	BS	0.138	0.066	0.066	30	0.29	0.22
HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	PB	0.163	0.078	0.078	36	0.29	0.22
HAE6010A, 1/2W (380-433MHz)	5.65	432.9875	120	120	E	PF	0.080	0.038	0.038	18	0.29	0.22

Table 2 (continued): E-field - MPE assessment data with antenna mounted on the roof

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
HAE6011A Antenna												
HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	BS	0.206	0.097	0.097	48	0.25	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	PB	0.023	0.011	0.011	5	0.25	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	380.0125	120	120	E	PF	0.010	0.005	0.005	2	0.25	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	BS	0.207	0.097	0.097	48	0.27	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	PB	0.083	0.039	0.039	19	0.27	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	406.5	120	120	E	PF	0.010	0.005	0.005	2	0.27	0.20
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	BS	0.052	0.025	0.025	11	0.29	0.22
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	PB	0.077	0.036	0.036	17	0.29	0.22
HAE6011A, 5/8W (380-433MHz)	7.15	432.9875	120	120	E	PF	0.000	0.000	0.000	0	0.29	0.22
HAE4011A Antenna												
HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	BS	0.284	0.136	0.136	61	0.30	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	PB	0.030	0.014	0.014	6	0.30	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	450.0125	120	120	E	PF	0.027	0.013	0.013	6	0.30	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	BS	0.248	0.119	0.119	52	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	PB	0.023	0.011	0.011	5	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	460.0125	120	120	E	PF	0.040	0.019	0.019	8	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	BS	0.160	0.078	0.078	33	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	PB	0.017	0.008	0.008	3	0.31	0.23
HAE4011A, 1/2W (450-470MHz)	5.65	469.9875	120	120	E	PF	0.017	0.008	0.008	3	0.31	0.23
RAE4014ARB Antenna												
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	BS	0.178	0.085	0.085	38	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	PB	0.027	0.013	0.013	6	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	445.0125	120	120	E	PF	0.007	0.003	0.003	1	0.30	0.22
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	BS	0.114	0.055	0.055	24	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	PB	0.000	0.000	0.000	0	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	457.5	120	120	E	PF	0.000	0.000	0.000	0	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	BS	0.015	0.007	0.007	3	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	PB	0.000	0.000	0.000	0	0.31	0.23
RAE4014ARB, 5/8W (445-470MHz)	7.15	469.9875	120	120	E	PF	0.000	0.000	0.000	0	0.31	0.23

Table 2 (continued): E-field - MPE assessment data with antenna mounted on the roof

Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	E/H Field	Test Pos.	Avg. over Body (mW/cm ²)	Calc. P.D. (mW/cm ²)	Max Calc. P.D. (mW/cm ²)	% of ICNIRP Spec Limit	FCC Spec Limit (mW/cm ²)	ICNIRP Spec Limit (mW/cm ²)
HAE6013A Antenna												
HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	BS	0.299	0.141	0.141	70	0.25	0.20
HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	PB	0.290	0.136	0.136	68	0.25	0.20
HAE6013A, 1/2W (380-470MHz)	4.15	380.0125	120	120	E	PF	0.097	0.045	0.045	23	0.25	0.20
HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	BS	0.303	0.144	0.144	68	0.28	0.21
HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	PB	0.177	0.084	0.084	39	0.28	0.21
HAE6013A, 1/2W (380-470MHz)	4.15	425.0125	120	120	E	PF	0.113	0.054	0.054	25	0.28	0.21
HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	BS	0.254	0.123	0.123	52	0.31	0.23
HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	PB	0.087	0.042	0.042	18	0.31	0.23
HAE6013A, 1/2W (380-470MHz)	4.15	469.9875	120	120	E	PF	0.123	0.060	0.060	25	0.31	0.23
HAE6031A Antenna												
HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	BS	0.253	0.119	0.119	59	0.25	0.20
HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	PB	0.243	0.114	0.114	57	0.25	0.20
HAE6031A, 1/2W (380-520 MHz)	4.15	380.0125	120	120	E	PF	0.077	0.036	0.036	18	0.25	0.20
HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	BS	0.313	0.149	0.149	70	0.28	0.21
HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	PB	0.183	0.087	0.087	41	0.28	0.21
HAE6031A, 1/2W (380-520 MHz)	4.15	425.0125	120	120	E	PF	0.110	0.052	0.052	25	0.28	0.21
HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	BS	0.334	0.162	0.162	69	0.31	0.23
HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	PB	0.130	0.063	0.063	27	0.31	0.23
HAE6031A, 1/2W (380-520 MHz)	4.15	469.9875	120	120	E	PF	0.283	0.137	0.137	58	0.31	0.23

12.0 Conclusion

The assessments for this device were performed with an output power range as indicated in section 8.0. The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification of 120W for frequency range of 380 - 470MHz. The highest power density results for the mobile device scaled to the maximum allowable power output is 0.81mW/cm² for internal/passenger to the vehicle, and 0.36mW/cm² for external/bystander to the vehicle.

RF Exposure Results for FCC Part 90 (406.1-470 MHz)

	UHFR1 Band
Passenger - Max Calculated Power Density	0.60 mW/cm ²
Bystander - Max Calculated Power Density	0.36 mW/cm ²

RF Exposure Results (380-470MHz)

	UHFR1 Band
Passenger - Max Calculated Power Density	0.81 mW/cm ²
Bystander - Max Calculated Power Density	0.36 mW/cm ²


These MPE results herein demonstrate compliance to the FCC/IEEE/ICNIRP Occupational/Controlled Exposure limit. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits. Although MPE is a convenient method of demonstrating compliance, SAR is recognized as the "basic restriction". For those configurations exceeding the MPE limit noted (in bold with *) in section 11 tables 1 and 2, compliance to the FCC SAR General Population/Uncontrolled limit of 1.6mW/g is demonstrated in Appendix D via SAR computational analysis.

The computational results show that this device, when used with the offered antennas in accordance with the user manual instructions, exhibits the maximum peak 1-g average SAR values as indicated in the table below.


Maximum peak 1g average SAR	
RF Exposure Results for FCC Part 90 (406.1-470 MHz)	0.69 mW/g
RF Exposure Results (380-470MHz) – not applicable for FCC Part 90	0.90 mW/g

APPENDIX A Illustration of Antenna Locations and Test Distances

Antenna Location Drawing with Test Locations Identified

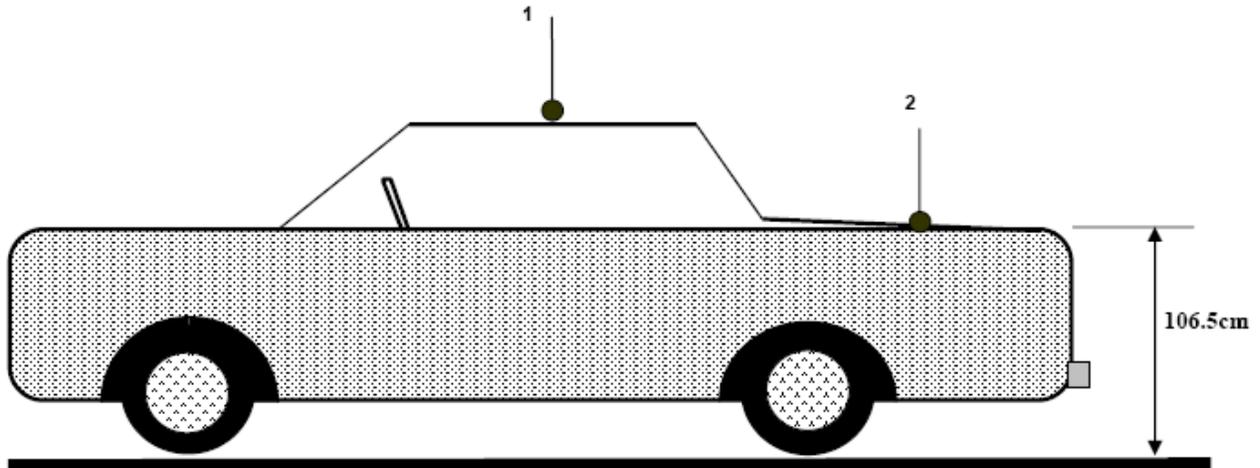

1 - Roof (center)
2 - Trunk (center)

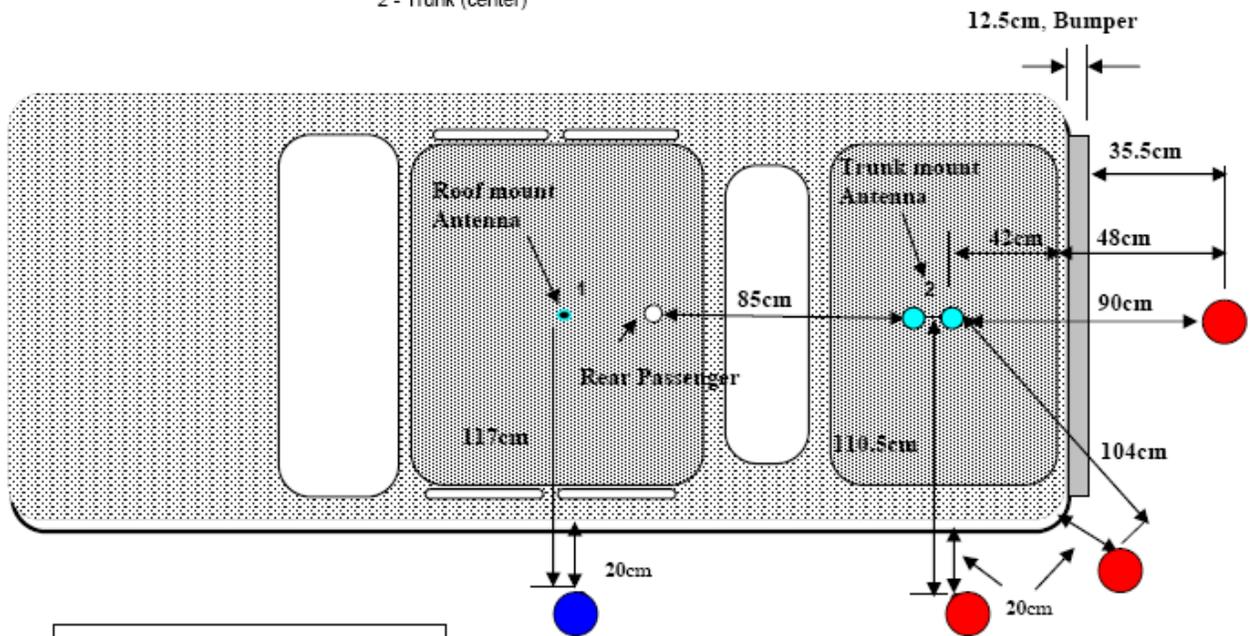

By-Stander Test Locations

- Roof Mount
- Trunk Mount

APPENDIX B
Meter/Probe Calibration Certificates



Cert I.D.: 75742

Certificate of Calibration Conformance

Page 1 of 4

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	100kHz - 5GHz
Model Number:	E100	Instrument Type:	Isotropic Probe > 1 GHz
Serial Number/ ID:	00109011	Date Code:	
Tracking Number:	S000017735	Alternate ID:	
Date Completed:	22-Oct-09	Customer:	MOTOROLA INC. (FL)
Test Type:	Standard Field, Field Strength		


Calibration Uncertainty: Std Field Method 10kHz - 18000 MHz, +/-0.7 dB, 26.5GHz - 40GHz, +/- 0.95 dB
k=2, (95% Confidence Level)


Test Remarks: Special calibration - Additional field levels added.

Calibration Traceability: All Measuring and Test Equipment (M/TE) identified below are traceable to the National Institute for Standards and Technology (NIST). Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005.

Standards and Equipment Used:

Make / Model / Name / S/N / Recall Date	Condition of Instrument Upon Receipt:
Rohde & Schwarz 857.8008.0 Power Meter NRVD 828110/019 10-Feb-10	In Tolerance to Internal Quality Standards
Hewlett Packard 437B HP Power Meter 3110A03972 09-Jan-10	
Fluke 6060B RF Signal Generator 5690204 11-Jun-10	On Release:
Marconi 2022 Signal Generator 119019/077 25-Sep-10	
Rohde & Schwarz 857.8008.0 Power Meter NRVD 100451 18-Nov-09	
Hewlett Packard 83620B Signal Generator 3722A00541 25-Sep-10	In Tolerance to Internal Quality Standards

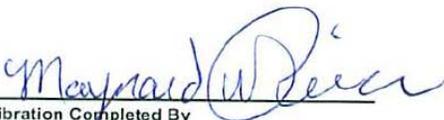
 Calibration Completed By
 Maynard Reich, Calibration Technician


 Attested and Issued on 22-Oct-09
 Justin Tarr, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005. QAF 1127 (06/07)



Frequency Response Calibration Factors
Model E100 Serial Number 00109011
Date of Calibration 21 Oct 2009

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			Avg
		X	Y	Z	X	Y	Z	
1.00	7.64	7.02	7.79	6.94	1.14	1.04	0.98	1.05
1.00	19.82	16.71	17.11	16.74	1.18	1.16	1.18	1.18
1.00	71.15	57.93	59.53	58.16	1.23	1.19	1.22	1.22
1.00	125.11	100.56	104.03	102.13	1.24	1.20	1.23	1.22
15.00	7.95	8.17	8.28	8.18	0.98	0.96	0.97	0.97
15.00	19.94	19.63	19.98	19.65	1.02	1.00	1.01	1.01
15.00	70.00	67.78	68.81	67.94	1.03	1.02	1.03	1.03
15.00	124.61	120.61	122.69	121.30	1.03	1.02	1.03	1.03
30.00	7.95	8.49	8.59	8.45	0.93	0.93	0.94	0.93
30.00	19.81	19.99	20.29	20.08	1.00	0.97	0.98	0.98
30.00	69.87	69.71	70.67	70.11	1.00	0.99	1.00	1.00
30.00	124.31	124.11	125.93	125.11	1.00	0.99	0.99	0.99
75.00	8.06	8.62	8.75	8.77	0.94	0.93	0.91	0.92
75.00	19.92	20.32	20.71	20.76	0.97	0.96	0.96	0.97
75.00	69.19	71.16	72.25	72.19	0.97	0.96	0.96	0.96
75.00	123.17	126.65	128.70	128.37	0.97	0.96	0.96	0.96
100.00	7.99	8.30	8.54	8.58	0.96	0.95	0.92	0.94
100.00	19.72	20.02	20.31	20.50	0.98	0.97	0.96	0.97
100.00	70.01	70.85	71.90	72.15	0.99	0.97	0.97	0.98
100.00	126.58	128.59	130.29	130.10	0.98	0.97	0.97	0.98
150.00	8.05	8.13	8.26	8.36	0.99	0.98	0.95	0.98
150.00	19.93	20.03	20.39	20.66	0.99	0.98	0.96	0.98
150.00	69.87	70.30	71.46	71.94	0.99	0.98	0.97	0.98
150.00	124.91	126.00	127.53	128.17	0.99	0.98	0.97	0.98
200.00	8.07	8.50	8.67	8.69	0.95	0.94	0.92	0.94
200.00	19.86	20.80	21.21	21.58	0.96	0.94	0.92	0.94
200.00	69.73	73.51	74.90	75.46	0.95	0.93	0.92	0.93
200.00	125.11	132.11	134.58	134.95	0.95	0.93	0.93	0.93
250.00	8.00	8.33	8.42	8.60	0.96	0.95	0.93	0.95
250.00	20.02	20.72	21.00	21.43	0.97	0.95	0.93	0.95
250.00	70.08	72.35	73.13	74.05	0.97	0.96	0.95	0.96
250.00	123.93	128.09	129.47	130.20	0.97	0.96	0.95	0.96
300.00	8.02	8.27	8.40	8.57	0.97	0.95	0.94	0.95
300.00	19.96	20.48	20.79	21.31	0.98	0.96	0.94	0.96
300.00	69.80	71.54	72.40	73.40	0.98	0.96	0.95	0.96
300.00	125.31	129.68	131.16	131.92	0.97	0.96	0.95	0.96
400.00	7.97	8.30	8.34	8.56	0.97	0.95	0.93	0.95
400.00	20.00	20.54	20.92	21.48	0.97	0.96	0.93	0.95
400.00	70.16	71.90	72.88	73.99	0.98	0.96	0.95	0.96
400.00	126.35	129.28	131.06	132.12	0.98	0.96	0.96	0.97
500.00	7.99	8.01	8.18	8.39	1.00	0.98	0.95	0.97
500.00	20.01	20.00	20.41	20.98	1.00	0.98	0.95	0.98
500.00	69.97	69.80	71.05	72.15	1.00	0.98	0.97	0.99
500.00	124.82	125.16	127.11	128.22	1.00	0.98	0.97	0.98
600.00	8.05	8.00	8.13	8.36	1.01	0.99	0.96	0.99
600.00	19.91	19.62	19.99	20.62	1.01	1.00	0.97	0.99
600.00	70.04	68.89	69.92	71.17	1.02	1.00	0.98	1.00
600.00	126.51	124.61	126.45	127.20	1.02	1.00	0.99	1.00




Frequency Response Calibration Factors
Model E100 Serial Number 00109011
Date of Calibration 21 Oct 2009

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			Avg
		X	Y	Z	X	Y	Z	
700.00	8.00	7.97	8.10	8.33	1.00	0.99	0.96	0.98
700.00	19.96	19.73	20.08	20.70	1.01	0.99	0.96	0.99
700.00	70.92	70.15	71.10	72.40	1.01	1.00	0.98	1.00
700.00	126.17	124.81	126.29	127.81	1.01	1.00	0.99	1.00
800.00	8.03	7.80	7.94	8.18	1.03	1.01	0.98	1.01
800.00	20.00	19.25	19.67	20.30	1.04	1.02	0.99	1.01
800.00	70.11	67.44	68.66	69.87	1.04	1.02	1.01	1.02
800.00	124.80	120.51	122.51	123.68	1.04	1.02	1.01	1.02
900.00	8.00	7.62	7.82	8.04	1.05	1.02	1.00	1.02
900.00	20.12	19.05	19.57	20.18	1.06	1.03	1.00	1.03
900.00	69.94	66.19	67.78	68.96	1.06	1.03	1.01	1.03
900.00	124.54	118.24	120.95	121.59	1.05	1.03	1.02	1.04
1000.00	7.99	8.48	8.65	9.01	0.94	0.92	0.89	0.92
1000.00	19.88	21.08	21.49	22.22	0.94	0.92	0.89	0.92
1000.00	70.09	74.27	75.51	76.80	0.94	0.93	0.91	0.93
1000.00	126.71	134.43	136.66	137.97	0.94	0.93	0.92	0.93
2000.00	20.27	19.59	20.78	20.88	1.03	0.98	0.97	0.99
2450.00	19.89	18.55	19.38	19.12	1.07	1.03	1.04	1.05
3000.00	20.20	19.52	20.35	21.43	1.03	0.99	0.94	0.99
3500.00	19.95	20.73	22.23	21.00	0.96	0.90	0.95	0.94
4000.00	20.49	21.32	21.67	21.70	0.96	0.95	0.94	0.95
5000.00	20.26	16.24	17.62	17.17	1.25	1.15	1.18	1.19
5500.00	19.77	15.77	16.06	14.83	1.25	1.23	1.33	1.27
6000.00	19.99	14.67	16.77	16.40	1.36	1.19	1.22	1.26



PROBE ROTATIONAL RESPONSE

Model E100
S/N 00109011
Date 22-Oct-2009
Time 07:40:55
Variation 0.39 dB

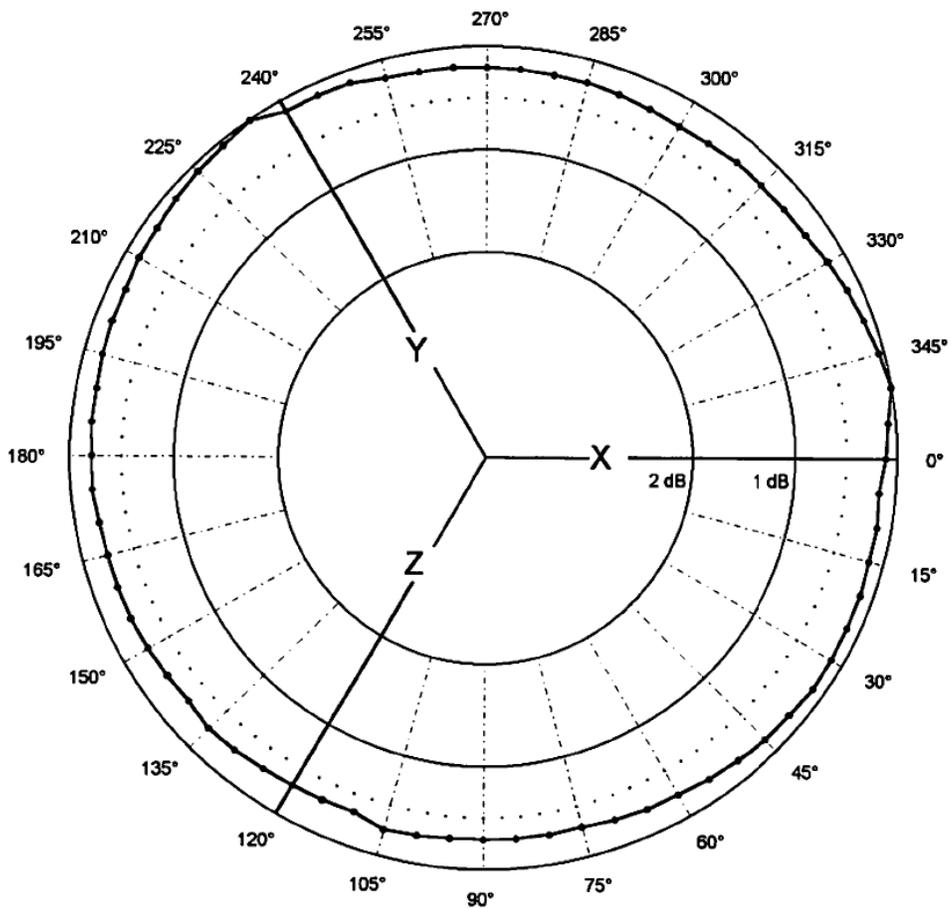

• Isotropic response measured in a 20 V/m field at 400 MHz

Service Test Report
QAF 1126, 06/07
Report ID: 75744



Certificate of Test Conformance

Page 1 of 1

Reference: S 000017735

Customer: MOTOROLA INC. (FL)

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Not Applicable. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 using ETS-Lindgren Quality Management System internal procedures.

<u>Manufacturer</u>	ETS-Lindgren	<u>Status In</u>	Other
<u>Instrument Type</u>	RF Survey Meter	<u>Date Completed</u>	22-Oct-09
<u>Model</u>	HI-2200	<u>Status Out</u>	Compliant with Internal Quality Standards
<u>Serial Number/ID</u>	00086316		

Remarks

Secured mounting screw on LCD to remove lines - Functional Test Performed.

I would like to take this opportunity to express our appreciation for using ETS-Lindgren for your EMI test equipment services and I am looking forward to continued business with your organization. Please feel free to contact our offices at (512) 531-6400, if you have any questions regarding this report.

Sincerely,

Justin Tarr

Calibration Supervisor

Date Attested: 22-Oct-09

APPENDIX C
Photos of Assessed Antennas
(Refer to Exhibit 7B)

APPENDIX D
SAR Simulation Report