



Electromagnetic Compatibility Test Report

Test Report No: MOT 290611

Issued on: June 29, 2011

Product Name

VML700

Model: F4080A

**Tested According to
FCC 47 CFR, Part 22
Industry Canada & RSS 132**

**Tests Performed for
Motorola Solutions Inc.**

One Motorola Plaza, Holtsville, N.Y 11742, USA

QualiTech EMC Laboratory, ECI Telecom

30 Hasivim Street,
Petah-Tikva, 49517, Israel
Tel: +972-3-926 8443
Fax: +972-3-928 7490



ELECTRICAL TESTING
CERT #1633.01

The information contained herein is the property of QualiTech, EMC Lab and is supplied without liability for errors or omissions.

*The copyright for this document vests in QualiTech, EMC Lab.
All rights reserved.*

This Test Report may not be reproduced, by any method, without the written permission of the QualiTech, EMC Lab.

If and when such permission is granted, the report must be reproduced only in the full format.

Test Personnel



Tests Performed By: -----

Sergey Kapustin



Report Prepared By: -----

Bina Talkar



Report Reviewed By: -----

Rami Nataf
EMC Lab. Manager
QualiTech EMC Laboratory

Test Report details:

Test commencement date: 01.06.2011
Test completion date: 24.06.2011
Customer's representative: Kfir Kamil
Issued on: 29.06.2011

Assessment information:

This report contains an assessment of the EUT against Electromagnetic Compatibility based upon tests carried out on the samples submitted. The results contained in this report relate only to the items tested. Manufactured products will not necessarily give identical results due to production and measurement tolerances. QualiTech, EMC Lab does not assume responsibility for any conclusion and generalization drawn from the test results with regards to other specimens or samples of type of the equipment represented by test item.

The EUT was set up and exercised using the configuration, modes of operation and arrangements defined in this report only.

Modifications:

Modifications made to the EUT

None.

Modifications made to the Test Standard

None.

Summary of Compliance Status

Test Spec. Clause	Test Case	Remarks
47 CFR §22.913 (a)(2) & §2.1046 & RSS-132, 4.4	RF Power Output	Pass
47 CFR §2.1049 & RSS-Gen, 4.6	Occupied Bandwidth	Pass
47 CFR §22.917 (a)(b) & RSS-132, 4.5	Band Edge	Pass
47 CFR §22.917 (a)(b) & §2.1051 & RSS-132, 4.5	Out of Band Emissions	Pass
47 CFR §22.913 (a)(2) & RSS-132, 4.4	Radiated Peak Power Output	Pass
47 CFR §22.917 (a) & RSS-132, 4.5	Field Strength of Spurious Radiation	Pass
47 CFR §22.355 & §2.1055 & RSS-132, 4.3	Frequency Stability	Pass

Table of Contents

1. GENERAL DESCRIPTION.....	6
2. METHOD OF MEASUREMENTS	7
2.1. Conducted RF Measurements:	7
2.2. Field Strength of Spurious Radiation Measurements:	8
2.3. Frequency stability measurements:	9
2.4. Worst Case Results:	9
3. TEST FACILITY & UNCERTAINTY OF MEASUREMENT	10
3.1. Accreditation/ Registration reference:	10
3.2. Test Facility description.....	10
4. FCC 47 CFR, PART 22: REPORT OF MEASUREMENTS AND EXAMINATIONS	11
4.1. RF Power Output.....	11
4.2. Occupied Bandwidth	14
4.3. Band Edge	20
4.4. Out of Band Emissions.....	24
4.5. Radiated Peak Power Output.....	28
4.6. Field Strength of Spurious Radiation	32
4.7. Frequency Stability.....	41
5. APPENDIX	42

1. General Description

Description of the EUT System/Test Item: LTE User Equipment (Modem)

Product Name: VML700

Model: F4080A

FCC ID: AZ492FT7045

IC: 109U-92FT7045

Description: Its basic purpose is used for communication the VML700 consists of LTE band 13, LTE band 14, EVDO Rev A (CDMA), WiFi 802.11b/g

In case of no coverage in LTE band the device will switch automatically to CDMA/EVDO cellular band (BC0 /BC1)

Maximum Peak Output Power: 24.5dBm

Nominal Output Power: 23.5dBm

Frequency Range: EVDO TX: 824MHz-849MHz, Rx 869MHz-894MHz

Transmit Data Rate:

Protocol	Rate
1xRTT	Up 153Kbps peak
EVDO Rev -0	Up 153Kbps peak
EVDO Rev -A	Up 1.8Mbps peak

Type of Modulation:

Protocol	Modulation
1xRTT	QPSK
EVDO Rev -0	QPSK
EVDO Rev -A	QPSK 16QAM

Antenna Specification:

Antenna Specification:

Type: Folded Monopole

Gain (including 12ft coaxial cable): 2.6dBi

2. Method of Measurements

2.1. Conducted RF Measurements:

During RF Power Output verification test, the transmitter's output was connected to the power meter and the base station simulator through a directional coupler. The external attenuations were taken into account to correct the reading. Worst-case results of the various operation & modulation modes were reported.


For Occupied Bandwidth measurement, the Spectrum Analyzer with appropriate integrated feature was employed.

For Out of Band emissions measurement, the spectrum was investigated from 9 kHz up to at least the tenth harmonic of the highest fundamental frequency. Multiple sweeps were recorded in max hold mode using a peak detector to ensure that the worst-case emissions were caught.

Test Setups:


RF Power Output verification

Laptop with test application

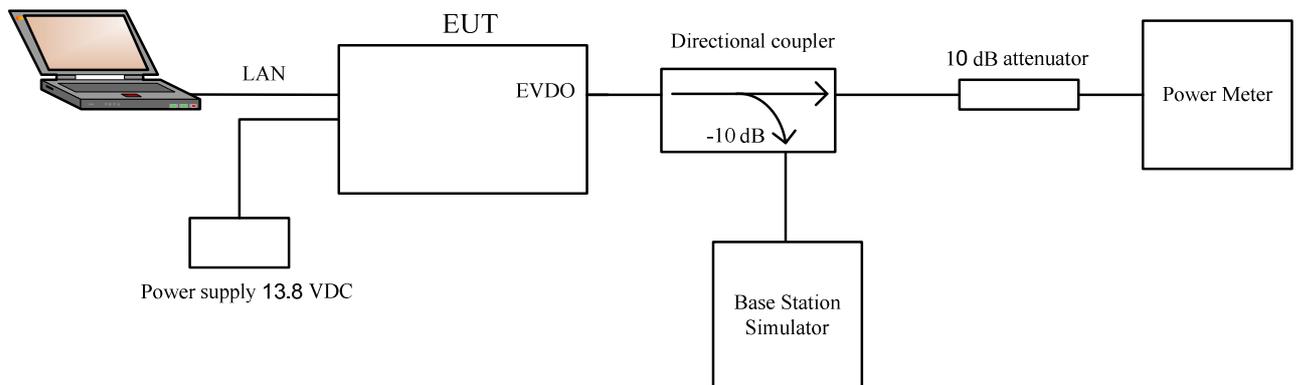

Out of Band Emissions

Laptop with test application

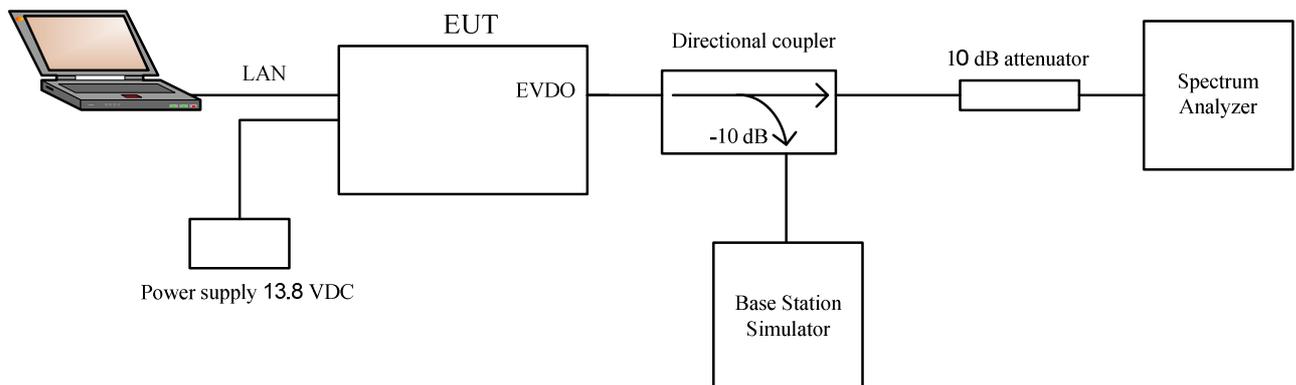


2.2. Field Strength of Spurious Radiation Measurements:

Measurements were performed in a semi-anechoic chamber at a 3-meter measurement distance in order to evaluate the radiated electromagnetic interference characteristics of the EUT. The EUT was placed on a non-metallic table, 0.8 m above the turntable, was configured, arranged and operated in a manner consistent with typical application and load conditions. The test program of exercising equipment ensured that various parts of the EUT were exercised to permit detection of all EUT disturbances.

While the turntable was being rotated around 360 degrees, the height of the antenna was varied from 1 to 4 m for the frequency range from 30 MHz up to at least the tenth harmonic of the highest fundamental frequency. Measurements were performed for vertical and horizontal polarization.

Using the Substitution Method in accordance to ANSI/TIA-603, an antenna with a known gain substituted the EUT, and an RF signal source was connected to the antenna input. The signal source level was adjusted until the previously recorded maximum reading was obtained. The power source reading was corrected for the cable loss and the antenna gain was added to obtain the calculated ERP/EIRP peak power. Measurements were made at the low, middle and high channels.

Test Setup:

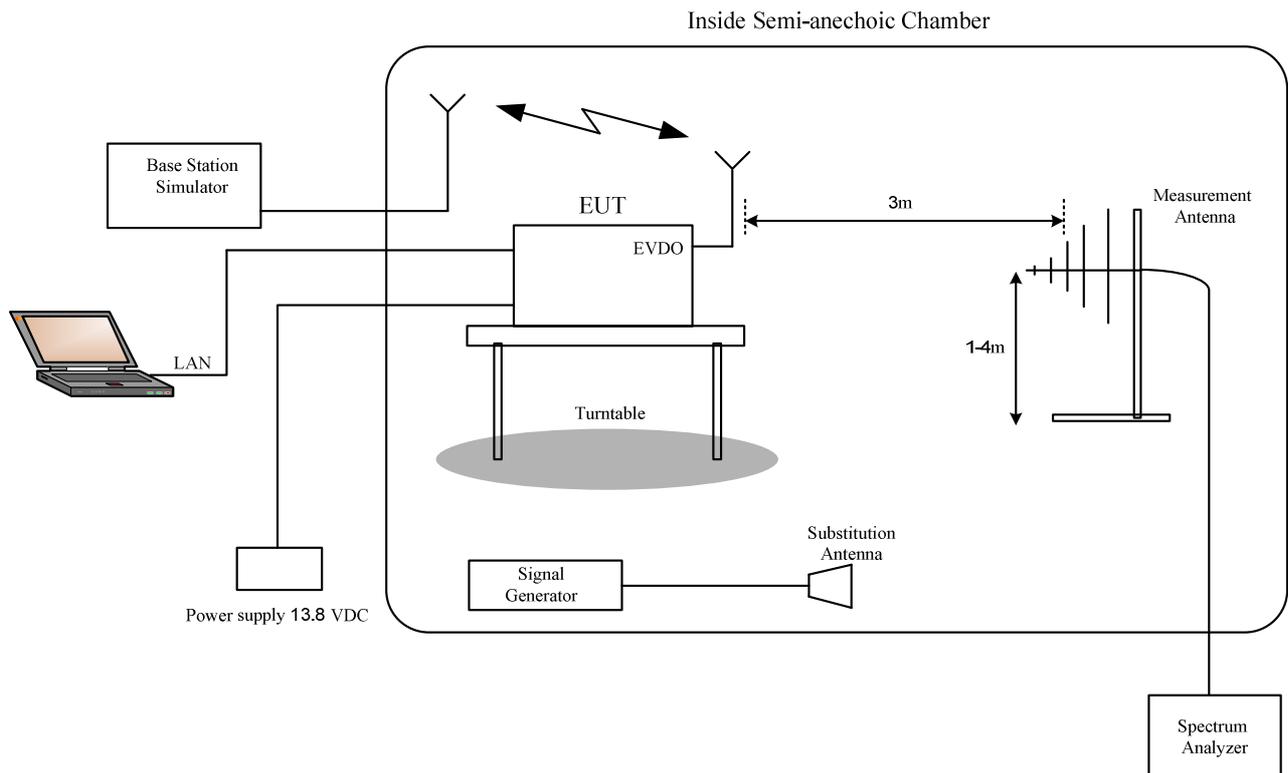


2.3. Frequency stability measurements:

The EUT was placed inside an environmental chamber and the frequency stability was measured with variations of ambient temperatures from -30°C to +60°C. Frequency measurements were made at the extremes of the specified temperature range and at intervals of 10°C through the range.

The frequency stability was measured also with variations of primary supply voltage from 85 to 115 percent of the nominal value.

Test Setup:

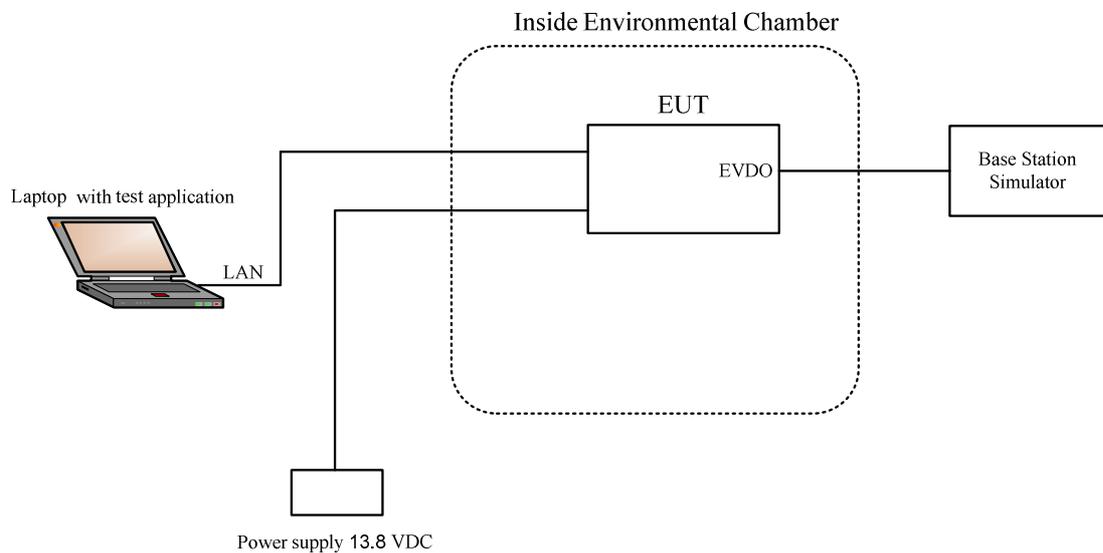

2.4. Worst Case Results:

Worst case result is determined for applicable modulation types and data rates. Pre-scan has been conducted to determine the worst-case.

3. Test Facility & Uncertainty of Measurement

3.1. Accreditation/ Registration reference:

- A2LA Certificate Number: 1633.01

3.2. Test Facility description

The tests were performed at the EMC Laboratory, QualiTech Division, ECI Telecom Group

Address: 30, Hasivim St., Petah Tikva, Israel.
Tel: 972-3-926-8443

3m Anechoic Chamber:

The 3m-screened chamber is used in two configurations: the semi-anechoic configuration for Radiated Emission measurements and the full-anechoic configuration for Radiated Immunity tests.

Semi Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	9.5m x 6.5m x 5.2m
Antenna height	1 - 4m
Shielding Effectiveness	Magnetic field ≥ 80 dB at 15 kHz ≥ 90 dB at 100 kHz Electric field > 120 dB from 1MHz to 1GHz > 110 dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls
Normalized Site Attenuation measured at 5 positions	± 3.49 dB, 30MHz to 1GHz
Transmission Loss measured at 5 positions, at 1.5m height	± 3 dB, 1GHz to 18GHz

Full-Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	7m x 4m x 3m
Antenna height	1.55m at Horizontal & Vertical polarizations
Shielding Effectiveness	Magnetic field ≥ 80 dB at 15 kHz ≥ 90 dB at 100 kHz Electric field > 120 dB from 1MHz to 1GHz > 110 dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls and floor
Field Uniformity to EN61000-4-3	± 3 dB 80MHz to 18GHz

4. FCC 47 CFR, Part 22: Report of Measurements and examinations

4.1. RF Power Output

Reference document:	47 CFR §22.913 (a)(2) & §2.1046		
Test Requirements:	The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
Power meter settings:	AVG		
Environment conditions:	Ambient Temperature: 22°C		
Test Result:	See below	---	

Test results for lowest frequency 824.7 MHz:

Mode	Test case			BC0 (850 MHz)					
	#	FWD RC/TAP	REV RC/TAP	Channel 1013, Frequency 824.7 MHz					
				Output power* [dBm]	Antenna gain** [dBd]	ERP calculated [dBm]	Limit [dBm]	Margin [dB]	Result
1xRTT	1	RC1	RC1 (SO2)	24,55	0,45	25,00	38,45	-13,45	Pass
	2	RC1	RC1 (SO55)	24,53	0,45	24,98	38,45	-13,47	Pass
	3	RC2	RC2 (SO9)	24,56	0,45	25,01	38,45	-13,44	Pass
	4	RC2	RC2 (SO55)	24,46	0,45	24,91	38,45	-13,54	Pass
	5	RC3	RC3 (SO55)	24,43	0,45	24,88	38,45	-13,57	Pass
	6	RC3	RC3 (SO32)	23,32	0,45	23,77	38,45	-14,68	Pass
1xEVDO Rel0	1	FTAP Rate = 307 kbps (2 slot, QPSK)	RTAP rate = 9.6 kbps	24,47	0,45	24,92	38,45	-13,53	Pass
	2		RTAP rate = 19.2 kbps	24,38	0,45	24,83	38,45	-13,62	Pass
	3		RTAP rate = 38.4 kbps	24,45	0,45	24,90	38,45	-13,55	Pass
	4		RTAP rate = 76.8 kbps	24,44	0,45	24,89	38,45	-13,56	Pass
	5		RTAP rate = 153.6 kbps	24,47	0,45	24,92	38,45	-13,53	Pass
1xEVDO RevA	1	FETAP rate = 307 kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	24,47	0,45	24,92	38,45	-13,53	Pass
	2		RETAP – payload size = 256	24,41	0,45	24,86	38,45	-13,59	Pass
	3		RETAP – payload size = 512	24,45	0,45	24,90	38,45	-13,55	Pass
	4		RETAP – payload size = 768	24,47	0,45	24,92	38,45	-13,53	Pass
	5		RETAP – payload size = 1024	24,44	0,45	24,89	38,45	-13,56	Pass
	6		RETAP – payload size = 1536	24,41	0,45	24,86	38,45	-13,59	Pass
	7		RETAP – payload size = 2048	24,40	0,45	24,85	38,45	-13,60	Pass
	8		RETAP – payload size = 3072	24,44	0,45	24,89	38,45	-13,56	Pass
	9		RETAP – payload size = 4096	24,53	0,45	24,98	38,45	-13,47	Pass
	10		RETAP – payload size = 6144	24,47	0,45	24,92	38,45	-13,53	Pass
	11		RETAP – payload size = 8192	24,38	0,45	24,83	38,45	-13,62	Pass
	12		RETAP – payload size = 12288	24,42	0,45	24,87	38,45	-13,58	Pass

* Corrected for external attenuations.

** As provided by the manufacturer (maximum antenna gain including cable loss).

Test results for middle frequency 836.52 MHz:

Mode	Test case			BC0 (850 MHz)					
	#	FWD RC/TAP	REV RC/TAP	Channel 384, Frequency 836.52 MHz					
				Output power* [dBm]	Antenna gain** [dBd]	ERP calculated [dBm]	Limit [dBm]	Margin [dB]	Result
1xRTT	1	RC1	RC1 (SO2)	24,66	0,45	25,11	38,45	-13,34	Pass
	2	RC1	RC1 (SO55)	24,74	0,45	25,19	38,45	-13,26	Pass
	3	RC2	RC2 (SO9)	24,88	0,45	25,33	38,45	-13,12	Pass
	4	RC2	RC2 (SO55)	24,72	0,45	25,17	38,45	-13,28	Pass
	5	RC3	RC3 (SO55)	24,61	0,45	25,06	38,45	-13,39	Pass
	6	RC3	RC3 (SO32)	23,25	0,45	23,70	38,45	-14,75	Pass
1xEVDO Rel0	1	FTAP Rate = 307 kbps (2 slot, QPSK)	RTAP rate = 9.6 kbps	24,82	0,45	25,27	38,45	-13,18	Pass
	2		RTAP rate = 19.2 kbps	24,91	0,45	25,36	38,45	-13,09	Pass
	3		RTAP rate = 38.4 kbps	24,81	0,45	25,26	38,45	-13,19	Pass
	4		RTAP rate = 76.8 kbps	24,84	0,45	25,29	38,45	-13,16	Pass
	5		RTAP rate = 153.6 kbps	24,92	0,45	25,37	38,45	-13,08	Pass
1xEVDO RevA	1	FETAP rate = 307 kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	24,82	0,45	25,27	38,45	-13,18	Pass
	2		RETAP – payload size = 256	24,83	0,45	25,28	38,45	-13,17	Pass
	3		RETAP – payload size = 512	24,82	0,45	25,27	38,45	-13,18	Pass
	4		RETAP – payload size = 768	24,78	0,45	25,23	38,45	-13,22	Pass
	5		RETAP – payload size = 1024	24,76	0,45	25,21	38,45	-13,24	Pass
	6		RETAP – payload size = 1536	24,84	0,45	25,29	38,45	-13,16	Pass
	7		RETAP – payload size = 2048	24,79	0,45	25,24	38,45	-13,21	Pass
	8		RETAP – payload size = 3072	24,89	0,45	25,34	38,45	-13,11	Pass
	9		RETAP – payload size = 4096	24,87	0,45	25,32	38,45	-13,13	Pass
	10		RETAP – payload size = 6144	24,84	0,45	25,29	38,45	-13,16	Pass
	11		RETAP – payload size = 8192	24,82	0,45	25,27	38,45	-13,18	Pass
	12		RETAP – payload size = 12288	24,79	0,45	25,24	38,45	-13,21	Pass

* Corrected for external attenuations.

** As provided by the manufacturer (maximum antenna gain including cable loss).

Test results for highest frequency 848.31 MHz:

Mode	Test case			BC0 (850 MHz)					
	#	FWD RC/TAP	REV RC/TAP	Channel 777, Frequency 848.31 MHz					
				Output power*[dBm]	Antenna gain**[dBd]	ERP calculated [dBm]	Limit [dBm]	Margin [dB]	Result
1xRTT	1	RC1	RC1 (SO2)	24,92	0,45	25,37	38,45	-13,08	Pass
	2	RC1	RC1 (SO55)	24,78	0,45	25,23	38,45	-13,22	Pass
	3	RC2	RC2 (SO9)	24,72	0,45	25,17	38,45	-13,28	Pass
	4	RC2	RC2 (SO55)	24,77	0,45	25,22	38,45	-13,23	Pass
	5	RC3	RC3 (SO55)	24,81	0,45	25,26	38,45	-13,19	Pass
	6	RC3	RC3 (SO32)	23,19	0,45	23,64	38,45	-14,81	Pass
1xEVDO Rel0	1	FTAP Rate = 307 kbps (2 slot, QPSK)	RTAP rate = 9.6 kbps	24,79	0,45	25,24	38,45	-13,21	Pass
	2		RTAP rate = 19.2 kbps	24,72	0,45	25,17	38,45	-13,28	Pass
	3		RTAP rate = 38.4 kbps	24,74	0,45	25,19	38,45	-13,26	Pass
	4		RTAP rate = 76.8 kbps	24,71	0,45	25,16	38,45	-13,29	Pass
	5		RTAP rate = 153.6 kbps	24,75	0,45	25,20	38,45	-13,25	Pass
1xEVDO RevA	1	FETAP rate = 307 kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	24,74	0,45	25,19	38,45	-13,26	Pass
	2		RETAP – payload size = 256	24,65	0,45	25,10	38,45	-13,35	Pass
	3		RETAP – payload size = 512	24,77	0,45	25,22	38,45	-13,23	Pass
	4		RETAP – payload size = 768	24,72	0,45	25,17	38,45	-13,28	Pass
	5		RETAP – payload size = 1024	24,69	0,45	25,14	38,45	-13,31	Pass
	6		RETAP – payload size = 1536	24,74	0,45	25,19	38,45	-13,26	Pass
	7		RETAP – payload size = 2048	24,71	0,45	25,16	38,45	-13,29	Pass
	8		RETAP – payload size = 3072	24,72	0,45	25,17	38,45	-13,28	Pass
	9		RETAP – payload size = 4096	24,76	0,45	25,21	38,45	-13,24	Pass
	10		RETAP – payload size = 6144	24,78	0,45	25,23	38,45	-13,22	Pass
	11		RETAP – payload size = 8192	24,75	0,45	25,20	38,45	-13,25	Pass
	12		RETAP – payload size = 12288	24,77	0,45	25,22	38,45	-13,23	Pass

* Corrected for external attenuations.

** As provided by the manufacturer (maximum antenna gain including cable loss).


4.2. Occupied Bandwidth

Reference document:	47 CFR §2.1049		
Test Requirements:	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 30 kHz, VBW: 300 kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48 %	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.2.1 - Plot 4.2.10	


Test results:

Channel	Frequency [MHz]	Occupied BW 99% Power [MHz]	26 dB Bandwidth [MHz]	Reference Plots
CDMA 1xRTT, RC3 (SO55)				
1013 (low)	824.7	1.2709	1.419	4.2.1
384 (mid)	836.52	1.2762	1.431	4.2.2
777 (high)	848.31	1.2663	1.437	4.2.3
CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps				
1013 (low)	824.7	1.2682	1.430	4.2.4
384 (mid)	836.52	1.2735	1.433	4.2.5
777 (high)	848.31	1.2672	1.434	4.2.6
CDMA 1xEVDO RevA, RETAP – payload size = 4096				
1013 (low)	824.7	1.2752	1.438	4.2.7
384 (mid)	836.52	1.2710	1.432	4.2.8
777 (high)	848.31	1.2787	1.435	4.2.9


CDMA 1xRTT, RC3 (SO55)
Lowest Frequency 824.7 MHz
Plot 4.2.1

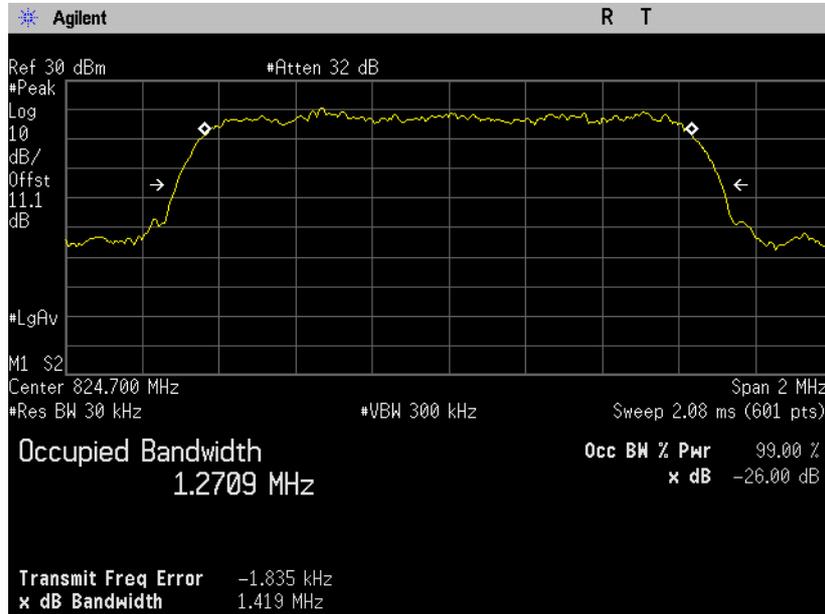


Middle Frequency 836.52 MHz
Plot 4.2.2

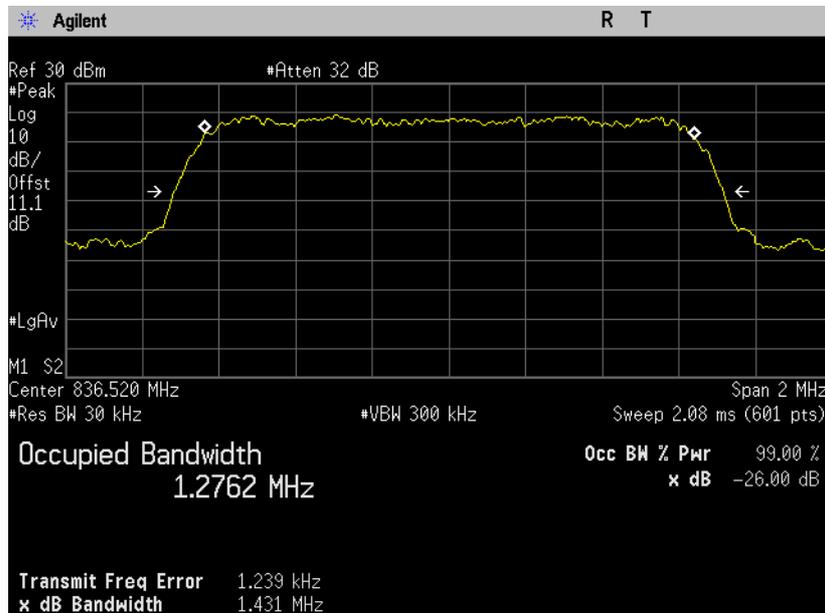


Highest Frequency 848.31 MHz
Plot 4.2.3

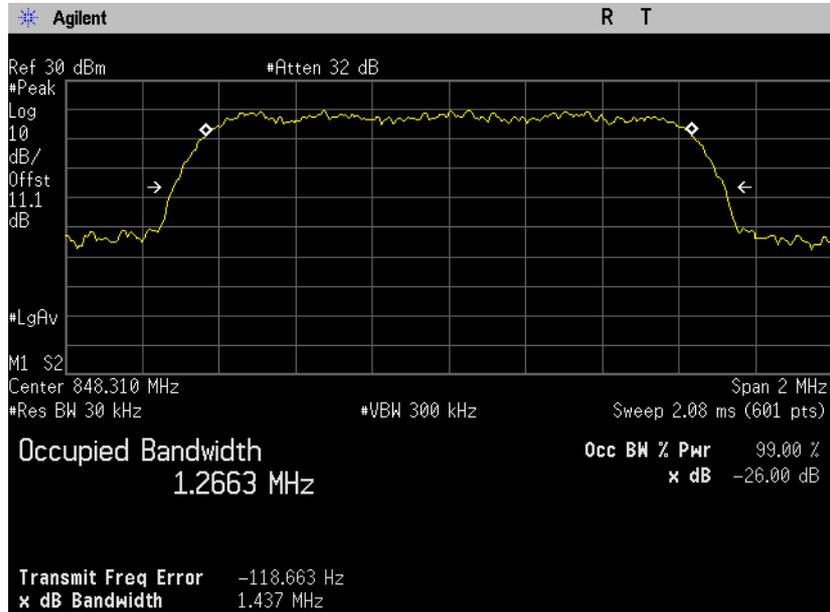


CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps
Lowest Frequency 824.7 MHz
Plot 4.2.4

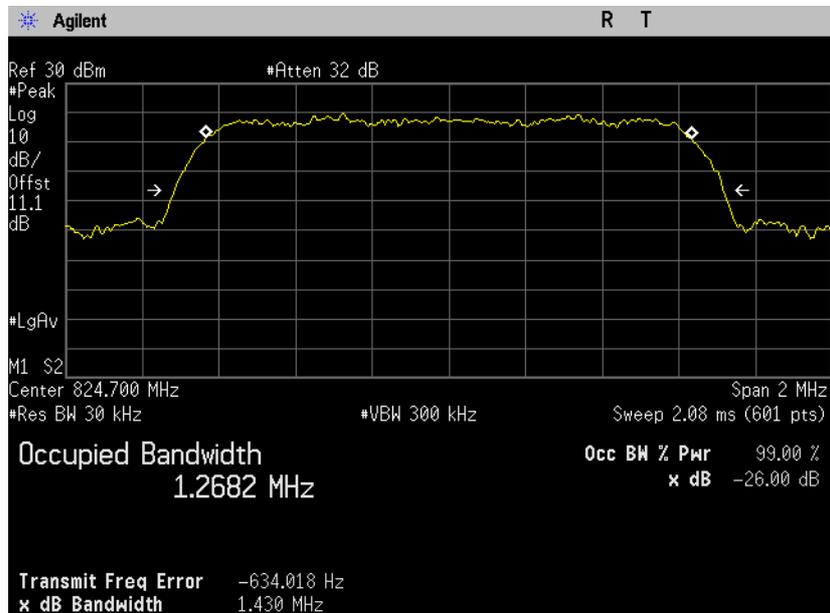


Middle Frequency 836.52 MHz
Plot 4.2.5

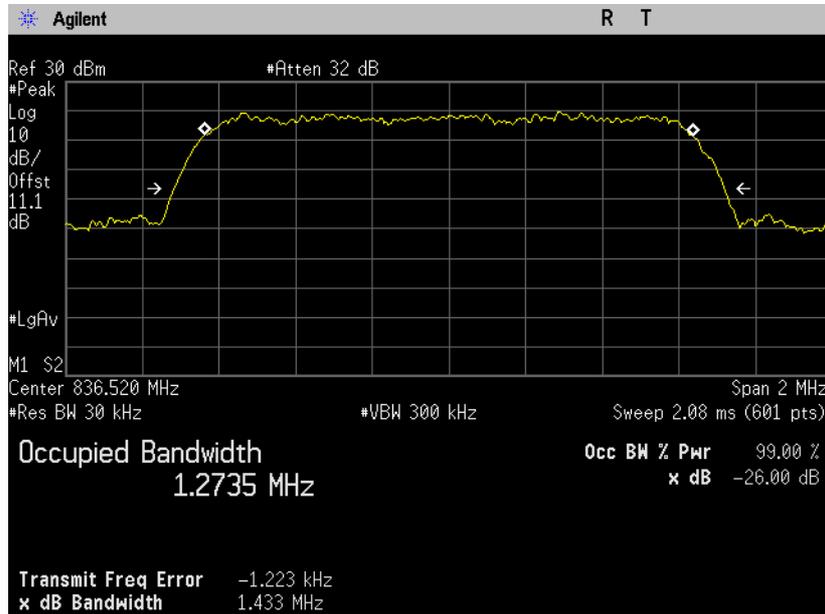


Highest Frequency 848.31 MHz
Plot 4.2.6

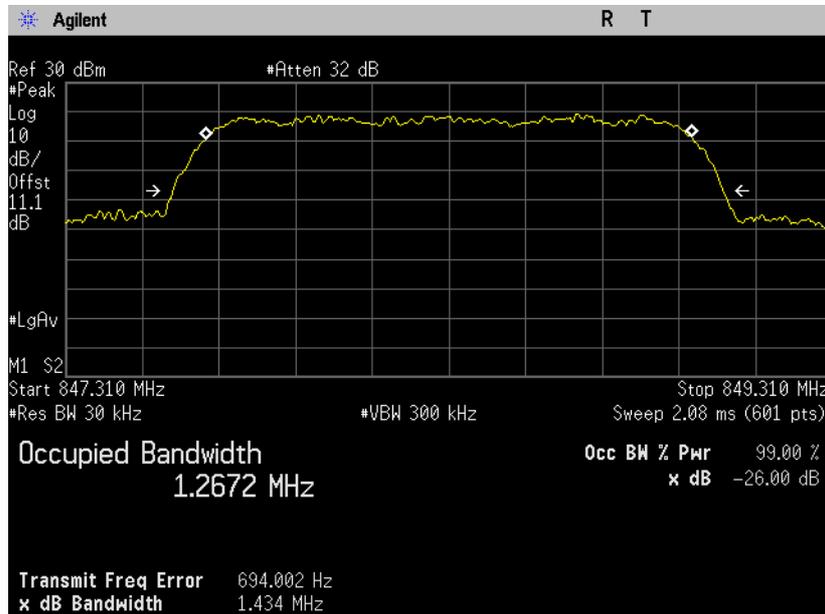


CDMA 1xEVDO RevA, RETAP – payload size = 4096
Lowest Frequency 824.7 MHz
Plot 4.2.7

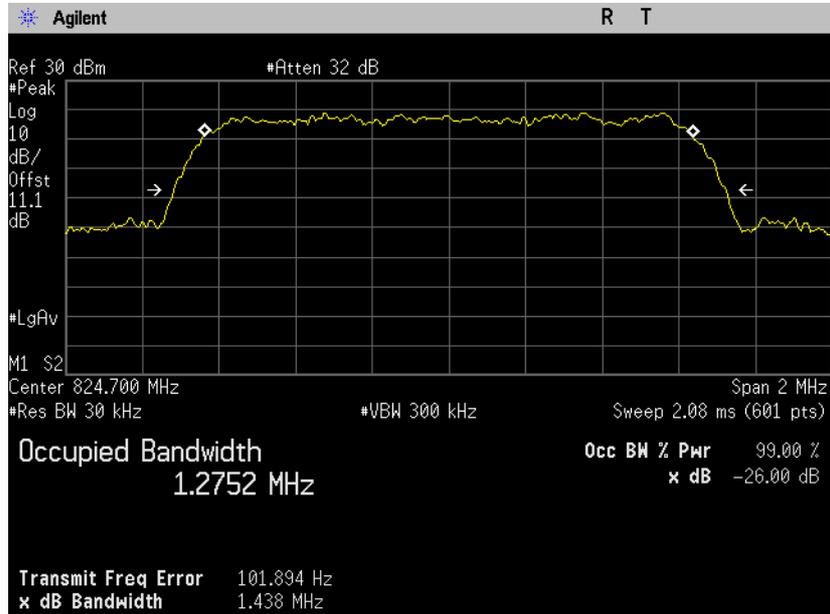

Middle Frequency 836.52 MHz
Plot 4.2.8

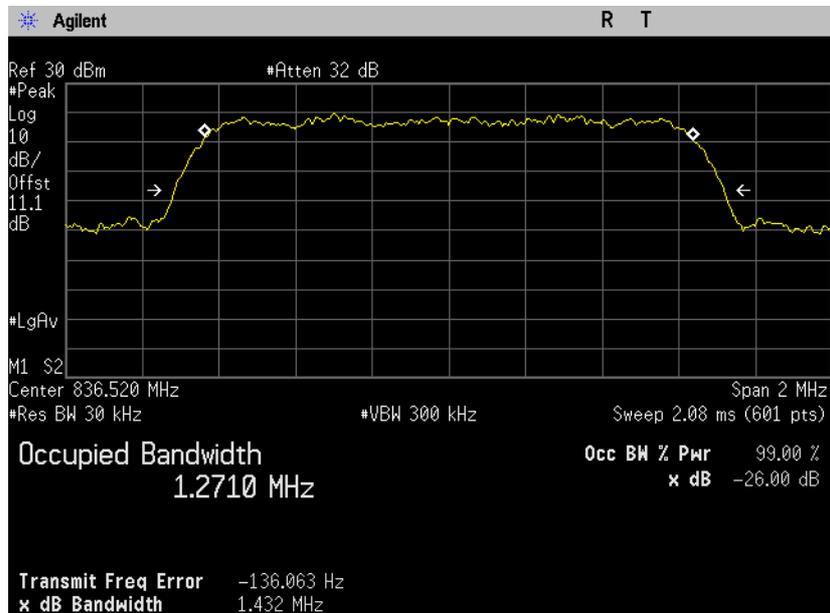

Highest Frequency 848.31 MHz
Plot 4.2.9

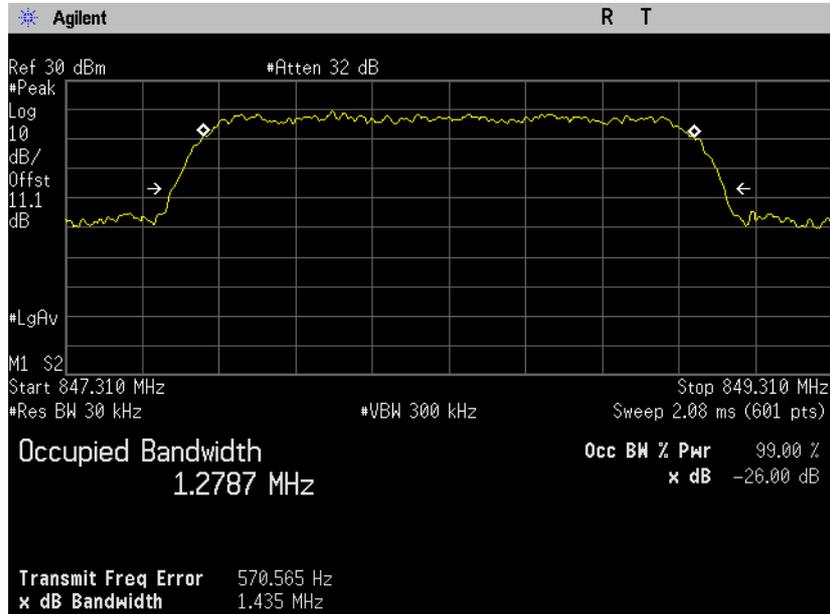


4.3. Band Edge

Reference document:	47 CFR §22.917 (a)(b)		
Test Requirements:	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 13 kHz, VBW: 13 kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48 %	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 5.3.1 -Plot 5.3.6	


Test results:

Channel	Frequency [MHz]	Band Edge Frequency [MHz]	Emission Level [dBm]	Limit [dBm]	Margin [dB]	Reference Plots	Result
CDMA 1xRTT, RC3 (SO55)							
1013 (low)	824.7	824	-17.897	-13	-4.897	5.3.1	Pass
777 (high)	848.31	849	-14.138	-13	-1.138	5.3.2	Pass
CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps							
1013 (low)	824.7	824	-16.799	-13	-3.799	5.3.3	Pass
777 (high)	848.31	849	-13.275	-13	-0.275	5.3.4	Pass
CDMA 1xEVDO RevA, RETAP – payload size = 4096							
1013 (low)	824.7	824	-16.566	-13	-3.566	5.3.5	Pass
777 (high)	848.31	849	-13.259	-13	-0.259	5.3.6	Pass


CDMA 1xRTT, RC3 (SO55)
Lowest Frequency 824.7 MHz
Plot 4.3.1

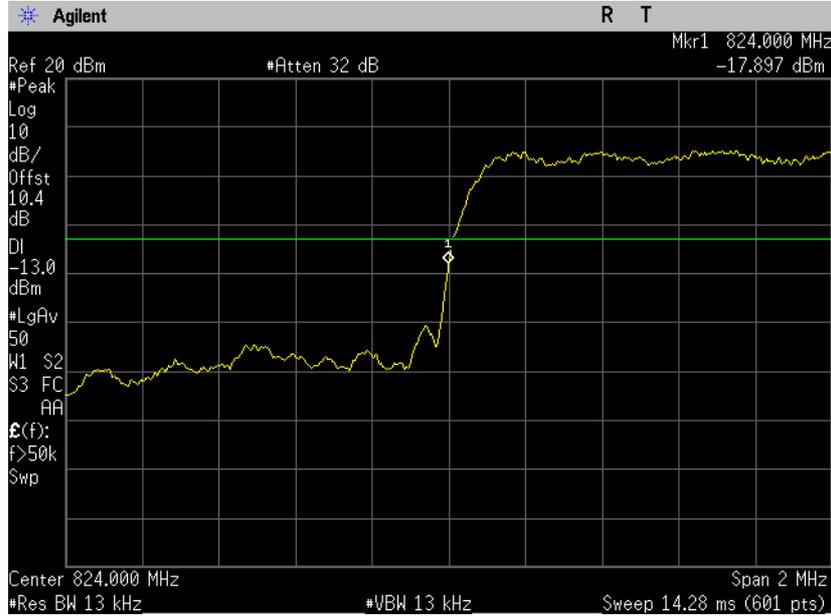

Highest Frequency 848.31 MHz
Plot 4.3.2

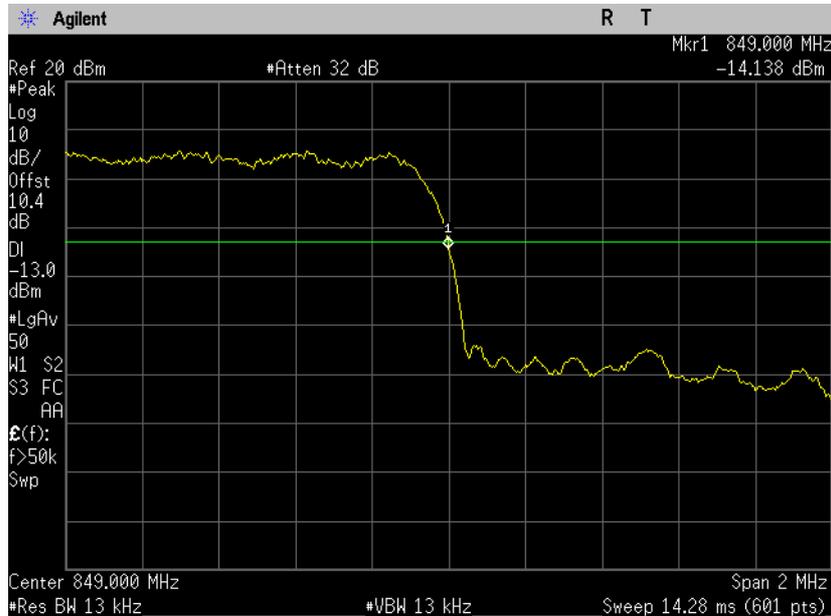


CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps
Lowest Frequency 824.7 MHz
Plot 4.3.3

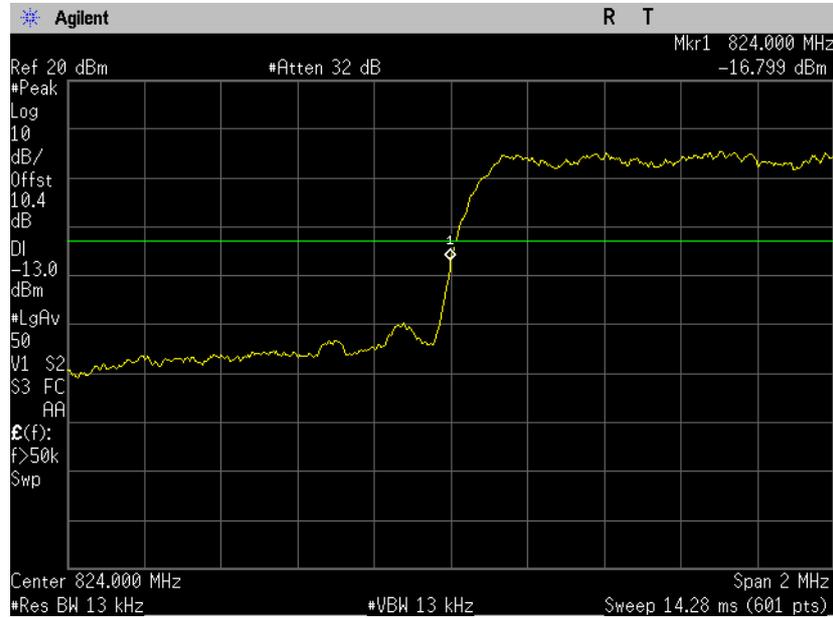

Highest Frequency 848.31 MHz
Plot 4.3.4



CDMA 1xEVDO RevA, RETAP – payload size = 4096
Lowest Frequency 824.7 MHz
Plot 4.3.5

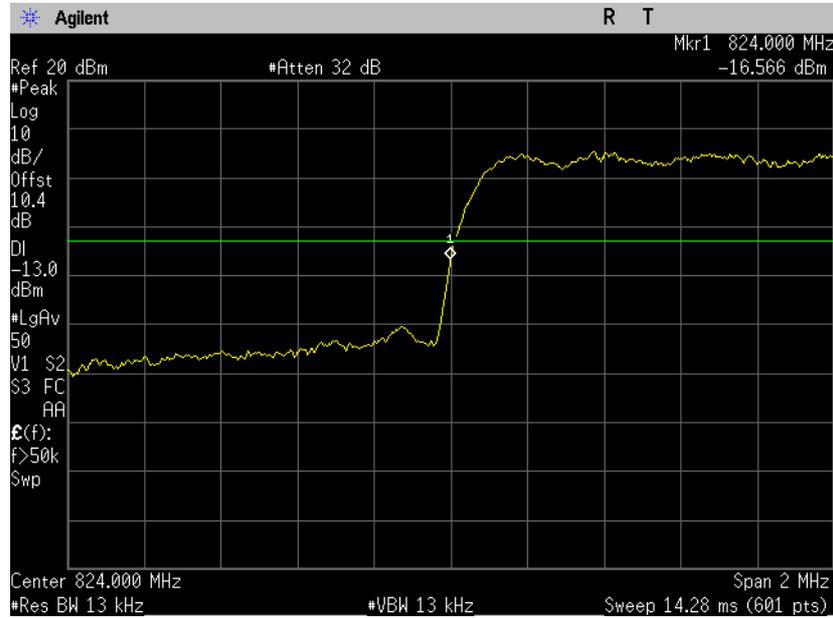

Highest Frequency 848.31 MHz
Plot 4.3.6



4.4. Out of Band Emissions

Reference document:	47 CFR §22.917 (a)(b) & §2.1051		
Test Requirements:	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43+10log (P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed.		
Test setup:	See sec 2.3	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1 MHz, VBW: 3 MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.4.1- Plot 4.4.6	


*It translates to a limit of -13 dBm

Test results:


Channel	Frequency [MHz]	Spurious Emission Frequency [MHz]	Spurious Emission Level* [dBm]	Limit [dBm]	Margin [dB]	Reference Plots	Results
CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps							
1013 (low)	824.7	*	*	-13	*	4.4.1 – 4.4.2	Pass
384 (mid)	836.52	*	*	-13	*	4.4.3 – 4.4.4	Pass
777 (high)	848.31	*	*	-13	*	4.4.5 – 4.4.6	Pass

* all readings were at least 15 dB below the limit.


CDMA 1xEVDO Rel0, RTAP rate = 153.6 kbps
Lowest Frequency 824.7 MHz
Plot 4.4.1

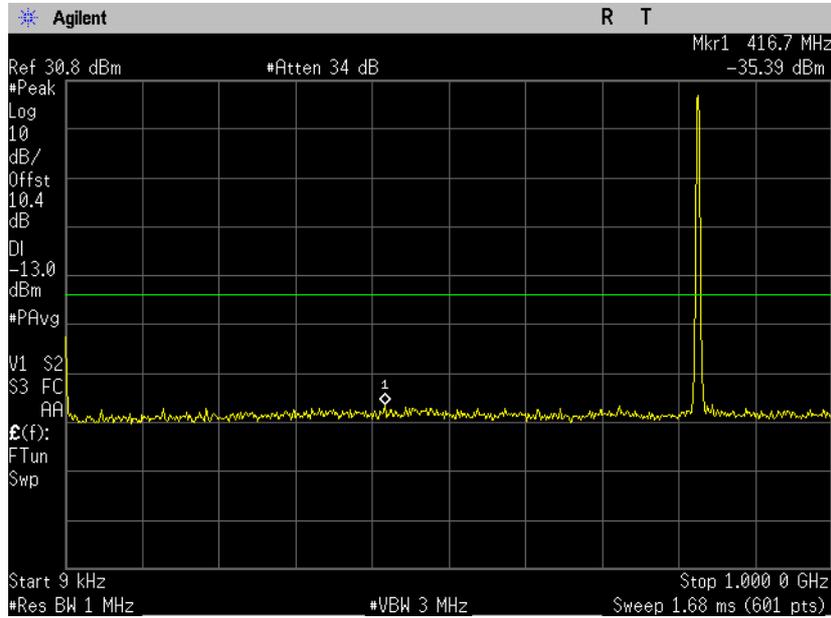


Plot 4.4.2

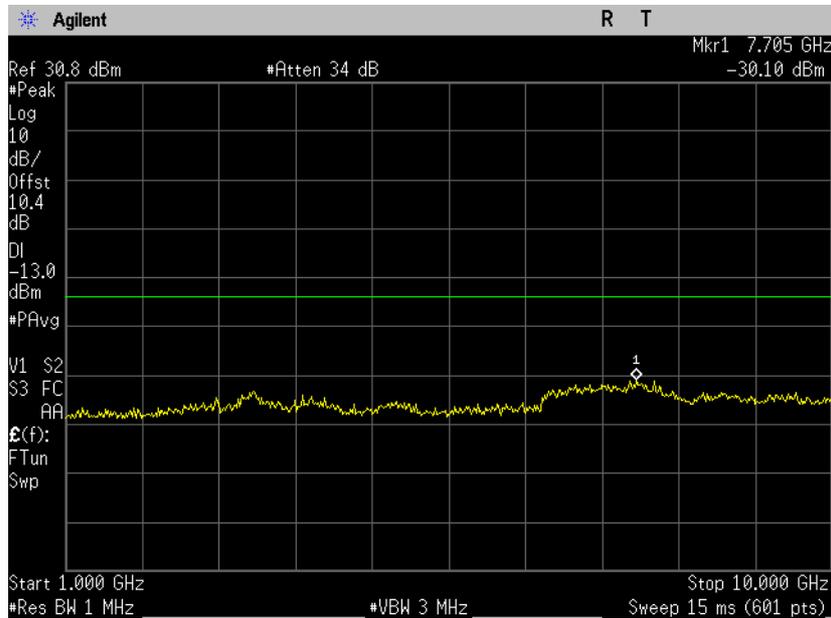


Middle Frequency 836.52 MHz
Plot 4.4.3

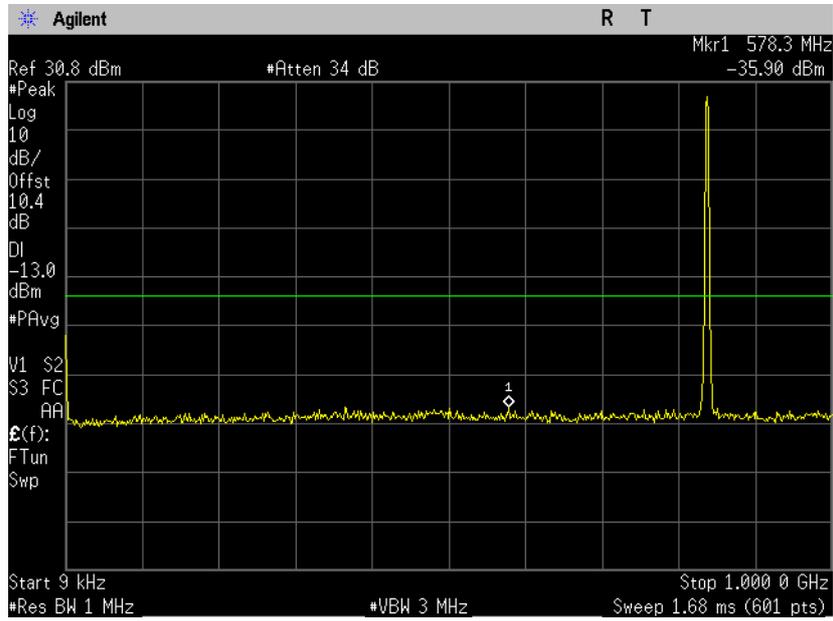


Plot 4.4.4

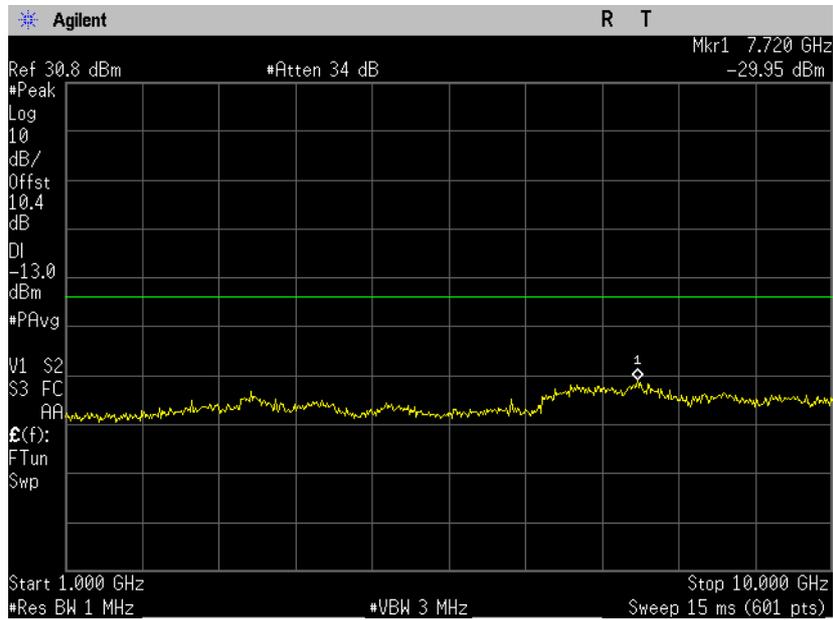

Highest Frequency 848.31 MHz
Plot 4.4.5

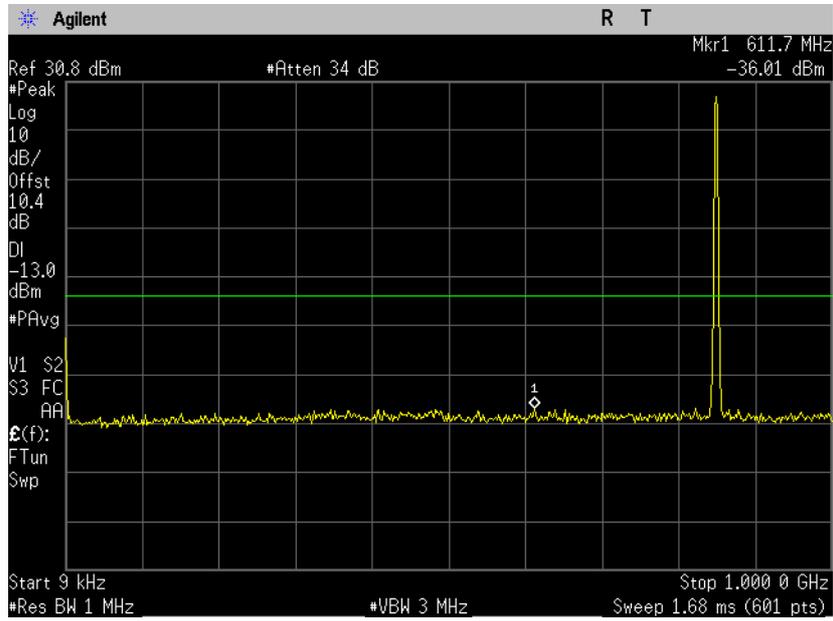

Plot 4.4.6

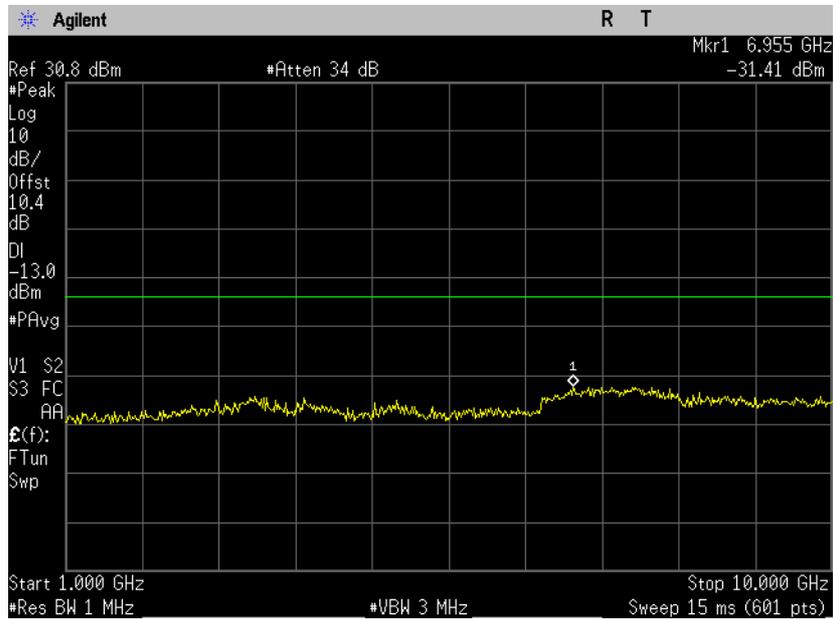

4.5. Radiated Peak Power Output

Reference document:	47 CFR §22.913 (a)(2)		
Test Requirements:	The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.		
Test setup:	See Sec. 2.2	Pass	
Method of testing:	Radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 3 MHz, VBW: 3 MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48 %	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	Plot 4.5.1 - Plot 4.5.6	

Test results:


Channel / Frequency	Max Reading [dBμV/m]	Polarization [H/V]	*Signal Generator Level [dBm]	Antenna Gain [dBd]	ERP calculated [dBm]	Limit [dBm]	Margin [dB]	Reference Plots	Results
CDMA 1xRTT, RC3 (S055)									
1013 (low) 824.7 MHz	121.76	V	16.74	4.71	21.45	38.45	-17.00	4.5.1 – 4.5.2	Pass
384 (mid) 836.52 MHz	122.63	V	17.36	4.70	22.06	38.45	-16.39	4.5.3 – 4.5.4	Pass
777 (high) 848.31 MHz	120.22	V	14.84	4.70	19.54	38.45	-18.91	4.5.5 – 4.5.6	Pass

*Corrected for cable loss

CDMA 1xRTT, RC3 (SO55)
Lowest Frequency 824.7 MHz
Horizontal Polarization
Plot 4.5.1




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 824.38 MHz
112.54 dB μ V/m

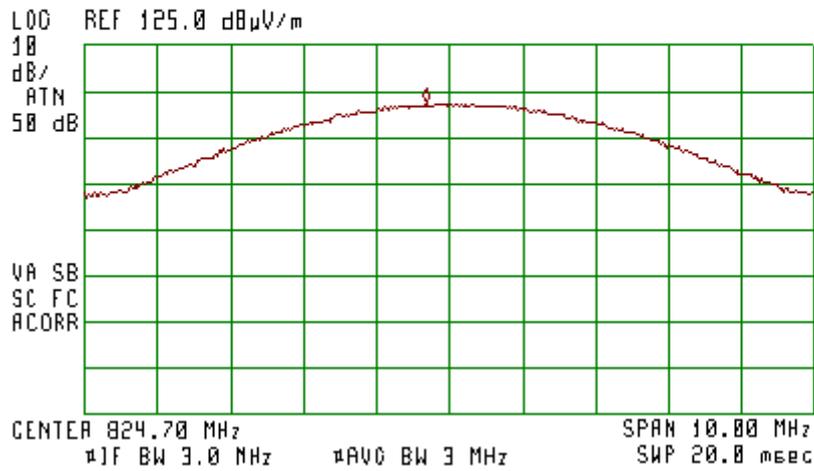

Vertical Polarization
Plot 4.5.2




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 824.75 MHz
121.76 dB μ V/m

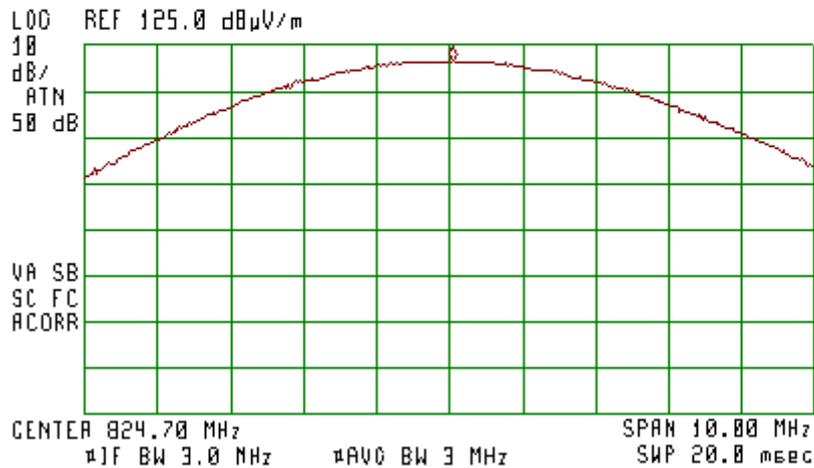

Middle Frequency 836.52 MHz
Horizontal Polarization
Plot 4.5.3




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 836.62 MHz
111.66 dB μ V/m

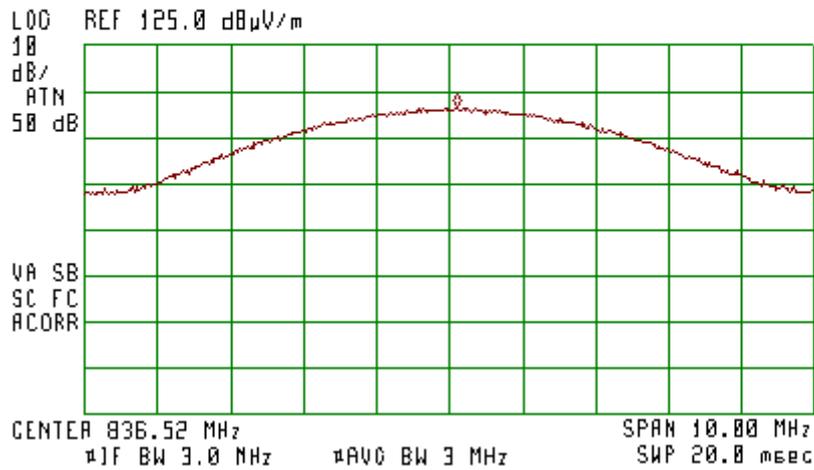

Vertical Polarization
Plot 4.5.4




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 836.65 MHz
122.63 dB μ V/m

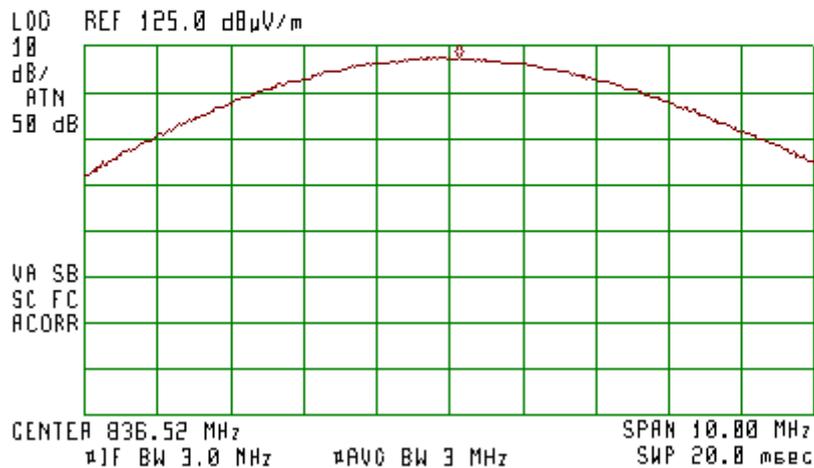

Highest Frequency 848.31 MHz
Horizontal Polarization
Plot 4.5.5




ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 848.21 MHz
118.48 dB μ V/m

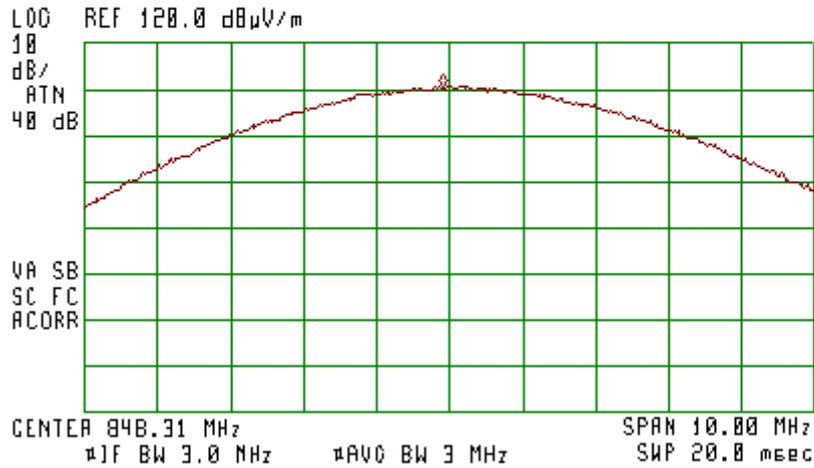

Vertical Polarization
Plot 4.5.6



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 848.21 MHz
120.22 dB μ V/m

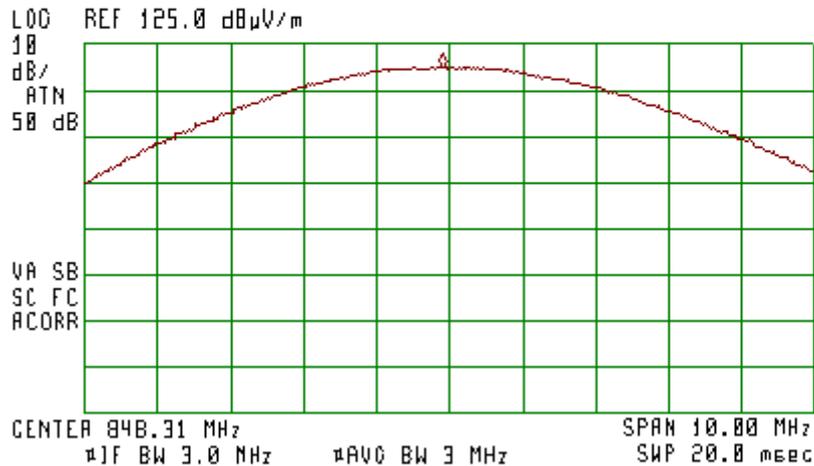

4.6. Field Strength of Spurious Radiation

Reference document:	47 CFR §22.917 (a)		
Test Requirements:	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB *.		
Test setup:	See Sec. 2.2	Pass	
Method of testing:	Radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	f < 1GHz: RBW: 120 kHz , VBW: 300 kHz f > 1GHz: RBW: 1 MHz , VBW: 3 MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48 %	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	Plots 4.6.1- 4.6.14	

*It translates to a limit of -13 dBm

Test results:

Channel / Frequency	Spurious Emission Frequency [MHz]	Max Reading [dBμV/m]	Polarization [H/V]	*Signal Generator Level [dBm]	Antenna Gain [dBd]	Emission power calculated [dBm]	Limit [dBm]	Margin [dB]	Results
CDMA 1xRTT, RC3 (SO55)									
1013 (low) 824.7 MHz	1649	47.90	V	-62.59	5.19	-57.40	-13	-44.40	Pass
	3301	48.38	V	-59.84	6.49	-53.35	-13	-40.35	Pass
384 (mid) 836.52 MHz	1674	48.59	V	-61.38	5.18	-56.20	-13	-43.20	Pass
	3346	49.86	V	-58.35	6.53	-51.82	-13	-38.82	Pass
777 (high) 848.31 MHz	1698	50.17	V	-59.47	5.17	-54.30	-13	-41.30	Pass
	4240	48.95	V	-61.82	6.98	-54.84	-13	-41.84	Pass

*Corrected for cable loss

Note: Measurements were taken using a high pass filter (where appropriate) at the spectrum analyzer input.

Test results below 1GHz:


All measurements were done in horizontal and vertical polarizations; the results show the worst case for all frequencies.

Spurious Emission Frequency [MHz]	Max Reading [dB μ V/m]	Polarization [H/V]	*Signal Generator Level [dBm]	Antenna Gain [dBd]	Emission power calculated [dBm]	Limit [dBm]	Margin [dB]	Result
All readings were at least 20 dB below the limit								Pass


* Corrected for cable loss

Note: Measurements were taken using a band reject filter (where appropriate) at the spectrum analyzer input.


CDMA 1xRTT, RC3 (SO55)
Lowest Frequency 824.7 MHz
Horizontal & Vertical Polarization
Plot 4.6.1

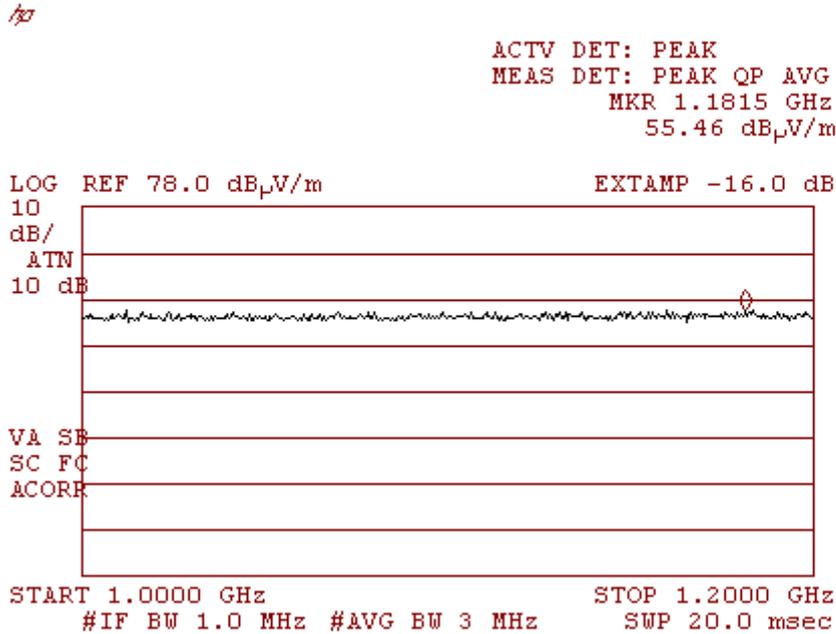


Horizontal & Vertical Polarization
Plot 4.6.2

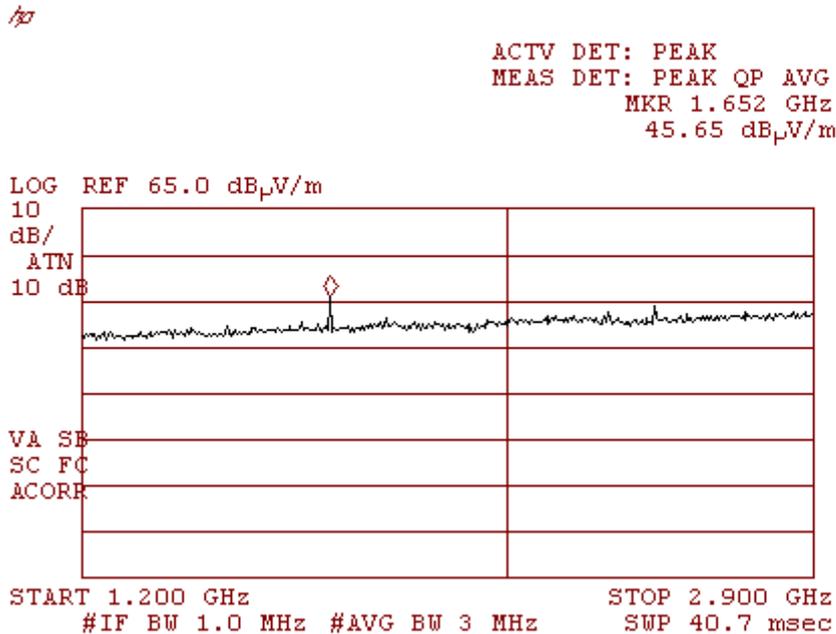


Horizontal & Vertical Polarization
Plot 4.6.3

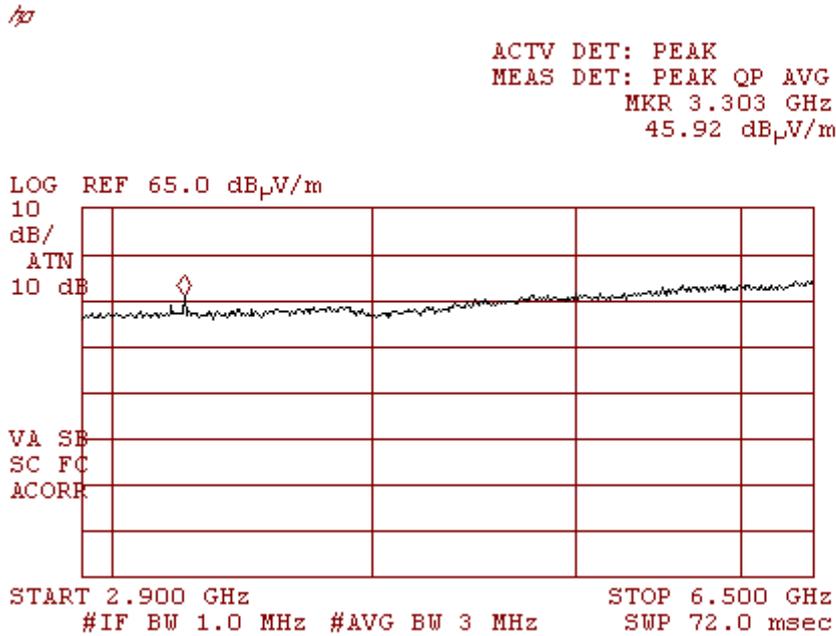


Horizontal & Vertical Polarization
Plot 4.6.4

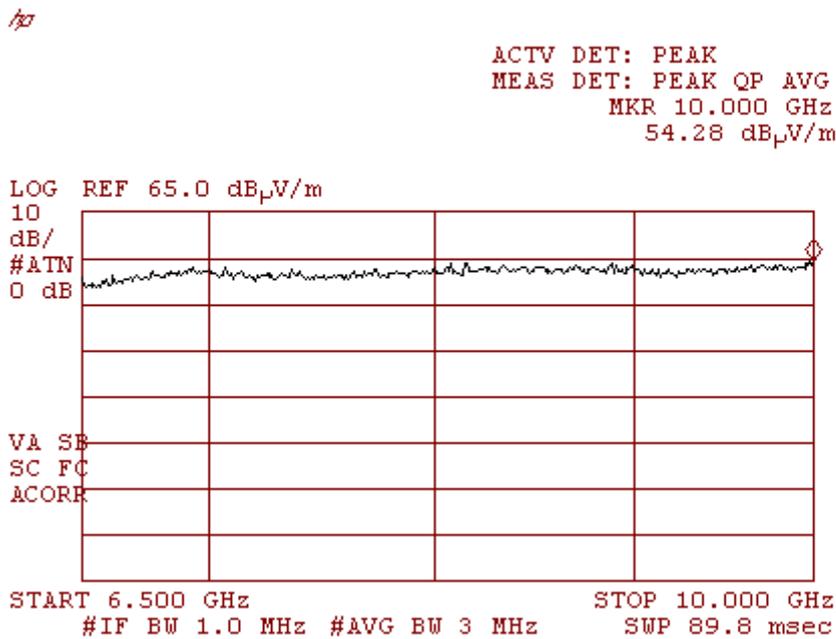


**Middle Frequency 836.52 MHz
Horizontal & Vertical Polarization
Plot 4.6.5**

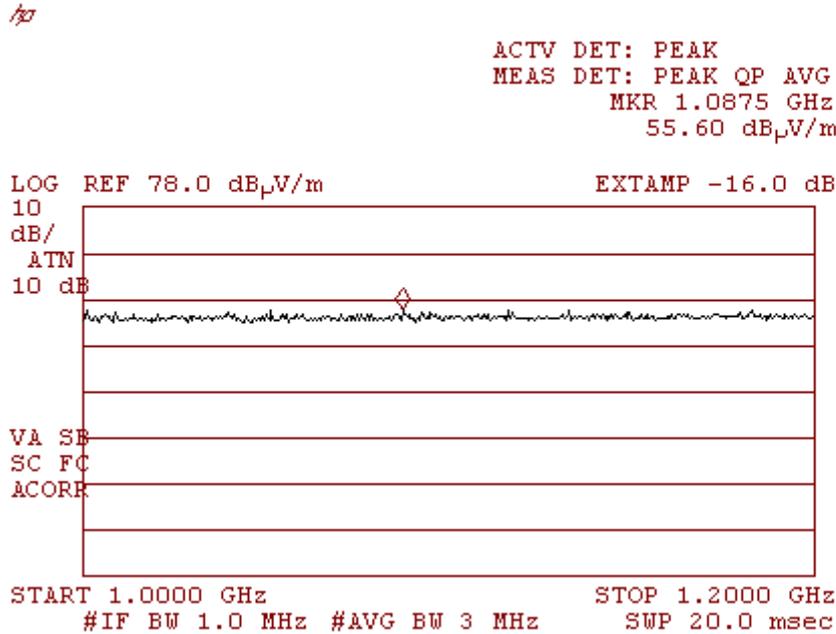


**Horizontal & Vertical Polarization
Plot 4.6.6**

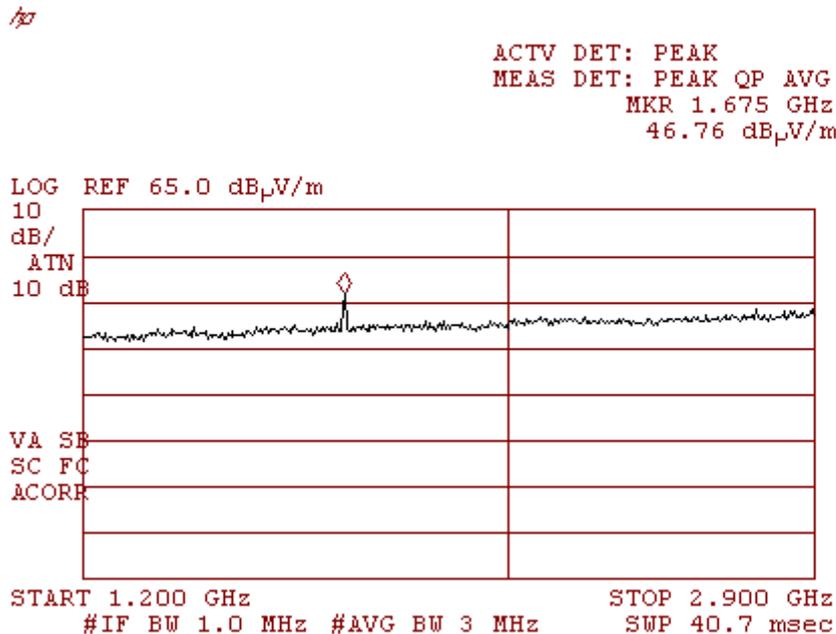


Horizontal & Vertical Polarization
Plot 4.6.7

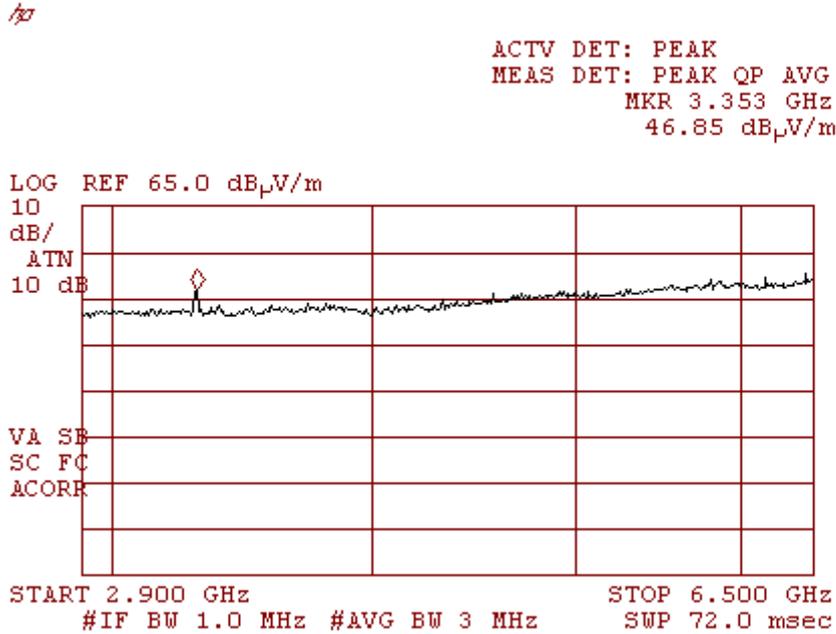


Horizontal & Vertical Polarization
Plot 4.6.8

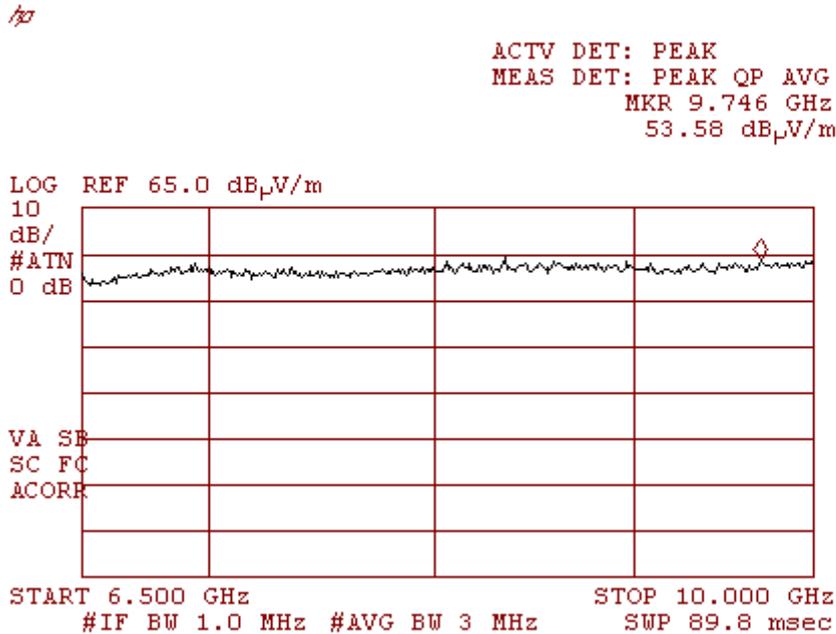


Highest Frequency 848.31 MHz
Horizontal & Vertical Polarization
Plot 4.6.9

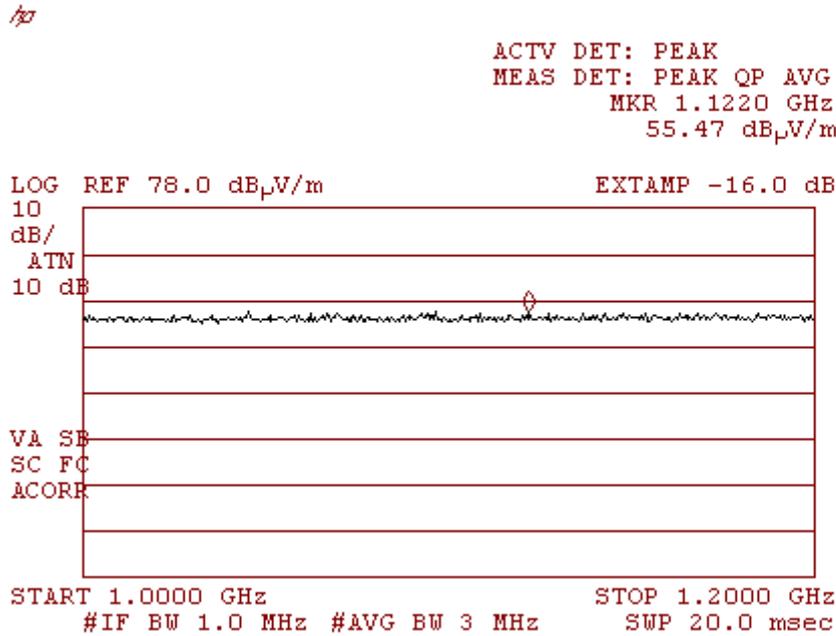


Horizontal & Vertical Polarization
Plot 4.6.10

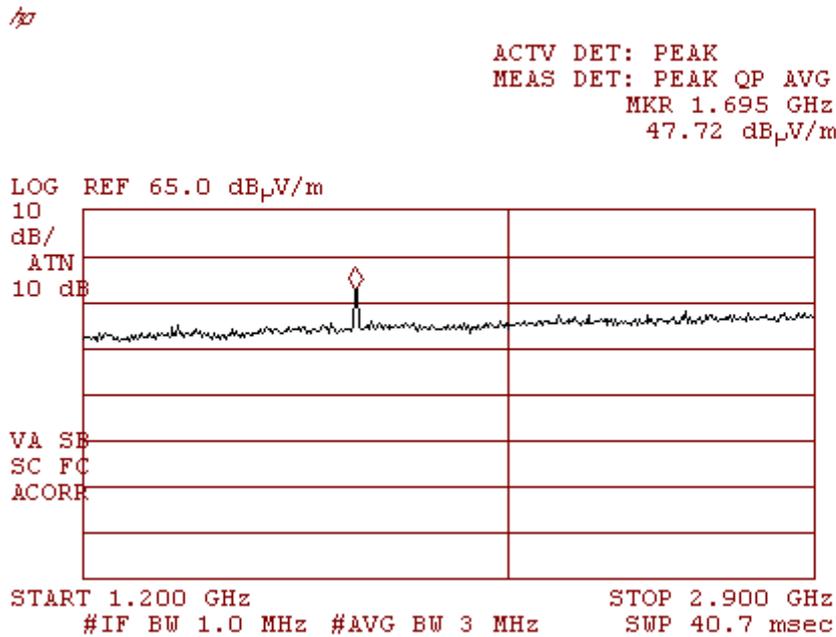


Horizontal & Vertical Polarization
Plot 4.6.11

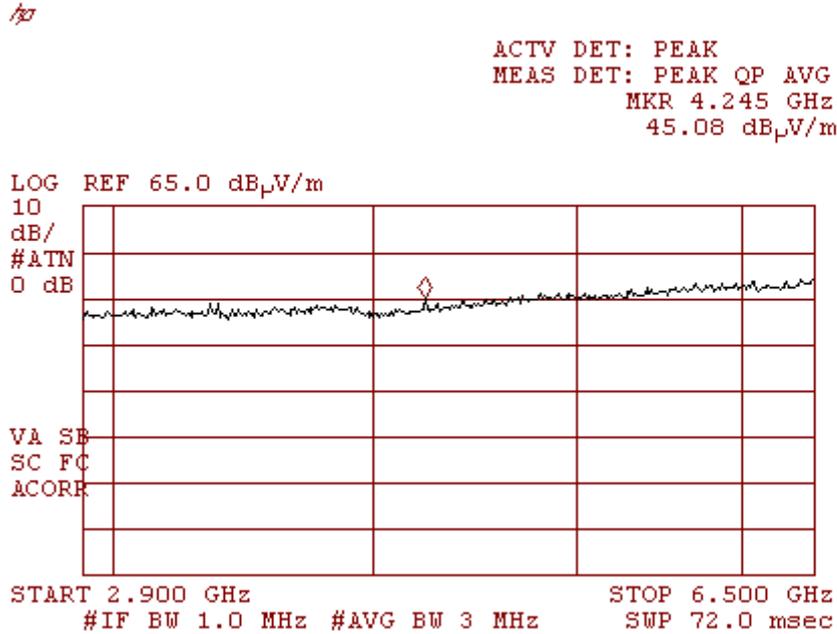


Horizontal & Vertical Polarization
Plot 4.6.12

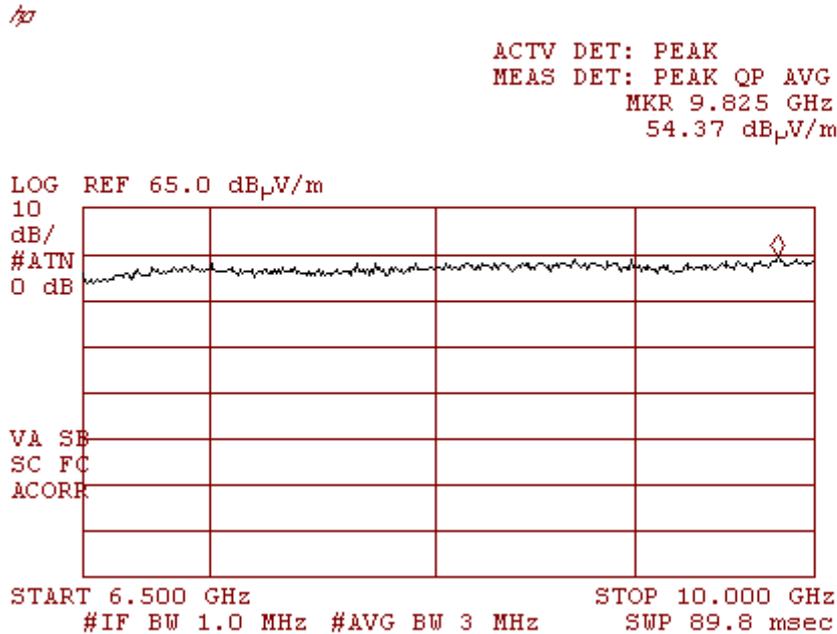

Below 1 GHz
Worst case for all frequencies
Horizontal & Vertical Polarization
Plot 4.6.13

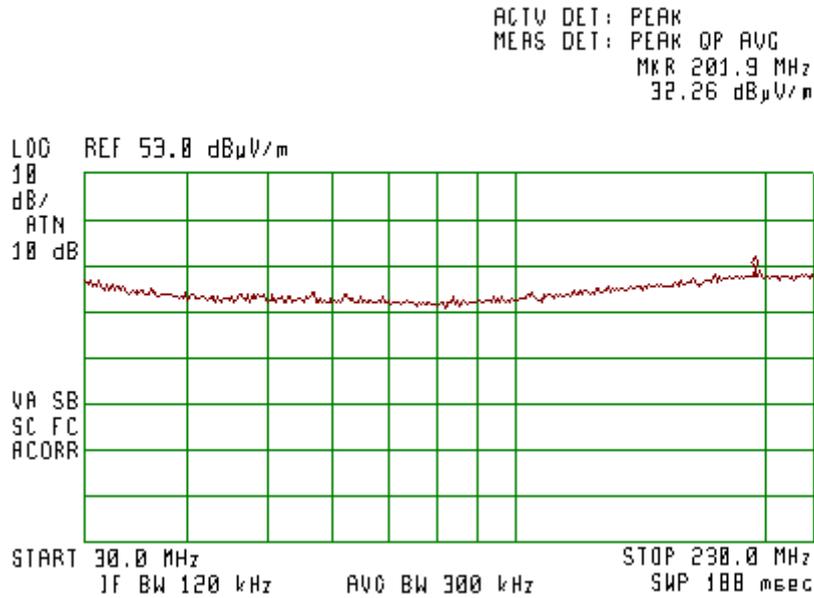

Horizontal & Vertical Polarization
Plot 4.6.14

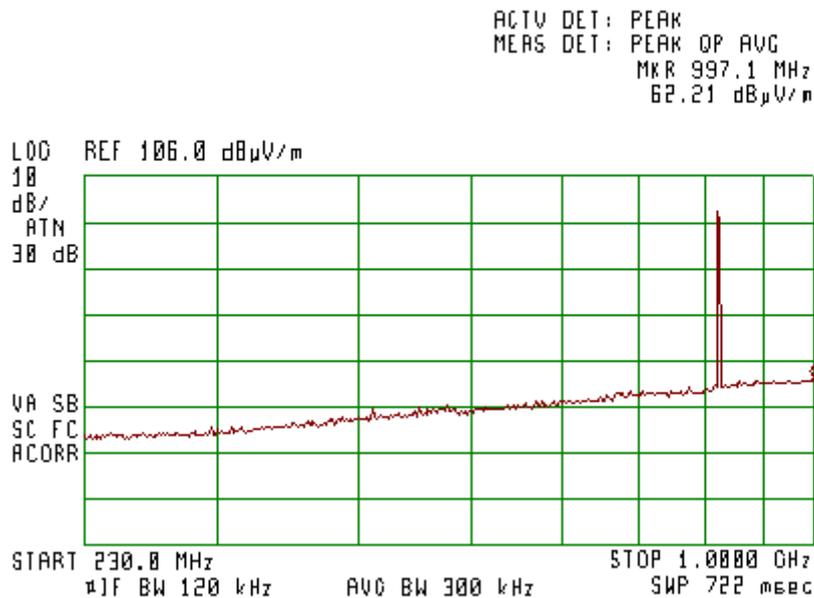

4.7. Frequency Stability

Reference document:	47 CFR §22.355 & §2.1055		
Test Requirements:	The carrier frequency of each transmitter in the Public Mobile Services must be maintained within 2.5 ppm		
Test setup:	See Sec. 2.3	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48 %	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	-	

Test results:

Frequency error vs. Voltage

Voltage [Vdc]	Frequency Error* [Hz]	Frequency Error [%]	Frequency Error [ppm]	Limit [ppm]	Test Result
CDMA 1xRTT, RC3 (SO55): 824.7 MHz					
11.7	1.7	0,00000021	0,002061356	2.5	Pass
13.8	2.1	0,00000025	0,002546381	2.5	Pass
15.9	3.3	0,00000040	0,004001455	2.5	Pass

Frequency error vs. Temperature

Temperature [°C]	Frequency Error* [Hz]	Frequency Error [%]	Frequency Error [ppm]	Limit [ppm]	Test Result
CDMA 1xRTT, RC3 (SO55): 824.7 MHz					
-30	4,3	0,00000052	0,005214017	2.5	Pass
-20	2,8	0,00000034	0,003395174	2.5	Pass
-10	2,1	0,00000025	0,002546381	2.5	Pass
0	2,5	0,00000030	0,003031405	2.5	Pass
10	3,8	0,00000046	0,004607736	2.5	Pass
20	3,1	0,00000038	0,003758943	2.5	Pass
30	1,9	0,00000023	0,002303868	2.5	Pass
40	2,1	0,00000025	0,002546381	2.5	Pass
50	2,3	0,00000028	0,002788893	2.5	Pass
60	2,5	0,00000030	0,003031405	2.5	Pass

***Note:** Frequency error measurements were made by using the build-in capability of the base station simulator.

5. Appendix

Appendix A: List of Measuring Equipment used:

Equipment	Manufacturer/ Model	Serial Number	Due date
CISPR 16 EMI Receiver, 9 kHz - 6.5 GHz	HP 8546A	3710A00392	30-06-2012
Spectrum Analyzer, 9 kHz - 22 GHz	HP 8593EM	3536A00131	30-06-2012
Spectrum Analyzer, 100 Hz - 26.5 GHz	Agilent E7405A	US41160436	30-06-2012
Spectrum Analyzer, 3 Hz - 44 GHz	Agilent E4446A	MY46180602	30-06-2012
Power Meter	Agilent N1911A	MY45100784	30-06-2012
Wideband power sensor	Agilent N1921A	MY45241242	30-06-2012
Low-Noise Amplifier, 0.1 - 18 GHz	MITEQ, AMF-7D-00101800-30-10P	1544443	30-06-2012
Low-Noise Amplifier, 18 - 26.5 GHz	MITEQ, AMF-5F-18002650-30-10P	945372	16-05-2012
Biconical Antenna, 20 - 200 MHz	Schwarzbeck VHBB 9124	9124/0255	16-05-2012
Log-Periodic Antenna, 200 - 1000 MHz	Schwarzbeck VUSLP 9111	VUSLP 9111184	16-05-2012
Double Ridged Guide Antenna, 1 - 18 GHz	A.R.A., DRG-118/A	17188	30-06-2012
SHF-EHF Horn, 15 - 40 GHz	Schwarzbeck BBHA 9170	BBHA9170214	30-06-2012
Turn table	HD 100	100/693	-
Antenna Mast	HD 100	100/693	-
LISN	Fischer 50/250-25-2	9705	30-06-2012
Transient Limiter, 9 kHz ÷ 200 MHz	HP 11947A	3107A04119	30-06-2012
Notch Filter	Micro-Tronics, BRM50702-05	0001	16-05-2012
Tunable Bandreject Filter	K&L, 3TNF-800/1000-0.2-N/N	336	16-05-2012
Tunable Bandreject Filter	K&L, 5TNF-1700/2000-0.1-N/N	212	16-05-2012
Highpass Filter, 1.2 ÷ 15 GHz	WAINWRIGHT, WHK1.2/15G-10EF	SN 3	16-05-2012
Highpass Filter, 2.4 ÷ 18 GHz	WAINWRIGHT, WHK2.4/18G-10EF	SN 1	16-05-2012
Highpass Filter, 7 ÷ 18 GHz	WAINWRIGHT, WHKX7.0/18G-8SS	SN 12	16-05-2012

Appendix B: Accreditation Certificate



The American Association for Laboratory Accreditation
World Class Accreditation

Accredited Laboratory
A2LA has accredited
QUALITECH (ECI TELECOM)
Petach-Tikva, ISRAEL
for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 22nd day of March 2011.



Peter Almy
President & CEO
For the Accreditation Council
Certificate Number 1633.01
Valid to September 30, 2012

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

End of the Test Report