



TESTING CERT # 2518.01

## DECLARATION OF COMPLIANCE: MPE/SAR ASSESSMENT Part 2 of 2

**EME Test Laboratory**  
8000 West Sunrise Blvd  
Fort Lauderdale, FL. 33322

**Date of Report:** June 30, 2011  
**Report Revision:** 0  
**Report ID:** SR9295\_MPE rpt\_APX7500\_UHF R2\_45W & VHF\_50W\_Mobile\_Rev O\_06302011

**Responsible Engineer:** Stephen C. Whalen (Principal Staff EME Test Engineer)  
**Report author:** Stephen C. Whalen (Principal Staff EME Test Engineer)  
**Date(s) Tested:** 11/07/2010 – 11/12/2010 & 8/20/09-8/21/09, 5/14/2011 - 5/15/2011, 5/20/2011, 6/13/2011 & 6/14/2011  
**Manufacturer/Location:** Motorola, Schaumburg, IL  
**Date submitted for test:** 03/01/2011  
**DUT Description:** APX7500 Dual Band UHF R2 45W (450 - 485MHz), 40W (485-512MHz), 25W (512-520MHz) & VHF 50W (136-174MH)  
**Test TX mode(s):** CW  
**Max. Power output:** 54W (450-485MHz), 48W (485-512MHz), 30W (512-520MHz) and 60W (136-174MHz)  
**TX Frequency Bands:** 450-520MHz & 136-174MHz  
**Signaling type:** Analog, APCO 25, and TDMA 1:2 (F2)  
**Model(s) Tested** M30SSS9PW1AN & M30KSS9PW1AN  
**Model(s) Certified:** M30TSS9PW1AN (MHUT1010A)  
**Serial Number(s):** QMKNJ033 & QMOKW063  
**Classification:** Occupational/Controlled Environment  
**FCC ID: AZ492FT7047** Part 22 & 90 UHF (450-512MHz) & VHF (150.8-173.4MHz) MPE results outside of Part 90 & 22 are not applicable for FCC compliance demonstration.  
**IC: 109U-92FT7047** UHF (450-470MHz) & VHF (138-174MHz)

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 3.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.

This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006

The results and statements contained in this report pertain only to the device(s) evaluated herein.

*Signature on file*  
Deanna Zakharia  
EME Lab Senior Resource Manager and  
Laboratory Director

Approval Date: 06/30/2011

Certification Date: 06/30/2011

Certification No.: L1110645P

**Document Revision History**

<b>Date</b>	<b>Revision</b>	<b>Comments</b>
06/30/2011	O	Initial release

**Part 1 of 2: MPE Assessment for 450-520MHz**  
**Part 2 of 2: MPE Assessment for 136-174MHz**

**Part 1 of 2**

**Table of Contents**

1.0	Introduction.....	4
2.0	Abbreviations / Definitions.....	4
3.0	Referenced Standards and Guidelines .....	4
4.0	Power Density Limits .....	5
5.0	N <sub>c</sub> Test Channels.....	6
6.0	Measurement Equipment .....	6
7.0	Measurement System Uncertainty Levels .....	6
8.0	Product and System Description.....	7
9.0	Additional Options and Accessories.....	7
10.0	Test Set-Up Description.....	7
11.0	Method of Measurement with trunk mounted antenna(s).....	8
	11.1 External/Bystander vehicle MPE measurements .....	8
	11.2 Internal/Passenger vehicle MPE measurements.....	8
12.0	Method of Measurement with roof mounted antenna(s) .....	9
	12.1 External/Bystander vehicle MPE measurements .....	9
	12.2 Internal/Passenger vehicle MPE measurements.....	9
13.0	MPE Calculations .....	10
14.0	Antenna Summary .....	11
15.0	Test Results Summary .....	11
	Conclusion .....	28
	Appendix A - Illustration of Antenna Locations and Test Distances .....	29
	Appendix B - Probe Calibration Certificates .....	32
	Appendix C - Photos of Assessed Antennas.....	45
	Appendix D – MPE Measurement Results .....	46

## 1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola's outside test site and Specific Absorption Rate (SAR) simulations for product model M30TSS9PW1AN (MHUT1010A).

## 2.0 Abbreviations / Definitions

APCO: Association of Public-Safety Communications Officials

BS: Bystander

C4FM: Compatible 4-Level Frequency Modulation

CNR: Calibration Not Required

CQPSK: Compatible Quadrature Phase Shift Keying

CW: Continues Wave

DUT: Device Under Test

EME: Electromagnetic Energy

F2: 2 slot Time Division Multiple Access

FM: Frequency Modulation

MPE: Maximum Permissible Exposure

NA: Not Applicable

PB: Passenger Backseat

PF: Passenger Front seat

PTT: Push to Talk

SAR: Specific Absorption Rate

TDMA: Time Division Multiple Access

## 3.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- Ministry of Health (Canada) Safety Code 6 (2009), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz

#### 4.0 Power Density Limits

**Table 1 – Occupational / Controlled Exposure Limits**

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	IEEE C95.1 1992/1999	RSS 102 issue 4 - 2010
	mW/cm <sup>2</sup>	mW/cm <sup>2</sup>	W/m <sup>2</sup>
30 - 300	1.0		*10.0
10 - 400			
100 - 300		1.0	
300 - 1,500	f/300		f/30
300 - 3,000		f/300	
400 - 2,000			
1,500 - 15,000			50.0
1,500 - 100,000	5.0		
2,000 – 300,000			
3,000 - 300,000		10.0	

\*Power density limit is applicable at frequencies greater than 100MHz

**Table 2 – General Population / Uncontrolled Exposure Limits**

Frequency Range (MHz)	FCC OET Bulletin 65 Supplement C	IEEE C95.1 1992/1999	RSS 102 issue 4 – 2010
	mW/cm <sup>2</sup>	mW/cm <sup>2</sup>	W/m <sup>2</sup>
30 – 300	0.2		*2.0
10 – 400			
100 – 300		0.2	
100 – 400			
300 – 1,500	f/1,500		f/150
400 – 2,000			
300 – 15,000		f/1,500	
1,500 – 15,000			10.0
1,500 – 100,000	1.0		
2,000 – 100,000			
2,000 – 300,000			

\*Power density limit is applicable at frequencies greater than 100MHz

## 5.0 $N_c$ Test Channels

The number of test channels are determined by using Equation 1 below. This equation is available in FCC's KDB 447498. The test channels are appropriately spaced across the antenna's frequency range.

Equation 1 – Number of test channels

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where  $N_c$  is the number of test channels,  $f_{\text{high}}$  and  $f_{\text{low}}$  are the highest and lowest frequencies within the transmission band,  $f_c$  is the mid-band frequency, and frequencies are in MHz.

## 6.0 Measurement Equipment

**Table 3 - Equipment**

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Automobile	2003 Ford Crown Victoria, 4-Door	NA	NA	NA
Survey Meter	ETS Model HI-2200	00086316	01/04/2011	01/04/2012
Probe – E-Field	ETS Model E100	00109011		
Probe – H-Field	ETS Model H200	00084230		
Survey Meter	ETS Model HI-2200	00086887	1/13/2009; 12/4/2008	1/13/2010; 12/4/2009
Probe – E-Field	ETS Model E100	00083370	12/4/2008	12/4/2009
Probe – H-Field	ETS Model H200	00084225	1/13/2009	1/13/2010

E-field measurements are in mW/cm<sup>2</sup>.

H-field measurements are in A/m

## 7.0 Measurement System Uncertainty Levels

**Table 4 - Uncertainty Budget for Near Field Probe Measurements**

	Tol. (± %)	Prob. Dist.	Divisor	$u_i$ (±%)	$v_i$
<b>Measurement System</b>					
Probe Calibration	6.0	N	1.00	6.0	∞
Survey Meter Calibration	3.0	N	1.00	3.0	∞
Hemispherical Isotropy	8.0	R	1.73	4.6	∞
Linearity	5.0	R	1.73	2.9	∞
Pulse Response	1.0	R	1.73	0.6	∞
RF Ambient Noise	3.0	R	1.73	1.7	∞
RF Reflections	8.0	R	1.73	4.6	∞
Probe Positioning	10.0	R	1.73	5.8	∞
<b>Test sample Related</b>					
Antenna Positioning	3.0	N	1.00	3.0	∞
Power drift	5.0	R	1.73	2.9	∞
<b>Combined Standard Uncertainty</b>		RSS		12.2	∞
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>		$k=2$		24	

## 8.0 Product and System Description

Model M30TSS9PW1AN (MHUT1010A) is a mobile transceiver that utilizes analog, APCO 25 & F2 digital two-way radio communications. The analog modulation scheme uses Frequency Modulation (FM). APCO 25 & F2 digital modes use C4FM of CQPSK family of modulation (Compatible 4-Level Frequency Modulation of Compatible Quadrature Phase Shift Keying). F2 is a TDMA 1:2 protocol that allocates portions of the RF signal by dividing time into two slots (2 slots TDMA). Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. This product supports voice in analog mode, and both voice and data modes in digital mode.

The maximum duty cycle for TDMA is 1:2 (50%) and is controlled by software. The FM signal is continuous. However, because of hand shaking or Push-To-Talk (PTT) between users and/or base stations a conservative 50% duty cycle is applied. The TDMA mode was not tested because its duty cycle is inherently 50% and would include an additional 50% duty cycle for PTT.

The intended use of the radio is PTT while the device is properly installed in a vehicle with an external antenna mounted at the roof or trunk.

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the passengers inside the vehicle and the bystanders external to the vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that "Bystanders" as used herein are people other than operator)

## 9.0 Additional Options and Accessories

Refer to Table 5 for complete list of tested antennas.

## 10.0 Test Set-Up Description

Assessments were performed with mobile radio installed in the test vehicle while engine was at idle, at the specified distances and test locations indicated in sections 11.0, 12.0 and Appendix A.

All antennas described in Table 5 were considered in order to develop the test plan for this product. Antennas were installed and tested per their appropriate mount locations (Roof / Trunk) and defined test channels.

## 11.0 Method of Measurement with trunk mounted antenna(s)

### 11.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the trunk. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2 m vertical line for each of the (3) bystander test locations indicated in Appendix A with 20 cm height increments, with antenna to probe sensor separation distances of 90 cm directly behind vehicle, 104 cm (45 degree radial) and 110.5 cm (90 degree radial). The separation distance used for testing is defined from the antenna where as the RF safety booklet defines the same distance from the vehicle body to ensure that the assessment is applicable to other vehicles. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

Each of the offered antennas mounted at the center of the trunk were assessed at the rear of the vehicle while maintaining a minimum of twenty (20) centimeter separation distance between the probe sensor and vehicle body. The worst case antenna was then tested at a 45° radial at the corner of the trunk, and 90° radial at the side of the trunk.

**Note: The distance from the centered trunk-mounted antenna to the rear edge of the vehicle is 42cm and the distance from the rear edge of the vehicle to the survey probe sensor is 48cm.**

### 11.2 Internal/Passenger vehicle MPE measurements

Antenna is located toward the center of the trunk at a minimum 85cm from backseat passenger. Users are instructed, per installation manual, to mount antennas on the roof only if a minimum 85cm cannot be achieved. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical

(relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

## 12.0 Method of Measurement with roof mounted antenna(s)

### 12.1 External/Bystander vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the test location indicated in Appendix A with 20cm increments at the test distance of 117cm from the antenna under test. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

**Note: Actual test distance was approximately 117cm from centered roof-mounted antenna to the probe element (97cm from antenna to edge of car door and 20cm from the edge of the car door to the survey probe sensor); this is the closest distance that can be achieved to a centered roof-mounted antenna used for MPE compliance assessment herein.**

### 12.2 Internal/Passenger vehicle MPE measurements

Antenna is located at the center of the roof. Refer to Appendix A for antenna location and distance.

MPE measurements for passenger front seat (PF) and backseat (PB) conditions are determined by taking the average of the (3) measurements (Head, Chest, and Lower Trunk) inside the vehicle for both the front and back seats.

The backseat is a bench seat and therefore each position (Head, Chest & Lower Trunk) were scanned across (horizontally) the seat starting from the middle of the seat to the edge of the seat stopping 20 cm from the vehicle door. Similar process was used in the front bucket seat.

The probe handle is oriented parallel (horizontal) to the ground and pointed towards the back of the vehicle. The probe handle is not oriented normal to the seat surface. The probe head (incorporating the field sensors) is scanned continuously (using the max-hold function available in the meter) along three test axes which are parallel to the seat angle (intended as the line determined by the intersection of the plane of the seat and the plane of the backrest) and are 20 cm from the seat surface. One test axis is at the Head height, another is at the Chest height, and another is at the Lower Trunk height. The maximum field level value recorded for each test axis is logged. The MPE is determined by averaging these three maximum values regardless of the geometrical location where they were observed. For instance, the locations of the three maxima may lie on different vertical (relative to ground) lines.

This approach leads to results that are representative of the exposure of vehicle occupants since it is based on an average across the body portions closest to the antenna for both trunk and roof mount positions, and is conservatively biased because the highest results for each test axis are combined, e.g. the highest head exposure could be in the middle of the seat while the highest lower trunk exposure could be closer to the door.

### 13.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0 Tables 6 - 9. These results are based on 50% duty cycle for PTT.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations.

External to vehicle (Bystander) - 10 measurements are averaged over the body (*Avg\_over\_body*).

Internal to vehicle (Passengers) - 3 measurements are averaged over the body (*Avg\_over\_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

Equation 2 – Power Density Calculation (*Calc.\_P.D.*)

$$\text{Calc.}_P.D. = (\text{Avg\_over\_body}) * (\text{probe\_frequency\_cal\_factor}) * (\text{duty\_cycle})$$

*Note 1: The highest “average” cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine “probe\_frequency\_cal\_factor” for the specific test frequencies.*

*Note 2: The E-field probe calibration certificate’s frequency cal factors were determined by measuring V/m. The survey meter’s results were measured in power density (mW/cm<sup>2</sup>) and therefore the “probe\_frequency\_cal\_factor” was squared in equation 2 to account for these results.*

*Note 3: The H-field probe calibration certificate’s frequency cal factors were determined by measuring A/m. The survey meter’s results were measured in A/m and therefore the “Avg\_over\_body” A/m results were converted to power density (mW/cm<sup>2</sup>) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.*

Equation 3 – Converting A/m to mW/cm<sup>2</sup>

$$mW / cm^2 = (A / m)^2 * 37.699$$

Equation 4 – Power Density Maximum Calculation

$$\text{Max\_Calc.}_P.D. = P.D._calc * \frac{\text{max\_output\_power}}{\text{initial\_output\_power}}$$

*Note 4: For initial output power > max\_output\_power; max\_output\_power / initial output power = 1*

## 14.0 Antenna Summary

Table 5 below summarizes the tested antennas, mount location (roof/trunk), overlap of FCC bands and the number of test channels per FCC KDB 447498. This information was used to determine the test configurations presented in this report.

**Table 5**

#	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Mount Location (Roof/Trunk)	Overlap FCC Bands	N <sub>c</sub> Test Channels (KDB447498)
1	HAD4006A	136-144	52.0	2.15	1/4 wave, wire	R	NA	3
2	HAD4007A	144-150.8	49.0	2.15	1/4 wave, wire	R	150.8	2
3	HAD4008A	150.8-162	45.5	2.15	1/4 wave, wire	R	150.8-162	3
4	HAD4009A	162-174	43.0	2.15	1/4 wave, wire	R	162-174	3
5	*RAD4010ARB	136-174	143.5 130.5 127.0 121.5 112.5 103.5	5.15	1/2 wave, wire	R/T	150.8-173.4	5
6	HAD4016A	136-162	51.0	2.15	1/4 wave, wire	R	150.8-162	5
7	HAD4017A	146-174	47.5	2.15	1/4 wave, wire	R	150.8-173.4	5
8	HAD4021A	136-174	51.7	2.15	1/4 wave, wire	R	150.8-173.4	5

\* Antennas trimmed per test frequency.

## 15.0 Test Results Summary

The following tables below summarize the MPE results for each test configuration: antenna location, test positions (BS-Bystander, PB-Passenger Backseat, PF-Passenger Front seat), E/H field measurements, angle, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/IEEE specification limits and % of the applicable specification limits.

Table 6

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for trunk mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Trunk	BS	E	0	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.096	0.20	48.2
					60	58.0	146.00	0.112	0.20	55.9
					60	57.6	150.80	0.108	0.20	53.8
					60	58.3	155.00	0.127	0.20	63.4
					60	58.1	165.01	0.096	0.20	48.1
					60	58.1	173.01	0.132	0.20	66.0
			45	RAD4010ARB, (136-174MHz)	60	58.1	173.01	0.114	0.20	56.8
			90	RAD4010ARB, (136-174MHz)	60	58.1	173.01	0.105	0.20	52.7

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 7

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for trunk mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Trunk	PB	E	NA	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.017	0.20	8.6
					60	58.0	146.00	0.023	0.20	11.6
					60	57.6	150.80	0.027	0.20	13.3
					60	58.3	155.00	0.045	0.20	22.5
					60	58.1	165.01	0.084	0.20	42.1
					60	58.1	173.01	0.181	0.20	90.3
	PF	E	NA	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.002	0.20	0.9
					60	58.0	146.00	0.012	0.20	5.8
					60	57.6	150.80	0.012	0.20	5.8
					60	58.3	155.00	0.005	0.20	2.5
					60	58.1	165.01	0.018	0.20	8.9
					60	58.1	173.01	0.052	0.20	26.1

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 8

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for trunk mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Trunk	BS	H	0	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.070	0.20	34.8
					60	58.0	146.00	0.083	0.20	41.5
					60	57.6	150.80	0.086	0.20	42.9
					60	58.3	155.00	0.112	0.20	56.1
					60	58.1	165.01	0.088	0.20	43.9
					60	58.1	173.01	0.140	0.20	70.1
			45	RAD4010ARB, (136-174MHz)	60	58.1	173.01	0.121	0.20	60.7
			90	RAD4010ARB, (136-174MHz)	60	58.1	173.01	0.114	0.20	56.9

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 9

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for trunk mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Trunk	PB	H	NA	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.011	0.20	5.5
					60	58.0	146.00	0.008	0.20	4.0
					60	57.6	150.80	0.008	0.20	4.0
					60	58.3	155.00	0.013	0.20	6.4
					60	58.1	165.01	0.031	0.20	15.3
					60	58.1	173.01	0.095	0.20	47.7
	PF	H	NA	RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.004	0.20	2.2
					60	58.0	146.00	0.006	0.20	3.0
					60	57.6	150.80	0.011	0.20	5.3
					60	58.3	155.00	0.006	0.20	2.8
					60	58.1	165.01	0.004	0.20	2.0
					60	58.1	173.01	0.022	0.20	11.0

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 10

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	BS	E	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.065	0.20	32.7
					60	57.4	140.00	0.066	0.20	33.1
					60	58.0	144.00	0.066	0.20	33.0
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.066	0.20	33.0
					60	58.0	146.00	0.072	0.20	36.0
					60	57.6	150.80	0.069	0.20	34.3
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.067	0.20	33.5
					60	58.2	156.40	0.078	0.20	39.2
					60	58.0	162.00	0.074	0.20	37.0
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.067	0.20	33.3
					60	58.1	168.00	0.072	0.20	35.8
					60	58.1	173.01	0.080	0.20	40.1
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.032	0.20	16.2
					60	58.0	146.00	0.040	0.20	20.1
					60	57.6	150.80	0.037	0.20	18.5
					60	58.3	155.00	0.047	0.20	23.5
					60	58.1	165.01	0.040	0.20	20.1
					60	58.1	173.01	0.065	0.20	32.5

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 10 (continued)

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	BS	E	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.053	0.20	26.5
					60	58.0	144.00	0.065	0.20	32.3
					60	57.6	150.80	0.070	0.20	34.8
					60	58.2	156.40	0.068	0.20	33.8
					60	58.0	162.00	0.062	0.20	31.1
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.043	0.20	21.4
					60	57.6	150.80	0.059	0.20	29.3
					60	58.0	158.01	0.081	0.20	40.5
					60	58.1	165.01	0.035	0.20	17.4
					60	58.1	173.01	0.076	0.20	37.8
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.055	0.20	27.5
					60	58.0	144.00	0.063	0.20	31.5
					60	57.6	150.80	0.068	0.20	33.8
					60	58.0	158.01	0.074	0.20	37.1
					60	58.1	165.01	0.056	0.20	27.9
					60	58.1	173.01	0.061	0.20	30.6

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 11

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PB	E	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.084	0.20	42.1
					60	57.4	140.00	0.197	0.20	98.7
					60	58.0	144.00	0.132	0.20	66.2
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.139	0.20	69.5
					60	58.0	146.00	0.081	0.20	40.6
					60	57.6	150.80	0.078	0.20	39.2
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.077	0.20	38.3
					60	58.2	156.40	0.073	0.20	36.7
					60	58.0	162.00	0.066	0.20	33.2
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.070	0.20	34.8
					60	58.1	168.00	0.096	0.20	48.0
					60	58.1	173.01	0.055	0.20	27.7
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.012	0.20	6.0
					60	58.0	146.00	0.013	0.20	6.6
					60	57.6	150.80	0.012	0.20	5.8
					60	58.3	155.00	0.030	0.20	15.0
					60	58.1	165.01	0.015	0.20	7.3
					60	58.1	173.01	0.057	0.20	28.5

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 11 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit			
Roof	PB	E	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.071	0.20	35.5			
					60	58.0	144.00	0.113	0.20	56.3			
					60	57.6	150.80	0.100	0.20	50.0			
					60	58.2	156.40	0.062	0.20	31.0			
					60	58.0	162.00	0.055	0.20	27.6			
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.053	0.20	26.5			
					60	57.6	150.80	0.067	0.20	33.3			
					60	58.0	158.01	0.033	0.20	16.4			
					60	58.1	165.01	0.061	0.20	30.7			
					60	58.1	173.01	0.048	0.20	23.8			
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.074	0.20	37.1			
					60	58.0	144.00	0.126	0.20	62.9			
					60	57.6	150.80	0.072	0.20	35.8			
					60	58.0	158.01	0.023	0.20	11.5			
					60	58.1	165.01	0.047	0.20	23.5			
					60	58.1	173.01	0.043	0.20	21.4			

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 11 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PF	E	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.035	0.20	17.3
					60	57.4	140.00	0.045	0.20	22.6
					60	58.0	144.00	0.063	0.20	31.4
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.066	0.20	33.1
					60	58.0	146.00	0.081	0.20	40.6
					60	57.6	150.80	0.045	0.20	22.5
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.040	0.20	20.0
					60	58.2	156.40	0.029	0.20	14.7
					60	58.0	162.00	0.026	0.20	13.0
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.026	0.20	13.0
					60	58.1	168.00	0.019	0.20	9.6
					60	58.1	173.01	0.014	0.20	7.1
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.000	0.20	0.0
					60	58.0	146.00	0.010	0.20	5.0
					60	57.6	150.80	0.007	0.20	3.3
					60	58.3	155.00	0.003	0.20	1.7
					60	58.1	165.01	0.008	0.20	4.0
					60	58.1	173.01	0.032	0.20	15.8

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 11 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PF	E	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.028	0.20	14.0
					60	58.0	144.00	0.058	0.20	29.0
					60	57.6	150.80	0.038	0.20	19.2
					60	58.2	156.40	0.021	0.20	10.6
					60	58.0	162.00	0.023	0.20	11.3
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.045	0.20	22.3
					60	57.6	150.80	0.035	0.20	17.5
					60	58.0	158.01	0.029	0.20	14.7
					60	58.1	165.01	0.024	0.20	12.1
					60	58.1	173.01	0.016	0.20	7.9
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.028	0.20	14.0
					60	58.0	144.00	0.048	0.20	24.0
					60	57.6	150.80	0.040	0.20	20.0
					60	58.0	158.01	0.031	0.20	15.6
					60	58.1	165.01	0.018	0.20	8.9
					60	58.1	173.01	0.013	0.20	6.3

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 12

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	BS	H	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.066	0.20	33.1
					60	57.4	140.00	0.073	0.20	36.5
					60	58.0	144.00	0.068	0.20	34.1
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.064	0.20	32.1
					60	58.0	146.00	0.064	0.20	32.1
					60	57.6	150.80	0.063	0.20	31.4
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.063	0.20	31.4
					60	58.2	156.40	0.077	0.20	38.3
					60	58.0	162.00	0.077	0.20	38.4
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.071	0.20	35.5
					60	58.1	168.00	0.077	0.20	38.7
					60	58.1	173.01	0.077	0.20	38.6
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.019	0.20	9.5
					60	58.0	146.00	0.026	0.20	13.0
					60	57.6	150.80	0.025	0.20	12.5
					60	58.3	155.00	0.033	0.20	16.3
					60	58.1	165.01	0.031	0.20	15.5
					60	58.1	173.01	0.053	0.20	26.4

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 12 (continued)

## Bystander MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	BS	H	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.053	0.20	26.5
					60	58.0	144.00	0.064	0.20	32.1
					60	57.6	150.80	0.067	0.20	33.4
					60	58.2	156.40	0.066	0.20	33.2
					60	58.0	162.00	0.059	0.20	29.5
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.040	0.20	20.0
					60	57.6	150.80	0.055	0.20	27.7
					60	58.0	158.01	0.069	0.20	34.3
					60	58.1	165.01	0.075	0.20	37.5
					60	58.1	173.01	0.079	0.20	39.7
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.055	0.20	27.4
					60	58.0	144.00	0.059	0.20	29.3
					60	57.6	150.80	0.063	0.20	31.4
					60	58.0	158.01	0.067	0.20	33.3
					60	58.1	165.01	0.058	0.20	28.8
					60	58.1	173.01	0.058	0.20	29.0

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 13

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PB	H	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.038	0.20	19.0
					60	57.4	140.00	0.073	0.20	36.5
					60	58.0	144.00	0.053	0.20	26.6
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.059	0.20	29.6
					60	58.0	146.00	0.037	0.20	18.4
					60	57.6	150.80	0.042	0.20	21.1
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.032	0.20	16.2
					60	58.2	156.40	0.027	0.20	13.5
					60	58.0	162.00	0.027	0.20	13.5
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.027	0.20	13.5
					60	58.1	168.00	0.026	0.20	13.2
					60	58.1	173.01	0.026	0.20	12.9
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.008	0.20	4.2
					60	58.0	146.00	0.016	0.20	8.2
					60	57.6	150.80	0.008	0.20	4.0
					60	58.3	155.00	0.016	0.20	7.9
					60	58.1	165.01	0.006	0.20	2.8
					60	58.1	173.01	0.015	0.20	7.6

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 13 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PB	H	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.038	0.20	19.0
					60	58.0	144.00	0.053	0.20	26.6
					60	57.6	150.80	0.042	0.20	21.1
					60	58.2	156.40	0.023	0.20	11.5
					60	58.0	162.00	0.019	0.20	9.7
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.020	0.20	9.9
					60	57.6	150.80	0.032	0.20	16.2
					60	58.0	158.01	0.027	0.20	13.5
					60	58.1	165.01	0.026	0.20	13.2
					60	58.1	173.01	0.030	0.20	15.0
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.038	0.20	19.0
					60	58.0	144.00	0.037	0.20	18.4
					60	57.6	150.80	0.037	0.20	18.6
					60	58.0	158.01	0.027	0.20	13.5
					60	58.1	165.01	0.016	0.20	7.8
					60	58.1	173.01	0.022	0.20	11.0

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 13 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PF	H	NA	HAD4006A, (136-144MHz)	60	57.6	136.00	0.029	0.20	14.3
					60	57.4	140.00	0.037	0.20	18.6
					60	58.0	144.00	0.032	0.20	16.1
				HAD4007A, (144- 150.8MHz)	60	58.0	144.00	0.032	0.20	16.1
					60	58.0	146.00	0.028	0.20	13.9
					60	57.6	150.80	0.020	0.20	10.0
				HAD4008A, (150.8- 162MHz)	60	57.6	150.80	0.028	0.20	14.0
					60	58.2	156.40	0.016	0.20	8.0
					60	58.0	162.00	0.016	0.20	8.0
				HAD4009A, (162-174MHz)	60	58.0	162.00	0.016	0.20	8.0
					60	58.1	168.00	0.013	0.20	6.3
					60	58.1	173.01	0.015	0.20	7.6
				RAD4010ARB, (136-174MHz)	60	57.6	136.00	0.003	0.20	1.4
					60	58.0	146.00	0.008	0.20	4.0
					60	57.6	150.80	0.008	0.20	4.0
					60	58.3	155.00	0.004	0.20	2.0
					60	58.1	165.01	0.006	0.20	2.8
					60	58.1	173.01	0.015	0.20	7.6

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

Table 13 (continued)

## Passenger MPE assessment to General Pop. / Uncontrolled Exposure Limits for roof mounted antennas

Trunk/ Roof	Test Position	E/H field	Angle (Degree)	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm <sup>2</sup> )	FCC & ICNIRP Limit	% To Spec Limit
Roof	PF	H	NA	HAD4016A, (132-162MHz)	60	57.6	136.00	0.029	0.20	14.3
					60	58.0	144.00	0.032	0.20	16.1
					60	57.6	150.80	0.024	0.20	11.9
					60	58.2	156.40	0.013	0.20	6.5
					60	58.0	162.00	0.014	0.20	6.9
				HAD4017A, (146-174MHz)	60	58.0	146.00	0.016	0.20	8.2
					60	57.6	150.80	0.020	0.20	10.0
					60	58.0	158.01	0.023	0.20	11.5
					60	58.1	165.01	0.013	0.20	6.3
					60	58.1	173.01	0.018	0.20	9.2
				HAD4021A, (136-174MHz)	60	57.6	136.00	0.024	0.20	12.2
					60	58.0	144.00	0.028	0.20	13.9
					60	57.6	150.80	0.028	0.20	14.0
					60	58.0	158.01	0.013	0.20	6.5
					60	58.1	165.01	0.010	0.20	5.0
					60	58.1	173.01	0.010	0.20	4.9

Note that the test frequencies that are outside the relevant FCC frequency allocations are presented in blue font.

**Conclusion**

The assessments for this device were performed with an output power range as indicated in section 15.0 Tables 6 - 13. The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification of 60W (136 - 174MHz). The highest power density results for the mobile device scaled to the maximum allowable power output are indicated in the Tables 14 and 15 for internal/passenger to the vehicle, and external/bystander to the vehicle.

**Table 14: RF Exposure Results for FCC Part 90 (150.8-173.4MHz)**


	VHF Band
<b>Passenger - Max Calculated Power Density</b>	0.140mW/cm <sup>2</sup>
<b>Bystander - Max Calculated Power Density</b>	0.181mW/cm <sup>2</sup>

**Table 15: RF Exposure Results (136-174MHz)**


	VHF Band
<b>Passenger - Max Calculated Power Density</b>	0.140mW/cm <sup>2</sup>
<b>Bystander - Max Calculated Power Density</b>	0.197mW/cm <sup>2</sup>

These MPE results herein demonstrate compliance to the FCC/IEEE Occupational/Controlled Exposure limit. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits.

**Appendix A - Illustration of Antenna Locations and Test Distances**

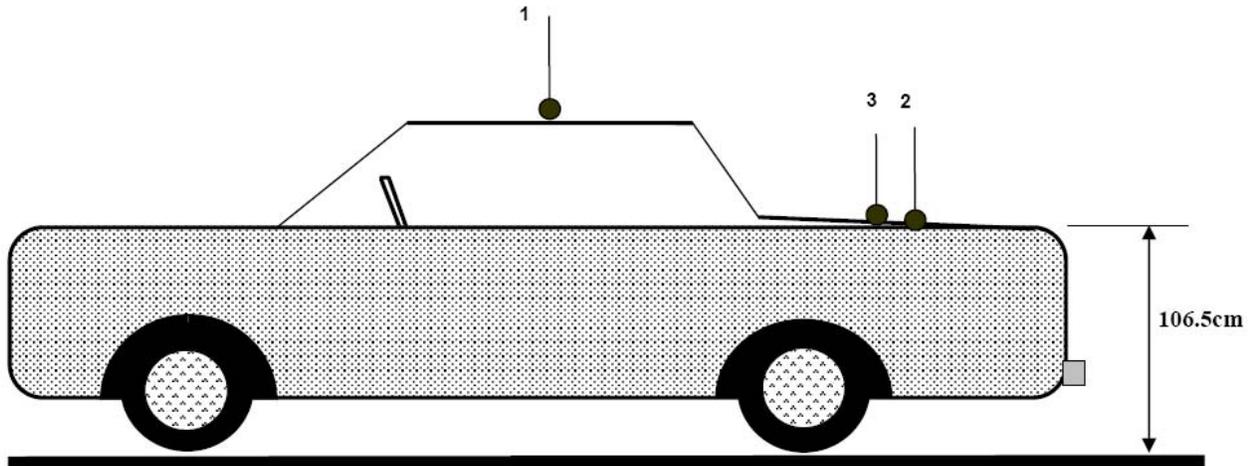

- 1 - Roof (center)
- 2 - Trunk (center)
- 3 - Trunk (85cm from back of the back seat)

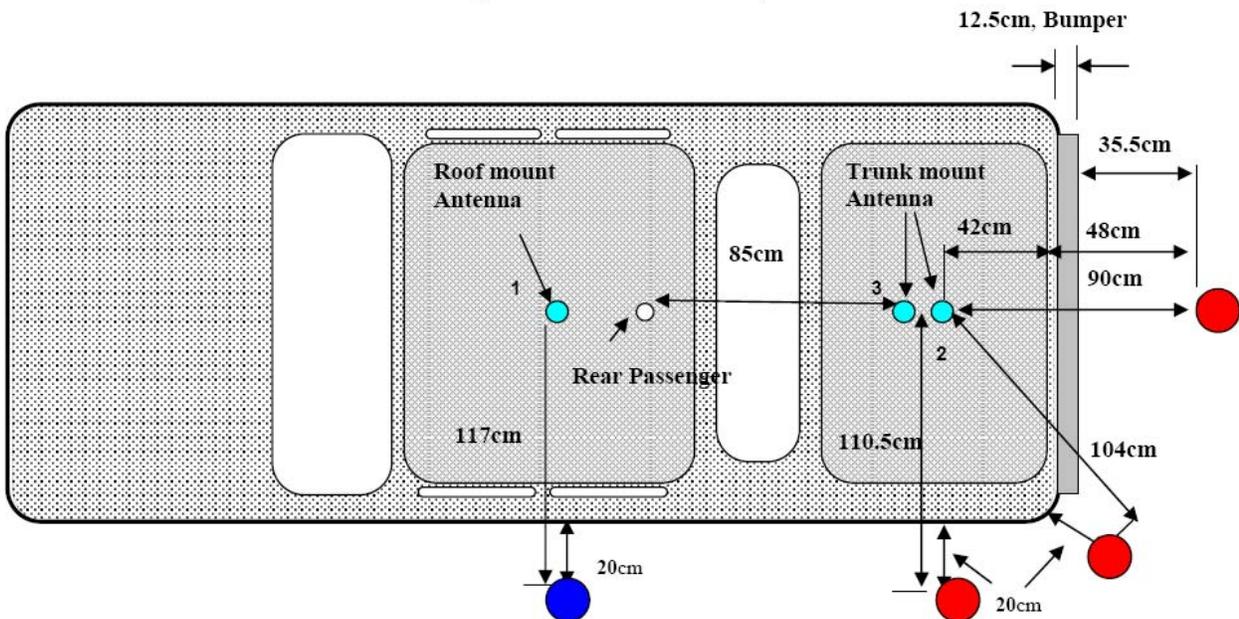

By-Stander Test Locations


- Roof Mount
- Trunk Mount

**Note:** The distance from the centered trunk-mounted antenna to the edge of the vehicle is 42cm and the distance from the edge of the vehicle to the survey probe sensor is 48cm.

Seat scan areas  
(Applicable to both front and back seats)

Meter - Probe

 Probe diameter is 5.5cm

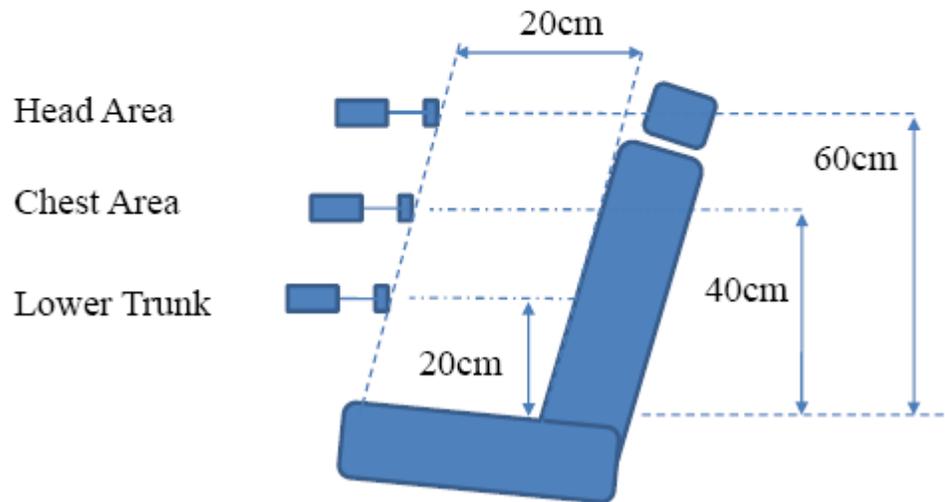

**Appendix B - Probe Calibration Certificates**

Service Test Report  
QAF 1126, 06/07  
Report ID: 82515



**Certificate of Test Conformance**

Page 1 of 1

Reference: S 000021039

Customer: AGILENT/MOTOROLA (FL)

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Not Applicable. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 using ETS-Lindgren Quality Management System internal procedures.

<b><u>Manufacturer</u></b>	ETS-Lindgren	<b><u>Status In</u></b>	In Tolerance
<b><u>Instrument Type</u></b>	RF Survey Meter	<b><u>Date Completed</u></b>	04-Jan-11
<b><u>Model</u></b>	HI-2200	<b><u>Status Out</u></b>	Compliant with Internal Quality Standards
<b><u>Serial Number/ID</u></b>	00086316		

**Remarks**

Performed functional test with customer probes.

I would like to take this opportunity to express our appreciation for using ETS-Lindgren for your EMI test equipment services and I am looking forward to continued business with your organization. Please feel free to contact our offices at (512) 531-6400, if you have any questions regarding this report.

Sincerely,

Richard Goodlow

Calibration Supervisor

Date Attested: 04-Jan-11



An ESCO Technologies Company  
 1301 Arrow Point Drive  
 Cedar Park, Texas 78613  
 (512) 531-6498



Cert I.D.: 82513

*Certificate of Calibration Conformance*  
 Page 1 of 4

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

<b>Manufacturer:</b>	ETS-Lindgren	<b>Operating Range:</b>	100kHz - 5GHz
<b>Model Number:</b>	E100	<b>Instrument Type:</b>	Isotropic Probe > 1 GHz
<b>Serial Number/ ID:</b>	00109011	<b>Date Code:</b>	
<b>Tracking Number:</b>	S000021039	<b>Alternate ID:</b>	
<b>Date Completed:</b>	04-Jan-11	<b>Customer:</b>	AGILENT/MOTOROLA (FL)
<b>Test Type:</b>	Standard Field, Field Strength		

**Calibration Uncertainty:** Std Field Method 10kHz - 18000 MHz, +/-0.7 dB, 26.5GHz - 40GHz, +/- 0.95 dB  
 k=2, (95% Confidence Level)

**Test Remarks:** Provided specific frequencies per customer request.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the National Institute for Standards and Technology (NIST). Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005.

**Standards and Equipment Used:**

Make / Model / Name / S/N / Recall Date					Condition of Instrument Upon Receipt:
Hewlett Packard	437B	HP Power Meter	3125U12370	15-Jun-11	In Tolerance to Internal Quality Standards
Fluke	6060B	RF Signal Generator	5680204	15-Jun-11	
Marconi	2022	Signal Generator	119019/077	23-Sep-11	<b>On Release:</b>
Agilent	E4419B	Power Meter	MY45104171	23-Sep-11	In Tolerance to Internal Quality Standards
Rohde & Schwarz	857.8008.02	Power Meter NRVD	100451	11-Mar-11	
Hewlett Packard	83650L	Synthesized Sweep Gen	3844A00422	29-Jan-11	

Calibration Completed By  
 Alan Schifferdecker, Calibration Technician

Attested and Issued on 04-Jan-11  
 Richard Goodlow, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005. QAF 1127 (06/07)



**ETS-LINDGREN™**  
An ESCO Technologies Company  
**Frequency Response Calibration Factors**  
**Model E100 Serial Number 00109011**  
**Date of Calibration 4 Jan 2011**

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			
		X	Y	Z	X	Y	Z	Avg
1.00	8.01	6.72	6.81	6.79	1.19	1.18	1.19	1.18
1.00	19.91	16.99	17.06	16.81	1.18	1.16	1.18	1.17
1.00	69.94	57.57	58.72	57.39	1.21	1.19	1.22	1.21
1.00	124.57	101.46	104.06	102.37	1.23	1.20	1.22	1.21
15.00	7.96	7.86	7.90	7.83	1.01	1.01	1.02	1.01
15.00	20.05	19.63	19.82	19.48	1.02	1.01	1.03	1.02
15.00	70.00	69.10	69.69	68.73	1.01	1.00	1.02	1.01
15.00	124.88	122.58	123.22	122.40	1.02	1.01	1.02	1.02
30.00	7.98	8.01	8.05	7.96	1.00	0.99	1.00	1.00
30.00	19.92	19.97	19.95	19.75	1.00	1.00	1.01	1.00
30.00	70.27	70.84	71.25	70.61	0.99	0.99	1.00	0.99
30.00	125.59	125.86	126.38	125.94	1.00	0.99	1.00	1.00
75.00	7.98	8.06	8.10	8.14	0.99	0.98	0.98	0.98
75.00	19.98	20.08	20.34	20.37	0.99	0.98	0.98	0.99
75.00	69.66	71.26	71.78	71.67	0.98	0.97	0.97	0.97
75.00	124.36	126.52	127.22	126.98	0.98	0.98	0.98	0.98
100.00	8.00	8.31	8.35	8.32	0.97	0.96	0.95	0.96
100.00	19.94	20.43	20.62	20.69	0.98	0.97	0.96	0.97
100.00	69.60	71.97	72.44	72.45	0.97	0.96	0.96	0.96
100.00	124.78	129.20	129.68	129.76	0.97	0.96	0.96	0.96
150.00	8.03	8.22	8.28	8.36	0.98	0.97	0.96	0.97
150.00	20.04	20.29	20.56	20.74	0.99	0.97	0.97	0.98
150.00	69.71	71.24	71.85	72.06	0.98	0.97	0.97	0.97
150.00	124.96	127.79	128.59	128.81	0.98	0.97	0.97	0.97
200.00	7.96	8.42	8.54	8.67	0.95	0.93	0.92	0.93
200.00	19.94	20.85	21.26	21.50	0.96	0.94	0.93	0.94
200.00	69.91	73.96	75.03	75.43	0.94	0.93	0.93	0.93
200.00	125.22	132.74	134.34	135.14	0.94	0.93	0.93	0.93
250.00	8.01	8.24	8.23	8.39	0.97	0.97	0.96	0.97
250.00	19.97	20.34	20.44	20.74	0.98	0.98	0.96	0.97
250.00	69.73	72.74	71.86	72.46	0.97	0.97	0.96	0.96
250.00	124.77	129.17	128.53	129.40	0.97	0.97	0.97	0.97
300.00	7.99	8.19	8.22	8.40	0.97	0.97	0.95	0.97
300.00	19.98	20.29	20.42	20.78	0.99	0.98	0.96	0.98
300.00	69.98	72.15	72.24	72.93	0.97	0.97	0.96	0.97
300.00	125.38	130.27	130.16	131.02	0.96	0.96	0.96	0.96
400.00	7.98	8.15	8.17	8.34	0.98	0.98	0.95	0.97
400.00	19.89	20.07	20.26	20.67	0.99	0.98	0.96	0.98
400.00	69.66	71.58	71.93	72.74	0.97	0.97	0.96	0.97
400.00	124.82	128.40	128.45	129.35	0.97	0.97	0.96	0.97
500.00	8.01	7.90	8.00	8.20	1.01	1.00	0.98	1.00
500.00	20.01	19.58	19.94	20.36	1.02	1.00	0.98	1.00
500.00	70.01	69.21	70.57	70.91	1.01	1.00	0.98	1.00
500.00	124.92	123.45	124.93	125.25	1.01	1.00	0.99	1.00
600.00	8.00	7.74	7.78	7.97	1.03	1.03	1.00	1.02
600.00	19.99	19.16	19.35	19.81	1.04	1.03	1.01	1.03
600.00	69.71	67.99	68.18	68.96	1.03	1.02	1.01	1.02
600.00	125.01	121.68	121.62	123.11	1.03	1.03	1.02	1.02




**Frequency Response Calibration Factors**  
**Model E100 Serial Number 00109011**  
**Date of Calibration 4 Jan 2011**

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			Avg
		X	Y	Z	X	Y	Z	
700.00	7.98	7.54	7.55	7.75	1.06	1.06	1.03	1.05
700.00	19.95	18.65	18.77	19.21	1.07	1.06	1.04	1.06
700.00	70.29	66.67	66.74	67.70	1.05	1.05	1.04	1.05
700.00	125.03	118.33	118.33	119.37	1.05	1.06	1.05	1.05
800.00	8.02	7.36	7.46	7.65	1.09	1.08	1.05	1.07
800.00	20.01	18.20	18.51	18.79	1.10	1.09	1.06	1.08
800.00	70.11	64.66	65.16	66.08	1.09	1.08	1.06	1.07
800.00	124.54	114.33	115.44	115.49	1.09	1.08	1.08	1.08
900.00	8.01	7.73	7.90	8.11	1.04	1.01	0.99	1.01
900.00	20.03	19.06	19.57	20.19	1.05	1.02	1.00	1.02
900.00	70.05	67.21	68.79	69.68	1.04	1.02	1.01	1.02
900.00	125.46	120.34	121.90	123.03	1.05	1.03	1.02	1.03
1000.00	8.01	8.03	8.09	8.31	1.00	0.99	0.96	0.98
1000.00	19.92	19.81	19.86	20.44	1.01	1.00	0.98	0.99
1000.00	69.72	69.27	70.09	71.56	1.00	1.00	0.97	0.99
1000.00	125.71	124.36	124.64	125.68	1.01	1.01	1.00	1.01
2000.00	20.37	20.04	19.84	20.46	1.02	1.03	1.00	1.01
2450.00	20.04	18.11	19.40	19.62	1.11	1.03	1.02	1.05
3000.00	19.97	19.95	19.47	19.27	1.00	1.03	1.04	1.02
3500.00	19.93	20.40	22.00	20.96	0.98	0.91	0.95	0.94
4000.00	20.05	20.37	19.96	20.00	0.98	1.00	1.00	1.00
5000.00	19.80	14.46	15.77	14.64	1.37	1.26	1.35	1.33
5500.00	19.98	15.05	15.28	15.18	1.33	1.31	1.32	1.32
6000.00	20.07	13.45	15.63	15.58	1.49	1.28	1.29	1.35



### PROBE ROTATIONAL RESPONSE

**Model** E100  
**S/N** 00109011  
**Date** 04-Jan-2011  
**Time** 14:33:16  
**Variation** 0.31 dB

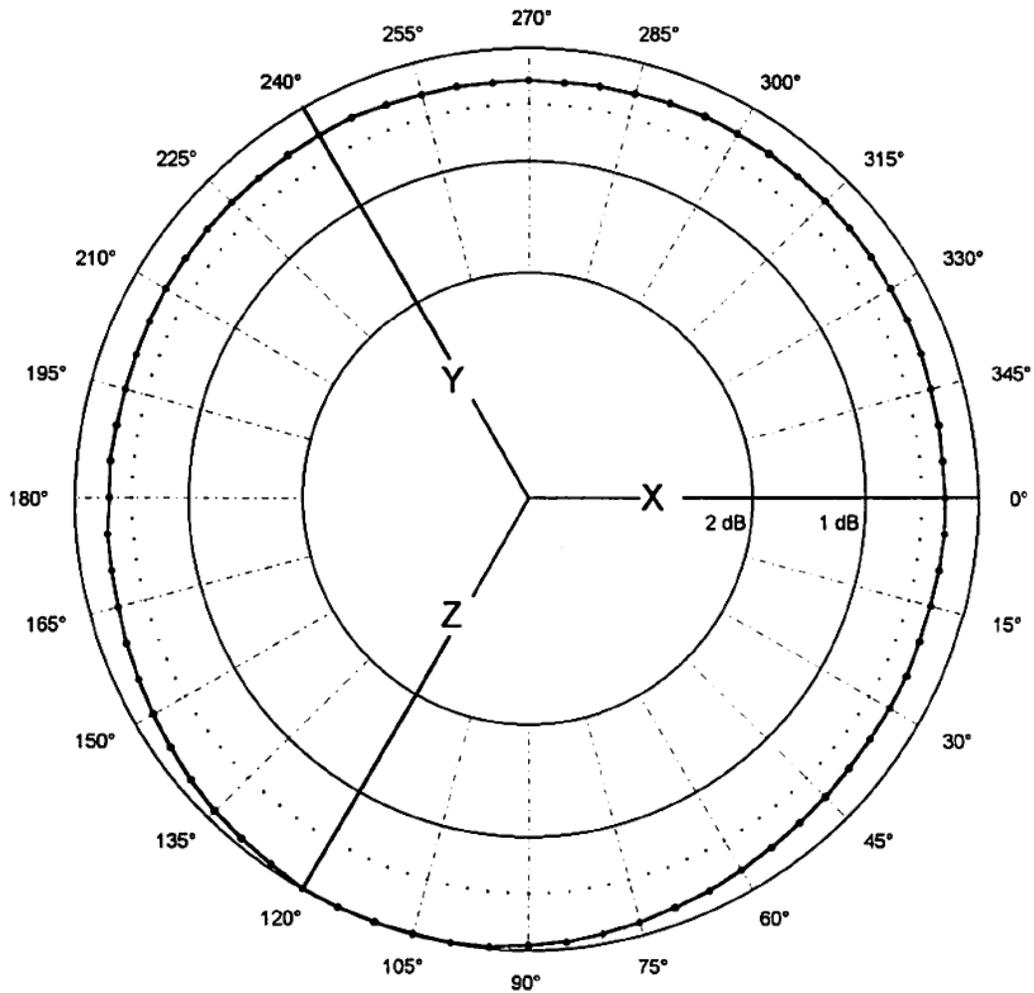

• Isotropic response measured in a 20 V/m field at 400 MHz



Cert I.D.: 82514

**Certificate of Calibration Conformance**

Page 1 of 2

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

<b>Manufacturer:</b>	ETS-Lindgren	<b>Operating Range:</b>	5-300MHz / 30mA/m-10A/m
<b>Model Number:</b>	H200	<b>Instrument Type:</b>	Isotropic Magnetic Field Probe (2)
<b>Serial Number/ ID:</b>	00084230	<b>Date Code:</b>	
<b>Tracking Number:</b>	S000021039	<b>Alternate ID:</b>	
<b>Date Completed:</b>	04-Jan-11	<b>Customer:</b>	AGILENT/MOTOROLA (FL)
<b>Test Type:</b>	Standard Field, Field Strength		
<b>Calibration Uncertainty:</b>	Direct Field Method	1.15dB	
k=2, (95% Confidence Level)			

**Test Remarks:** Provided specified frequencies per customer request.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the National Institute for Standards and Technology (NIST). Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005.

**Standards and Equipment Used:**

Make / Model / Name / S/N / Recall Date				Condition of Instrument	
Hewlett Packard	8648C	Signal Generator	3836A04299	23-Sep-11	Upon Receipt: In Tolerance to Internal Quality Standards
Agilent	E9304A	Agilent Power Sensor	MY41497694	11-Feb-11	
Hewlett Packard	E4419B	Power Meter	US39250717	22-Sep-11	On Release: In Tolerance to Internal Quality Standards

Calibration Completed By  
 Alan Schifferdecker, Calibration Technician

Attested and Issued on 04-Jan-11  
 Richard Goodlow, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005. QAF 1127 (06/07)





Cert I.D.: 70578  
Lab Code 115844/1207.01

**ETS-LINDGREN™**  
An ESCO Technologies Company  
1301 Arrow Point Drive  
Cedar Park, Texas 78613  
(512) 531-6498

**ETS-LINDGREN™**  
An ESCO Technologies Company  
Track# S000015131 Ltd Cal   
By AS Date 04-Dec-08  
Next Cal Due \_\_\_\_\_  
www.ets-lindgren.com

*Certificate of Calibration Conformance*

Page 1 of 4

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2005, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM! 5305 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

<b>Manufacturer:</b>	ETS-Lindgren	<b>Operating Range:</b>	100kHz - 5GHz
<b>Model Number:</b>	E100	<b>Instrument Type:</b>	Isotropic Probe > 1 GHz
<b>Serial Number/ ID:</b>	00083370	<b>Date Code:</b>	
<b>Tracking Number:</b>	S000015131	<b>Alternate ID:</b>	
<b>Date Completed:</b>	04-Dec-08	<b>Customer:</b>	MOTOROLA INC. (FL)
<b>Test Type:</b>	Standard Field, Field Strength		

**Calibration Uncertainty:** Std Field Method 10kHz - 18000 MHz, +/-0.7 dB, 26.5GHz - 40GHz, +/- 0.95 dB  
k=2, (95% Confidence Level)

**Test Remarks:** Provided special data points per customer request.

Calibration Traceability: All Measuring and Test Equipment (M/TE) identified below are traceable to the National Institute for Standards and Technology (NIST). Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005.

**Standards and Equipment Used:**

Make / Model / Name / S/N / Recall Date					Condition of Instrument Upon Receipt:
Boonton	9200B	RF Voltmeter	280601AE	29-Sep-09	In Tolerance to Internal Quality Standards
Hewlett Packard	437B	HP Power Meter	3125U12370	21-May-09	
Fluke	6060B	RF Signal Generator	5690204	20-May-09	<b>On Release:</b>
Marconi	2022	Signal Generator	119019/077	02-Oct-09	In Tolerance to Internal Quality Standards
Rohde & Schwarz	857.8008.0	Power Meter NRVD	828110/019	27-Dec-08	
Hewlett Packard	83620B	Signal Generator	3722A00541	19-Sep-09	

\_\_\_\_\_  
Calibration Completed By  
Alan Schifferdecker, Calibration Technician

\_\_\_\_\_  
Attested and Issued on 04-Dec-08  
Justin Tarr, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005. QAF 1127 (06/07)



**Frequency Response Calibration Factors**  
**Model E100 Serial Number 00083370**  
**Date of Calibration 4 Dec 2008**

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			
		X	Y	Z	X	Y	Z	Avg
1.00	7.97	6.74	6.71	6.60	1.18	1.19	1.21	1.19
1.00	20.01	17.05	16.99	16.75	1.17	1.18	1.19	1.18
1.00	69.93	59.37	59.09	58.36	1.18	1.18	1.20	1.19
1.00	124.30	105.11	104.67	103.34	1.18	1.19	1.20	1.19
15.00	8.02	7.86	7.79	7.76	1.02	1.03	1.03	1.03
15.00	19.96	19.62	19.45	19.42	1.02	1.03	1.03	1.02
15.00	70.28	68.97	68.30	68.14	1.02	1.03	1.03	1.03
15.00	125.20	122.31	121.06	120.78	1.02	1.03	1.04	1.03
30.00	8.02	8.00	7.92	7.89	1.00	1.01	1.02	1.01
30.00	20.11	20.09	19.88	19.85	1.00	1.01	1.01	1.01
30.00	69.83	69.30	68.56	68.31	1.01	1.02	1.02	1.02
30.00	124.31	122.47	121.21	120.74	1.01	1.03	1.03	1.02
75.00	8.03	8.24	8.23	8.12	0.97	0.98	0.99	0.98
75.00	20.11	20.71	20.64	20.46	0.97	0.97	0.98	0.98
75.00	70.04	72.11	71.83	71.03	0.97	0.98	0.99	0.98
75.00	124.66	128.20	127.66	126.29	0.97	0.98	0.99	0.98
100.00	8.02	8.17	8.13	8.04	0.98	0.99	1.00	0.99
100.00	20.04	20.45	20.33	20.21	0.98	0.99	0.99	0.99
100.00	70.33	71.31	70.79	70.25	0.99	0.99	1.00	0.99
100.00	124.43	125.68	124.79	123.57	0.99	1.00	1.01	1.00
150.00	8.03	8.14	8.14	8.02	0.99	0.99	1.00	0.99
150.00	19.96	20.33	20.31	20.09	0.98	0.98	0.99	0.99
150.00	70.14	71.64	71.55	70.58	0.98	0.98	0.99	0.98
150.00	125.58	128.56	128.42	126.52	0.98	0.98	0.99	0.98
200.00	8.00	8.43	8.53	8.28	0.95	0.94	0.97	0.95
200.00	19.97	21.08	21.37	20.85	0.95	0.93	0.96	0.95
200.00	69.86	74.08	74.82	72.92	0.94	0.93	0.96	0.94
200.00	124.95	132.17	134.06	130.32	0.95	0.93	0.96	0.95
250.00	7.97	8.11	7.88	7.96	0.98	1.01	1.00	1.00
250.00	19.99	20.55	19.75	20.20	0.97	1.01	0.99	0.99
250.00	70.06	72.32	70.37	70.59	0.97	1.00	0.99	0.99
250.00	125.12	128.64	124.26	125.28	0.97	1.01	1.00	0.99
300.00	8.00	8.08	7.94	7.97	0.99	1.01	1.00	1.00
300.00	20.03	20.57	20.25	20.34	0.97	0.99	0.98	0.98
300.00	69.79	72.57	71.30	71.56	0.96	0.98	0.98	0.97
300.00	125.28	130.82	128.42	128.85	0.96	0.98	0.97	0.97
400.00	8.00	8.10	7.97	7.97	0.99	1.00	1.00	1.00
400.00	19.89	20.15	19.87	19.89	0.99	1.00	1.00	1.00
400.00	69.67	70.49	69.32	69.33	0.99	1.01	1.00	1.00
400.00	125.09	126.27	124.24	124.10	0.99	1.01	1.01	1.00
500.00	8.01	7.89	7.95	7.68	1.02	1.01	1.03	1.02
500.00	19.94	19.59	19.74	19.37	1.02	1.01	1.03	1.02
500.00	70.28	69.65	70.06	68.64	1.01	1.00	1.02	1.01
500.00	124.58	123.19	123.63	121.24	1.01	1.01	1.03	1.02
600.00	8.01	7.65	7.63	7.61	1.04	1.05	1.06	1.05
600.00	20.01	19.34	19.09	19.06	1.04	1.05	1.05	1.04
600.00	69.90	67.55	67.54	66.46	1.03	1.04	1.05	1.04
600.00	125.28	120.21	120.01	119.47	1.03	1.05	1.05	1.04




**Frequency Response Calibration Factors**  
**Model E100 Serial Number 00083370**  
**Date of Calibration 4 Dec 2008**

Frequency (MHz)	Applied V/m	Probe Reading			Correction Factor			Avg
		X	Y	Z	X	Y	Z	
700.00	7.96	7.56	7.35	7.42	1.05	1.08	1.07	1.07
700.00	20.10	19.21	18.63	18.87	1.05	1.08	1.06	1.06
700.00	70.26	67.25	65.16	65.96	1.05	1.08	1.07	1.06
700.00	125.09	119.09	115.24	116.69	1.05	1.09	1.07	1.07
800.00	8.04	7.34	7.28	7.22	1.10	1.10	1.11	1.10
800.00	20.02	18.38	18.27	18.07	1.09	1.09	1.11	1.10
800.00	69.85	64.15	63.68	63.03	1.09	1.10	1.11	1.10
800.00	124.82	113.69	112.90	111.64	1.10	1.10	1.12	1.11
900.00	7.97	7.70	7.78	7.56	1.03	1.02	1.05	1.04
900.00	20.03	19.42	19.58	19.07	1.03	1.02	1.05	1.03
900.00	70.21	67.77	68.79	66.47	1.04	1.02	1.06	1.04
900.00	124.81	119.63	120.40	117.19	1.04	1.04	1.06	1.05
1000.00	7.99	8.09	7.90	7.89	0.99	1.01	1.01	1.00
1000.00	19.92	20.17	19.63	19.74	0.99	1.01	1.01	1.00
1000.00	69.78	70.08	68.11	68.35	1.00	1.02	1.02	1.01
1000.00	124.80	124.87	120.11	120.41	1.01	1.04	1.03	1.02
2000.00	19.92	19.09	18.99	20.04	1.04	1.05	0.99	1.03
2450.00	20.38	19.27	18.50	17.75	1.06	1.10	1.15	1.10
3000.00	20.36	19.27	18.66	19.77	1.06	1.09	1.03	1.06
3500.00	20.02	21.99	21.67	19.57	0.91	0.92	1.02	0.95
4000.00	19.99	19.75	18.25	19.57	1.01	1.10	1.02	1.04
5000.00	19.97	14.40	13.92	15.38	1.39	1.43	1.30	1.37



### PROBE ROTATIONAL RESPONSE

**Model** E100  
**S/N** 00083370  
**Date** 04-Dec-2008  
**Time** 20:40:05  
**Variation** 0.59 dB

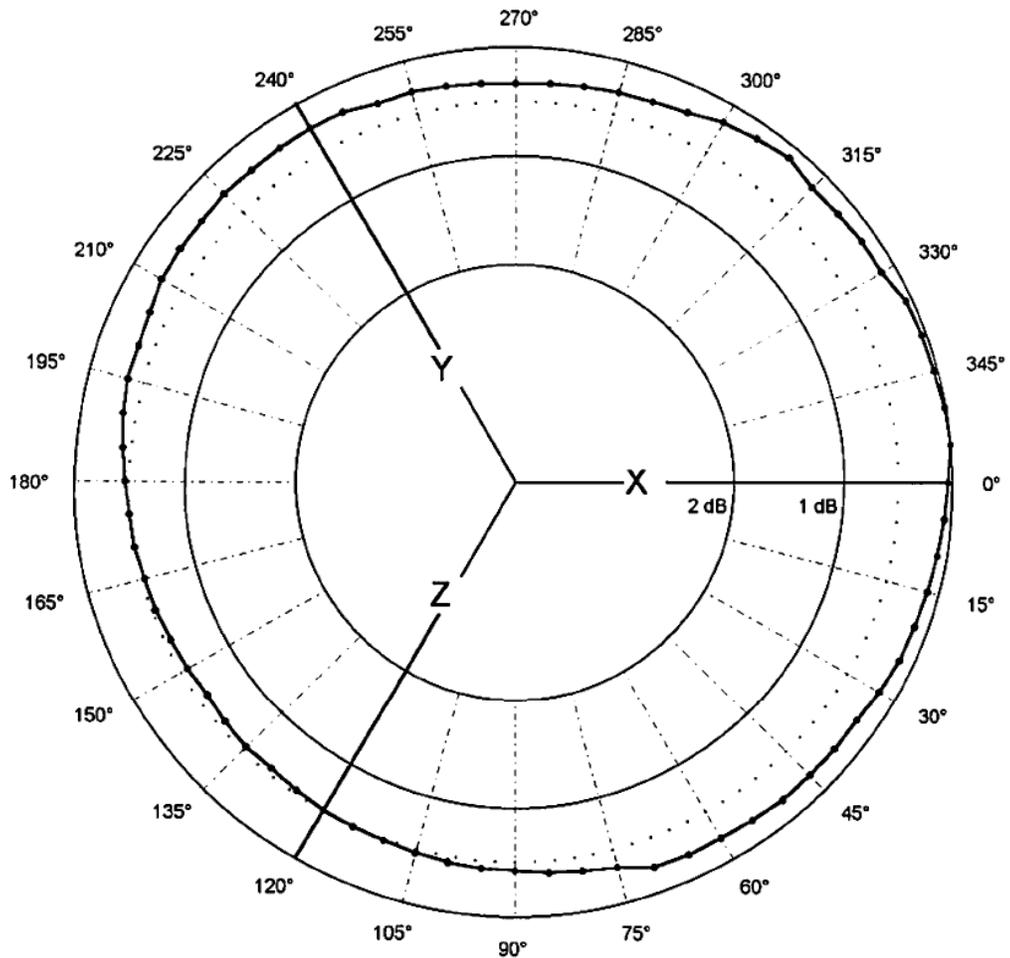

• Isotropic response measured in a 20 V/m field at 400 MHz



**Appendix C - Photos of Assessed Antennas**

(Refer to Exhibit 7B)

**Appendix D – MPE Measurement Results**

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99	BS	0.03	0.05	0.06	0.07	0.1	0.19	0.32	0.39	0.35	0.31	0.5	0.187	0.093	0.096
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	BS	0.03	0.06	0.08	0.09	0.12	0.26	0.38	0.44	0.39	0.40	0.5	0.225	0.108	0.112
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	BS	0.03	0.05	0.08	0.08	0.13	0.25	0.38	0.40	0.38	0.37	0.5	0.215	0.103	0.108
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	BS	0.05	0.08	0.09	0.1	0.15	0.29	0.42	0.47	0.44	0.45	0.5	0.254	0.123	0.127
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	BS	0.04	0.06	0.07	0.08	0.13	0.24	0.34	0.35	0.32	0.35	0.5	0.198	0.093	0.096
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	BS	0.05	0.07	0.09	0.12	0.20	0.35	0.46	0.47	0.48	0.49	0.5	0.278	0.128	0.132
45 (corner)																							
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	BS	0.10	0.17	0.17	0.14	0.22	0.31	0.33	0.33	0.32	0.30	0.5	0.239	0.110	0.114
90 (side)																							
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	BS	0.07	0.10	0.08	0.13	0.29	0.35	0.35	0.31	0.28	0.26	0.5	0.222	0.102	0.105

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99		PB	0.04	0.04				
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	PB	0.06	0.05	0.03	0.5	0.047	0.022	0.023
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	PB	0.04	0.07	0.05	0.5	0.053	0.026	0.027
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	PB	0.09	0.1	0.08	0.5	0.090	0.044	0.045
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	PB	0.15	0.18	0.19	0.5	0.173	0.081	0.084
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	PB	0.35	0.37	0.42	0.5	0.380	0.175	0.181
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99	PF	0.01	0.00	0.00	0.5	0.003	0.002	0.002
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	PF	0.02	0.02	0.03	0.5	0.023	0.011	0.012
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	PF	0.01	0.02	0.04	0.5	0.023	0.011	0.012
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	PF	0.01	0.01	0.01	0.5	0.010	0.005	0.005
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	PF	0.01	0.04	0.06	0.5	0.037	0.017	0.018
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	PF	0.08	0.09	0.16	0.5	0.110	0.051	0.052

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm <sup>2</sup> )	Calc. P.D. (mW/cm <sup>2</sup> )	Max Calc. P.D. (mW/cm <sup>2</sup> )
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79	BS	0.03	0.02	0.03	0.03	0.04	0.05	0.08	0.11	0.13	0.15	0.5	0.169	0.067	0.070
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	BS	0.03	0.03	0.03	0.04	0.05	0.07	0.09	0.12	0.14	0.15	0.5	0.075	0.080	0.083
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	BS	0.03	0.03	0.04	0.05	0.06	0.07	0.09	0.11	0.14	0.14	0.5	0.076	0.082	0.086
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	BS	0.03	0.03	0.05	0.06	0.07	0.09	0.11	0.14	0.15	0.16	0.5	0.299	0.109	0.112
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	BS	0.04	0.04	0.04	0.05	0.06	0.07	0.10	0.12	0.13	0.14	0.5	0.079	0.085	0.088
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	BS	0.05	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16	0.16	0.5	0.101	0.136	0.140
45 (corner)																							
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	BS	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.13	0.5	0.094	0.118	0.121
90 (side)																							
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	BS	0.04	0.06	0.07	0.09	0.10	0.10	0.11	0.11	0.12	0.11	0.5	0.091	0.110	0.114

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79		PB	0.03	0.03				
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	PB	0.02	0.02	0.03	0.5	0.023	0.008	0.008
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	PB	0.03	0.02	0.02	0.5	0.023	0.008	0.008
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	PB	0.04	0.03	0.02	0.5	0.034	0.012	0.013
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	PB	0.06	0.04	0.04	0.5	0.047	0.030	0.031
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	PB	0.10	0.08	0.07	0.5	0.083	0.092	0.095
Trunk	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79	PF	0.02	0.02	0.01	0.5	0.010	0.004	0.004
Trunk	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	PF	0.02	0.02	0.02	0.5	0.020	0.006	0.006
Trunk	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	PF	0.03	0.02	0.03	0.5	0.027	0.010	0.011
Trunk	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	PF	0.02	0.02	0.02	0.5	0.015	0.006	0.006
Trunk	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	PF	0.01	0.02	0.02	0.5	0.017	0.004	0.004
Trunk	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	PF	0.03	0.04	0.05	0.5	0.040	0.021	0.022

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	E	0.95	BS	0.04	0.10	0.12	0.11	0.10	0.12	0.16	0.20	0.19	0.18	0.5	0.132	0.063	0.065
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	E	0.96	BS	0.05	0.10	0.11	0.10	0.09	0.10	0.17	0.21	0.20	0.19	0.5	0.132	0.063	0.066
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	E	0.96	BS	0.05	0.08	0.08	0.06	0.07	0.12	0.18	0.23	0.24	0.22	0.5	0.133	0.064	0.066
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	E	0.96	BS	0.04	0.08	0.08	0.08	0.08	0.12	0.18	0.22	0.23	0.22	0.5	0.133	0.064	0.066
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	E	0.96	BS	0.04	0.08	0.08	0.08	0.08	0.13	0.20	0.26	0.24	0.26	0.5	0.145	0.070	0.072
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	E	0.96	BS	0.03	0.06	0.05	0.05	0.08	0.14	0.21	0.24	0.27	0.24	0.5	0.137	0.066	0.069
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	BS	0.03	0.05	0.04	0.06	0.09	0.16	0.20	0.25	0.25	0.21	0.5	0.134	0.064	0.067
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	BS	0.04	0.06	0.06	0.06	0.12	0.21	0.25	0.30	0.25	0.25	0.5	0.160	0.076	0.078
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58.0	CW	E	0.94	BS	0.03	0.04	0.04	0.08	0.11	0.19	0.26	0.27	0.26	0.24	0.5	0.152	0.071	0.074
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	E	0.94	BS	0.03	0.04	0.03	0.06	0.12	0.18	0.22	0.23	0.25	0.21	0.5	0.137	0.064	0.067
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	E	0.93	BS	0.02	0.03	0.03	0.05	0.16	0.23	0.24	0.28	0.23	0.22	0.5	0.149	0.069	0.072
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	BS	0.02	0.03	0.04	0.09	0.18	0.22	0.26	0.31	0.29	0.25	0.5	0.169	0.078	0.080
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99	BS	0.01	0.02	0.03	0.02	0.02	0.03	0.06	0.1	0.15	0.19	0.5	0.063	0.031	0.032
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	BS	0.02	0.05	0.04	0.03	0.02	0.04	0.08	0.13	0.18	0.22	0.5	0.081	0.039	0.040
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	BS	0.02	0.04	0.04	0.02	0.02	0.04	0.07	0.12	0.17	0.20	0.5	0.074	0.036	0.037
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	BS	0.02	0.03	0.02	0.01	0.02	0.06	0.12	0.18	0.23	0.25	0.5	0.094	0.046	0.047
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	BS	0.02	0.02	0.02	0.01	0.05	0.08	0.11	0.15	0.17	0.20	0.5	0.083	0.039	0.040
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	BS	0.02	0.03	0.02	0.04	0.10	0.15	0.20	0.24	0.26	0.31	0.5	0.137	0.063	0.065

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	E	0.95	BS	0.03	0.07	0.09	0.08	0.10	0.10	0.14	0.16	0.15	0.15	0.5	0.107	0.051	0.053
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	E	0.96	BS	0.05	0.09	0.08	0.05	0.06	0.11	0.17	0.23	0.24	0.22	0.5	0.130	0.062	0.065
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	BS	0.04	0.04	0.05	0.05	0.09	0.14	0.23	0.27	0.26	0.22	0.5	0.139	0.067	0.070
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	BS	0.03	0.05	0.04	0.03	0.08	0.15	0.22	0.27	0.27	0.24	0.5	0.138	0.066	0.068
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	E	0.94	BS	0.02	0.03	0.02	0.05	0.12	0.18	0.22	0.23	0.22	0.19	0.5	0.128	0.060	0.062
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	E	0.96	BS	0.03	0.05	0.05	0.03	0.04	0.07	0.11	0.15	0.17	0.16	0.5	0.086	0.041	0.043
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	BS	0.02	0.04	0.04	0.04	0.07	0.12	0.19	0.23	0.22	0.20	0.5	0.117	0.056	0.059
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	E	0.95	BS	0.03	0.04	0.03	0.05	0.14	0.23	0.27	0.32	0.29	0.25	0.5	0.165	0.078	0.081
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	BS	0.03	0.03	0.03	0.08	0.16	0.24	0.24	0.27	0.25	0.23	0.23	0.156	0.034	0.035
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	BS	0.02	0.02	0.03	0.09	0.20	0.23	0.23	0.23	0.28	0.26	0.5	0.159	0.073	0.076
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	E	0.95	BS	0.04	0.08	0.09	0.09	0.08	0.10	0.14	0.17	0.17	0.15	0.5	0.111	0.053	0.055
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	E	0.96	BS	0.05	0.10	0.09	0.06	0.06	0.11	0.17	0.22	0.22	0.19	0.5	0.127	0.061	0.063
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	BS	0.04	0.06	0.04	0.04	0.09	0.14	0.22	0.25	0.25	0.22	0.5	0.135	0.065	0.068
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	E	0.95	BS	0.03	0.04	0.03	0.04	0.12	0.20	0.25	0.30	0.26	0.24	0.5	0.151	0.072	0.074
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	BS	0.02	0.03	0.03	0.05	0.12	0.17	0.17	0.19	0.19	0.18	0.5	0.115	0.054	0.056
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	BS	0.01	0.02	0.02	0.07	0.15	0.16	0.21	0.23	0.22	0.20	0.5	0.129	0.059	0.061

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	E	0.95	PB	0.24	0.16	0.11	0.5	0.170	0.081	0.084
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	E	0.96	PB	0.43	0.41	0.34	0.5	0.393	0.189	0.197
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	E	0.96	PB	0.24	0.28	0.28	0.5	0.267	0.128	0.132
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	E	0.96	PB	0.25	0.31	0.28	0.5	0.280	0.134	0.139
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	E	0.96	PB	0.14	0.18	0.17	0.5	0.163	0.078	0.081
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	E	0.96	PB	0.10	0.18	0.19	0.5	0.157	0.075	0.078
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	PB	0.09	0.18	0.19	0.5	0.153	0.074	0.077
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	PB	0.12	0.19	0.14	0.5	0.150	0.071	0.073
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58	CW	E	0.94	PB	0.17	0.09	0.15	0.5	0.137	0.064	0.066
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	E	0.94	PB	0.22	0.09	0.12	0.5	0.143	0.067	0.070
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	E	0.93	PB	0.15	0.23	0.22	0.5	0.200	0.093	0.096
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PB	0.11	0.10	0.14	0.5	0.117	0.054	0.055
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99	PB	0.02	0.03	0.02	0.5	0.023	0.012	0.012
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	PB	0.01	0.03	0.04	0.5	0.027	0.013	0.013
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	PB	0.01	0.03	0.03	0.5	0.023	0.011	0.012
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	PB	0.04	0.07	0.07	0.5	0.060	0.029	0.030
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	PB	0.02	0.03	0.04	0.5	0.030	0.014	0.015
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	PB	0.13	0.12	0.11	0.5	0.120	0.055	0.057

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.			Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	Head	Chest	Lower Trunk				
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	E	0.95	PB	0.20	0.13	0.10	0.5	0.143	0.068	0.071
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	E	0.96	PB	0.17	0.26	0.25	0.5	0.227	0.109	0.113
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	PB	0.16	0.25	0.19	0.5	0.200	0.096	0.100
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	PB	0.10	0.15	0.13	0.5	0.127	0.060	0.062
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	E	0.94	PB	0.15	0.10	0.09	0.5	0.113	0.053	0.055
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	E	0.96	PB	0.10	0.11	0.11	0.5	0.107	0.051	0.053
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	PB	0.08	0.16	0.16	0.5	0.133	0.064	0.067
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	E	0.95	PB	0.11	0.06	0.03	0.5	0.067	0.032	0.033
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	PB	0.18	0.10	0.10	0.5	0.127	0.060	0.061
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PB	0.09	0.07	0.14	0.5	0.100	0.046	0.048
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	E	0.95	PB	0.22	0.14	0.09	0.5	0.150	0.071	0.074
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	E	0.96	PB	0.24	0.28	0.24	0.5	0.253	0.122	0.126
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	PB	0.08	0.17	0.18	0.5	0.143	0.069	0.072
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	E	0.95	PB	0.07	0.04	0.03	0.5	0.047	0.022	0.023
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	PB	0.13	0.09	0.07	0.5	0.097	0.045	0.047
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PB	0.08	0.09	0.10	0.5	0.090	0.041	0.043

MPE calculations are defined in section 13.0.

MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	E	0.95		PF	0.07	0.07				
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	E	0.96	PF	0.10	0.08	0.09	0.5	0.090	0.043	0.045
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	E	0.96	PF	0.10	0.12	0.16	0.5	0.127	0.061	0.063
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	E	0.96	PF	0.09	0.14	0.17	0.5	0.133	0.064	0.066
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	E	0.96	PF	0.13	0.15	0.21	0.5	0.163	0.078	0.081
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	E	0.96	PF	0.07	0.08	0.12	0.5	0.090	0.043	0.045
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	PF	0.07	0.08	0.09	0.5	0.080	0.038	0.040
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	PF	0.04	0.06	0.08	0.5	0.060	0.029	0.029
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58	CW	E	0.94	PF	0.03	0.04	0.09	0.5	0.053	0.025	0.026
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	E	0.94	PF	0.03	0.04	0.09	0.5	0.053	0.025	0.026
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	E	0.93	PF	0.03	0.03	0.06	0.5	0.040	0.019	0.019
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PF	0.03	0.03	0.03	0.5	0.030	0.014	0.014
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	E	0.99	PF	0.00	0.00	0.00	0.5	0.000	0.000	0.000
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	E	0.96	PF	0.01	0.02	0.03	0.5	0.020	0.010	0.010
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	E	0.96	PF	0.02	0.01	0.01	0.5	0.013	0.006	0.007
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	E	0.97	PF	0.00	0.02	0.00	0.5	0.007	0.003	0.003
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	E	0.94	PF	0.01	0.02	0.02	0.5	0.017	0.008	0.008
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	E	0.92	PF	0.05	0.06	0.09	0.5	0.067	0.031	0.032

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	E	0.95		PF	0.06	0.06				
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	E	0.96	PF	0.09	0.12	0.14	0.5	0.117	0.056	0.058
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	E	0.96	PF	0.06	0.07	0.10	0.5	0.077	0.037	0.038
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	E	0.95	PF	0.03	0.05	0.05	0.5	0.043	0.021	0.021
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	E	0.94	PF	0.02	0.04	0.08	0.5	0.047	0.022	0.023
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	E	0.96	PF	0.07	0.10	0.10	0.5	0.090	0.043	0.045
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	PF	0.05	0.07	0.09	0.5	0.070	0.034	0.035
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	E	0.95	PF	0.04	0.07	0.07	0.5	0.060	0.029	0.029
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	PF	0.03	0.04	0.08	0.5	0.050	0.024	0.024
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PF	0.03	0.04	0.03	0.5	0.033	0.015	0.016
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	E	0.95	PF	0.05	0.06	0.06	0.5	0.057	0.027	0.028
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	E	0.96	PF	0.08	0.09	0.12	0.5	0.097	0.046	0.048
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	E	0.96	PF	0.06	0.07	0.11	0.5	0.080	0.038	0.040
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	E	0.95	PF	0.04	0.06	0.09	0.5	0.063	0.030	0.031
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	E	0.94	PF	0.02	0.03	0.06	0.5	0.037	0.017	0.018
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	E	0.92	PF	0.03	0.02	0.03	0.5	0.027	0.012	0.013

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/cm <sup>2</sup> )	Calc. P.D. (mW/cm <sup>2</sup> )	Max Calc. P.D. (mW/cm <sup>2</sup> )
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	H	0.88	BS	0.03	0.03	0.05	0.06	0.07	0.08	0.08	0.09	0.09	0.08	0.5	0.066	0.064	0.066
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	H	0.87	BS	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.10	0.09	0.5	0.070	0.070	0.073
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	H	0.87	BS	0.03	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.5	0.068	0.066	0.068
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	H	0.87	BS	0.03	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.5	0.066	0.062	0.064
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	H	0.87	BS	0.03	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.5	0.066	0.062	0.064
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	H	0.87	BS	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.5	0.065	0.060	0.063
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	BS	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.5	0.065	0.060	0.063
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	BS	0.03	0.03	0.05	0.06	0.08	0.09	0.09	0.10	0.10	0.10	0.5	0.073	0.074	0.077
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58	CW	H	0.86	BS	0.03	0.03	0.05	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.5	0.073	0.074	0.077
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	H	0.86	BS	0.03	0.03	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.070	0.069	0.071
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	H	0.85	BS	0.03	0.03	0.05	0.07	0.08	0.09	0.09	0.10	0.10	0.10	0.5	0.074	0.075	0.077
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	BS	0.02	0.03	0.05	0.07	0.08	0.09	0.09	0.10	0.11	0.11	0.5	0.075	0.075	0.077
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79	BS	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.5	0.046	0.018	0.019
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	BS	0.02	0.02	0.03	0.04	0.04	0.05	0.04	0.04	0.06	0.08	0.5	0.042	0.025	0.026
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	BS	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.05	0.06	0.08	0.5	0.041	0.024	0.025
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	BS	0.02	0.02	0.03	0.04	0.04	0.04	0.05	0.06	0.08	0.1	0.5	0.087	0.032	0.033
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	BS	0.02	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.08	0.5	0.047	0.030	0.031
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	BS	0.02	0.03	0.03	0.05	0.06	0.06	0.07	0.09	0.10	0.11	0.5	0.062	0.051	0.053

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.			Bystander (BS) Positions										DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)	
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor	Test Pos.	20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm					
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	H	0.88	BS	0.02	0.02	0.04	0.05	0.07	0.07	0.08	0.08	0.08	0.08	0.08	0.5	0.059	0.051	0.053
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	H	0.87	BS	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.066	0.062	0.064
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	BS	0.03	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.067	0.064	0.067
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	BS	0.02	0.03	0.05	0.06	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.068	0.064	0.066
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	H	0.86	BS	0.02	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.09	0.09	0.09	0.5	0.064	0.057	0.059
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	H	0.87	BS	0.02	0.02	0.03	0.05	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.5	0.052	0.039	0.040
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	BS	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.5	0.061	0.053	0.055
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	H	0.86	BS	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.5	0.069	0.066	0.069
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	BS	0.03	0.03	0.05	0.07	0.08	0.09	0.09	0.09	0.10	0.10	0.10	0.5	0.073	0.073	0.075
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	BS	0.03	0.03	0.05	0.07	0.08	0.09	0.09	0.10	0.11	0.11	0.11	0.5	0.076	0.077	0.079
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	H	0.88	BS	0.02	0.02	0.04	0.05	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.5	0.060	0.053	0.055
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	H	0.87	BS	0.02	0.02	0.04	0.06	0.07	0.08	0.08	0.09	0.09	0.09	0.08	0.5	0.063	0.057	0.059
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	BS	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.065	0.060	0.063
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	H	0.86	BS	0.02	0.03	0.05	0.06	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.5	0.068	0.064	0.067
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	BS	0.02	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.09	0.09	0.09	0.5	0.064	0.056	0.058
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	BS	0.02	0.03	0.04	0.06	0.06	0.08	0.08	0.09	0.09	0.10	0.10	0.5	0.065	0.056	0.058

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	H	0.88		PB	0.05	0.05				
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	H	0.87	PB	0.07	0.07	0.07	0.5	0.070	0.070	0.073
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	H	0.87	PB	0.05	0.06	0.07	0.5	0.060	0.051	0.053
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	H	0.87	PB	0.05	0.07	0.07	0.5	0.063	0.057	0.059
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	H	0.87	PB	0.07	0.04	0.04	0.5	0.050	0.036	0.037
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	H	0.87	PB	0.07	0.05	0.04	0.5	0.053	0.041	0.042
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	PB	0.06	0.04	0.04	0.5	0.047	0.031	0.032
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	PB	0.05	0.04	0.04	0.5	0.043	0.026	0.027
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58	CW	H	0.86	PB	0.05	0.04	0.04	0.5	0.043	0.026	0.027
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	H	0.86	PB	0.05	0.04	0.04	0.5	0.043	0.026	0.027
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	H	0.85	PB	0.06	0.04	0.03	0.5	0.043	0.026	0.026
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PB	0.05	0.05	0.03	0.5	0.043	0.025	0.026
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79	PB	0.03	0.02	0.02	0.5	0.021	0.008	0.008
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	PB	0.03	0.03	0.04	0.5	0.033	0.016	0.016
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	PB	0.02	0.03	0.02	0.5	0.023	0.008	0.008
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	PB	0.03	0.04	0.03	0.5	0.042	0.015	0.016
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	PB	0.02	0.02	0.02	0.5	0.020	0.005	0.006
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	PB	0.04	0.03	0.03	0.5	0.033	0.015	0.015

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	H	0.88		PB	0.06	0.06				
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	H	0.87	PB	0.06	0.06	0.06	0.5	0.060	0.051	0.053
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	PB	0.07	0.05	0.04	0.5	0.053	0.041	0.042
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	PB	0.04	0.04	0.04	0.5	0.040	0.022	0.023
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	H	0.86	PB	0.04	0.04	0.03	0.5	0.037	0.019	0.019
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	H	0.87	PB	0.03	0.04	0.04	0.5	0.037	0.019	0.020
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	PB	0.06	0.04	0.04	0.5	0.047	0.031	0.032
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	H	0.86	PB	0.05	0.04	0.04	0.5	0.043	0.026	0.027
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	PB	0.05	0.04	0.04	0.5	0.043	0.026	0.026
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PB	0.06	0.05	0.03	0.5	0.047	0.029	0.030
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	H	0.88	PB	0.05	0.06	0.04	0.5	0.050	0.036	0.038
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	H	0.87	PB	0.05	0.06	0.04	0.5	0.050	0.036	0.037
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	PB	0.06	0.05	0.04	0.5	0.050	0.036	0.037
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	H	0.86	PB	0.04	0.06	0.03	0.5	0.043	0.026	0.027
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	PB	0.04	0.03	0.03	0.5	0.033	0.015	0.016
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PB	0.05	0.04	0.03	0.5	0.040	0.021	0.022

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4006A, (136-144MHz)	2.15	136.0	60	57.6	CW	H	0.88		PF	0.04	0.04				
Roof	HAD4006A, (136-144MHz)	2.15	140.0	60	57.4	CW	H	0.87	PF	0.05	0.05	0.05	0.5	0.050	0.036	0.037
Roof	HAD4006A, (136-144MHz)	2.15	144.0	60	58.0	CW	H	0.87	PF	0.04	0.05	0.05	0.5	0.047	0.031	0.032
Roof	HAD4007A, (144-150.8MHz)	2.15	144.0	60	58.0	CW	H	0.87	PF	0.04	0.05	0.05	0.5	0.047	0.031	0.032
Roof	HAD4007A, (144-150.8MHz)	2.15	146.0	60	58.0	CW	H	0.87	PF	0.04	0.04	0.05	0.5	0.043	0.027	0.028
Roof	HAD4007A, (144-150.8MHz)	2.15	150.8	60	57.6	CW	H	0.87	PF	0.04	0.04	0.03	0.5	0.037	0.019	0.020
Roof	HAD4008A, (150.8-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	PF	0.04	0.05	0.04	0.5	0.043	0.027	0.028
Roof	HAD4008A, (150.8-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	PF	0.04	0.03	0.03	0.5	0.033	0.015	0.016
Roof	HAD4008A, (150.8-162MHz)	2.15	162.0	60	58	CW	H	0.86	PF	0.04	0.03	0.03	0.5	0.033	0.015	0.016
Roof	HAD4009A, (162-174MHz)	2.15	162.0	60	58.0	CW	H	0.86	PF	0.04	0.03	0.03	0.5	0.033	0.015	0.016
Roof	HAD4009A, (162-174MHz)	2.15	168.0	60	58.1	CW	H	0.85	PF	0.04	0.03	0.02	0.5	0.030	0.012	0.013
Roof	HAD4009A, (162-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PF	0.03	0.04	0.03	0.5	0.033	0.015	0.015
Roof	RAD4010ARB, (136-174MHz)	5.15	136.0	60	57.6	CW	H	0.79	PF	0.02	0.01	0.01	0.5	0.007	0.003	0.003
Roof	RAD4010ARB, (136-174MHz)	5.15	146.0	60	58.0	CW	H	0.87	PF	0.02	0.03	0.02	0.5	0.023	0.008	0.008
Roof	RAD4010ARB, (136-174MHz)	5.15	150.8	60	57.6	CW	H	0.87	PF	0.02	0.02	0.03	0.5	0.023	0.008	0.008
Roof	RAD4010ARB, (136-174MHz)	5.15	155.0	60	58.3	CW	H	0.73	PF	0.02	0.01	0.02	0.5	0.010	0.004	0.004
Roof	RAD4010ARB, (136-174MHz)	5.15	165.0	60	58.1	CW	H	0.85	PF	0.02	0.02	0.02	0.5	0.020	0.005	0.006
Roof	RAD4010ARB, (136-174MHz)	5.15	173.0	60	58.1	CW	H	0.84	PF	0.04	0.03	0.03	0.5	0.033	0.015	0.015

MPE calculations are defined in section 13.0.

## MPE measurement data for Passenger

D.U.T. Info.							Probe Info.		Test Pos.	Passenger Positions			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head	Chest	Lower Trunk				
Roof	HAD4016A, (132-162MHz)	2.15	136.0	60	57.6	CW	H	0.88		PF	0.04	0.04				
Roof	HAD4016A, (132-162MHz)	2.15	144.0	60	58	CW	H	0.87	PF	0.04	0.05	0.05	0.5	0.047	0.031	0.032
Roof	HAD4016A, (132-162MHz)	2.15	150.8	60	57.6	CW	H	0.87	PF	0.05	0.04	0.03	0.5	0.040	0.023	0.024
Roof	HAD4016A, (132-162MHz)	2.15	156.4	60	58.2	CW	H	0.86	PF	0.04	0.03	0.02	0.5	0.030	0.013	0.013
Roof	HAD4016A, (132-162MHz)	2.15	162.0	60	58	CW	H	0.86	PF	0.04	0.03	0.02	0.5	0.031	0.013	0.014
Roof	HAD4017A, (146-174MHz)	2.15	146.0	60	58.0	CW	H	0.87	PF	0.03	0.03	0.04	0.5	0.033	0.016	0.016
Roof	HAD4017A, (146-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	PF	0.04	0.04	0.03	0.5	0.037	0.019	0.020
Roof	HAD4017A, (146-174MHz)	2.15	158.0	60	58	CW	H	0.86	PF	0.05	0.04	0.03	0.5	0.040	0.022	0.023
Roof	HAD4017A, (146-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	PF	0.04	0.03	0.02	0.5	0.030	0.012	0.013
Roof	HAD4017A, (146-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PF	0.04	0.04	0.03	0.5	0.037	0.018	0.018
Roof	HAD4021A, (136-174MHz)	2.15	136.0	60	57.6	CW	H	0.88	PF	0.04	0.04	0.04	0.5	0.040	0.023	0.024
Roof	HAD4021A, (136-174MHz)	2.15	144.0	60	58	CW	H	0.87	PF	0.04	0.05	0.04	0.5	0.043	0.027	0.028
Roof	HAD4021A, (136-174MHz)	2.15	150.8	60	57.6	CW	H	0.87	PF	0.05	0.04	0.04	0.5	0.043	0.027	0.028
Roof	HAD4021A, (136-174MHz)	2.15	158.0	60	58	CW	H	0.86	PF	0.04	0.03	0.02	0.5	0.030	0.013	0.013
Roof	HAD4021A, (136-174MHz)	2.15	165.0	60	58.1	CW	H	0.85	PF	0.03	0.03	0.02	0.5	0.027	0.010	0.010
Roof	HAD4021A, (136-174MHz)	2.15	173.0	60	58.1	CW	H	0.84	PF	0.03	0.03	0.02	0.5	0.027	0.009	0.010

MPE calculations are defined in section 13.0