



Underwriters
Laboratories

FCC ID : AZDBM70432
Test report No. : 30IE0003-SH-03-A
Page : 1 of 79
Issued date : June 8, 2010
Revised date : July 8, 2010

RADIO TEST REPORT

Test Report No.: 30IE0003-SH-03-A

Applicant : CANON INC.
Type of Equipment : Wireless LAN Module
Model No. : BM70432
FCC ID : AZDBM70432
Test regulation : FCC Part15 Subpart C: 2010
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: April 27, 28, 29 30, and May 1, 2010

Tested by: H. Shirasawa
Hikaru Shirasawa
EMC Service

A. Hayashi
Akio Hayashi
EMC Service

Tested by: T. Arai
Tatsuya Arai
EMC Service

Approved by: I. Isozaki
Ichiro Isozaki
Leader of EMC Service



The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400
Facsimile: +81 463 50 6401

Table of Contents	Page
1 Applicant Information	3
2 Equipment under test (E.U.T.)	3
3 Test specification, procedures and results	4
4 System test configuration	6
5 Conducted emission	8
6 6dB bandwidth & Occupied bandwidth (99%)	9
7 Maximum peak output power	9
8 Out of band emissions (Antenna port conducted)	9
9 Out of band emissions (Radiated)	10
10 Peak power density	11
Contents of Appendixes	12
APPENDIX 1: Photographs of test setup	13
APPENDIX 2: Test data	17
APPENDIX 3: Test instruments	79

1 Applicant information

Company Name : CANON INC.
Address : 30-2, Shimomaruko 3-chome, Ohta-Ku, Tokyo, 146-8501 Japan
Telephone Number : +81-3-3757-8538
Facsimile Number : +81-3-5482-3960
Contact Person : Hideki Hosoya

2 Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless LAN Module
Model No. : BM70432
Serial No. : 14 (Radiated emission, Conducted emission), 19 (other test)
Rating : DC3.3V & DC 2.85V
Country of Mass-production : Japan
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.
Receipt Date of Sample : April 26, 2010

2.2 Product description

Model: BM70432 (referred to as the EUT in this report) is a Wireless LAN Module.

Equipment type : Transceiver
Frequency of operation : 11b,11g, and 11n-20 : 2412-2462MHz
11n-40 : 2422-2452MHz
Clock frequency : 38.4MHz
Bandwidth & channel spacing : 11b,11g, and 11n-20
Bandwidth : 20MHz
Channel spacing : 5MHz
11n-40
Bandwidth : 40MHz
Channel spacing : 5MHz
Type of modulation : 11b : DSSS
11g, 11n : OFDM
Antenna type : Planar Inverted F Antenna
Antenna gain with cable loss : 2.37dBi
Antenna connector type : U.FL
ITU code : D1D, G1D
Operation temperature range : -0 to +45 deg.C.

FCC Part15.31 (e)

The Wireless LAN Module is provided with stable power supply (DC 3.3V & DC 2.85 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The EUT has a unique coupling/antenna connector (U.FL). Therefore the equipment complies with the requirement of 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3 Test specification, procedures and results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2010, final revised on January 22, 2010 and effective March 1, 2010
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.209 Radiated emission limits, general requirements Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A	12.5dB (0.17828MHz, L1, AV, 11n-40 Tx 2437MHz)	Complied
6dB Bandwidth	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (a)(2) & 15.209	Conducted	N/A		Complied
Maximum Peak Output Power	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (b)(3) & 15.209	Conducted	N/A		Complied
Out of Band Emission & Restricted Band Edges	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.109, 15.247 (d) & 15.209	Conducted / Radiated	N/A	5.0dB (2390.000MHz, Horizontal, AV, 11n-20 Tx 2412MHz)	Complied
Power Density	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (e)	Conducted	N/A	-	Complied

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Conducted emission (AC Mains) AMN/LISN	150kHz-30MHz	3.0 dB	2.6 dB	3.1 dB
Radiated emission (Measurement distance: 3m)	30MHz-300MHz	4.6 dB	4.5 dB	4.9 dB
	300MHz-1GHz	4.5 dB	4.6 dB	5.1 dB
	1GHz-13GHz	3.9 dB	3.9 dB	4.0 dB
Radiated emission (Measurement distance: 1m)	13GHz-18GHz	4.8 dB	4.8 dB	4.8 dB
	18GHz-40GHz	4.2 dB	4.2 dB	4.2 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

The data listed in this test report has enough margin, more than site margin.

Conducted emissions, Power Density Measurement (below 1GHz) uncertainty for this test was: (±) 1.1dB

Conducted emissions, Power Density Measurement (1G-3GHz) uncertainty for this test was: (±) 1.2dB

Conducted emissions, Power Density Measurement (3G-18GHz) uncertainty for this test was: (±) 2.9dB

Conducted emissions Measurement (18G-26.5GHz) uncertainty for this test was: (±) 3.4dB

Power Measurement uncertainty above 1GHz for this test was: (±) 0.8dB

Bandwidth Measurement uncertainty for this test was: (±) 5.4%

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

No.1/ No.2/ No.3 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on April 17, 2009 (Registration No.: 697847).

IC Registration No. : 2973D-1 (No1 anechoic chamber)
 2973D-2 (No2 anechoic chamber)
 2973D-3 (No3 anechoic chamber)

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.1 Shielded room	6.8 x 4.1 x 2.7
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.2 Shielded room	6.8 x 4.1 x 2.7
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35 Maximum measurement distance: 5m	No.3 Shielded room	6.3 x 4.7 x 2.7
No.4 Full-anechoic chamber	8.1 x 5.1 x 3.55	No.4 Shielded room	4.4 x 4.7 x 2.7
		No.5 Shielded room	7.8 x 6.4 x 2.7
		No.6 Shielded room	7.8 x 6.4 x 2.7

3.6 Test setup, Data of EMI & Test instruments

Refer to Appendix 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

4 System test configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Mode	Remarks*
IEEE 802.11b (11b)	11Mbps, PN9
IEEE 802.11g (11g)	24Mbps, PN9
IEEE 802.11n-20: 2.4G Band	MCS 2, PN9
IEEE 802.11n-40: 2.4G Band	MCS 3, PN9

*The worst condition was determined based on the test result of Maximum Peak Output Power (Low Channel)

Test Item	Operating Mode	Tested frequency
Conducted Emission	11b Tx	2412MHz
Spurious Emission	11g Tx	2437MHz
6dB Bandwidth	11n-20 Tx	2462MHz
Maximum Peak Output Power	11n-40 Tx	2422MHz
Power Density		2437MHz
99% Occupied Bandwidth		2452MHz

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400


Facsimile: +81 463 50 6401

4.2 Configuration and peripherals

Radiated emission



Other test

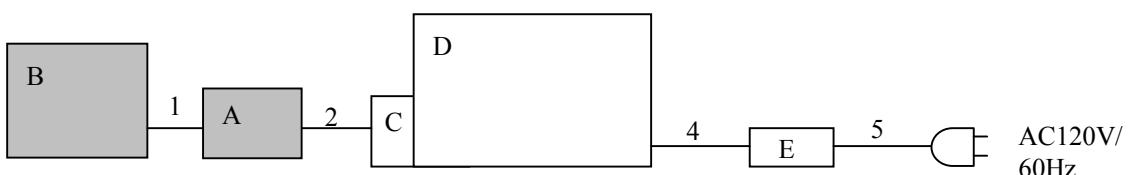

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks (FCC ID)
A	Wireless LAN Module	BM70432	*1)	Canon	EUT (AZDBM70432)
B	Antenna	PADCAN-001-BA 51153	DD-16	Canon	EUT
C	Test Jig	-	-	-	-
D	Laptop Computer	CF-W5AW1AXS	7GKSA84745	Panasonic	-
E	AC adapter	CF-AA6282A M1	6282AM107613901A	Panasonic	-

*1) 14: Radiated emission and Conducted emission, 19: Other test

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	Antenna Cable	0.08	Shielded	Shielded
2	IF Cable	0.07	Unshielded	Unshielded
3	DC Cable	3.5	Unshielded	Unshielded
4	DC Cable	1.4	Unshielded	Unshielded
5	AC Cable	0.9	Unshielded	Unshielded

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

5 Conducted emission

5.1 Operating environment

The test was carried out in No.3 shielded room.

Temperature : See test data
Humidity : See test data

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT position : Table top

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT within a screened room. The EUT was connected to a Line Impedance Stabilization Network (LISN).

An overview sweep with peak detection has been performed.

The measurements had been performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver.

Detector Type : Quasi-Peak/ Average
IF Bandwidth : 9kHz

5.5 Results

Summary of the test results : Pass

Date : May 1, 2010

Test engineer : Tatsuya Arai

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

6 6dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Date : April 27, 2010 Test engineer : Akio Hayashi

7 Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass
Date : April 27, 2010 Test engineer : Akio Hayashi

8 Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Summary of the test results: Pass
Date : April 28, 2010 Test engineer : Akio Hayashi

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

9 Out of band emissions (Radiated)

9.1 Operating environment

The test was carried out in No.3 anechoic chamber.

9.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. Photographs of the set up are shown in Appendix 1.

9.3 Test conditions

Frequency range : 30MHz - 26GHz

9.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m(below 13GHz) and 1m(above13GHz).

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer *1)
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 3MHz, RBW: 100kHz/VBW: 300kHz (20dBc) AV RBW: 1MHz VBW: 10Hz (No pulse noise)
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn
Test distance	3m	3m(below 13GHz) 1m(above 13GHz)

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Combinations of the worst case

Model	Worst position	
	Below 1GHz	Above 1GHz
EUT	Horizontal: X, Vertical: X	Horizontal: Y, Vertical: Y

9.5 Band edge

Band edge level at 2400MHz is less than 20dB of peak point of the carrier. Refer to the data of Out of Band Emissions (20dBc Data Sheet). Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of Radiated emission.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

9.6 Results

Summary of the test results : Pass
Date : April 28, 29 and 30, 2010 Test engineer : Hikaru Shirasawa and Tatsuya Arai

10 Peak power density

Test procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Instrument used : Spectrum Analyzer *1)
RBW / VBW : 30kHz / 100kHz *2)

*1) PSD Option 1 of " Measurement of Digital Transmission Systems Operating under Section 15.247".

*2) The test was not performed at RBW : 3kHz that was stated in the Regulation.

However, the measurement value with RBW: 3kHz is less than the value of RBW: 30kHz and the test data met the limit with RBW: 30kHz.

Summary of the test results: Pass
Date : April 27, 2010 Test engineer : Akio Hayashi

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

APPENDIX 1: Photographs of test setup

Page 13 : Conducted emission
Page 14 : Radiated emission
Page 15 - 16 : Pre-check of the worst position

APPENDIX 2: Test data

Page 17 - 28 : Conducted emission
Page 29 - 31 : 6dB bandwidth
Page 32 - 35 : Maximum peak output power
Page 36 - 59 : Out of band emissions (Radiated)
Page 60 - 73 : Out of band emissions (Antenna port conducted)
Page 74 - 76 : Peak power density
Page 77 - 78 : Occupied bandwidth

APPENDIX 3: Test instruments

Page 79 : Test instruments

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401