


APPENDIX 1 : Photographs of test setup


1. Photograph of EUT

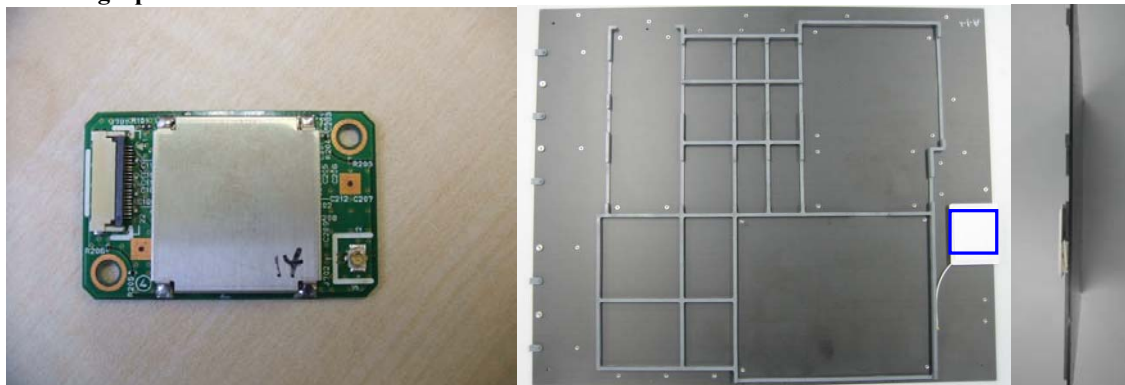

2. Antenna location

The shortest distance
between surface of host
device and antenna

5mm

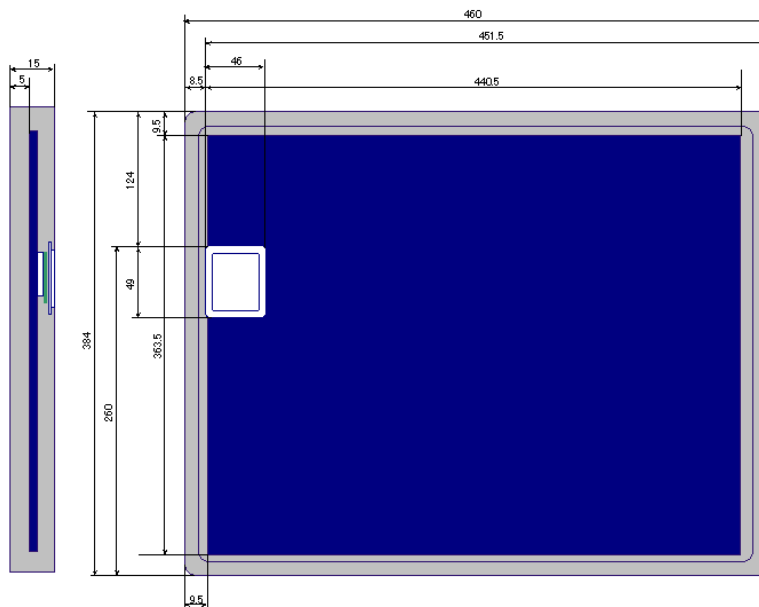

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Test report No. : 30IE0003-HO-01-A-R1
Page : 19 of 68
FCC ID : AZDBM70432
Issued date : June 8, 2010
Revised date : July 8, 2010

3. Host device

Type of Equipment		DIGITAL RADIOGRAPHY
Model No.		CXDI-70C Wireless
Serial No.		10DR-042
Manufacture		Canon
Battery	Type :	Li-ion Battery
	Model Name :	LB-1A
	Rating :	11.1V, Typ. 2.49Ah Min. 2.4Ah, 27Wh
	Manufacturer	Canon
	Option Battery	N/A
Size of EUT		384 (W)* 460 (L)* 15 (H) mm
Accessories		ANTI-SCATTER GRID Handle unit

Host device with accessories

Front



Rear




Host device without accessories

Front



Rear

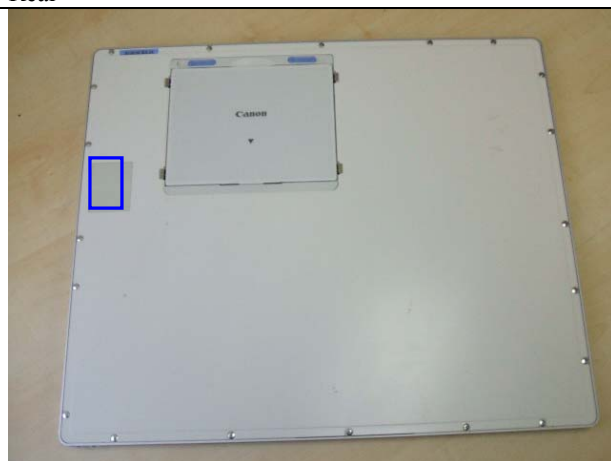

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4. Photograph of setup

Accessories for host device		
	ANTI-SCATTER GRID	Handle unit
Model	415937 284305	HU-1A
Selial	11B3X00078000001	No.6
Manufacture	MITAYA MFG.CO.,LTD	CANON
Photo		
Method of mounting		

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Front with accessories



Front without accessories

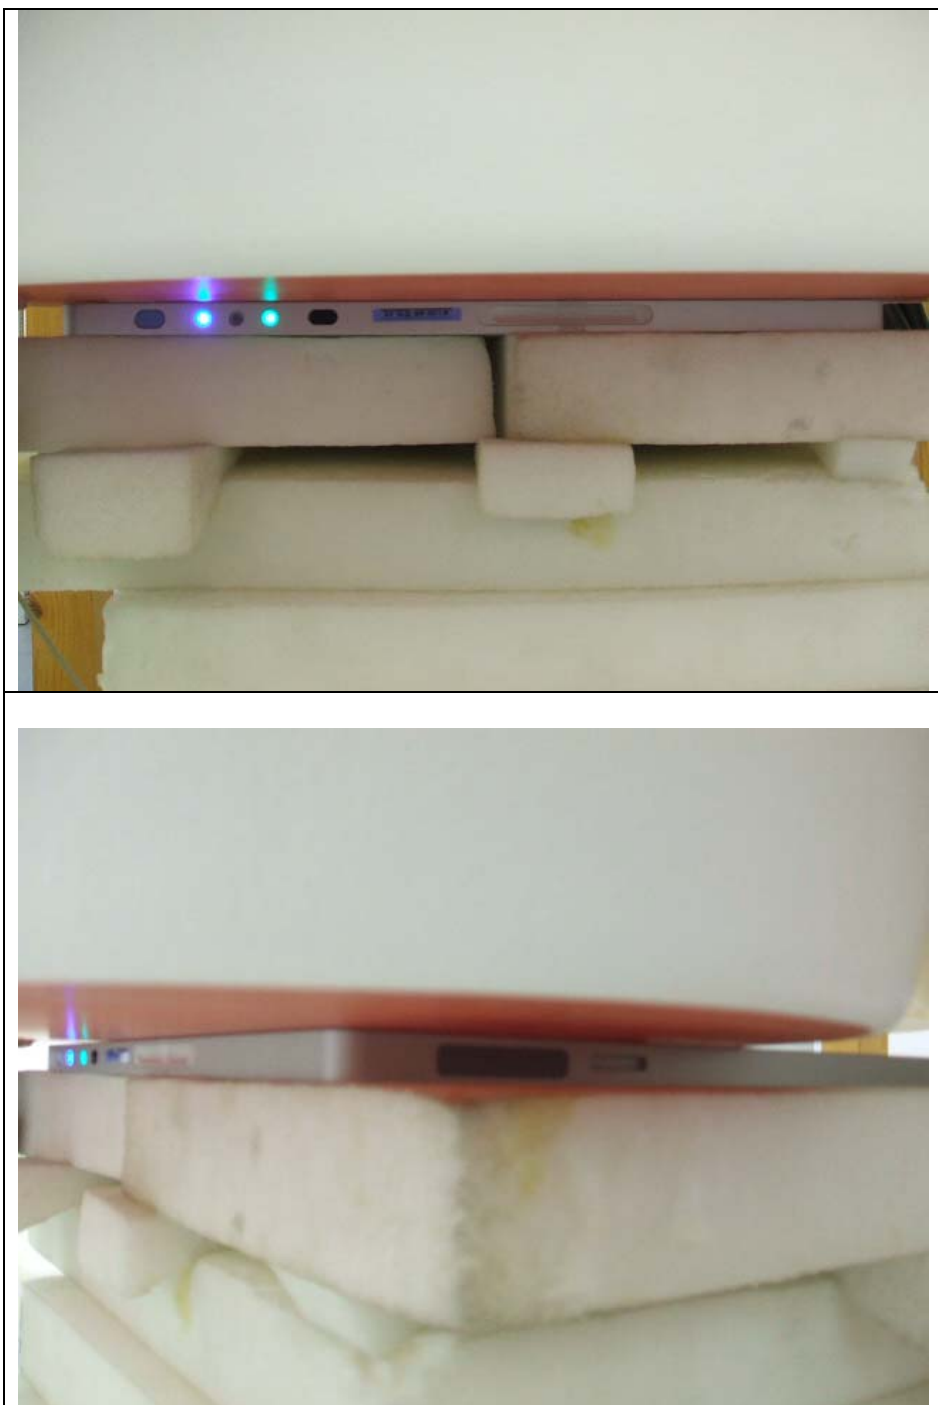

Front 5mm with accessories

