

Straubing, September 8, 2005

TEST - REPORT

No. 55503-050538 (Edition 1)

for

T4EXA (75 MHz)

Transmitter for Model Control

Applicant: Futaba Corporation

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 95, Subpart C&E

FCC Code of Federal Regulations,
CFR 47, Part 2, Subpart J

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures.....	8
6.1	Maximum Transmitter Power.....	8
6.2	Frequency tolerance	11
6.3	Emission Bandwidth	13
6.4	Unwanted Emission 30 MHz - 1 GHz	14
7	Photographs Taken During Testing	16
8	Test Results.....	19
8.1	Maximum transmitter power	20
8.2	Carrier Frequency Stability	22
8.3	Emission Bandwidth	25
8.4	Unwanted Radiation 30 MHz - 1 GHz.....	27
9	Referenced Regulations	31
10	Additional information to this Test Report.....	32

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	T4EXA (75 MHz)
Parts ² :	
Serial number(s):	A50607364
Manufacturer:	Futaba Corporation
Type of equipment:	Transmitter for Model Control
Version:	
FCC ID:	AZPT4EX-75
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	75.41 - 75.99 MHz
Frequency range:	75.41 – 75.99 MHz
Operating frequency:	75.710 MHz
Type of modulation:	FSK
Pulse train:	Not Applicable
Pulse width:	Not Applicable
Number of RF-channels:	1
Channel spacing:	20 kHz
Designation of emissions ³ :	5K00F1D
Type of antenna:	Telescope Antenna
Size/length of antenna:	0.95 m
Connection of antenna:	☐ detachable ☒ not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 9.6 V minimum voltage: 8.16 V maximum voltage: 11.04 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	Futaba Corporation 1080, Yabutsuka Chosei-mura, Chosei-gun, Chiba-ken 299-4395 Japan
Contact person:	Mr. Fujita
Contract identification:	
Receipt of EUT:	5 September 2005
Date(s) of test:	September 2005
Note(s):	

Report details	
Report number:	55503-050538
Edition:	1
Issue date:	September 8, 2005

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the
Code of Federal Regulations CFR 47, Part 95, Subpart C & E
and the
Code of Federal Regulations CFR 47 Part 2, Subpart J
of the Federal Communication Commission (FCC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:




Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 **Operation Mode and Configuration of EUT**

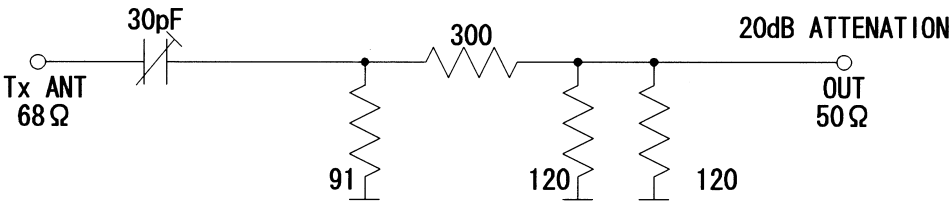Operation Mode(s)
- Transmitting continuously.⁴ - With battery supply, nominal 9.6V.⁵ - Antenna extended to maximum.⁶ - Operating frequency: 75.710 MHz. - For conducted measurements a dummy load was used as delivered by applicant.  - For frequency error tests the modulation was deactivated by connecting the modulation input to ground with a 1.2 kΩ resistor.

Configuration(s) of EUT
EUT was configured as stand alone device.

List of ports and cables
Not Applicable

List of devices connected to EUT
Not Applicable

List of support devices
Not Applicable

⁴ Modulation as indicated on appropriate test report.
⁵ For conducted measurements replaces by external DC supply
⁶ For radiated tests only.


6 Measurement Procedures

6.1 Maximum Transmitter Power

The maximum transmitter power was measured conducted and radiated.

6.1.1 Conducted Maximum Transmitter Power

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 95, section 95.639
Guide:	CFR 47 Part 2, section 2.1046
Conducted output power is measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer and/or a power meter with appropriate sensor. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If a spectrum analyzer is used and no other settings are specified resolution bandwidth shall be selected according to the carrier frequency f_c and set to 100 kHz. The video bandwidth shall be at least three times greater than the resolution bandwidth. The settings used have to be indicated within the appropriate test record(s).	

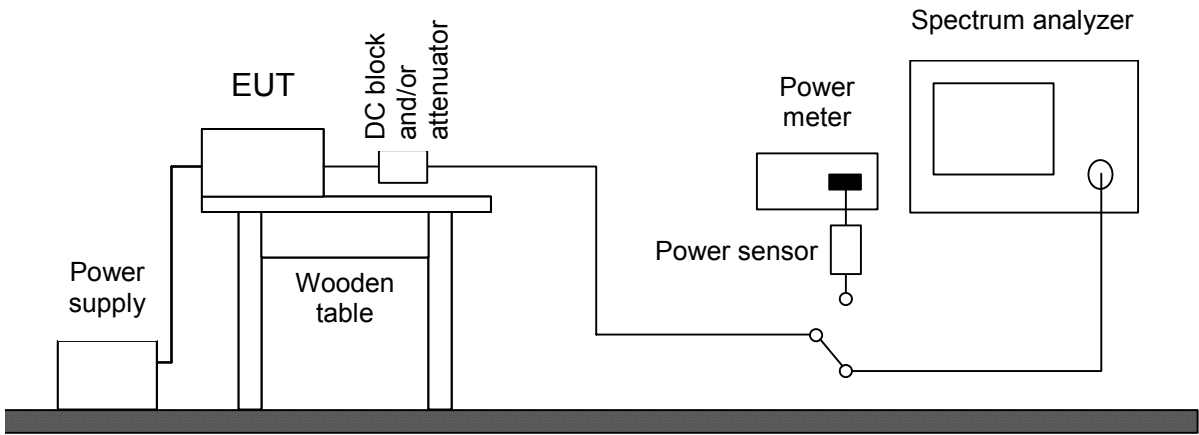

Test instruments used:


Used	Type	Model	Serial No. or ID	Manufacturer
☐	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☒	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Radio Communication Service Monitor	CMS 54	838384/030	Rohde & Schwarz
☒	Power meter	NRVS	836856/015	Rohde & Schwarz
☐	Peak power sensor	NRV-Z31	8579604.03	Rohde & Schwarz
☒	Power sensor	NRV-Z52	837901/030	Rohde & Schwarz
☐	Power sensor	NRV-Z4	863828/015	Rohde & Schwarz
☒	DC-block	7006	A2798	Weinschel
☐	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda
☒	Dummy Load	LD 01	001	Futaba

6.1.2 Radiated Maximum Transmitter Power

Measurement Procedure:
For measurement setup and procedure see section <i>Unwanted Emission 30 MHz - 1 GHz</i> (6.4)

6.2 Frequency tolerance

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 95, section 95.623
Guide:	ANSI C63.4
The frequency tolerance of the carrier signal is measured over a temperature variation of -30 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of +20 °C. If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used. For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to: • the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage • the battery nominal voltage • 85% of the battery nominal voltage • the battery operating end point voltage which shall be specified by the equipment manufacturer The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance. If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.	

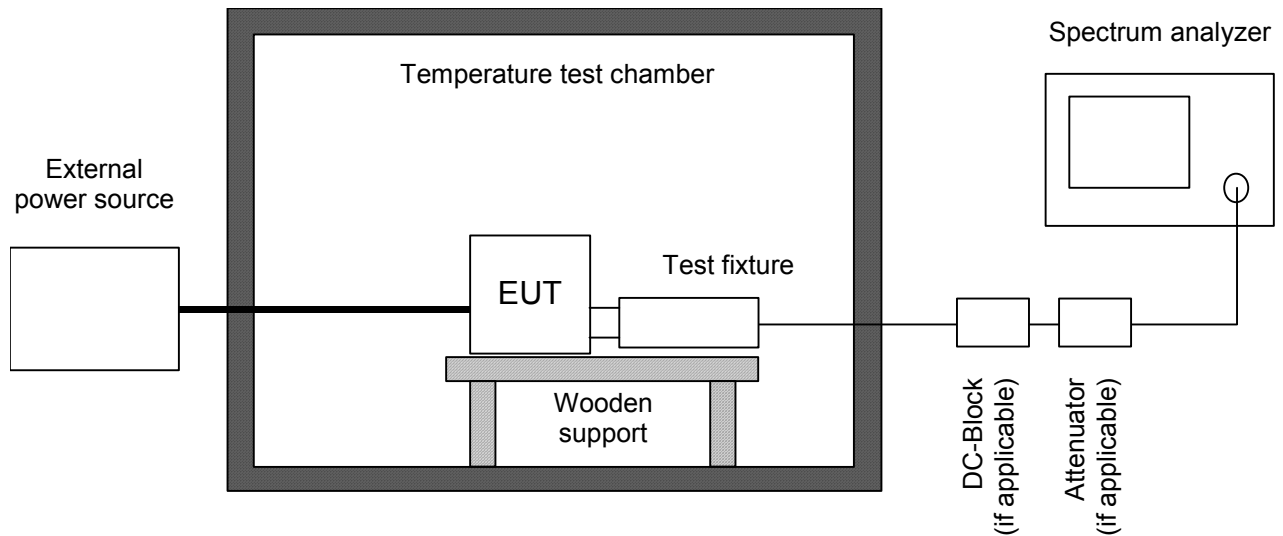

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Radio Communication Service Monitor	CMS 54	838384/030	Rohde & Schwarz
☐	DC-block	7006	A2798	Weinschel
☐	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda
☐	Test probe	TP01	001	Senton
☒	DC power supply	NGSM 32/10	203	Rohde & Schwarz
☐	Isolating transformer	RT 5A	10387	Grundig
☐	Isolating transformer	RT 5A	10416	Grundig
☒	Temperature test chamber	HT4010	07065550	Heraeus
☒	Dummy Load	LD 01	001	Futaba

6.3 Emission Bandwidth


Measurement Procedure:

Rules and specifications: CFR 47 Part 2, section 2.1046(a)

Guide: TIA/EI-603

Emission bandwidth is measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.

The occupied bandwidth measurement was performed referring to 99% of total power with RBW as close to, but not less than 1% of the 99% power bandwidth.

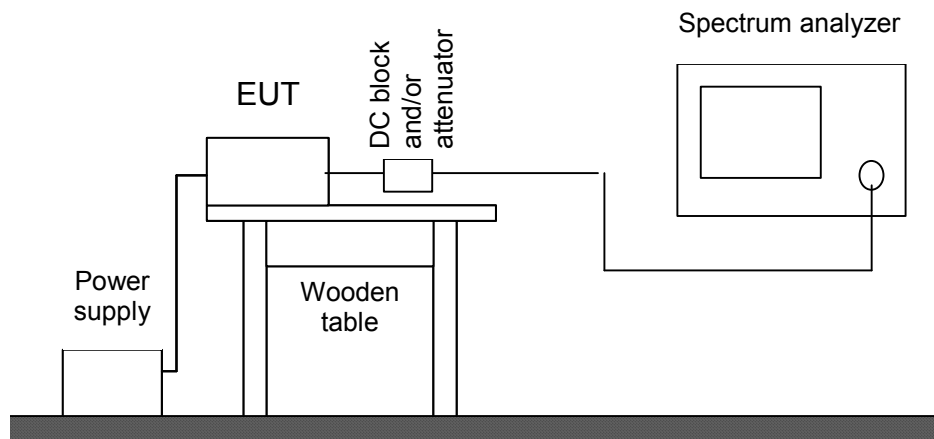


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
☐	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☒	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
☐	EMI test receiver	ESMI	839379/013	Rohde & Schwarz
			839587/006	
☐	Power meter	NRVS	836856/015	Rohde & Schwarz
☐	Peak power sensor	NRV-Z31	8579604.03	Rohde & Schwarz
☐	Power sensor	NRV-Z52	837901/030	Rohde & Schwarz
☐	Power sensor	NRV-Z4	863828/015	Rohde & Schwarz
☒	DC-block	7006	A2798	Weinschel
☐	Attenuator	4776-10	9412	Narda
☐	Attenuator	4776-20	9503	Narda
☒	Dummy Load	LD 01	001	Futaba

6.4 Unwanted Emission 30 MHz - 1 GHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 95, section 95.635
Guide:	ANSI C63.4 TIA/EIA-603, section 2.2.12
Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 30 kHz, video bandwidth set to 100 kHz. Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. Final testing was performed referring to substitution method as described in TIA/EIA-603, section 2.2.12 ("Radiated Spurious Emissions").	

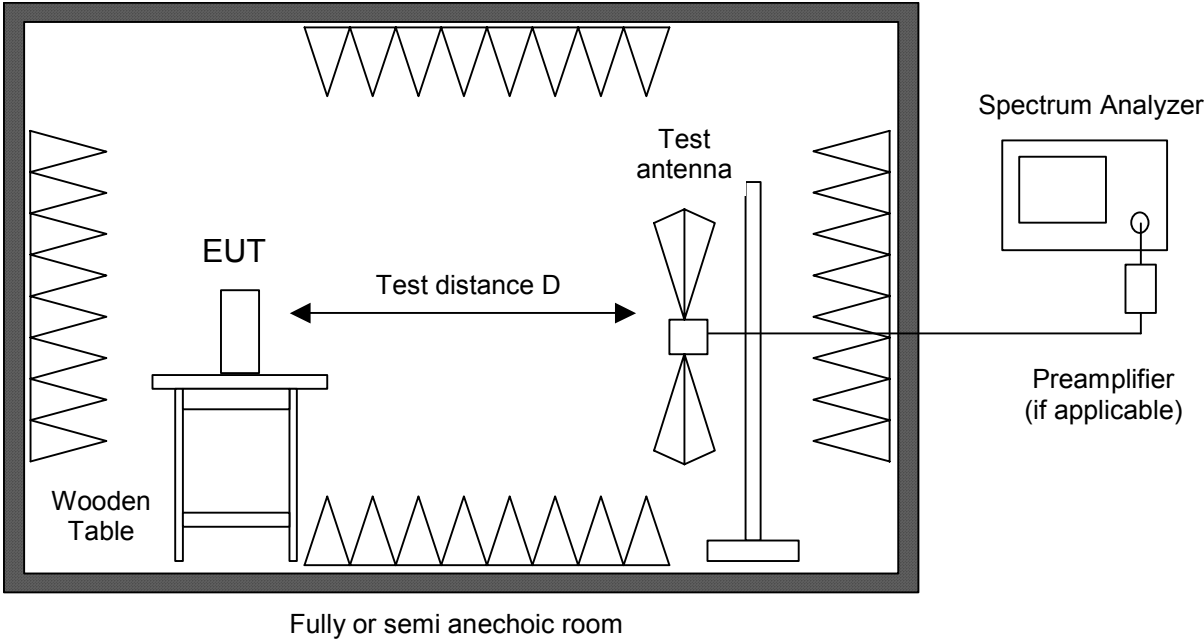

Test instruments used:


Used	Type	Model	Serial No. or ID	Manufacturer
☒	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
☐	Spectrum analyzer	R 3271	05050023	Advantest
☐	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	CPA9231A	3393	Schaffner
☐	Preamplifier	R14601		Advantest
☐	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
☐	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
☐	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
☐	External Mixer	WM782A	845881/005	Tektronix
☐	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
☒	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
☐	Horn antenna	3115	9508-4553	EMCO
☐	Horn antenna	3160-03	9112-1003	EMCO
☐	Horn antenna	3160-04	9112-1001	EMCO
☐	Horn antenna	3160-05	9112-1001	EMCO
☐	Horn antenna	3160-06	9112-1001	EMCO
☐	Horn antenna	3160-07	9112-1008	EMCO
☐	Horn antenna	3160-08	9112-1002	EMCO
☐	Horn antenna	3160-09	9403-1025	EMCO
☐	Horn antenna	3160-10	399185	EMCO
☒	Fully anechoic room	No. 2	1452	Albatross Projects
☐	Semi-anechoic room	No. 3	1453	Siemens

7 Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(fully anechoic room) - continued -**

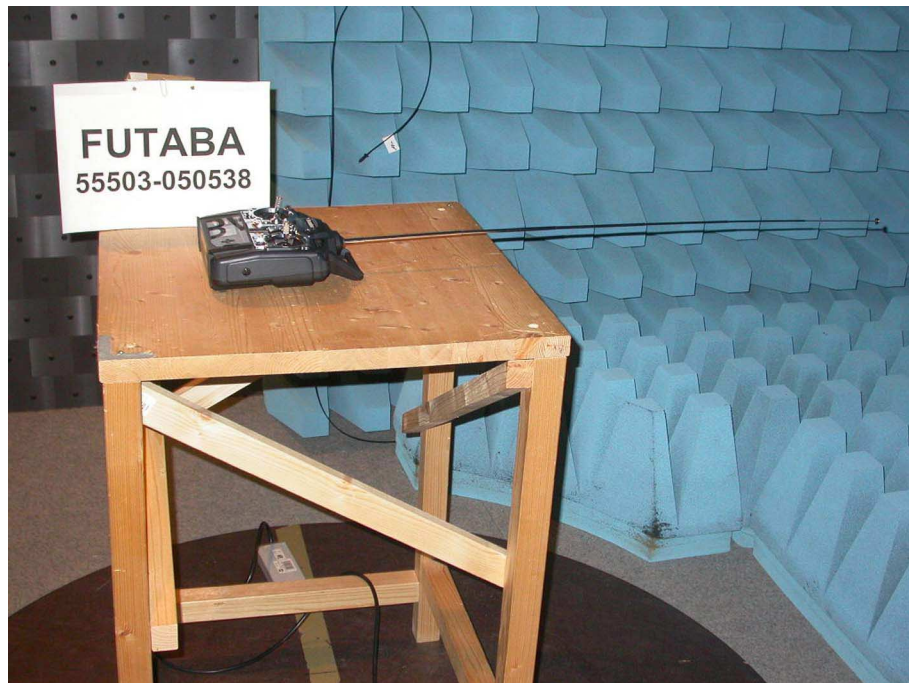

8 Test Results

CFR 47 Part 95 Subpart C / E CFR 47 Part 2 Subpart J			
<i>Section(s):</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
95.639	Maximum transmitter power	20	Passed
95.623	Frequency tolerance	22	Passed
95.633	Emission bandwidth	25	Passed
95.635	Unwanted radiation 30 MHz - 1 GHz	27	Passed

8.1 Maximum transmitter power

8.1.1 Maximum transmitter power - Conducted

Rules and specifications:	CFR 47 Part 95, section 95.639(b)(3)
Guide:	CFR 47 Part 2, section 2.1046
Limit:	0.75 W in the 72 – 76 MHz frequency band
Measurement procedure:	Conducted Maximum Transmitter Power (6.1.1)

Comment:	
Date of test:	6 September 2005
Test site:	Fully anechoic room, cabin no. 2
Test conditions:	Temperature + 20 °C
	Nominal supply voltage: 9.6 V
Specifications:	Voltage range: ±15 % of nominal supply voltage

Supply voltage (V)	Modulation	Transmitter power (dBm)	Transmitter power (W)	Limit (W)
8.16	off	19.36	0.086	0.750
9.60	off	20.35	0.108	0.750
11.04	off	20.71	0.118	0.750
8.16	PPM	19.01	0.080	0.750
9.60	PPM	19.96	0.099	0.750
11.04	PPM	19.48	0.089	0.750

Test Result:	Test passed
--------------	-------------

8.1.2 Maximum transmitter power - Radiated

Rules and specifications:	CFR 47 Part 95, section 95.635
Guide:	ANSI C63.4 TIA/EIA-603, section 2.2.12
Limit:	0.75 W (28.8 dBm) in the 72 – 76 MHz frequency band
Measurement procedure:	Radiated Maximum Transmitter Power (6.1.2)

Comment:	
Date of test:	5 September 2005
Test site:	Fully anechoic room, cabin no. 2
Test conditions:	Temperature + 20 °C Nominal supply voltage: 9.6 V
Note:	For calculation of correction factors see table "Test Site Calibration Data Sheets", supplied as additional information summarized on page 32.

Position of EUT	Antenna polarization	Frequency (MHz)	Reading value (dBm)	Correction factor (dB)	E(I)RP (dBm)	Limit (dBm)	Margin to limit (dB)
EUT in vertical position, Antenna to the top	Vertical	75.700	-8.5	26.5	18.0	28.8	+10.8
EUT in horizontal position, Rear side on table	Horizontal	75.700	-9.6	26.3	16.7	28.8	+12.1
EUT in horizontal position, Left side on table	Horizontal	75.700	-9.5	26.3	16.8	28.8	+12.0

Test Result:	Test passed
--------------	-------------


8.2 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 95, section 95.623(c)
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.002\%$ (± 20 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-30°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20 °C)
Measurement procedure:	Frequency tolerance (6.2)

Comment:	
Mode:	Transmitting continuously with unmodulated carrier
Date of test:	7 September 2005


Test Result:	Test passed
--------------	-------------

8.2.1 Frequency Stability vs. Temperature

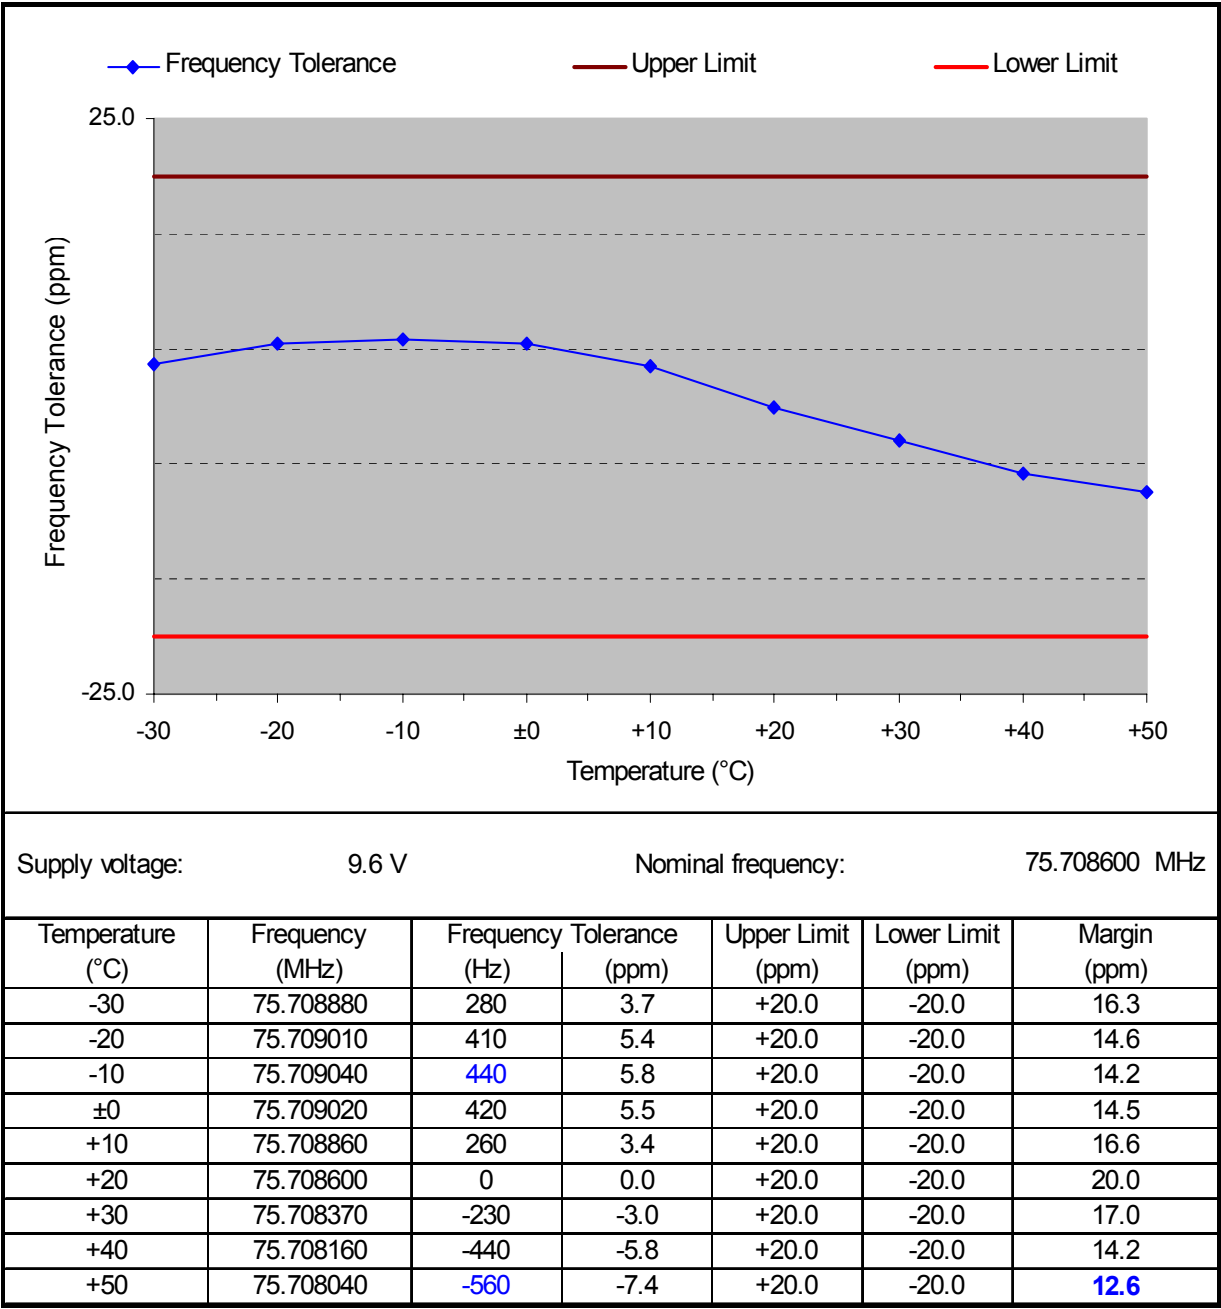

Test Result:	Test passed
--------------	-------------

8.2.2 Frequency Stability vs. Supply Voltage

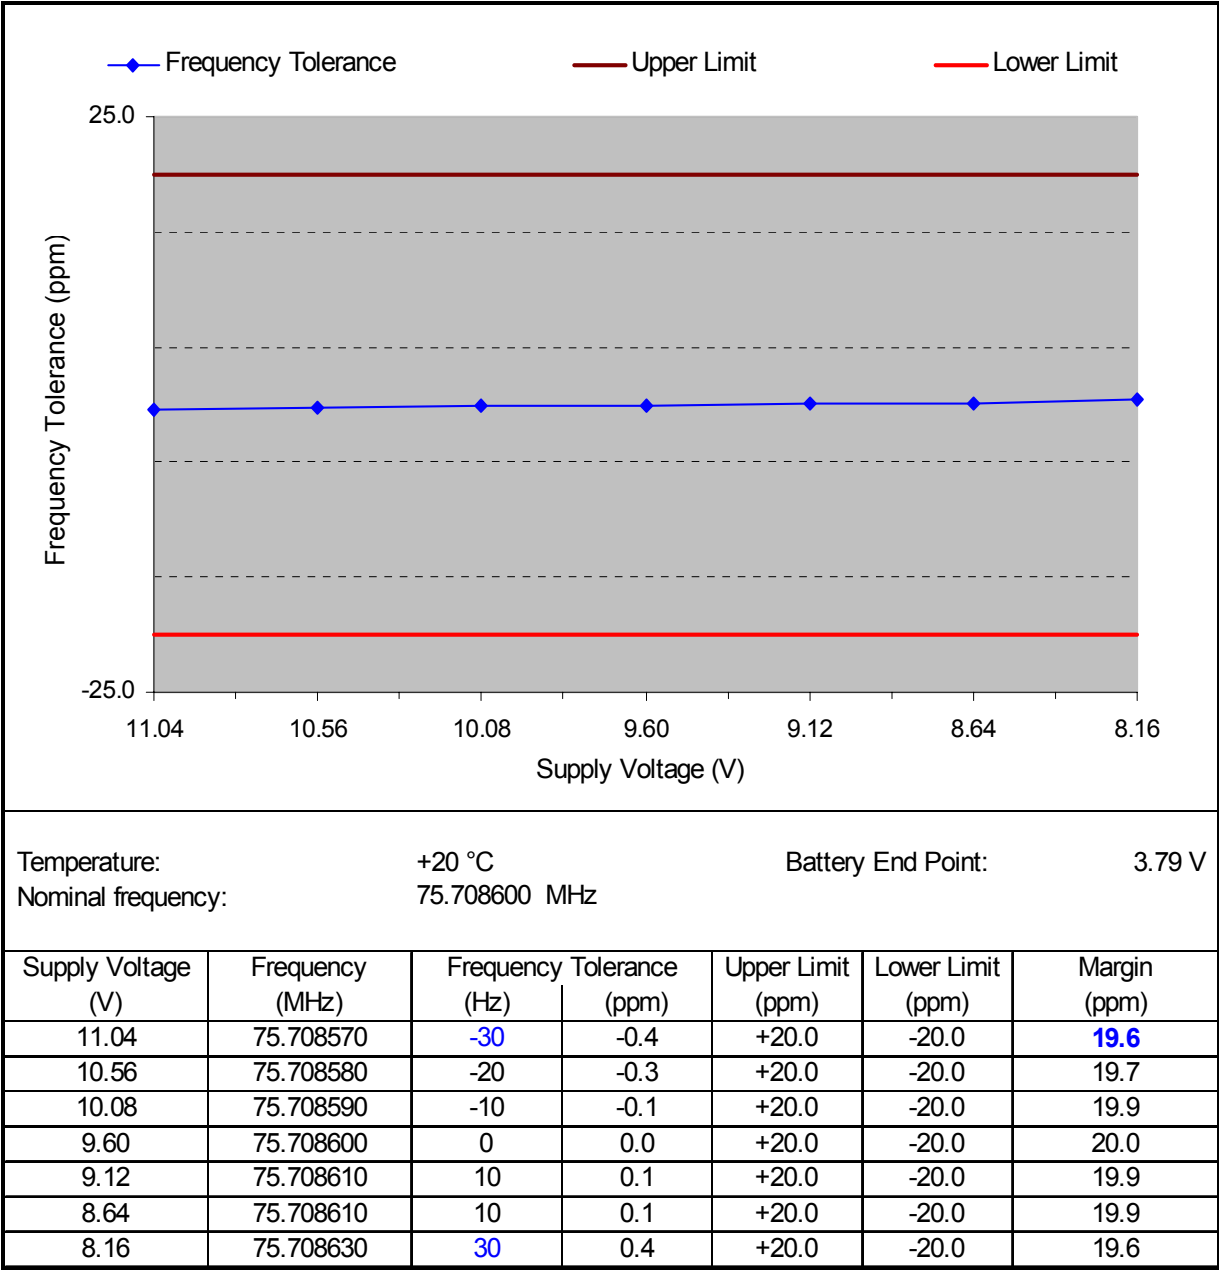

Note: EUT is equipped with a low battery warning indicator, starting at 8.60 V

Test Result: Test passed

8.3 Emission Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.1046(a)
Guide:	TIA/EI-603
Limit:	Authorized bandwidth: 8 kHz
Measurement procedure:	Emission Bandwidth (6.3)

Calculation	$B_n = 2 \cdot B \cdot K$
B = modulation rage	B = 2.5 kHz
K = Overall numerical factor	K = 1
	$B_n = 2 \cdot 2.5 \text{ kHz} \cdot 1 = 5.0 \text{ kHz}$
Type of Emission	5K00F1D

Test Result:	Test passed
--------------	-------------

Comment:	
Mode	Transmitting with modulated carrier (PPM)
Date of test:	6 September 2005



Comment: Futaba 050538 Occupied Bandwidth: PPM
Date: 6.SEP.2005 15:52:35

Occupied Bandwidth (99 %):	4.95 kHz
Test Result:	Test passed

8.4 Unwanted Radiation 30 MHz - 1 GHz

Rules and specifications:	CFR 47 Part 95, section 95.635
Guide:	ANSI C63.4 TIA/EIA-603, section 2.2.12
Limit:	$10 \log(P_{\text{carrier}}) - 56 \text{ dB}$ with P_{carrier} as the maximum transmitter power limit in W for the unmodulated carrier according to §95.639; that is -26.0 dBm .
Note	For calculation of correction factors see tables "Test Site Calibration Data Sheets" (supplied as additional information summarized on page 32
Measurement procedure:	Unwanted Emission 30 MHz - 1 GHz (6.4)

Test Result:	Test passed
--------------	-------------

Position:	
Mode:	Transmitting with modulated carrier (PPM)
Date of test:	5 September 20057
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

Maximum transmitter power (conducted):	19.96 dBm	0.099 W
Maximum transmitter power (radiated):	18.0 dBm	0.063W
Calculated limit (referring to TP):	-26.0 dBm	

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBm)	Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
151.400	vertical	Peak	-66.4	19.2	-47.2	-26.0	21.2
226.800	vertical	Peak	-77.6	21.1	-56.5	-26.0	30.5
302.800	vertical	Peak	-93.2	27.6	-65.6	-26.0	39.6
378.800	horizontal	Peak	-98.3	29.8	-68.5	-26.0	42.5
454.000	vertical	Peak	-92.4	28.9	-63.5	-26.0	37.5
530.000	horizontal	Peak	-102.3	30.5	-71.8	-26.0	45.8
605.600	horizontal	Peak	-103.1	31.9	-71.1	-26.0	45.1
681.600	horizontal	Peak	-104.2	32.5	-71.7	-26.0	45.7
757.200	vertical	Peak	-94.2	33.4	-60.8	-26.0	34.8
832.800	vertical	Peak	-92.8	35.4	-57.4	-26.0	31.4
908.400	vertical	Peak	-92.8	35.1	-57.7	-26.0	31.7
984.400	vertical	Peak	-91.4	35.2	-56.2	-26.0	30.2

Test Result:	Test passed
--------------	-------------

Position:	EUT in upright position
Mode:	Transmitting with modulated carrier (PPM)
Date of test:	5 September
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

Maximum transmitter power (conducted):	19.96 dBm	0.099 W
Maximum transmitter power (radiated):	16.7 dBm	0.047 W
Calculated limit (referring to TP):	-26.0 dBm	

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBm)	Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
151.400	horizontal	Peak	-67.5	20.6	-47.0	-26.0	21.0
226.800	horizontal	Peak	-72.8	22.0	-50.8	-26.0	24.8
302.800	horizontal	Peak	-79.0	25.8	-53.2	-26.0	27.2
378.800	horizontal	Peak	-87.6	29.8	-57.7	-26.0	31.7
454.000	horizontal	Peak	-87.9	30.4	-57.5	-26.0	31.5
530.000	horizontal	Peak	-91.6	30.5	-61.1	-26.0	35.1
605.600	horizontal	Peak	-94.5	31.9	-62.6	-26.0	36.6
757.200	horizontal	Peak	-91.7	34.5	-57.2	-26.0	31.2
832.800	horizontal	Peak	-91.4	34.1	-57.3	-26.0	31.3
908.400	horizontal	Peak	-96.2	35.5	-60.7	-26.0	34.7
984.400	horizontal	Peak	-89.2	36.6	-52.6	-26.0	26.6

Test Result:	Test passed
--------------	-------------

Position:	EUT with flat side on table
Mode:	Transmitting with modulated carrier (PPM)
Date of test:	5 September 2005
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

Maximum transmitter power (conducted):	19.96 dBm	0.099 W
Maximum transmitter power (radiated):	16.8 dBm	0.048 W
Calculated limit (referring to TP):	-26.0 dBm	

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBm)	Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
151.400	horizontal	Peak	-68.3	20.6	-47.8	-26.0	21.8
226.800	horizontal	Peak	-68.2	22.0	-46.2	-26.0	20.2
302.800	horizontal	Peak	-78.8	25.8	-53.0	-26.0	27.0
378.800	horizontal	Peak	-88.6	29.8	-58.8	-26.0	32.8
454.000	horizontal	Peak	-87.0	30.4	-56.6	-26.0	30.6
530.000	horizontal	Peak	-92.1	30.5	-61.6	-26.0	35.6
605.600	vertical	Peak	-96.2	33.1	-63.1	-26.0	37.1
757.200	vertical	Peak	-93.0	33.4	-59.6	-26.0	33.6
832.800	horizontal	Peak	-90.9	34.1	-56.8	-26.0	30.8
908.400	horizontal	Peak	-92.2	35.5	-56.6	-26.0	30.6
984.400	horizontal	Peak	-88.1	36.6	-51.5	-26.0	25.5

Test Result:	Test passed
--------------	-------------

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 10, 2004
☐	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	April 5, 2005
☒	CFR 47 Part 95 Subpart C/E	Code of Federal Regulations Part 95 (Personal Radio Services), Subpart C/E (Radio Control(R/C) Radio Service) of the Federal Communication Commission (FCC)	October 1, 2003
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
☐	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 2004
☐	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
☐	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
☒	TIA/EIA-603	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	February 1993
☒	TIA/EIA-603-1	Addendum to TIA/EIA-603	March 4, 1998
☐	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Additional information to this Test Report

Description	Pages
Test Site Calibration Data Sheets	4
Charts taken during testing	12

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: horizontal

Frequency	Transmit signal	TX antenna gain		True transmit signal	Analyzer reading	Correction
[MHz]	P tx [dBm]	(isotropic) [dBi]	(dipole) [dBd]	P true [dBm]	P site [dBm]	for reading in "dBm" [dB]
25.0	-1.1	-17.0	-19.2	-20.3	-44.9	25.3
30.0	-1.4	-13.8	-16.0	-17.3	-40.0	23.3
35.0	-1.5	-11.1	-13.3	-14.7	-36.1	22.0
40.0	-1.5	-8.8	-11.0	-12.5	-38.8	27.0
45.0	-1.6	-6.7	-8.9	-10.5	-35.7	25.9
50.0	-1.6	-5.1	-7.3	-8.9	-34.3	26.1
55.0	-1.7	-3.8	-6.0	-7.6	-32.9	25.9
60.0	-1.7	-2.8	-5.0	-6.7	-32.2	26.2
65.0	-1.7	-2.0	-4.2	-5.9	-31.4	26.2
70.0	-1.7	-1.3	-3.5	-5.2	-30.6	26.1
75.0	-1.8	-0.7	-2.9	-4.7	-30.4	26.4
80.0	-1.9	-0.1	-2.3	-4.1	-30.4	26.9
85.0	-1.9	0.2	-2.0	-3.9	-30.3	27.1
90.0	-2.0	0.5	-1.7	-3.6	-29.6	26.6
95.0	-2.0	0.6	-1.6	-3.6	-28.9	26.0
100.0	-2.0	0.7	-1.5	-3.5	-28.2	25.3
110.0	-2.1	0.9	-1.3	-3.3	-27.9	25.2
120.0	-2.1	1.0	-1.2	-3.3	-27.4	24.8
130.0	-2.2	1.1	-1.1	-3.3	-27.2	24.6
140.0	-2.3	1.4	-0.8	-3.0	-26.3	23.9
150.0	-2.3	1.8	-0.4	-2.7	-25.6	23.6
160.0	-2.4	1.9	-0.3	-2.6	-25.4	23.4
170.0	-2.4	2.0	-0.2	-2.6	-25.3	23.4
180.0	-2.5	2.1	0.0	-2.5	-25.6	23.7
190.0	-2.6	2.3	0.2	-2.4	-26.4	24.6
200.0	-2.6	2.3	0.2	-2.4	-27.8	26.0
200.1	-2.3	6.5	4.4	2.0	-19.4	22.0
220.0	-2.6	6.9	4.8	2.1	-19.6	22.4
240.0	-2.7	7.0	4.9	2.1	-20.5	23.3
260.0	-2.8	7.1	5.0	2.2	-21.5	24.4
280.0	-2.9	7.3	5.1	2.2	-22.9	25.7

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: horizontal

Frequency [MHz]	Transmit signal P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
		(isotropic) [dBi]	(dipole) [dBd]			
300.0	-3.0	7.2	5.1	2.1	-23.0	25.7
325.0	-3.0	7.2	5.1	2.0	-23.9	26.6
350.0	-3.2	7.1	5.0	1.8	-25.7	28.2
375.0	-3.2	7.2	5.1	1.8	-26.2	28.7
400.0	-3.1	6.8	4.7	1.6	-27.8	30.0
425.0	-3.4	6.7	4.6	1.1	-29.1	30.9
433.9	-3.4	6.8	4.7	1.3	-29.8	31.7
450.0	-3.4	7.0	4.9	1.4	-30.6	32.6
475.0	-3.6	6.9	4.8	1.2	-30.1	32.0
500.0	-3.7	7.0	4.9	1.2	-30.2	32.1
550.0	-3.8	7.5	5.4	1.6	-29.3	31.6
600.0	-3.7	7.0	4.9	1.1	-28.9	30.7
650.0	-4.0	6.9	4.8	0.8	-30.3	31.7
700.0	-4.2	6.5	4.4	0.2	-33.0	33.9
750.0	-4.2	7.2	5.1	0.8	-34.6	36.1
800.0	-4.3	7.1	5.0	0.7	-34.3	35.7
850.0	-4.6	6.7	4.6	0.0	-33.2	33.8
867.8	-4.4	6.6	4.5	0.0	-32.9	33.7
900.0	-4.6	7.0	4.9	0.3	-33.1	34.1
950.0	-4.6	7.7	5.6	0.9	-34.4	36.0
1000.0	-4.7	7.0	4.9	0.2	-36.9	37.8
1000.1	-4.6	4.3		-0.3	-36.8	37.2
1500.0	-5.6	6.9		1.3	-41.1	43.2
2000.0	-6.2	7.1		0.9	-42.7	44.4
2500.0	-6.6	7.6		1.0	-46.0	47.8
3000.0	-6.8	7.7		0.9	-47.9	49.7
3500.0	-7.6	7.8		0.2	-49.4	50.5
4000.0	-8.2	7.9		-0.3	-53.7	54.3
4500.0	-9.0	9.0		0.0	-55.3	56.4
5000.0	-9.5	8.9		-0.6	-55.5	55.9

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: vertical

Frequency	Transmit signal ¹ P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
[MHz]		(isotropic) [dBi]	(dipole) [dBd]			
25.0	-1.1	-17.0	-19.2	-20.3	-43.4	23.8
30.0	-1.4	-13.8	-16.0	-17.3	-38.6	21.9
35.0	-1.5	-11.1	-13.3	-14.7	-34.9	20.8
40.0	-1.5	-8.8	-11.0	-12.5	-34.3	22.5
45.0	-1.6	-6.7	-8.9	-10.5	-37.0	27.1
50.0	-1.6	-5.1	-7.3	-8.9	-34.3	26.1
55.0	-1.7	-3.8	-6.0	-7.6	-32.7	25.7
60.0	-1.7	-2.8	-5.0	-6.7	-32.5	26.4
65.0	-1.7	-2.0	-4.2	-5.9	-31.3	26.1
70.0	-1.7	-1.3	-3.5	-5.2	-30.6	26.1
75.0	-1.8	-0.7	-2.9	-4.7	-29.9	25.9
80.0	-1.9	-0.1	-2.3	-4.1	-29.9	26.5
85.0	-1.9	0.2	-2.0	-3.9	-30.5	27.2
90.0	-2.0	0.5	-1.7	-3.6	-30.3	27.3
95.0	-2.0	0.6	-1.6	-3.6	-29.0	26.1
100.0	-2.0	0.7	-1.5	-3.5	-28.3	25.5
110.0	-2.1	0.9	-1.3	-3.3	-27.9	25.2
120.0	-2.1	1.0	-1.2	-3.3	-28.2	25.5
130.0	-2.2	1.1	-1.1	-3.3	-27.0	24.3
140.0	-2.3	1.4	-0.8	-3.0	-25.8	23.4
150.0	-2.3	1.8	-0.4	-2.7	-25.1	23.1
160.0	-2.4	1.9	-0.3	-2.6	-25.1	23.1
170.0	-2.4	2.0	-0.2	-2.6	-25.0	23.1
180.0	-2.5	2.1	0.0	-2.5	-25.1	23.2
190.0	-2.6	2.3	0.2	-2.4	-25.5	23.7
200.0	-2.6	2.3	0.2	-2.4	-26.9	25.2
200.1	-2.3	6.5	4.4	2.0	-18.4	21.1
220.0	-2.6	6.9	4.8	2.1	-18.7	21.5
240.0	-2.7	7.0	4.9	2.1	-20.0	22.8
260.0	-2.8	7.1	5.0	2.2	-21.4	24.3
280.0	-2.9	7.3	5.1	2.2	-23.7	26.6

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)


Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: vertical

Frequency	Transmit signal ¹	TX antenna gain		True transmit signal	Analyzer reading	Correction
[MHz]	P tx [dBm]	(isotropic) [dBi]	(dipole) [dBd]	P true [dBm]	P site [dBm]	for reading in "dBm" [dB]
300.0	-3.0	7.2	5.1	2.1	-25.3	28.0
325.0	-3.0	7.2	5.1	2.0	-26.7	29.3
350.0	-3.2	7.1	5.0	1.8	-28.2	30.7
375.0	-3.2	7.2	5.1	1.8	-27.9	30.4
400.0	-3.1	6.8	4.7	1.6	-28.3	30.5
425.0	-3.4	6.7	4.6	1.1	-28.2	30.0
433.9	-3.4	6.8	4.7	1.3	-28.6	30.6
450.0	-3.4	7.0	4.9	1.4	-28.8	30.9
475.0	-3.6	6.9	4.8	1.2	-28.1	30.0
500.0	-3.7	7.0	4.9	1.2	-28.2	30.0
550.0	-3.8	7.5	5.4	1.6	-29.5	31.7
600.0	-3.7	7.0	4.9	1.1	-31.6	33.4
650.0	-4.0	6.9	4.8	0.8	-32.4	33.8
700.0	-4.2	6.5	4.4	0.2	-32.2	33.1
750.0	-4.2	7.2	5.1	0.8	-31.3	32.8
800.0	-4.3	7.1	5.0	0.7	-34.4	35.7
850.0	-4.6	6.7	4.6	0.0	-36.3	36.9
867.8	-4.4	6.6	4.5	0.0	-36.3	37.1
900.0	-4.6	7.0	4.9	0.3	-35.7	36.6
950.0	-4.6	7.7	5.6	0.9	-34.9	36.5
1000.0	-4.7	7.0	4.9	0.2	-34.7	35.6
1000.1	-4.6	4.3		-0.3	-36.3	36.7
1500.0	-5.6	6.9		1.3	-39.1	41.2
2000.0	-6.2	7.1		0.9	-44.3	46.1
2500.0	-6.6	7.6		1.0	-45.1	46.9
3000.0	-6.8	7.7		0.9	-46.5	48.3
3500.0	-7.6	7.8		0.2	-50.3	51.4
4000.0	-8.2	7.9		-0.3	-52.8	53.4
4500.0	-9.0	9.0		0.0	-55.9	57.0
5000.0	-9.5	8.9		-0.6	-54.7	55.1

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 1: in upright position
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

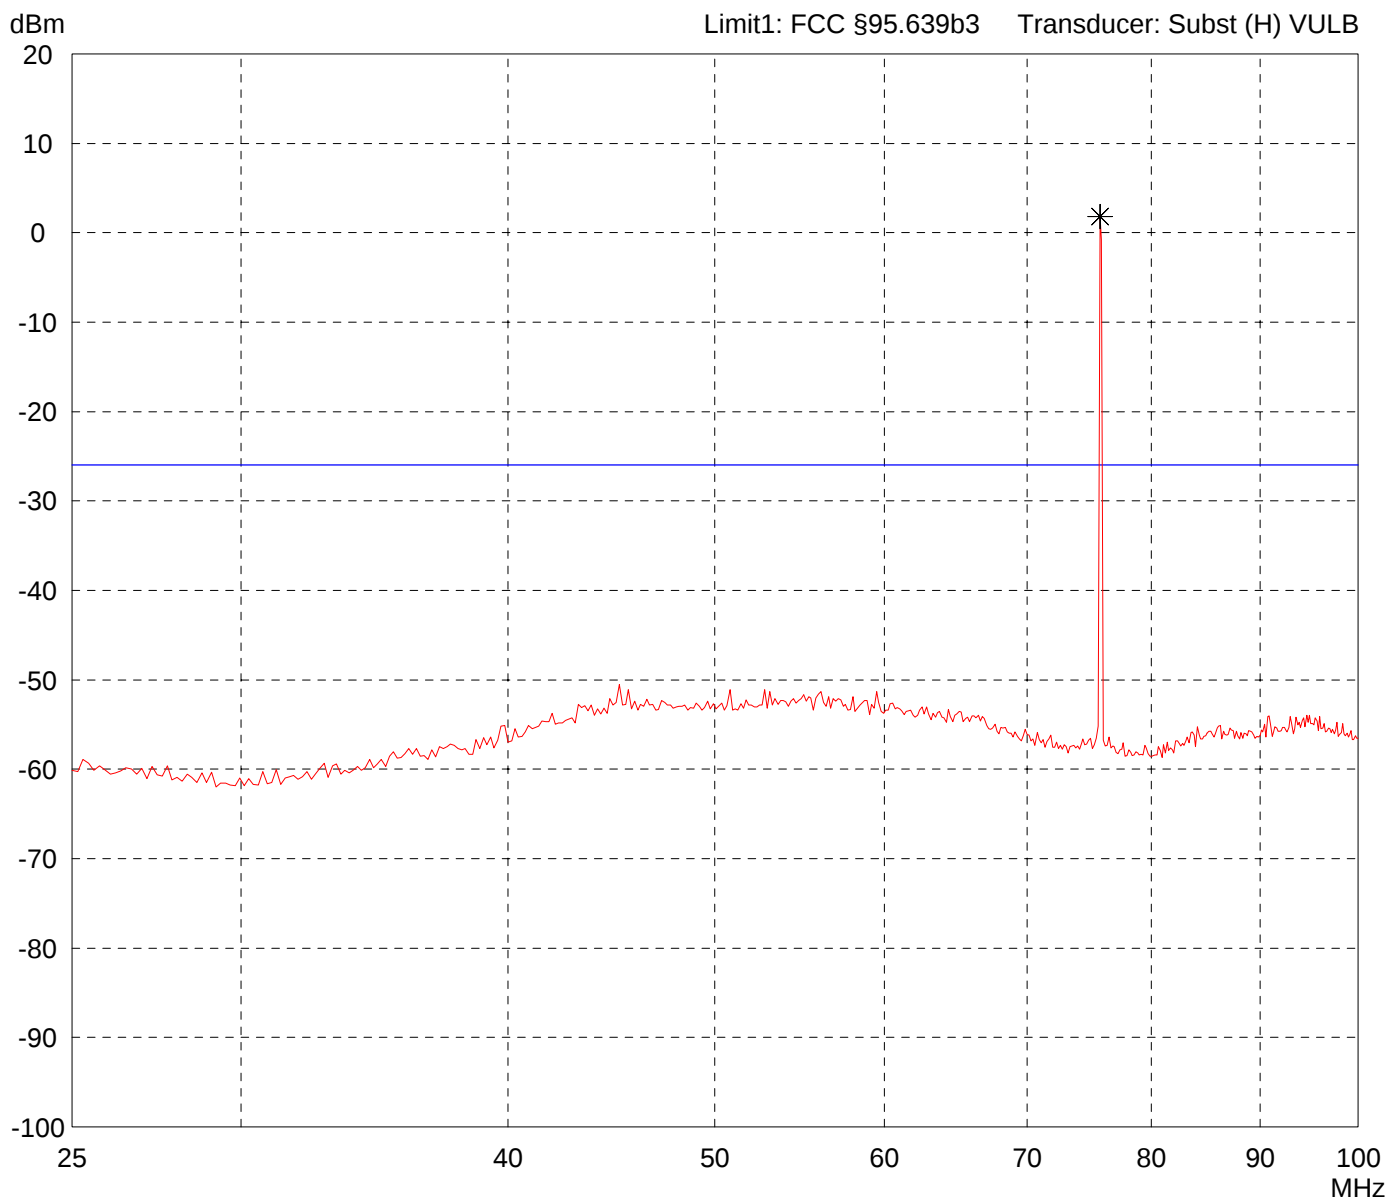


Result: Limit kept (Carrier excluded)	Project file: 55503-50538
---	-------------------------------------

Page of Pages

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 1: in upright position
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

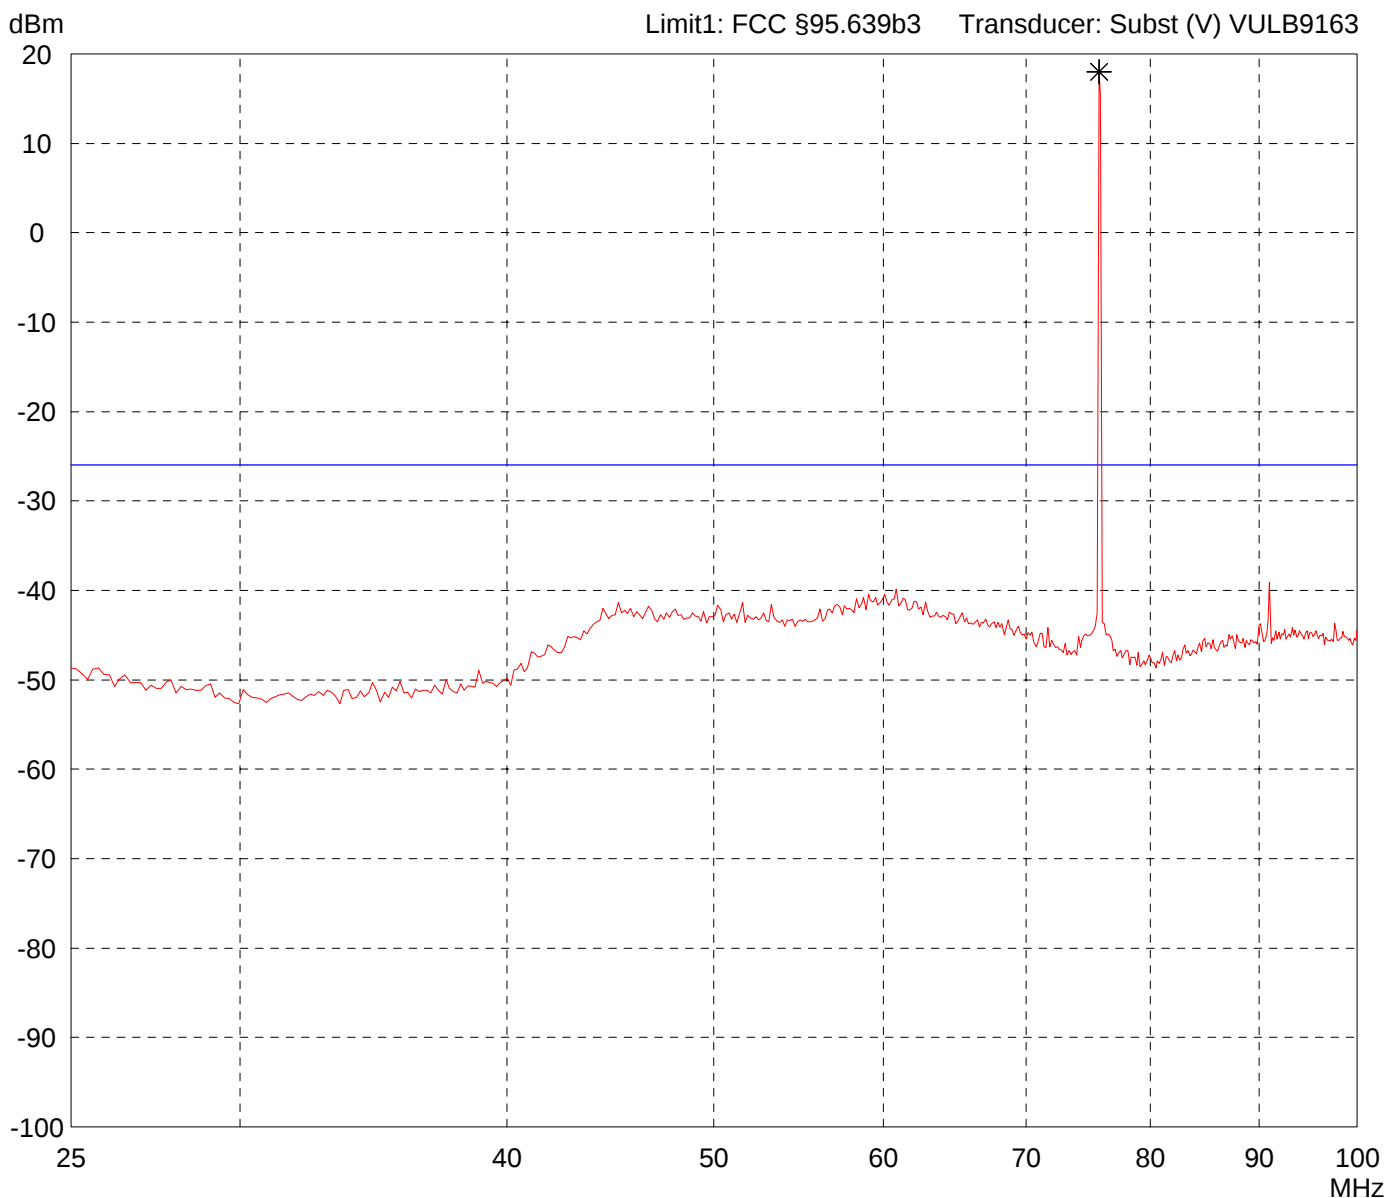


Result: Limit kept (Carrier excluded)	Project file: 55503-50538
---	-------------------------------------

Page of Pages

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 1: in vertical position
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

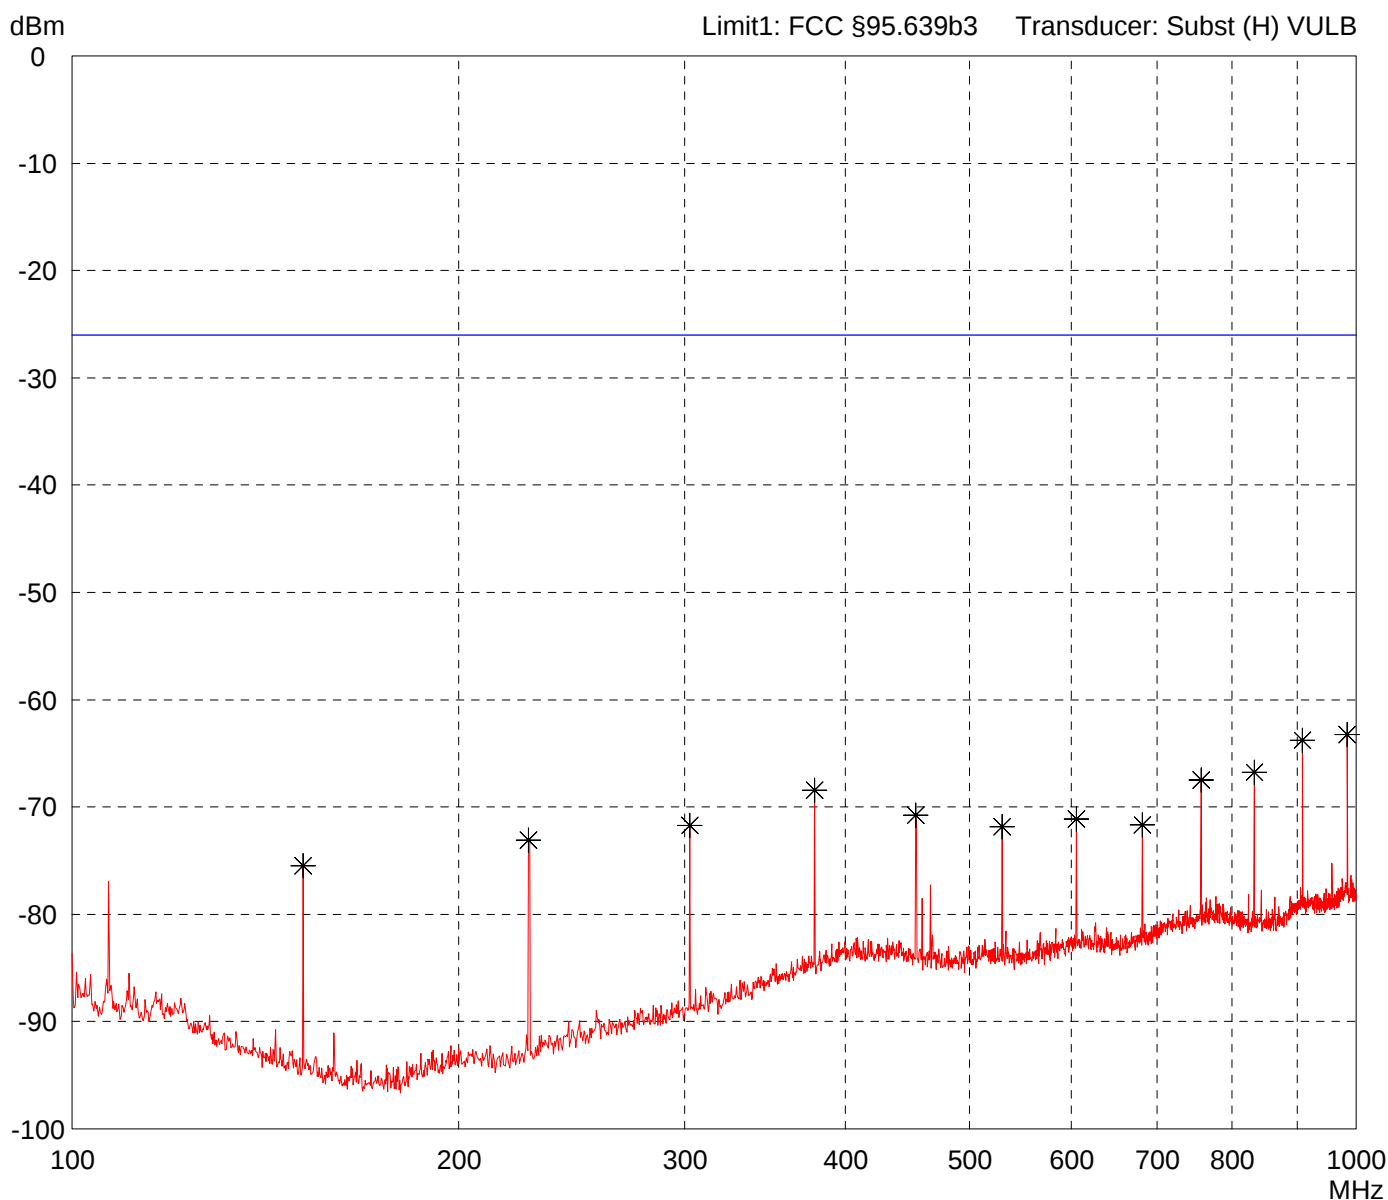


Result: Limit kept	Project file: 55503-50538
------------------------------	-------------------------------------

Page of Pages

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 1: in vertical position
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

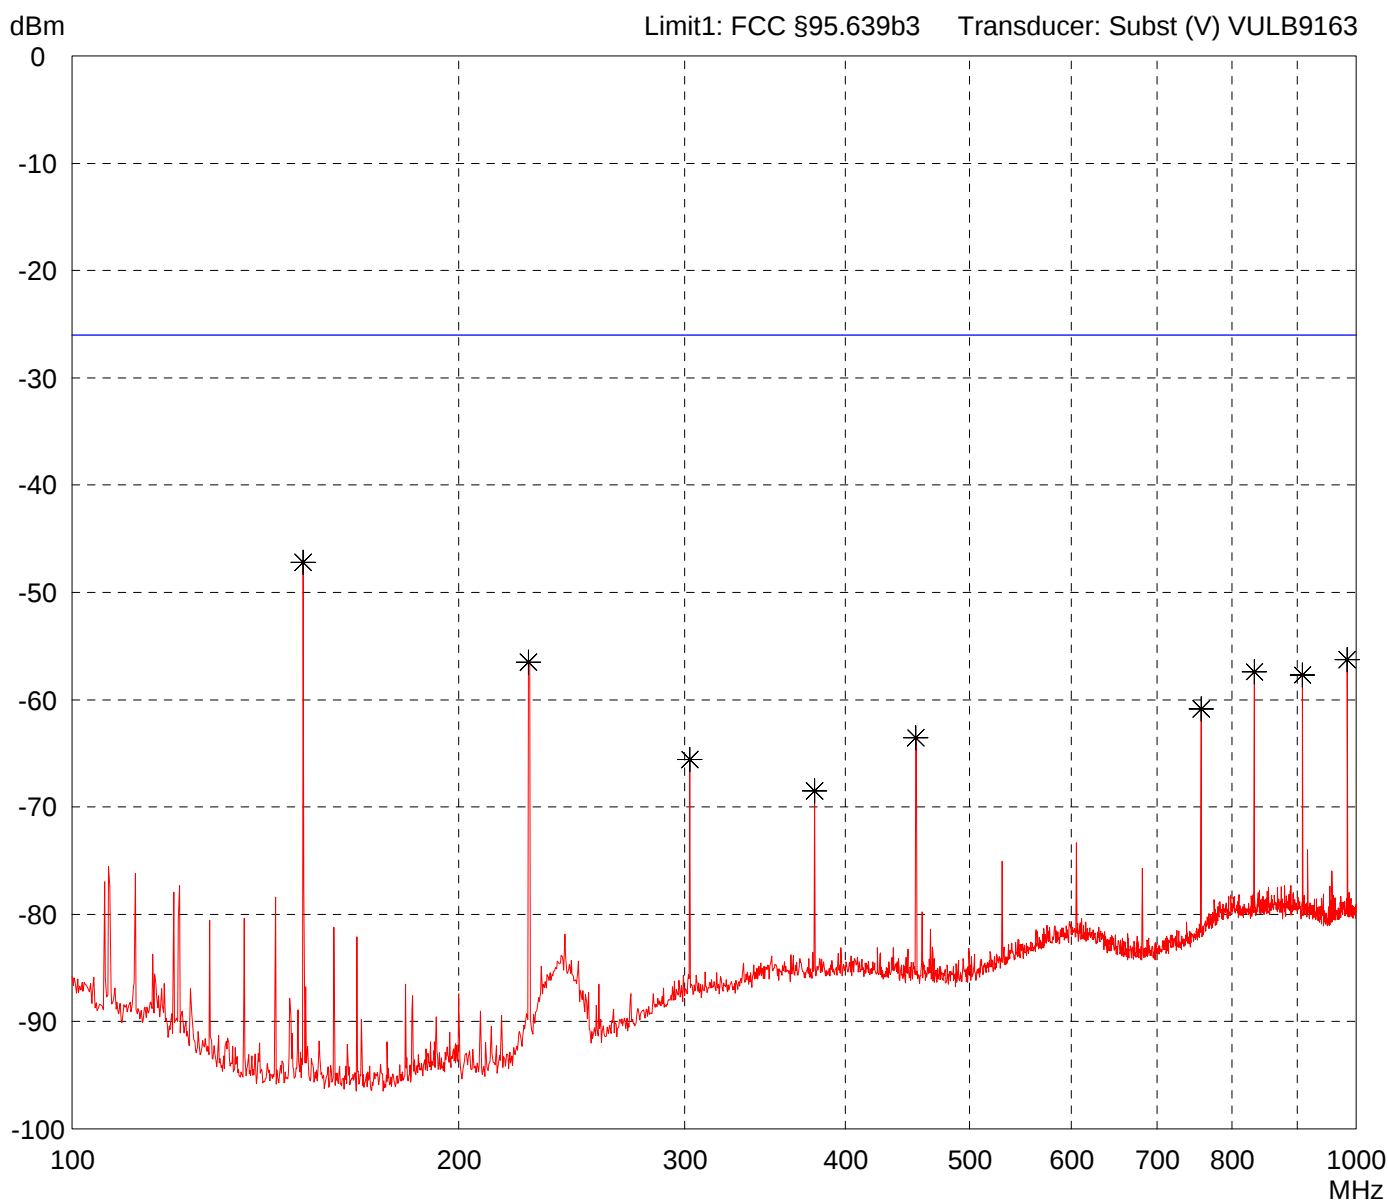


Result: Limit kept	Project file: 55503-50538
	Page of Pages

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 2: flat on table
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

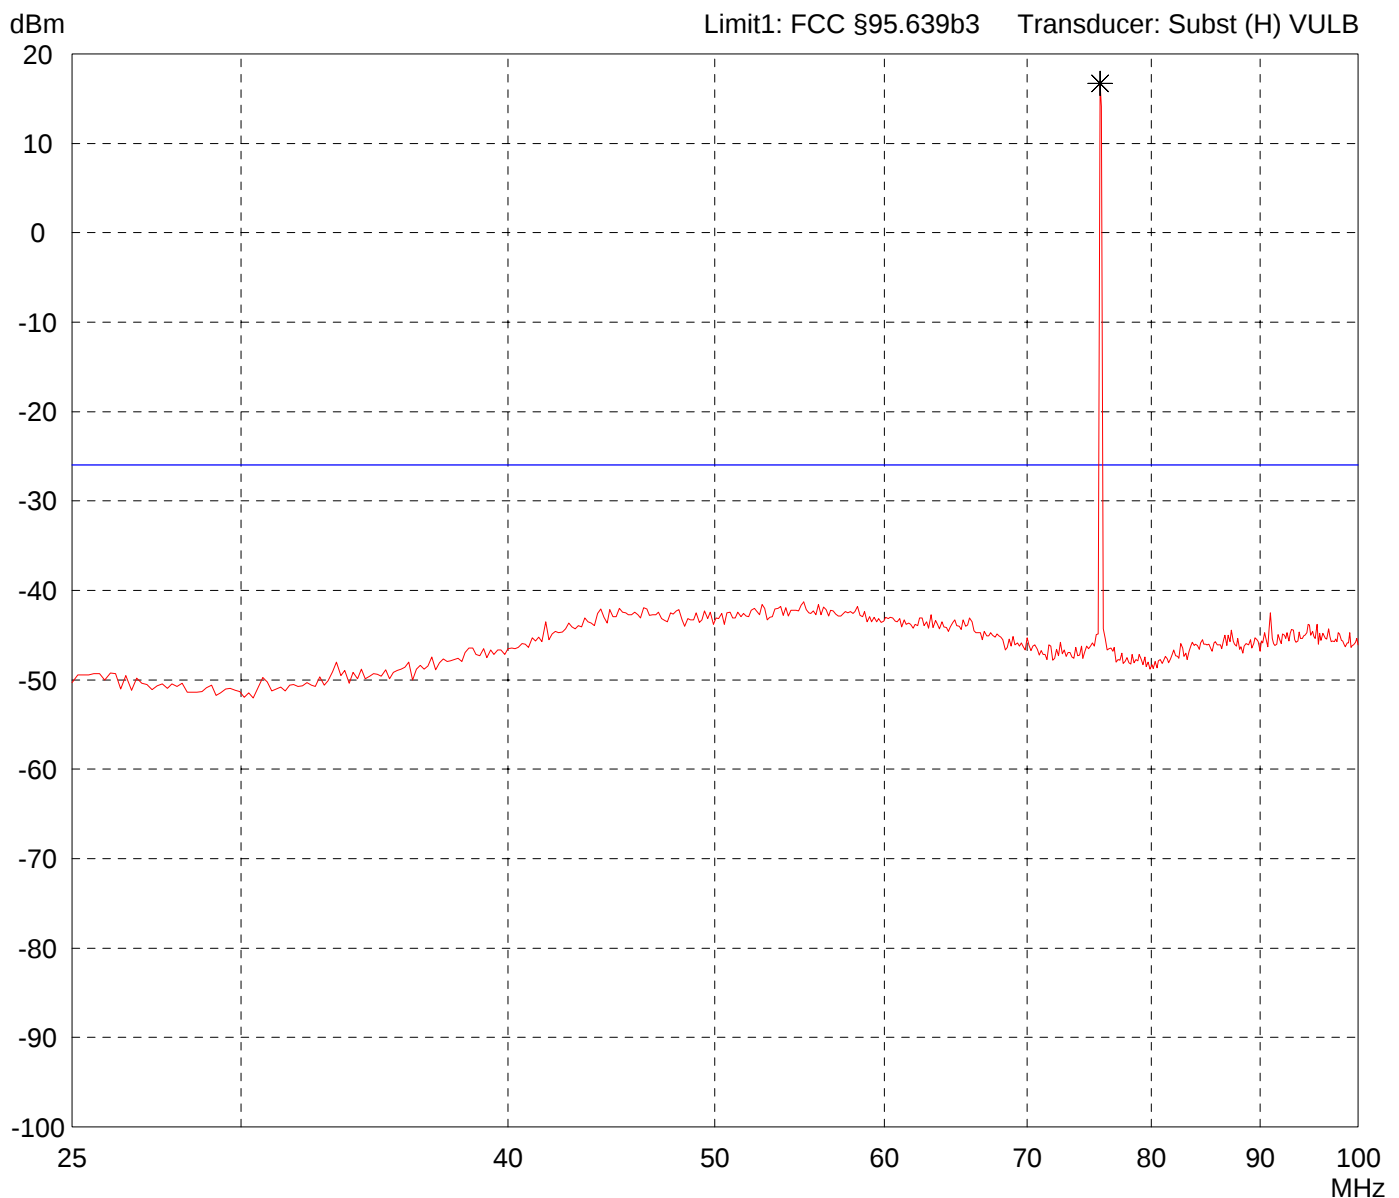


Result: Limit kept (Carrier excluded)	Project file: 55503-50538
---	-------------------------------------

Page of Pages

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 2: flat on table
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

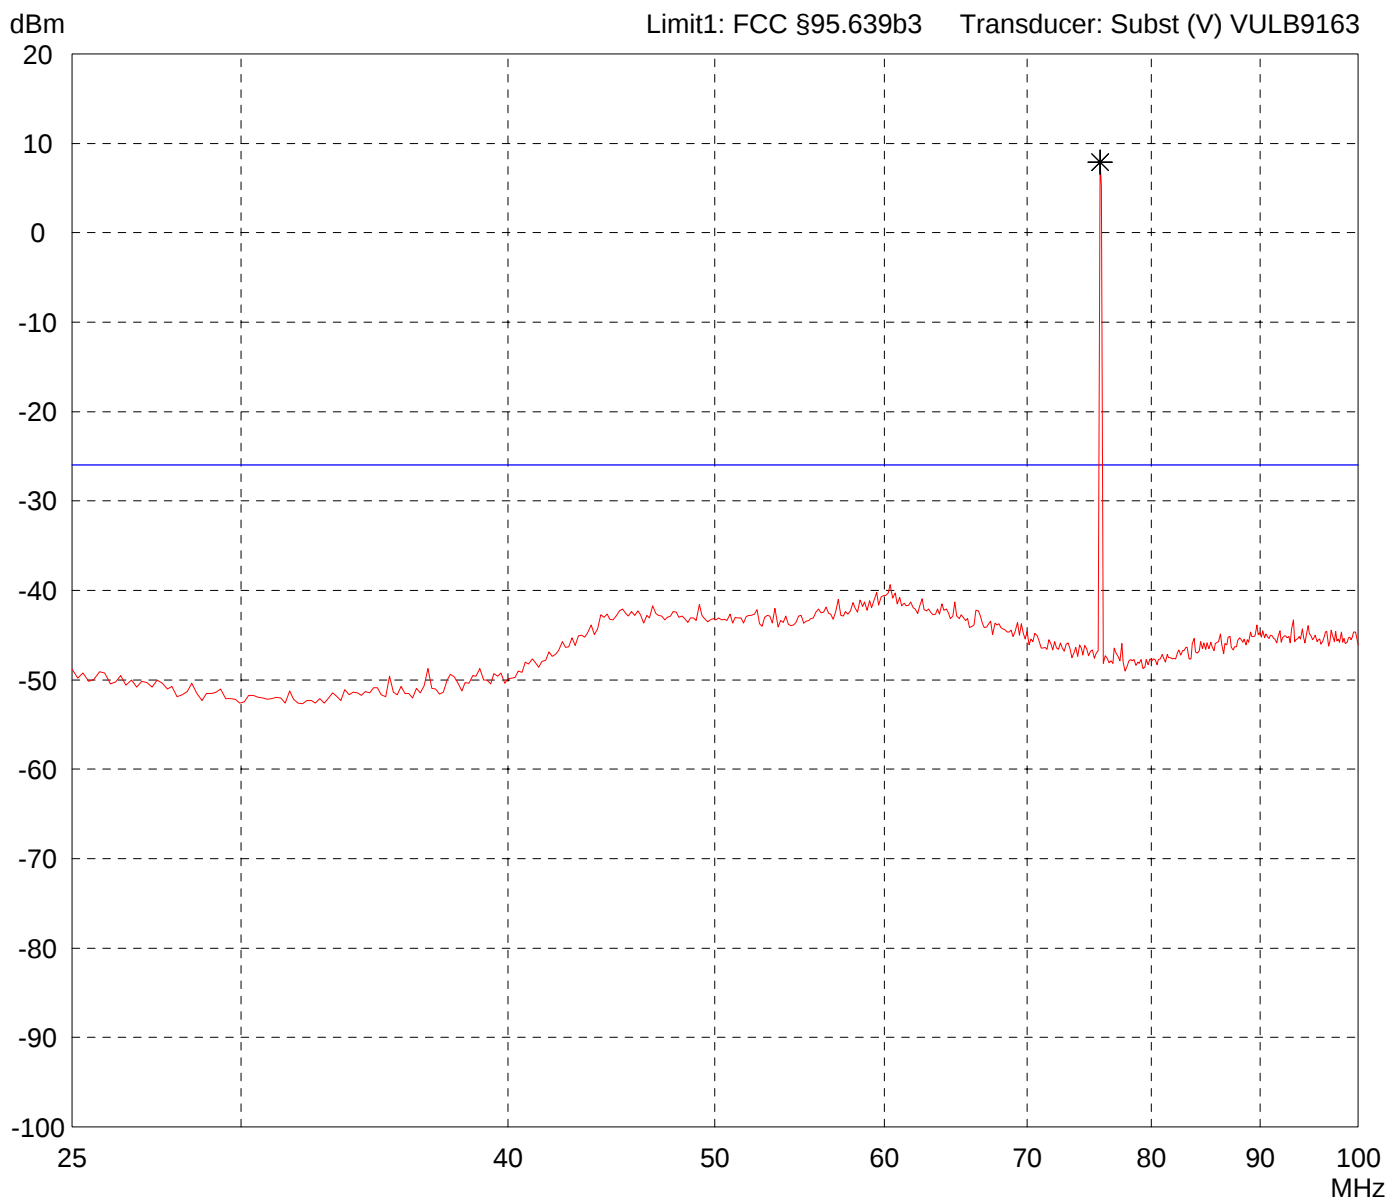


Result: Limit kept (Carrier excluded)	Project file: 55503-50538
	Page of Pages

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 2: flat on table
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

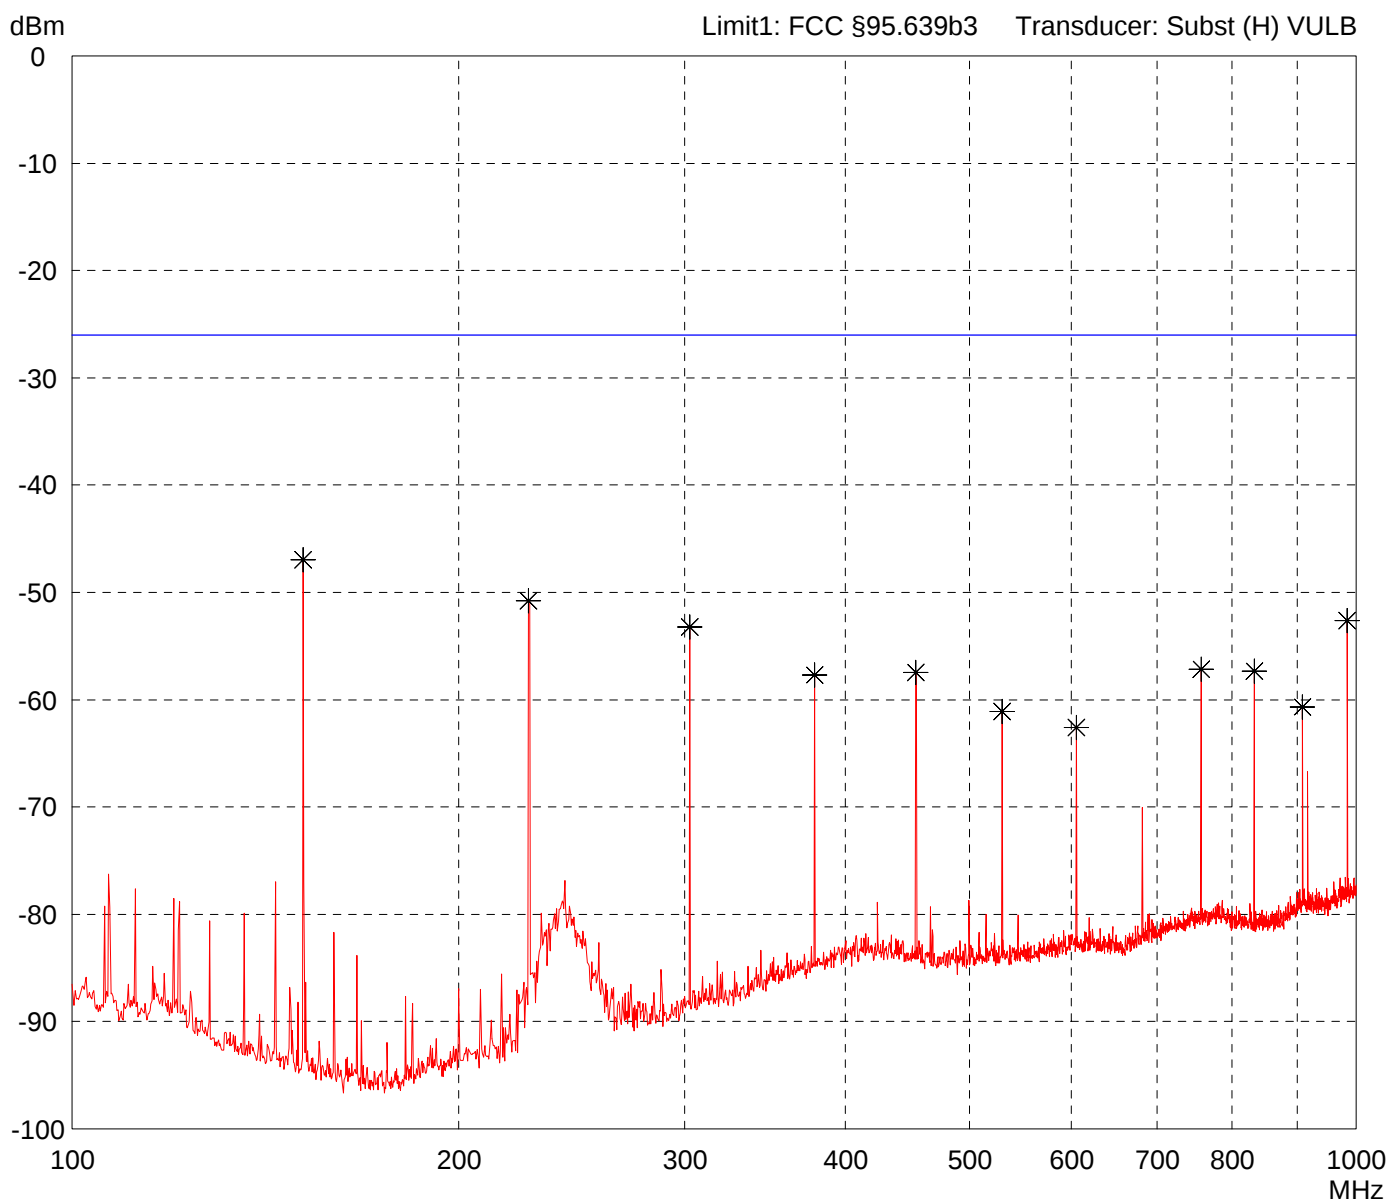


Result: Limit kept	Project file: 55503-50538
	Page of Pages

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 2: flat on table
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: Selected by hand
--------------------------	--

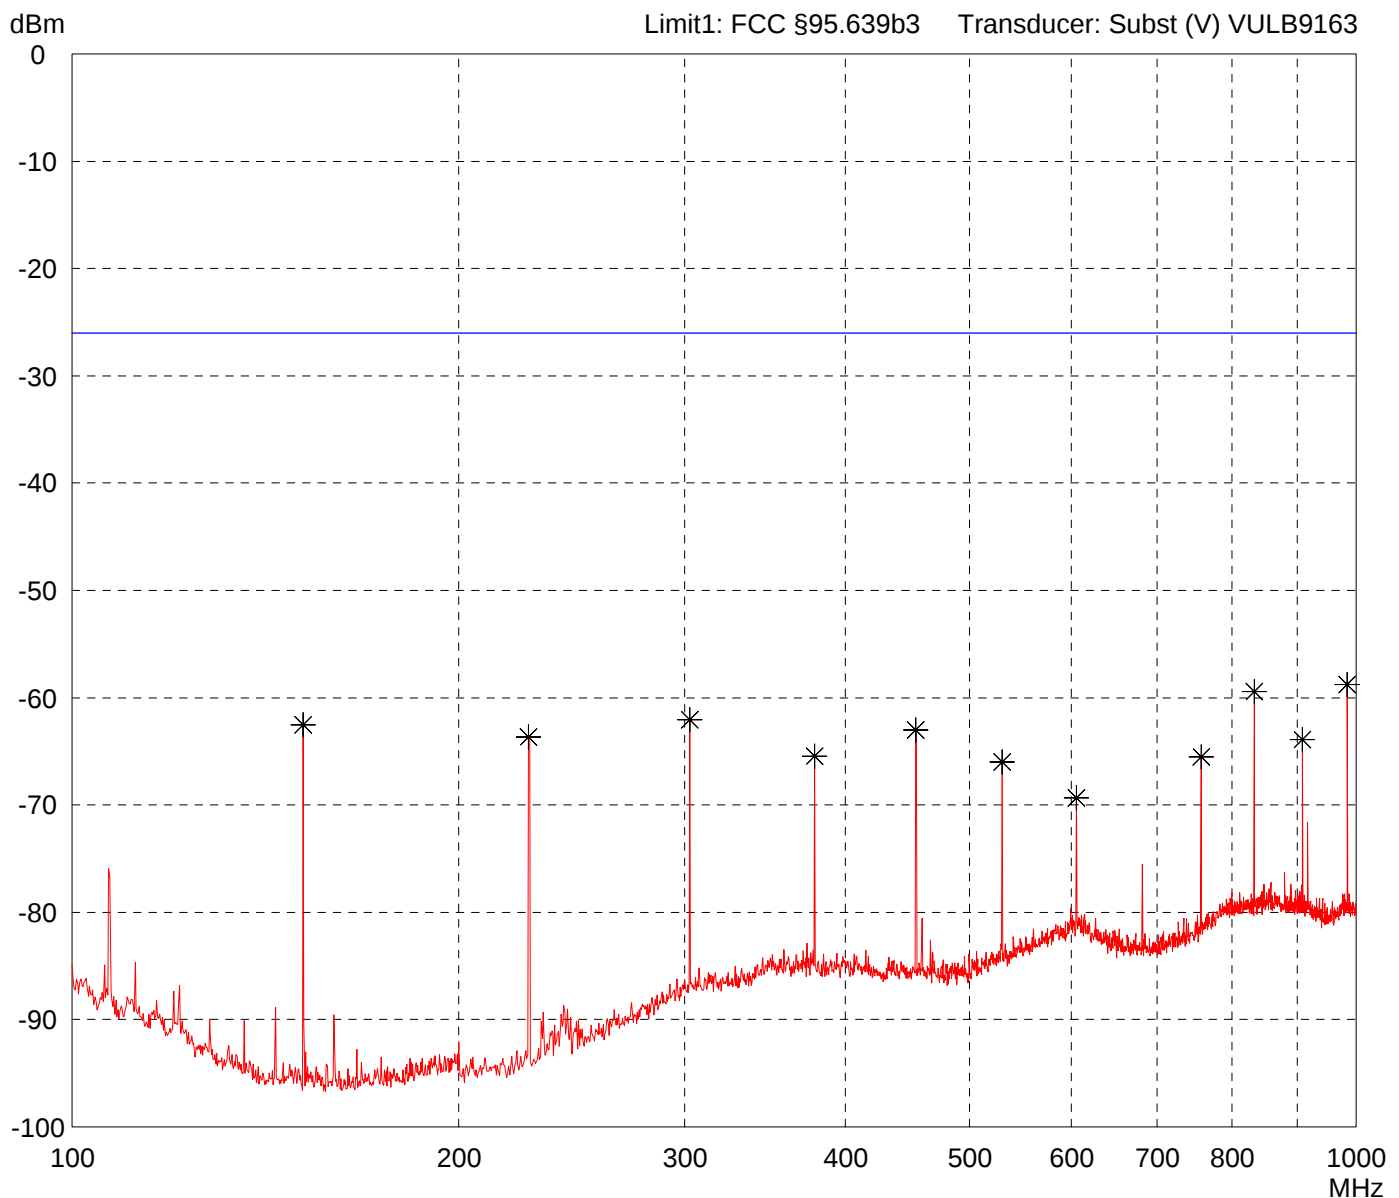

Result: Limit kept	Project file: 55503-50538
	Page of Pages

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E


Model: T4EXA (75 MHz) Serial no.: A50607364 Applicant: Futaba Corporation Test site: Fully anechoic room, cabin no. 2 Tested on: Test distance 3 metres Horizontal Polarization Date of test: 09/05/2005 Operator: M. Steindl Test performed: automatically File name: default.emi	Comment: - 9.6 V battery supply - transmitting continuously - Position 3: on left side
Detector: Peak	List of values: Selected by hand

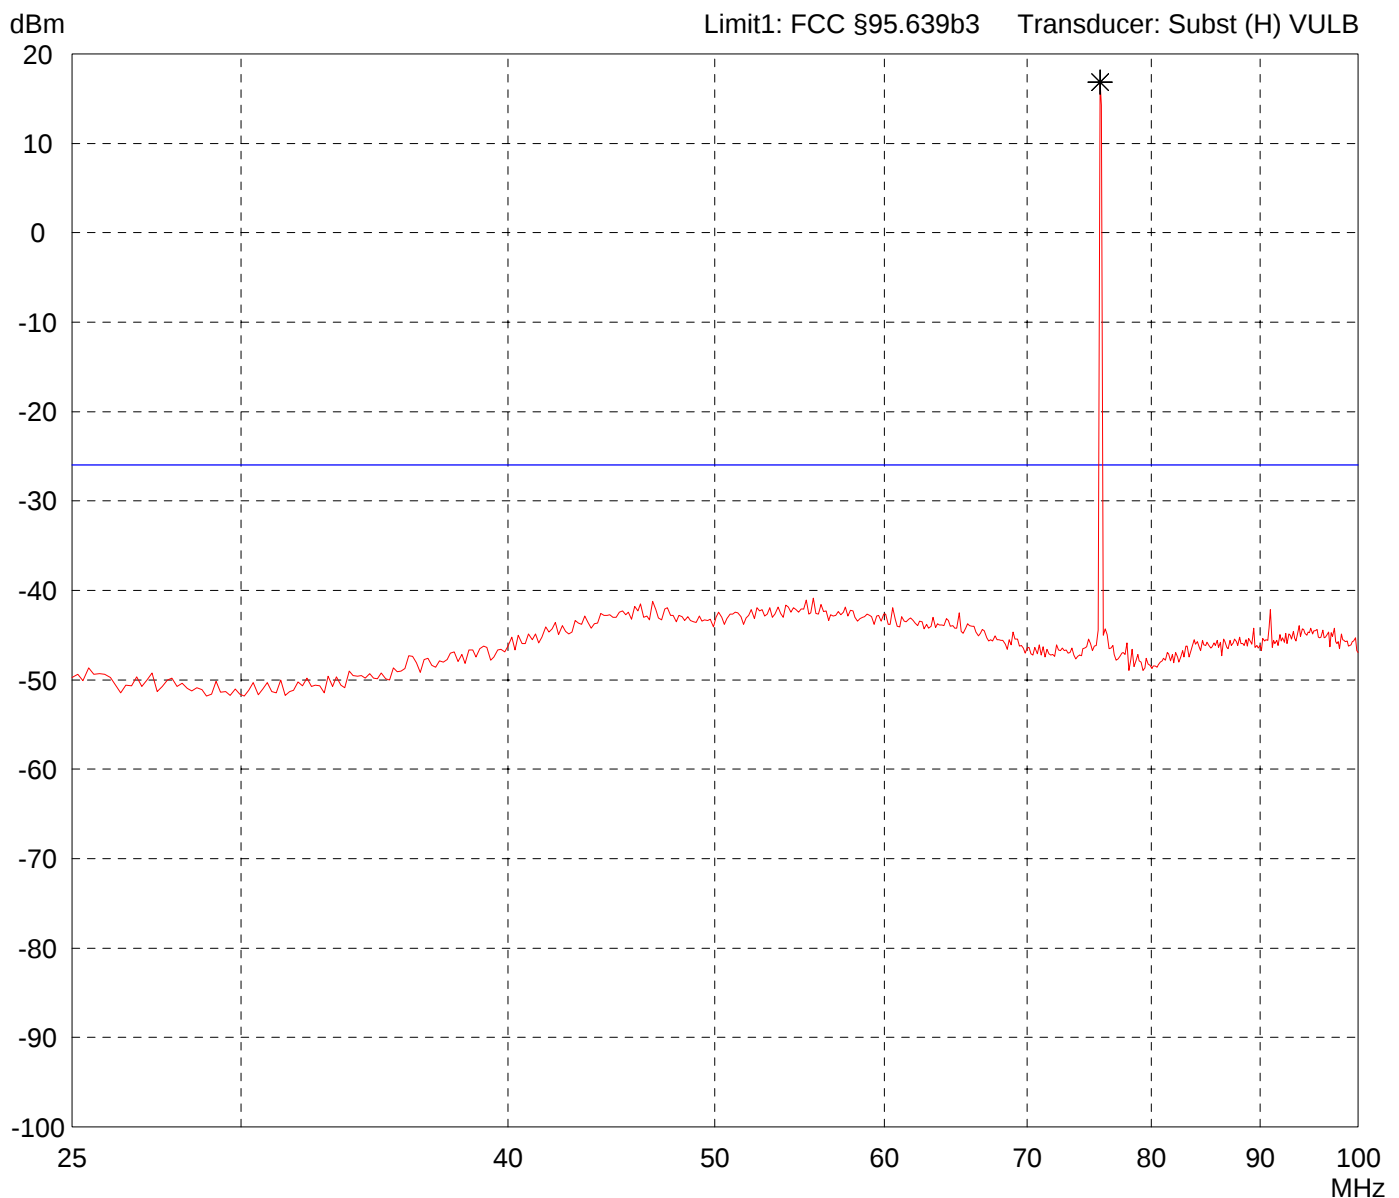

Result: Limit kept (Carrier excluded)	Project file: 55503-50538
Page of Pages	

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz) Serial no.: A50607364 Applicant: Futaba Corporation Test site: Fully anechoic room, cabin no. 2 Tested on: Test distance 3 metres Vertical Polarization Date of test: 09/05/2005 Operator: M. Steindl Test performed: automatically File name: default.emi	Comment: - 9.6 V battery supply - transmitting continuously - Position 3: on left side
Detector: Peak	List of values: Selected by hand

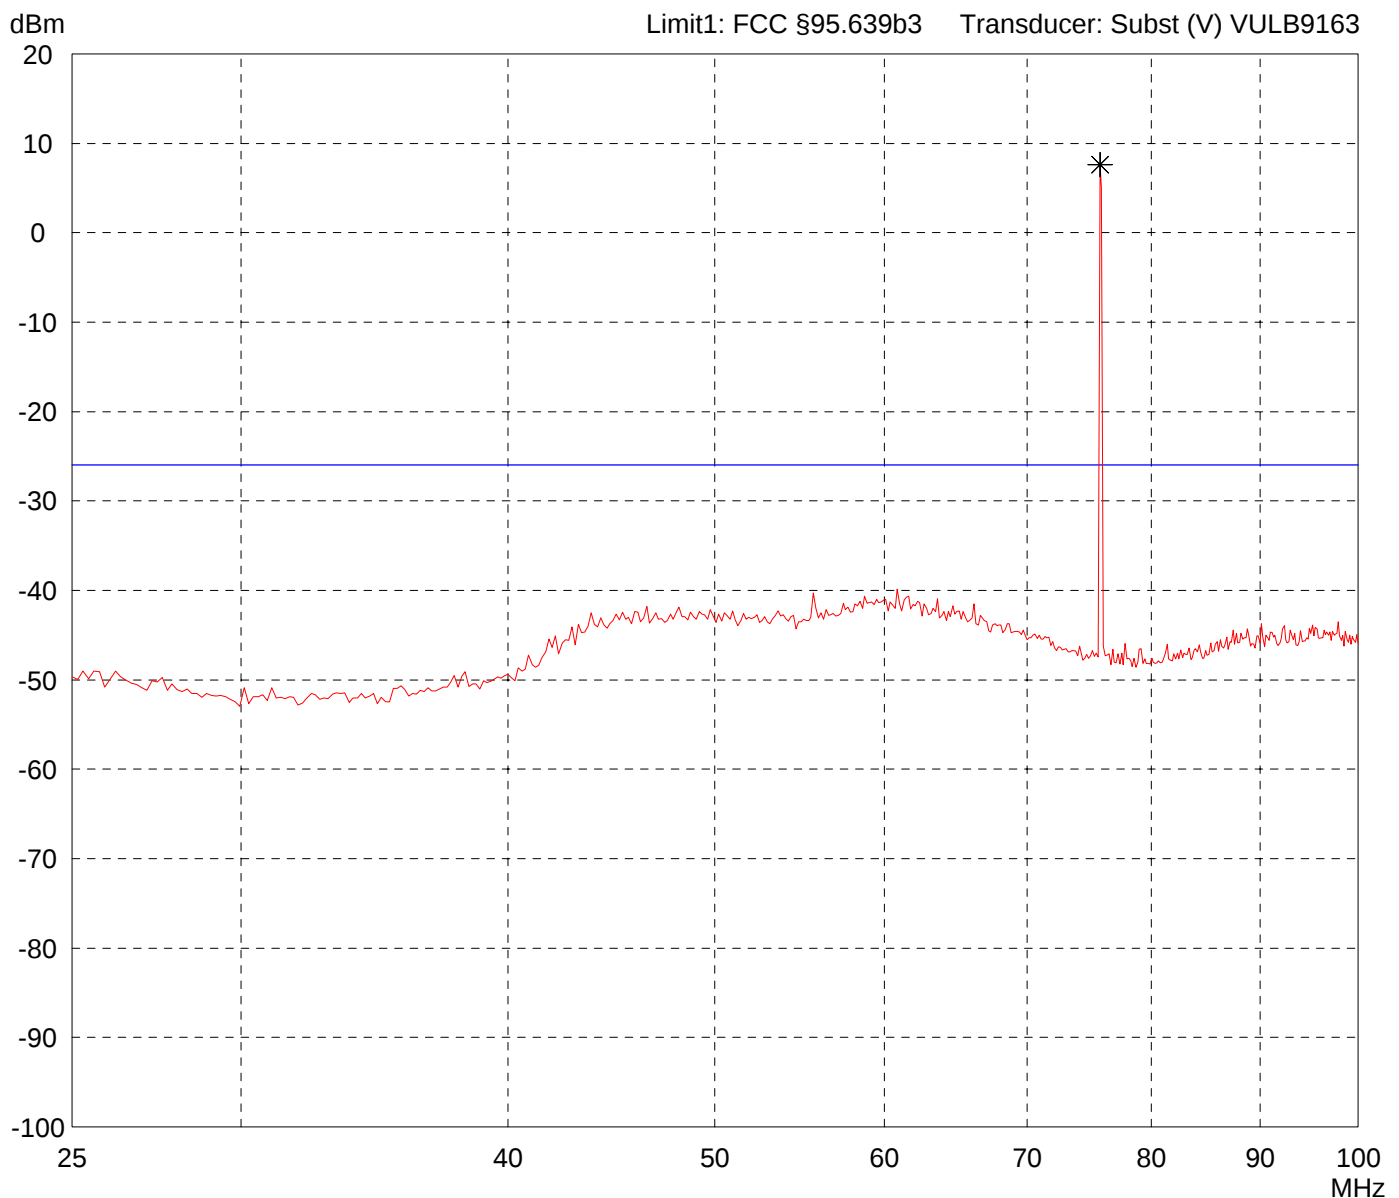


Result: Limit kept (Carrier excluded)	Project file: 55503-50538
Page of Pages	

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 3: on left side
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

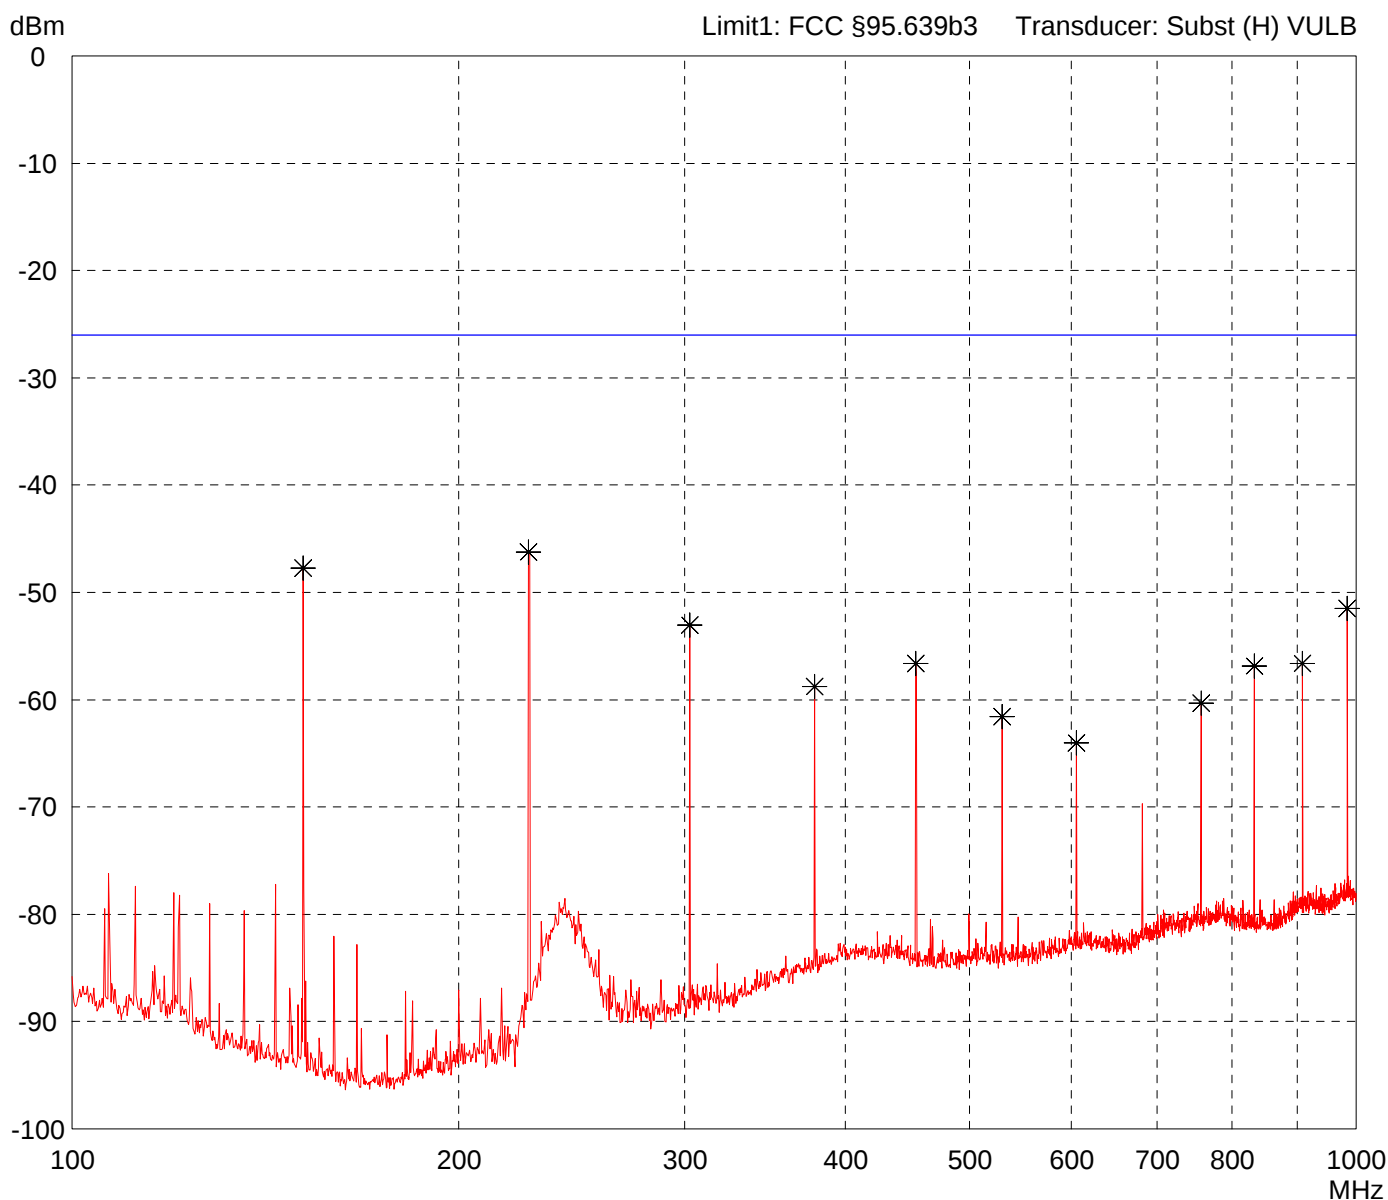


Result: Limit kept	Project file: 55503-50538
------------------------------	-------------------------------------

Page of Pages

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

Model: T4EXA (75 MHz)	Comment: - 9.6 V battery supply - transmitting continuously - Position 3: on left side
Serial no.: A50607364	
Applicant: Futaba Corporation	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 09/05/2005	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

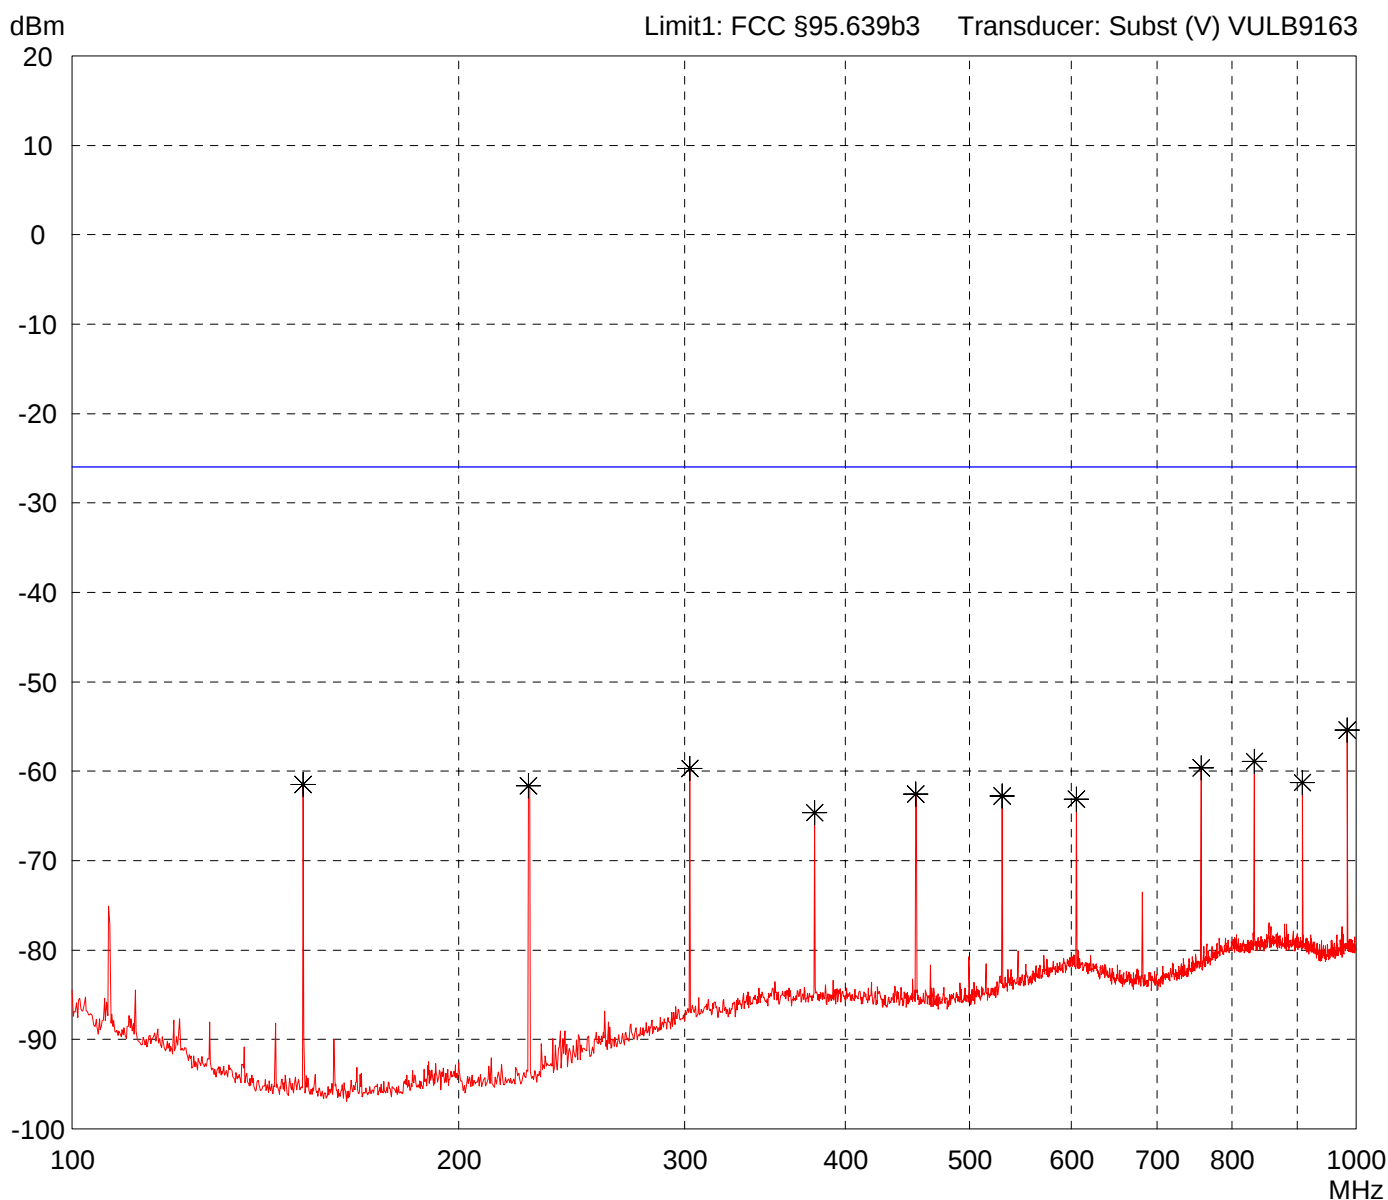

Result: Limit kept	Project file: 55503-50538
------------------------------	-------------------------------------

Page of Pages