

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	19
A.2.3 Emissions in Non-restricted Frequency Bands:.....	21
A.3 20dB BANDWIDTH	22
A.3.1 20dB Bandwidth Result.....	22
A.3.2 Measurement Plots	23
A.4 CARRIER FREQUENCY SEPARATION	25
A.5 TIME OF OCCUPANCY.....	29
A.5.1 Time of Occupancy	29
A.6 NUMBER OF HOPPING CHANNELS	34
A.7 MAXIMUM PEAK OUTPUT POWER	35
A.7.1 Maximum Peak Output Power.....	35
A.7.2 Average Output Power (Reporting only).....	35
A.8 EMISSION LIMITATIONS MEASUREMENT	36
A.8.1 Band Edge.....	36
A.8.2 Spurious Emission (30MHz –25GHz).....	38

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/01/20	Temp./Hum.	21°C/64%
Test Voltage	AC 120V 60Hz	Tested By	Bruce Tseng
Test Mode	Charge Mode (For LiPo Battery Charge)		

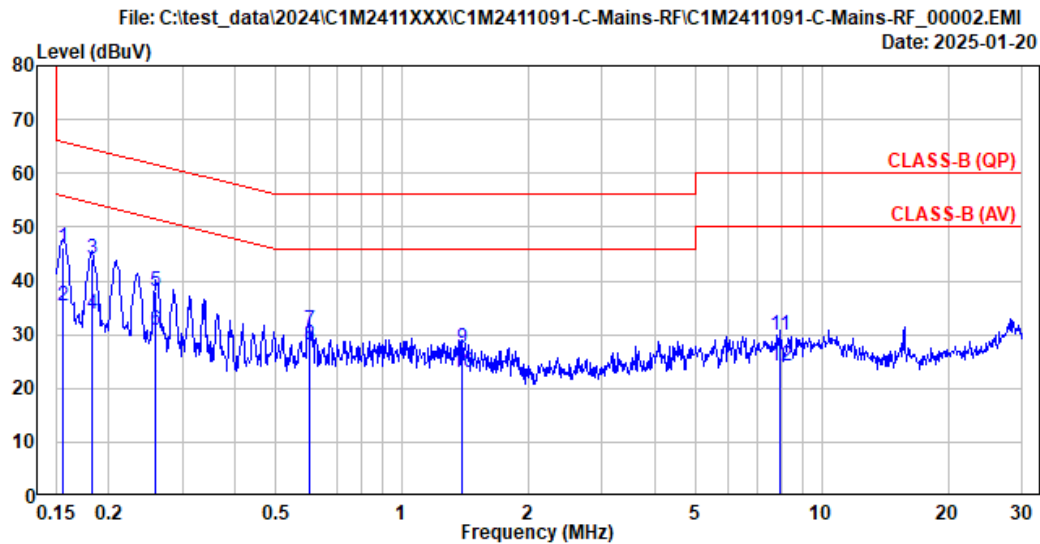

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC Part 18C (QP)	Phase	: Neutral
Environment	: 21°C/64%	Test Rating	: 120Vac/60Hz
EUT Model	: T6PV	Engineer	: Bruce
Test Mode	: Charge		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.156	10.27	0.03	9.85	25.98	46.13	65.67	19.54	QP
2	0.156	10.27	0.03	9.85	15.29	35.44	55.67	20.23	Average
3	0.183	10.26	0.03	9.85	23.91	44.05	64.34	20.29	QP
4	0.183	10.26	0.03	9.85	13.53	33.67	54.34	20.67	Average
5	0.260	10.26	0.03	9.85	17.87	38.01	61.45	23.44	QP
6	0.260	10.26	0.03	9.85	10.57	30.71	51.45	20.74	Average
7	0.600	10.26	0.03	9.85	10.60	30.74	56.00	25.26	QP
8	0.600	10.26	0.03	9.85	7.84	27.98	46.00	18.02	Average
9	1.385	10.28	0.05	9.85	7.25	27.43	56.00	28.57	QP
10	1.385	10.28	0.05	9.85	2.70	22.88	46.00	23.12	Average
11	7.928	10.50	0.12	9.88	9.50	30.00	60.00	30.00	QP
12	7.928	10.50	0.12	9.88	3.66	24.16	50.00	25.84	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/01/20	Temp./Hum.	21°C/64%
Test Voltage	AC 120V 60Hz	Tested By	Bruce Tseng
Test Mode	Charge Mode (For LiPo Battery Charge)		

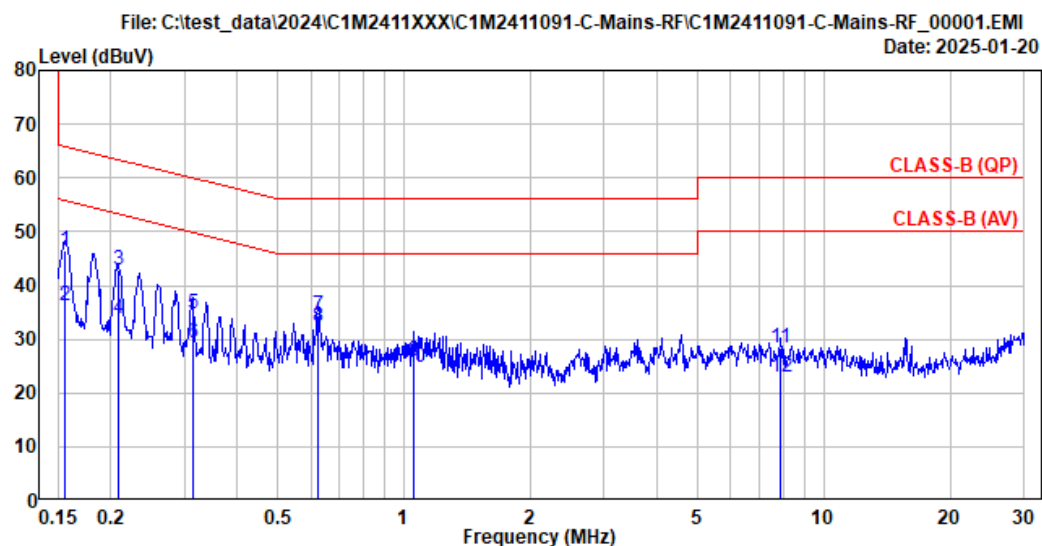

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC Part 18C (QP)	Phase	: Line
Environment	: 21°C/64%	Test Rating	: 120Vac/60Hz
EUT Model	: T6PV	Engineer	: Bruce
Test Mode	: Charge		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.155	10.26	0.03	9.85	26.29	46.43	65.71	19.28	QP
2	0.155	10.26	0.03	9.85	15.96	36.10	55.71	19.61	Average
3	0.208	10.25	0.03	9.85	22.66	42.79	63.27	20.48	QP
4	0.208	10.25	0.03	9.85	13.66	33.79	53.27	19.48	Average
5	0.314	10.25	0.03	9.85	14.61	34.74	59.87	25.13	QP
6	0.314	10.25	0.03	9.85	9.27	29.40	49.87	20.47	Average
7	0.624	10.25	0.03	9.85	14.34	34.47	56.00	21.53	QP
8	0.624	10.25	0.03	9.85	12.11	32.24	46.00	13.76	Average
9	1.053	10.26	0.04	9.85	5.81	25.96	56.00	30.04	QP
10	1.053	10.26	0.04	9.85	4.56	24.71	46.00	21.29	Average
11	7.888	10.41	0.12	9.88	8.10	28.51	60.00	31.49	QP
12	7.888	10.41	0.12	9.88	2.61	23.02	50.00	26.98	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/12/03~2025/01/15	Temp./Hum.	19~23°C/52~60%
Test Voltage	Charge Mode: AC 120V 60Hz Transmit Mode: DC 6.0V(Via AAA Batteryx4)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

Mode	Charge Mode (For LiPo Battery Charge)							
------	---------------------------------------	--	--	--	--	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.44	26.49	30.55	29.08	40.00	10.92	Peak
213.000	15.74	3.86	25.76	32.75	26.59	43.50	16.91	Peak
444.000	21.90	6.32	26.76	38.35	39.81	46.00	6.19	Peak
468.000	22.32	6.51	26.93	35.47	37.38	46.00	8.62	Peak
935.500	26.45	8.95	26.87	32.29	40.83	46.00	5.17	Peak
970.000	26.74	9.14	26.76	32.97	42.10	54.00	11.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.44	26.49	30.38	28.91	40.00	11.09	Peak
128.500	17.54	2.96	26.11	34.13	28.52	43.50	14.98	Peak
440.500	21.85	6.29	26.74	32.34	33.74	46.00	12.26	Peak
703.500	24.54	7.65	27.42	31.84	36.61	46.00	9.39	Peak
955.500	26.62	9.06	26.80	32.03	40.91	46.00	5.09	Peak
991.500	26.93	9.25	26.69	32.49	41.98	54.00	12.02	Peak

Mode	T-FHSS	Frequency	TX 2407.5MHz
------	--------	-----------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.44	26.50	30.21	28.72	40.00	11.28	Peak
214.500	15.84	3.88	25.80	33.68	27.60	43.50	15.90	Peak
441.500	21.86	6.30	26.84	33.48	34.81	46.00	11.19	Peak
702.000	24.53	7.64	27.49	32.42	37.11	46.00	8.89	Peak
932.000	26.41	8.94	27.04	32.93	41.24	46.00	4.76	Peak
970.500	26.75	9.14	26.91	33.03	42.00	54.00	12.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	23.14	1.46	26.50	30.96	29.05	40.00	10.95	Peak
212.000	15.68	3.85	25.80	38.88	32.60	43.50	10.90	Peak
440.500	21.85	6.29	26.83	36.33	37.64	46.00	8.36	Peak
711.000	24.58	7.70	27.47	33.18	37.99	46.00	8.01	Peak
872.500	25.84	8.61	27.20	32.69	39.94	46.00	6.06	Peak
990.500	26.92	9.24	26.85	33.23	42.54	54.00	11.46	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	S-FHSS				Frequency	TX 2403.25MHz		
------	--------	--	--	--	-----------	---------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.45	26.50	30.77	29.07	40.00	10.93	Peak
213.000	15.74	3.86	25.80	33.59	27.39	43.50	16.11	Peak
455.500	22.09	6.41	26.93	32.95	34.53	46.00	11.47	Peak
677.500	24.43	7.52	27.49	33.00	37.46	46.00	8.54	Peak
914.500	26.27	8.84	27.10	32.99	40.99	46.00	5.01	Peak
998.000	26.99	9.28	26.83	32.78	42.23	54.00	11.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.44	26.50	31.21	29.72	40.00	10.28	Peak
212.000	15.68	3.85	25.80	38.57	32.29	43.50	11.21	Peak
432.000	21.69	6.22	26.77	35.97	37.11	46.00	8.89	Peak
708.000	24.56	7.68	27.48	32.41	37.17	46.00	8.83	Peak
937.500	26.47	8.97	27.02	33.21	41.62	46.00	4.38	Peak
987.500	26.90	9.23	26.86	32.55	41.81	54.00	12.19	Peak

Mode	F-4G				Frequency	TX 2478MHz		
------	------	--	--	--	-----------	------------	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.000	23.58	1.44	26.50	30.58	29.09	40.00	10.91	Peak
213.500	15.77	3.86	25.80	32.76	26.60	43.50	16.90	Peak
452.000	22.03	6.38	26.91	33.08	34.59	46.00	11.41	Peak
680.000	24.44	7.53	27.49	32.16	36.64	46.00	9.36	Peak
864.500	25.76	8.57	27.21	33.83	40.95	46.00	5.05	Peak
969.500	26.74	9.13	26.92	33.41	42.37	54.00	11.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.45	26.50	30.75	29.05	40.00	10.95	Peak
213.000	15.74	3.86	25.80	40.31	34.11	43.50	9.39	Peak
450.500	22.01	6.37	26.90	36.12	37.60	46.00	8.40	Peak
663.000	24.36	7.44	27.49	33.08	37.40	46.00	8.60	Peak
807.000	25.11	8.24	27.32	34.06	40.10	46.00	5.90	Peak
994.000	26.96	9.26	26.84	32.50	41.88	54.00	12.12	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	T-FHSS	Frequency	TX 2407.5MHz
------	--------	-----------	--------------

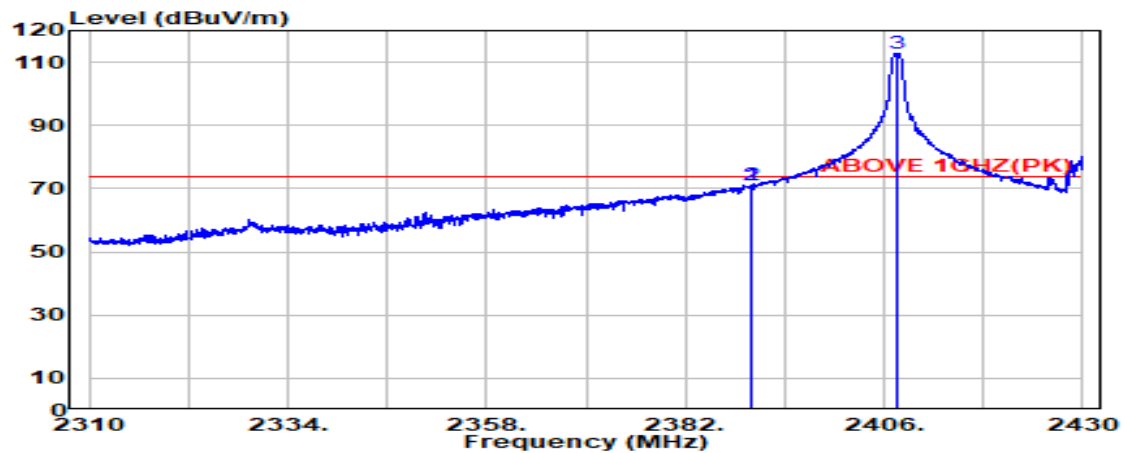

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.850	28.14	6.03	39.93	76.75	71.00	74.00	3.00	Peak
2390.000	28.14	6.03	39.93	76.71	70.96	74.00	3.04	Peak
@ 2407.450	28.13	6.06	39.93	118.49	112.75	---	---	Peak

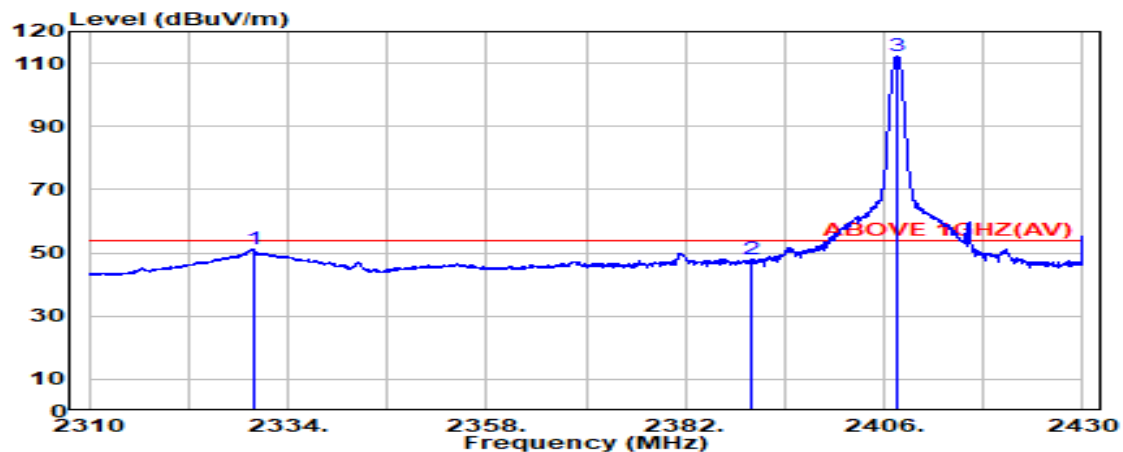

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.800	28.18	5.65	39.88	57.15	51.10	54.00	2.90	Average
2390.000	28.14	5.72	39.88	53.95	47.93	54.00	6.07	Average
@ 2407.550	28.13	5.74	39.88	118.32	112.32	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	T-FHSS	Frequency	TX 2407.5MHz
------	--------	-----------	--------------

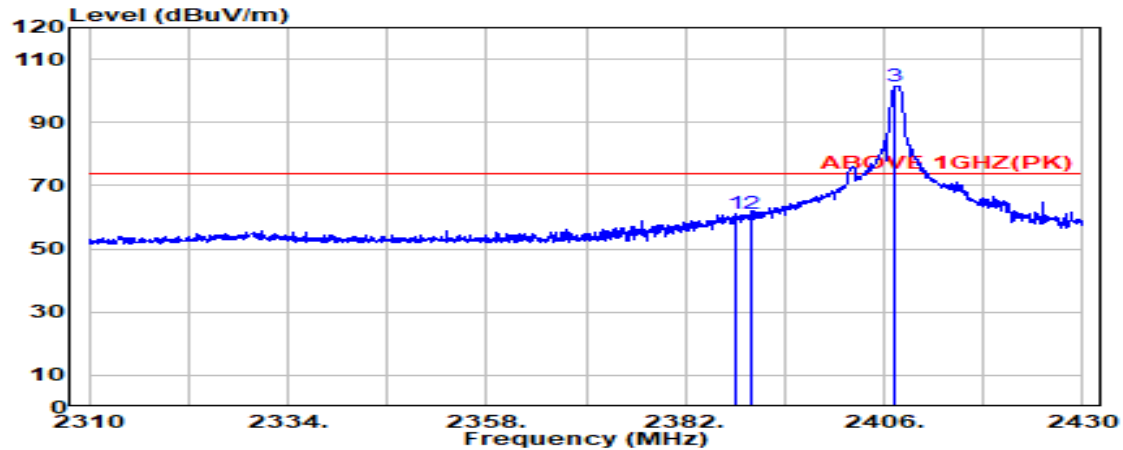

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.100	28.15	5.72	39.88	67.06	61.05	74.00	12.95	Peak
2390.000	28.14	5.72	39.88	67.20	61.18	74.00	12.82	Peak
@ 2407.350	28.13	5.74	39.88	107.49	101.49	---	---	Peak

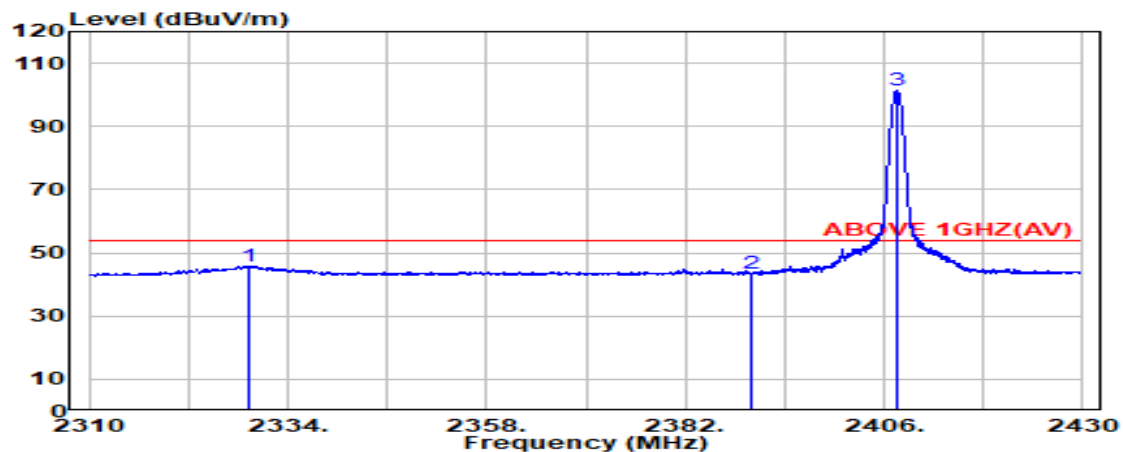


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.150	28.18	5.65	39.88	52.00	45.94	54.00	8.06	Average
2390.000	28.14	5.72	39.88	49.52	43.50	54.00	10.50	Average
@ 2407.600	28.13	5.74	39.88	107.29	101.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	T-FHSS	Frequency	TX 2467.5MHz
------	--------	-----------	--------------

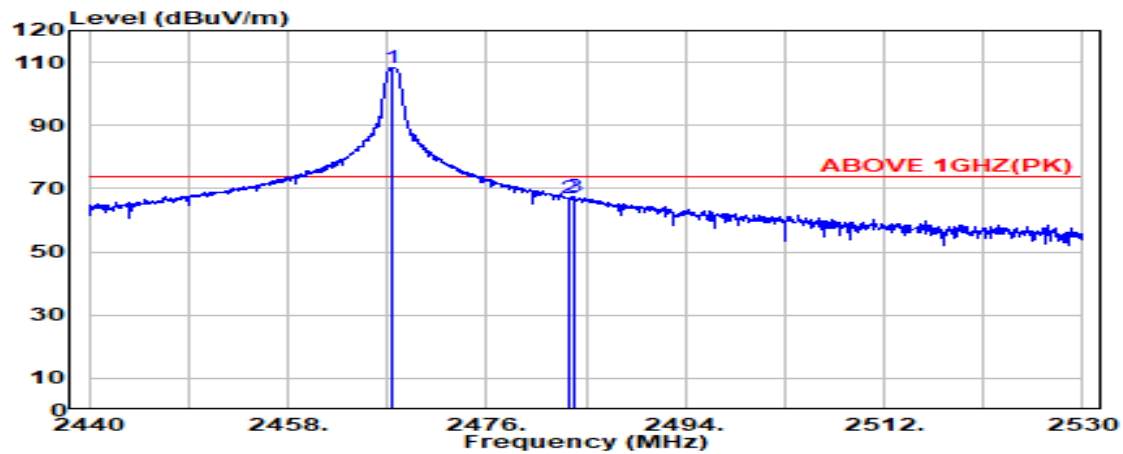

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.400	28.34	5.81	39.87	113.90	108.18	---	---	Peak
2483.500	28.37	5.83	39.87	72.61	66.94	74.00	7.06	Peak
2483.950	28.37	5.83	39.87	73.05	67.38	74.00	6.62	Peak

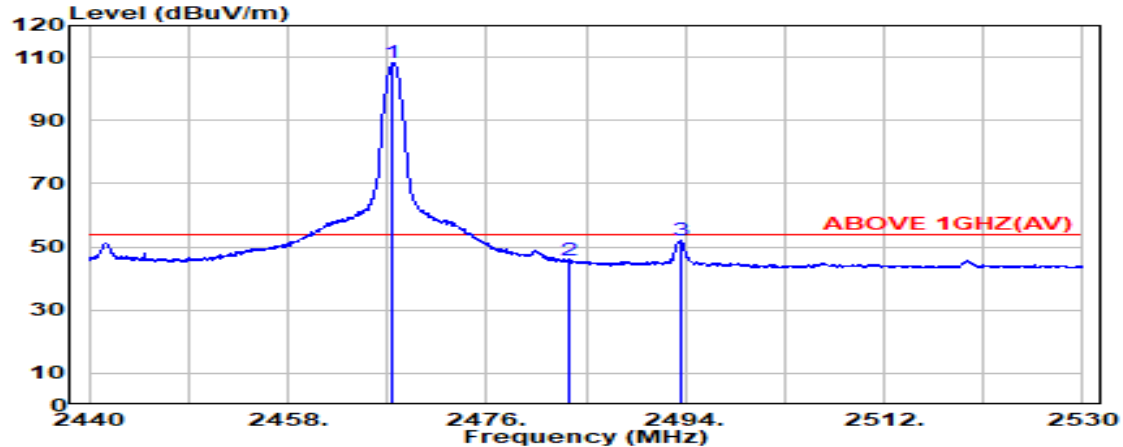

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.550	28.34	5.81	39.87	113.77	108.05	---	---	Average
2483.500	28.37	5.83	39.87	51.52	45.85	54.00	8.15	Average
2493.600	28.39	5.84	39.87	57.80	52.16	54.00	1.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	T-FHSS	Frequency	TX 2467.5MHz
------	--------	-----------	--------------

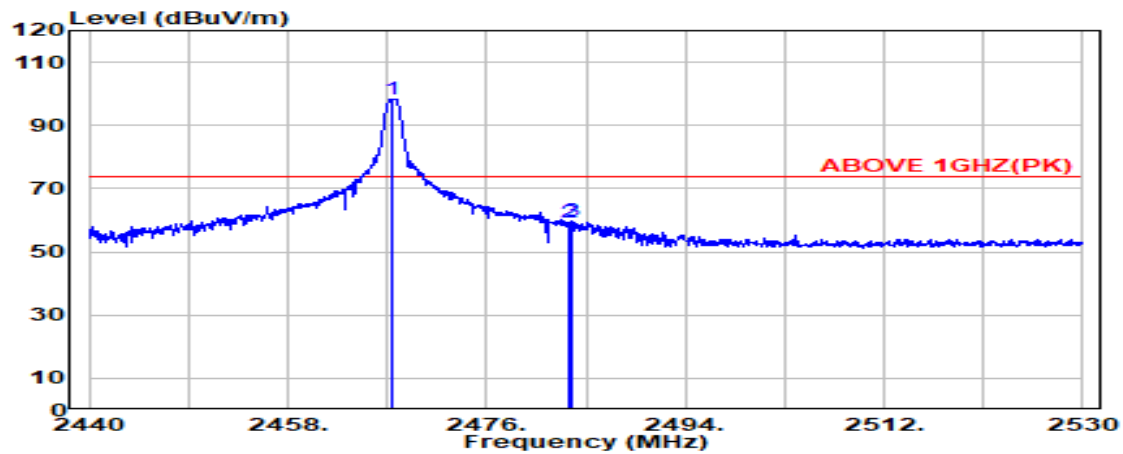

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.350	28.33	5.81	39.87	104.04	98.31	---	---	Peak
2483.500	28.37	5.83	39.87	64.93	59.25	74.00	14.75	Peak
2483.650	28.37	5.83	39.87	65.30	59.63	74.00	14.37	Peak

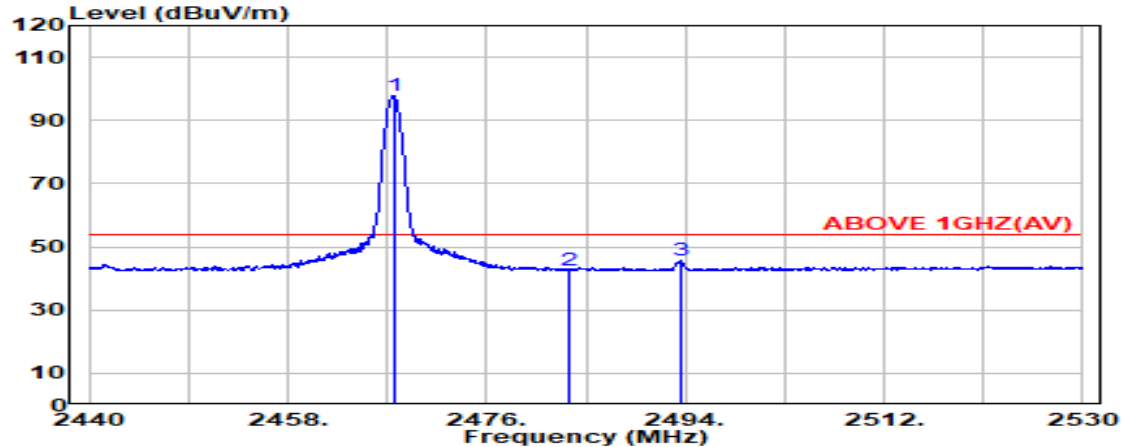


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.34	5.81	39.87	103.44	97.71	---	---	Average
2483.500	28.37	5.83	39.87	48.38	42.71	54.00	11.29	Average
2493.650	28.39	5.84	39.87	51.15	45.51	54.00	8.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	S-FHSS	Frequency	TX 2403.25MHz
------	--------	-----------	---------------

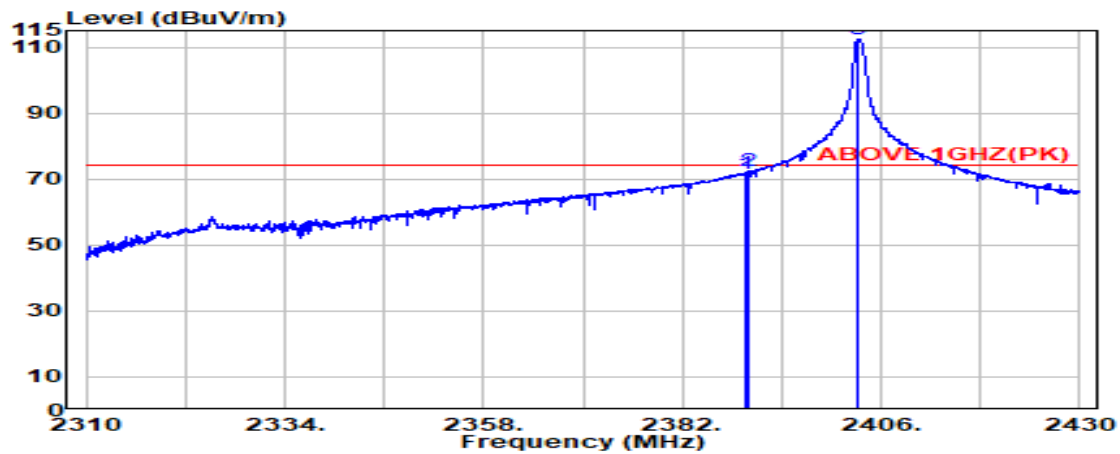

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.700	28.14	6.03	39.93	77.46	71.71	74.00	2.29	Peak
2390.000	28.14	6.03	39.93	78.09	72.33	74.00	1.67	Peak
@ 2403.300	28.11	6.05	39.93	118.36	112.60	---	---	Peak

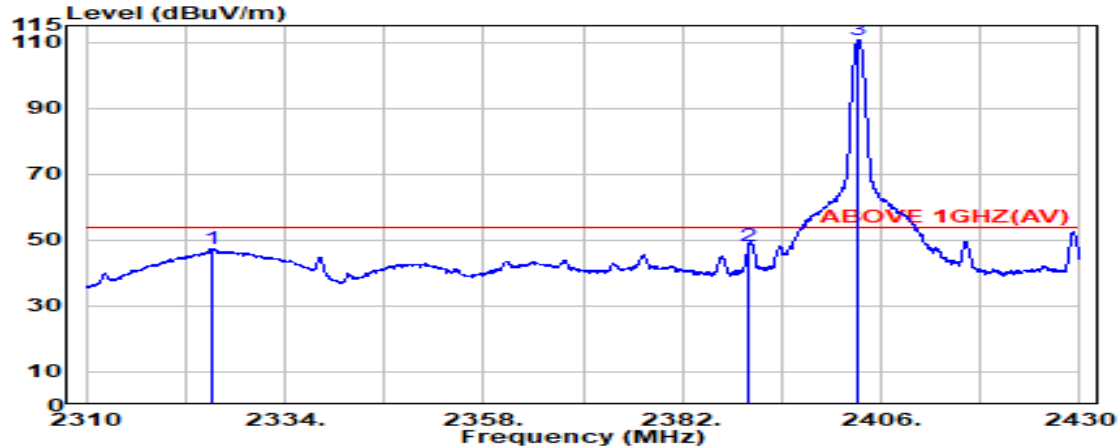

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2325.150	28.15	5.94	39.93	53.34	47.50	54.00	6.50	Average
2390.000	28.14	6.03	39.93	53.86	48.10	54.00	5.90	Average
@ 2403.300	28.11	6.05	39.93	116.51	110.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	S-FHSS	Frequency	TX 2403.25MHz
------	--------	-----------	---------------

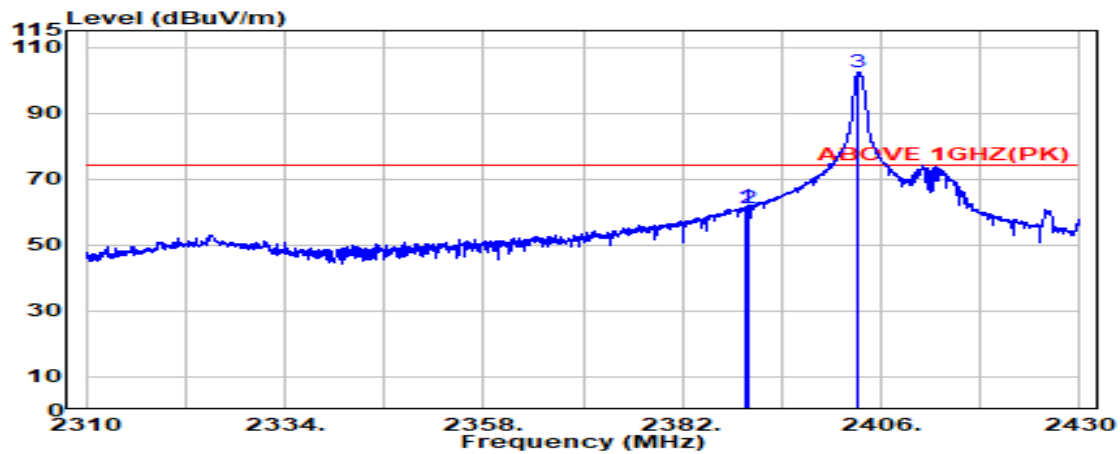

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	6.03	39.93	67.20	61.45	74.00	12.55	Peak
2390.000	28.14	6.03	39.93	67.02	61.26	74.00	12.74	Peak
@ 2403.250	28.11	6.05	39.93	108.11	102.35	---	---	Peak

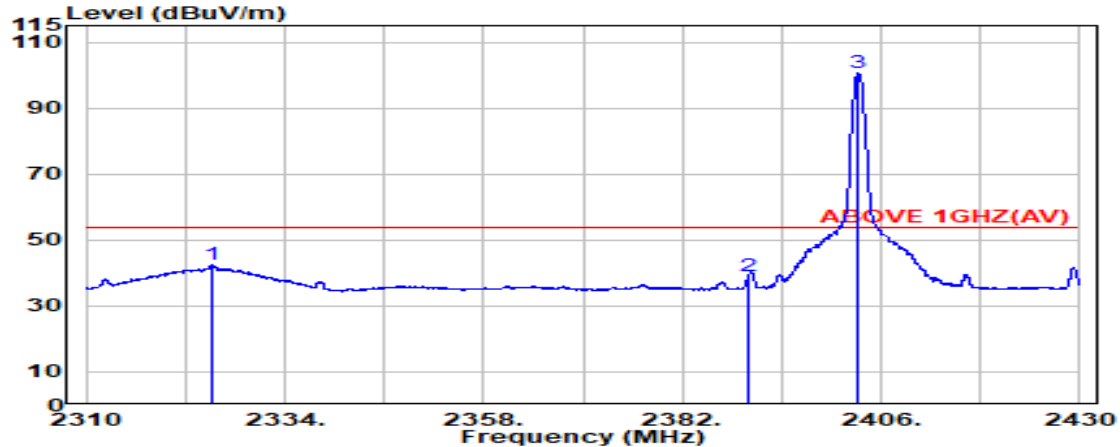

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2325.250	28.15	5.94	39.93	48.50	42.66	54.00	11.34	Average
2390.000	28.14	6.03	39.93	44.72	38.97	54.00	15.03	Average
@ 2403.200	28.11	6.05	39.93	106.38	100.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	S-FHSS	Frequency	TX 2447.5MHz
------	--------	-----------	--------------

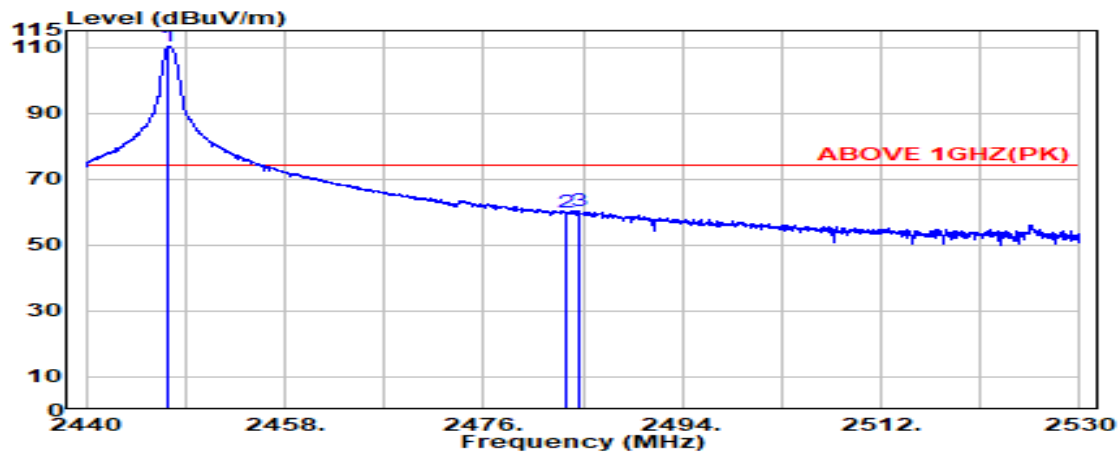

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.450	28.29	6.12	39.92	115.72	110.20	---	---	Peak
2483.500	28.37	6.17	39.92	65.08	59.69	74.00	14.31	Peak
2484.600	28.37	6.17	39.92	65.90	60.52	74.00	13.48	Peak

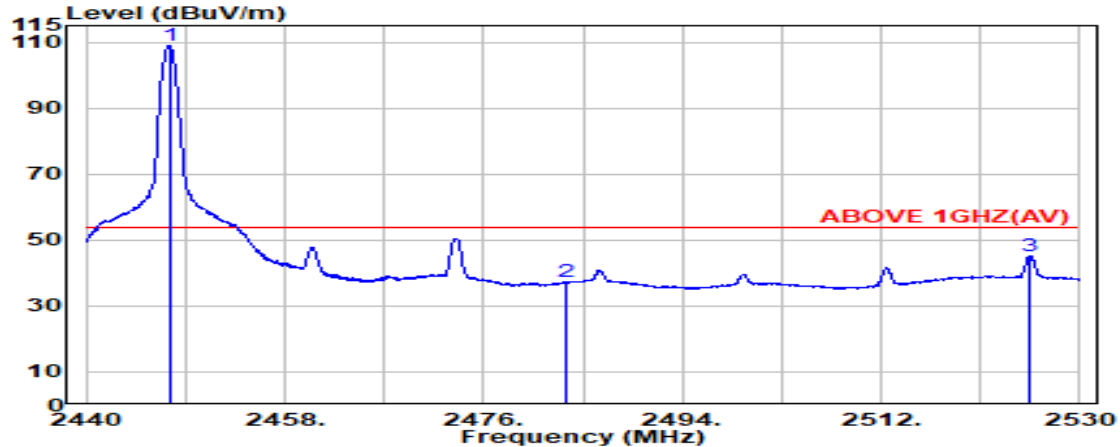

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.550	28.29	6.12	39.92	114.33	108.81	---	---	Average
2483.500	28.37	6.17	39.92	42.62	37.23	54.00	16.77	Average
2525.500	28.55	6.22	39.92	50.26	45.11	54.00	8.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	S-FHSS	Frequency	TX 2447.5MHz
------	--------	-----------	--------------

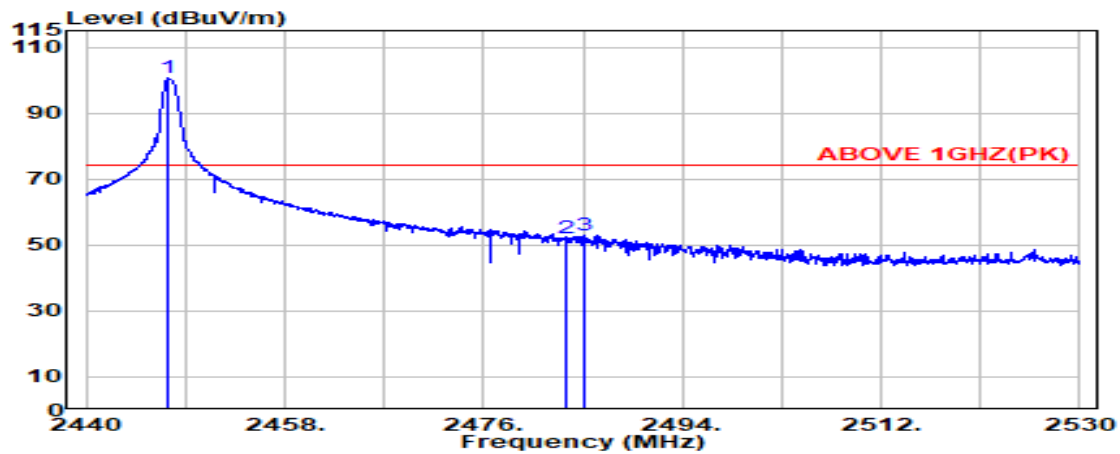

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.450	28.29	6.12	39.92	106.03	100.52	---	---	Peak
2483.500	28.37	6.17	39.92	57.62	52.23	74.00	21.77	Peak
2485.050	28.37	6.17	39.92	58.31	52.93	74.00	21.07	Peak

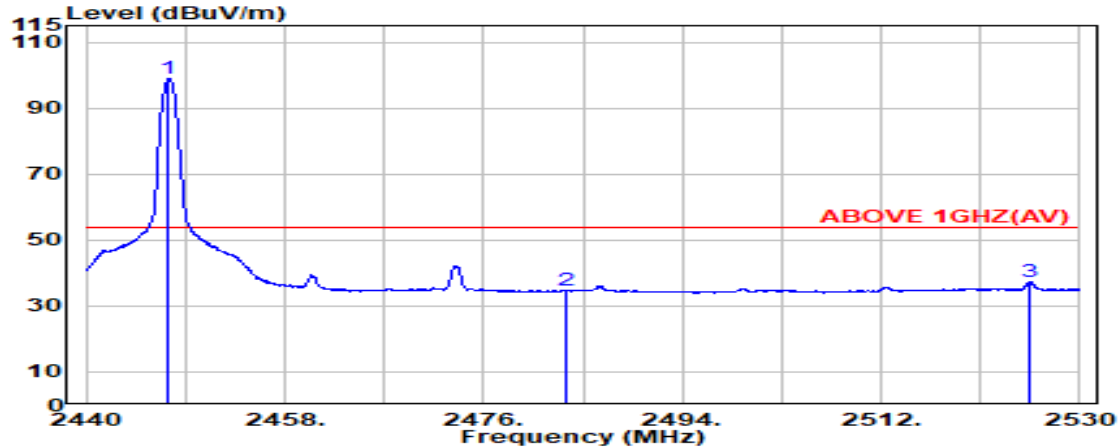

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.500	28.29	6.12	39.92	104.60	99.09	---	---	Average
2483.500	28.37	6.17	39.92	39.94	34.56	54.00	19.44	Average
2525.500	28.55	6.22	39.92	42.51	37.36	54.00	16.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	F-4G	Frequency	TX 2406MHz
------	------	-----------	------------

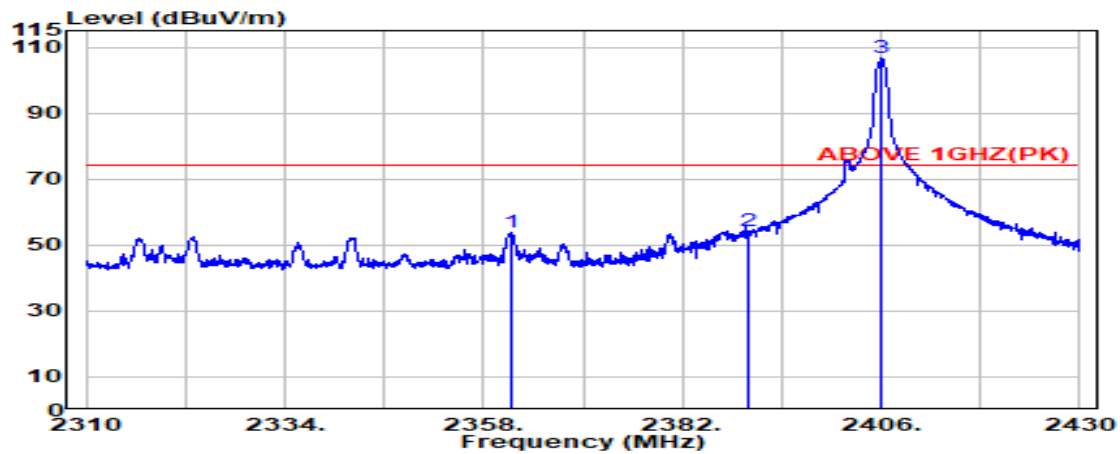

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.350	28.25	5.99	39.93	59.30	53.62	74.00	20.38	Peak
2390.000	28.14	6.03	39.93	60.21	54.45	74.00	19.55	Peak
@ 2406.050	28.12	6.06	39.93	112.47	106.72	---	---	Peak

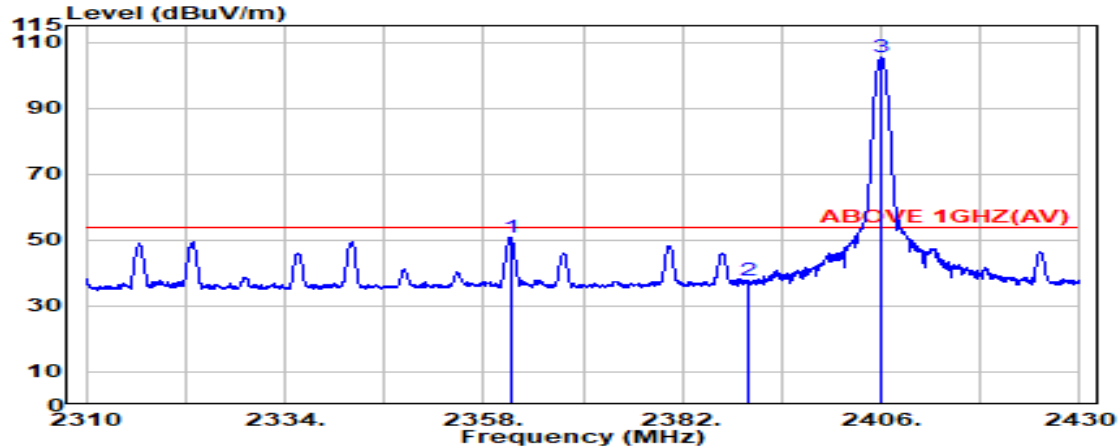

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.250	28.25	5.99	39.93	56.54	50.86	54.00	3.14	Average
2390.000	28.14	6.03	39.93	43.50	37.75	54.00	16.25	Average
@ 2406.000	28.12	6.06	39.93	111.36	105.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	F-4G	Frequency	TX 2406MHz
------	------	-----------	------------

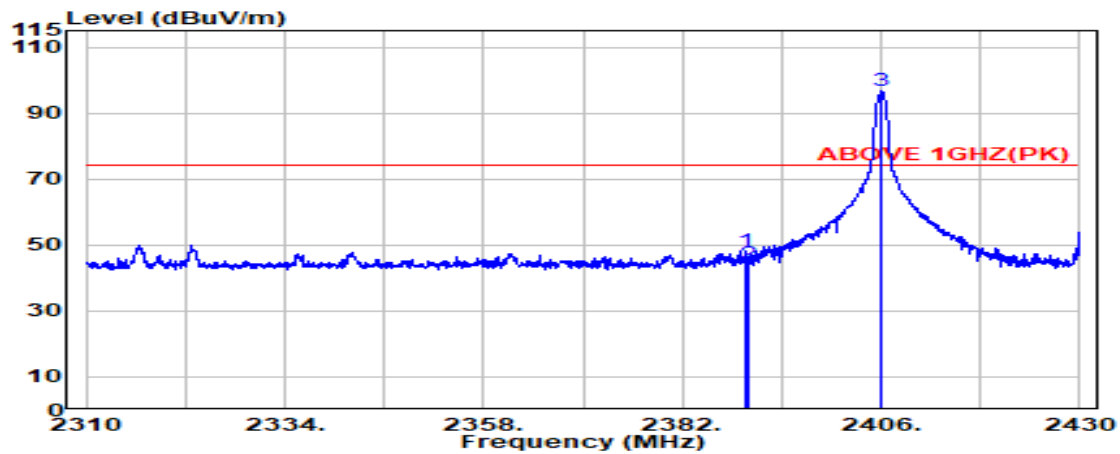

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	6.03	39.93	54.00	48.25	74.00	25.75	Peak
2390.000	28.14	6.03	39.93	50.19	44.43	74.00	29.57	Peak
@ 2406.050	28.12	6.06	39.93	102.45	96.70	---	---	Peak

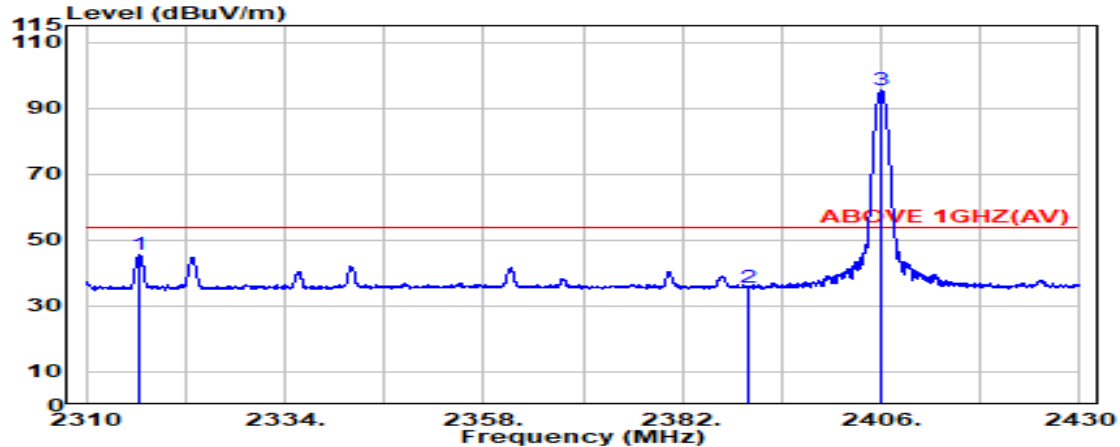

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2316.400	28.10	5.93	39.93	51.67	45.76	54.00	8.24	Average
2390.000	28.14	6.03	39.93	41.51	35.75	54.00	18.25	Average
@ 2406.050	28.12	6.06	39.93	101.21	95.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	F-4G	Frequency	TX 2478MHz
------	------	-----------	------------

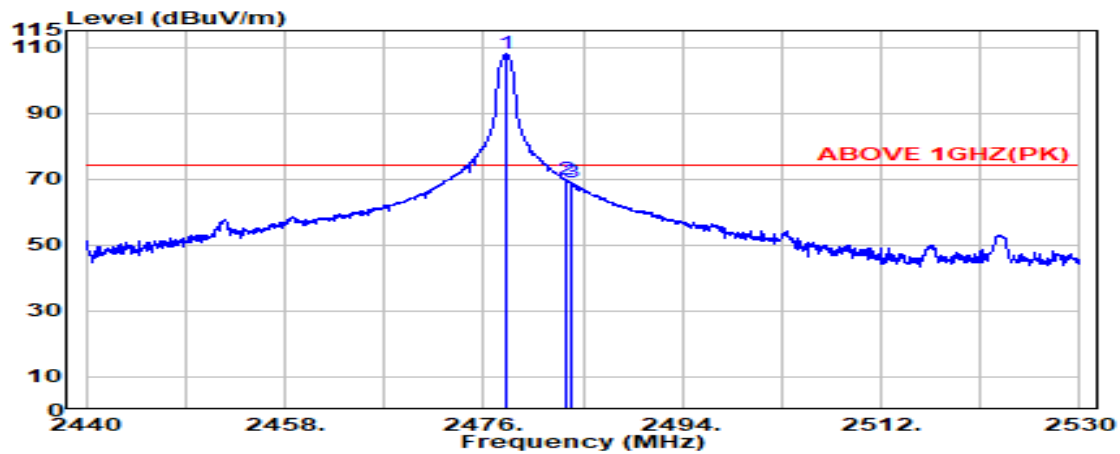

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.36	6.16	39.92	113.48	108.08	---	---	Peak
2483.500	28.37	6.17	39.92	75.16	69.78	74.00	4.22	Peak
2483.850	28.37	6.17	39.92	74.41	69.03	74.00	4.97	Peak

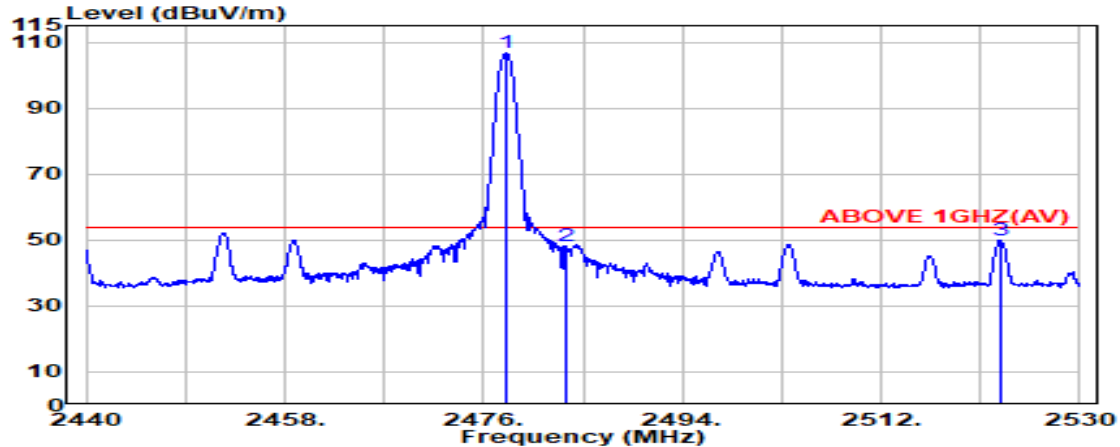

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.36	6.16	39.92	112.08	106.67	---	---	Average
2483.500	28.37	6.17	39.92	53.40	48.02	54.00	5.98	Average
2522.850	28.54	6.22	39.92	55.14	49.97	54.00	4.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	F-4G	Frequency	TX 2478MHz
------	------	-----------	------------

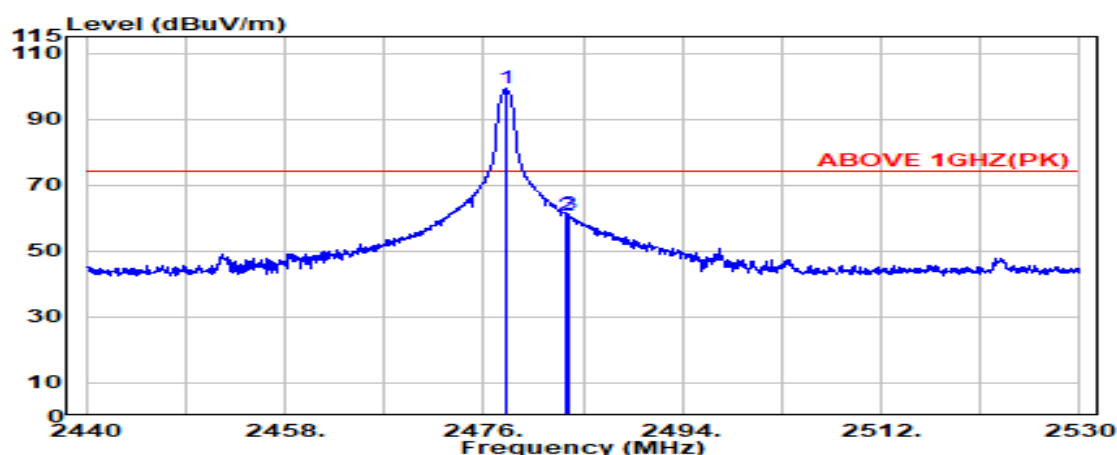

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.36	6.16	39.92	104.66	99.25	---	---	Peak
2483.500	28.37	6.17	39.92	66.26	60.87	74.00	13.13	Peak
2483.650	28.37	6.17	39.92	66.58	61.20	74.00	12.80	Peak

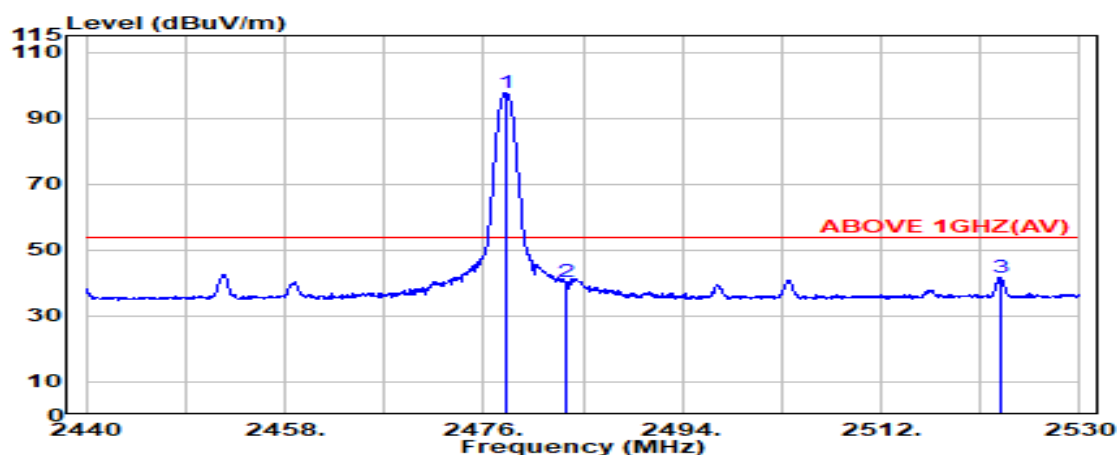

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.050	28.36	6.16	39.92	103.21	97.80	---	---	Average
2483.500	28.37	6.17	39.92	45.90	40.52	54.00	13.48	Average
2522.750	28.54	6.22	39.92	46.66	41.49	54.00	12.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	T-FHSS	Frequency	TX 2407.50MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4815.000	32.96	8.33	39.37	47.85	49.77	54.00	4.23	Average
4815.000	32.96	8.33	39.37	52.16	54.08	74.00	19.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4815.000	32.96	8.33	39.37	51.56	53.48	54.00	0.52	Peak

Mode	T-FHSS	Frequency	TX 2435.50MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4871.000	33.14	8.37	39.34	51.49	53.66	54.00	0.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4871.000	33.14	8.37	39.34	49.87	52.04	54.00	1.96	Peak

Mode	T-FHSS	Frequency	TX 2467.50MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4935.000	33.20	8.41	39.31	50.15	52.45	54.00	1.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4935.000	33.20	8.41	39.31	50.01	52.31	54.00	1.69	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	S-FHSS	Frequency	TX 2403.25MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4806.000	32.92	8.33	39.37	46.03	47.91	54.00	6.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4806.000	32.92	8.33	39.37	47.07	48.95	54.00	5.05	Peak

Mode	S-FHSS	Frequency	TX 2425.00MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4850.000	33.10	8.35	39.35	50.13	52.24	54.00	1.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4850.000	33.10	8.35	39.35	49.46	51.56	54.00	2.44	Peak

Mode	S-FHSS	Frequency	TX 2447.50MHz
------	--------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4895.000	33.19	8.38	39.33	49.65	51.89	54.00	2.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4895.000	33.19	8.38	39.33	49.95	52.19	54.00	1.81	Peak

Mode	F-4G	Frequency	TX 2406.00MHz
------	------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4812.000	32.95	8.33	39.37	46.33	48.24	54.00	5.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4812.000	32.95	8.33	39.37	48.23	50.13	54.00	3.87	Peak

Mode	F-4G	Frequency	TX 2442.00MHz
------	------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.38	39.34	49.03	51.24	54.00	2.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.17	8.38	39.34	48.90	51.11	54.00	2.89	Peak

Mode	F-4G	Frequency	TX 2478.00MHz
------	------	-----------	---------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4956.000	33.22	8.42	39.30	48.64	50.99	54.00	3.01	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4956.000	33.22	8.42	39.30	51.28	53.63	54.00	0.37	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH

Test Date	2024/11/12~20	Temp./Hum.	21~24°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		

A.3.1 20dB Bandwidth Result

Mode	Centre Frequency (MHz)	Bandwidth (MHz)		2/3 (20dB Bandwidth) (MHz)
		20dB	99% Occupied (Reference only)	
T-FHSS	2407.50	0.78	0.80	0.52
	2435.50	0.79	0.84	0.53
	2467.50	0.78	0.84	0.52
S-FHSS	2403.25	0.26	0.26	0.17
	2425.00	0.26	0.26	0.17
	2447.50	0.26	0.26	0.17
F-4G	2406.00	0.89	0.93	0.59
	2442.00	0.90	0.93	0.60
	2478.00	0.89	0.93	0.59

Remark:

1. T-FHSS Mode: The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.53MHz.
2. S-FHSS Mode: The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.17MHz.
3. F-4G Mode: The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.60MHz.
4. The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

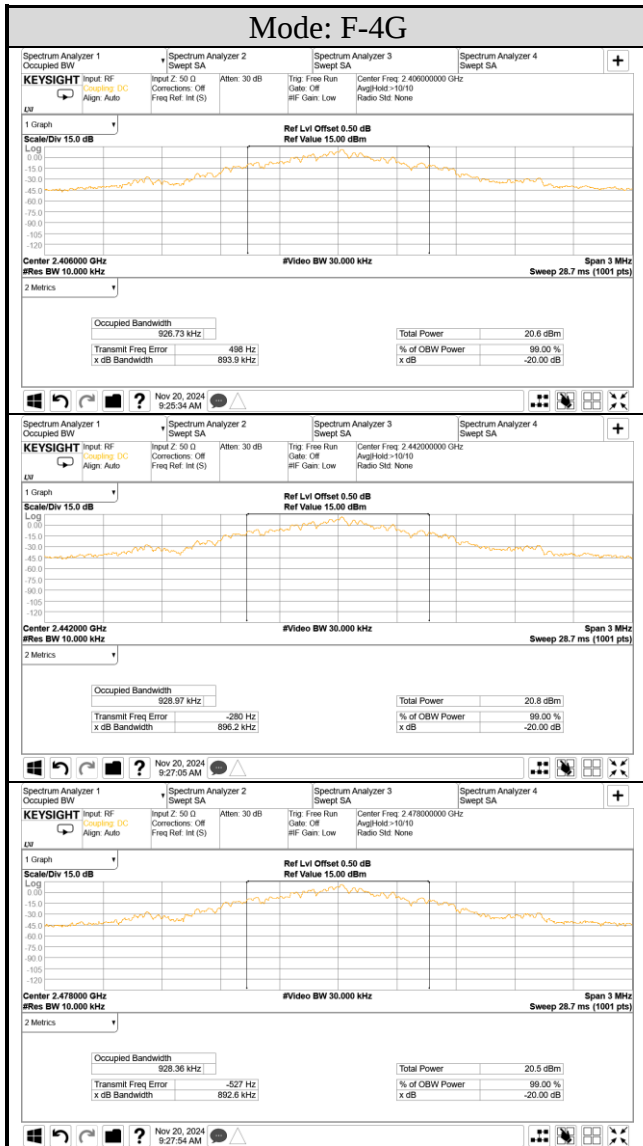

A.4 CARRIER FREQUENCY SEPARATION

Test Date	2024/11/12~20	Temp./Hum.	21~24°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		


Mode	Centre Frequency (MHz)		Carrier Frequency Separation (MHz)	Limit (MHz) 2/3 (20dB Bandwidth)
T-FHSS	2407.50		2.00	> 0.53
	2435.50	adjacent channel of right carrier frequency	2.00	
	2435.50	adjacent channel of left carrier frequency	1.98	
	2467.50		2.00	

Mode	Centre Frequency (MHz)		Carrier Frequency Separation (MHz)	Limit (MHz) 2/3 (20dB Bandwidth)
S-FHSS	2403.25		0.75	> 0.17
	2425.00	adjacent channel of right carrier frequency	0.75	
	2425.00	adjacent channel of left carrier frequency	0.75	
	2447.50		0.76	

Mode	Centre Frequency (MHz)		Carrier Frequency Separation (MHz)	Limit (MHz) 2/3 (20dB Bandwidth)
F-4G	2406.00		2.00	> 0.60
	2442.00	adjacent channel of right carrier frequency	2.00	
	2442.00	adjacent channel of left carrier frequency	2.00	
	2478.00		2.03	


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

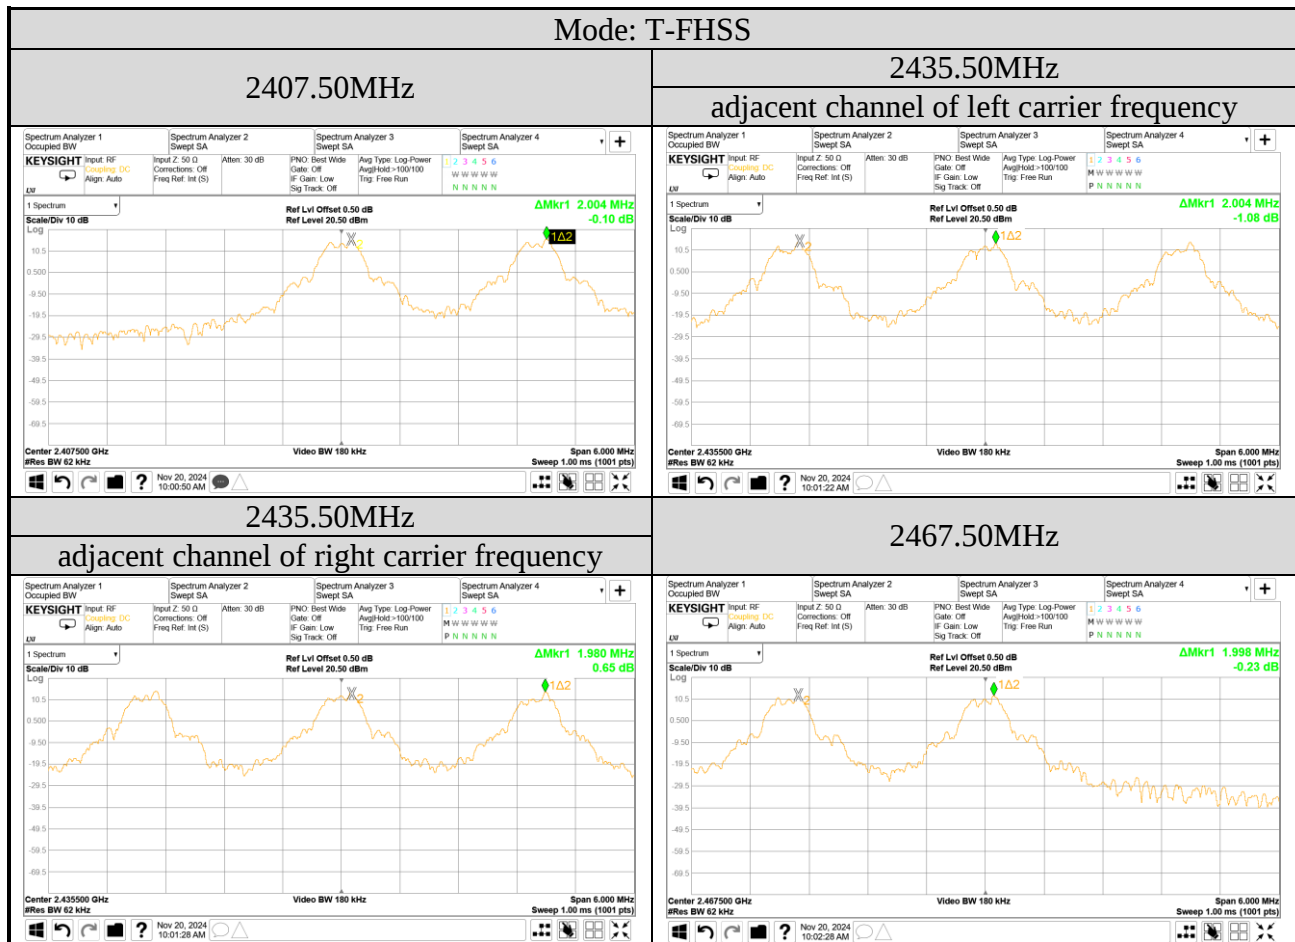

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

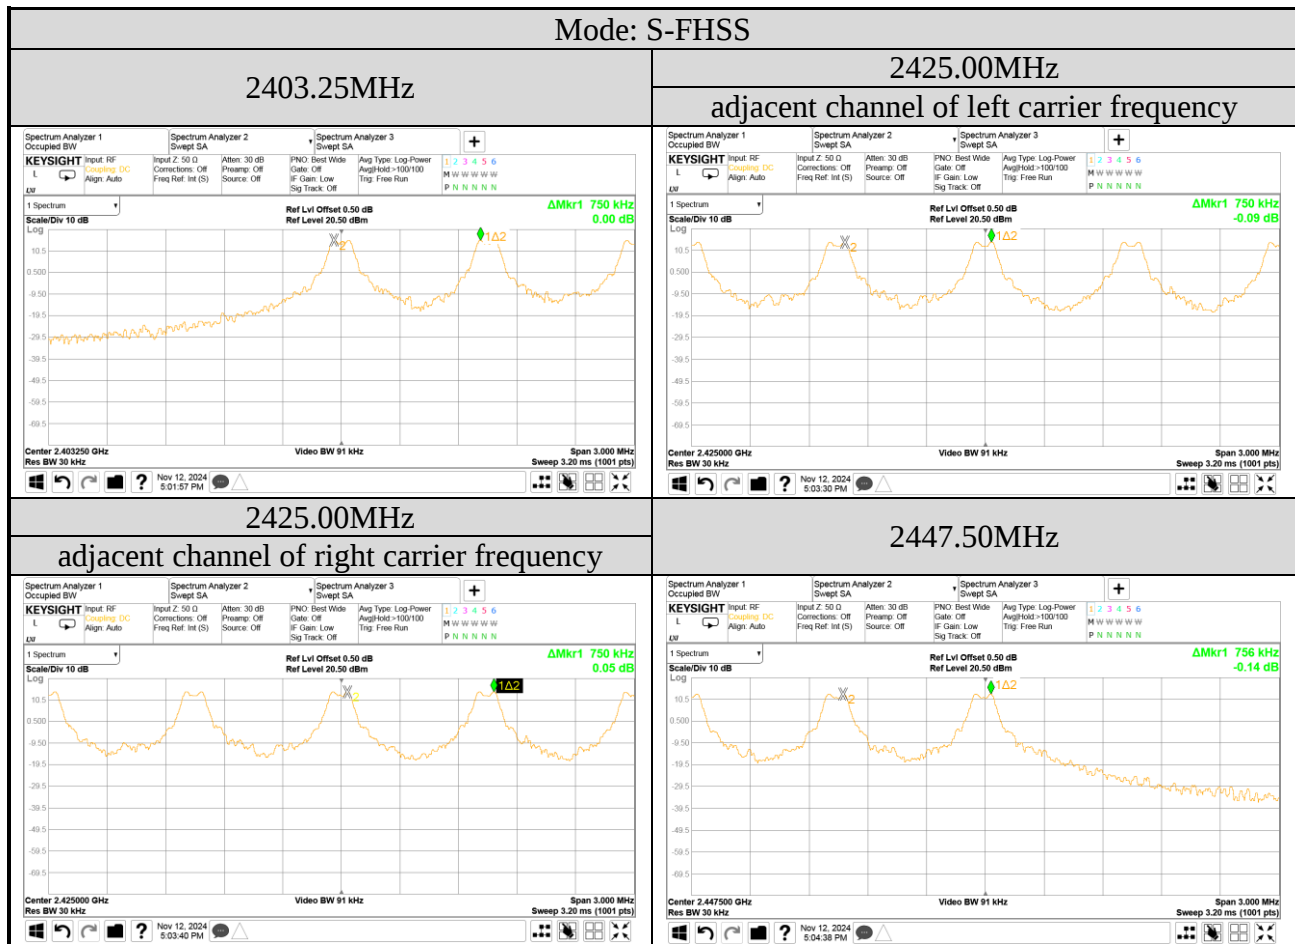

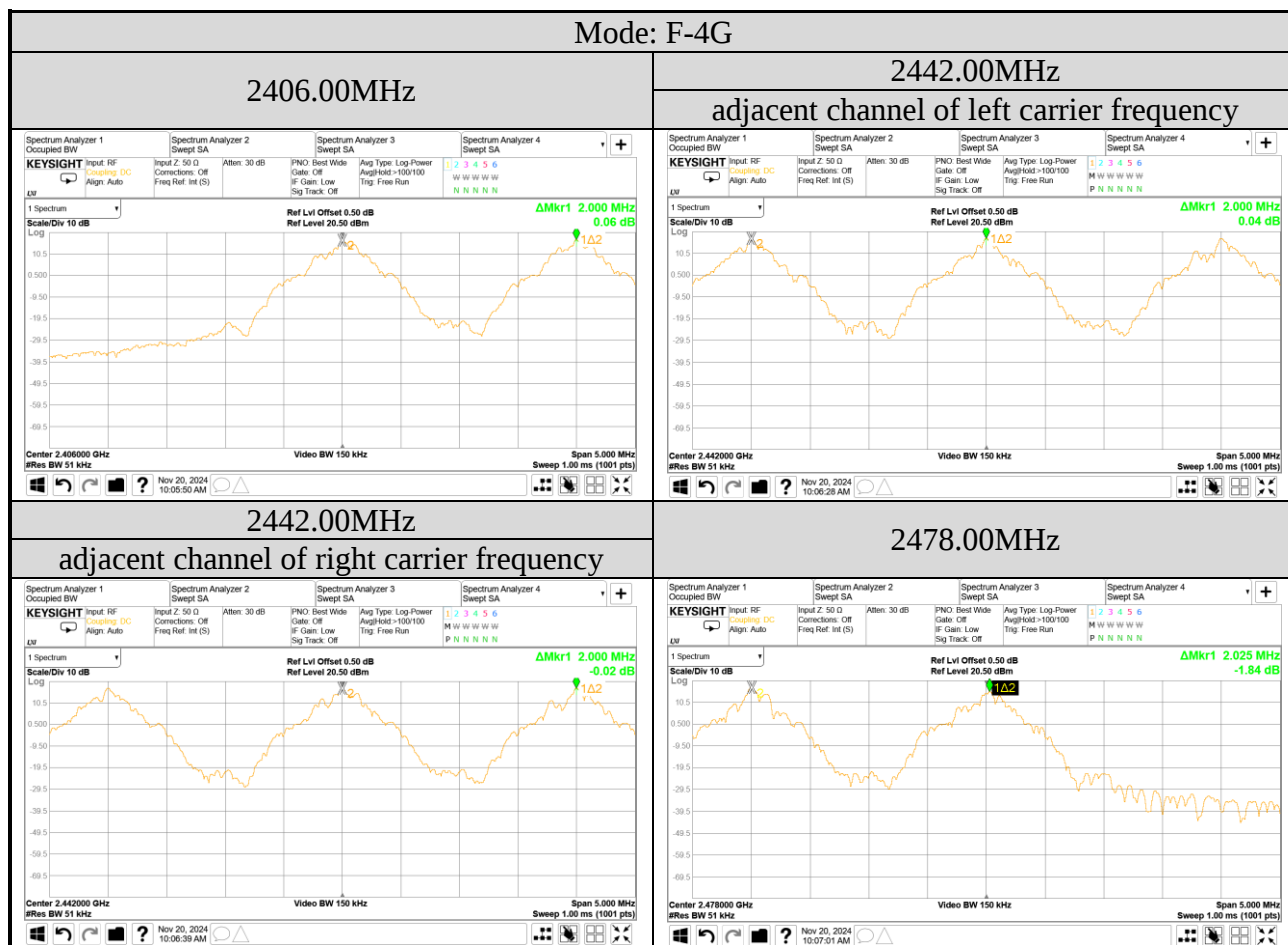

A.5 TIME OF OCCUPANCY

Test Date	2024/11/12~20	Temp./Hum.	21~24°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		

A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
T-FHSS	2407.50	11	0.42	57.29	<400
	2435.50	10	0.42	52.08	<400
	2467.50	10	0.42	52.08	<400

Observation Period:

31 channels* 0.4 seconds= 12.4 seconds

Centre Frequency: 2403.25

For each second of 11 transmission appearance,the longest time of occupancy is 11 channels 12.4 * 0.42 ms= 57.29 ms (<400ms)

Centre Frequency: 2425.00

For each second of 10 transmission appearance,the longest time of occupancy is 10 channels 12.4 * 0.42 ms= 52.08 ms (<400ms)

Centre Frequency: 2447.50

For each second of 10 transmission appearance,the longest time of occupancy is 10 channels 12.4 * 0.42 ms= 52.08 ms (<400ms)

Mode	Centre Frequency (MHz)	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
S-FHSS	2403.25	5	3.04	364.80	<400
	2425.00	5	3.04	364.80	<400
	2447.50	5	3.05	366.00	<400

Observation Period:

60 channels* 0.4 seconds= 24.0 seconds

Centre Frequency: 2403.25 MHz

For each second of 5 transmission appearance,the longest time of occupancy is 5 channels 24.0 * 3.04 ms= 364.80 ms (<400ms)

Centre Frequency: 2425.00 MHz

For each second of 5 transmission appearance,the longest time of occupancy is 5 channels 24.0 * 3.04 ms= 364.80 ms (<400ms)

Centre Frequency: 2447.50 MHz

For each second of 5 transmission appearance,the longest time of occupancy is 5 channels 24.0 * 3.05 ms= 366.00 ms (<400ms)

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	Centre Frequency (MHz)	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
F-4G	2406.00	45	0.17	113.22	<400
	2442.00	46	0.17	115.74	<400
	2478.00	45	0.17	113.22	<400

Observation Period:

37 channels* 0.4 seconds = 14.8 seconds

Centre Frequency: : 2406.00 MHz

For each second of 45 transmission appearance, the longest time of occupancy is 45 channels 14.8 * 0.17 ms = 113.22 ms (<400ms)

Centre Frequency: : 2442.00 MHz

For each second of 46 transmission appearance, the longest time of occupancy is 46 channels 14.8 * 0.17 ms = 115.74 ms (<400ms)


Centre Frequency: : 2478.00 MHz


For each second of 45 transmission appearance, the longest time of occupancy is 45 channels 14.8 * 0.17 ms = 113.22 ms (<400ms)

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● Measurement Plots

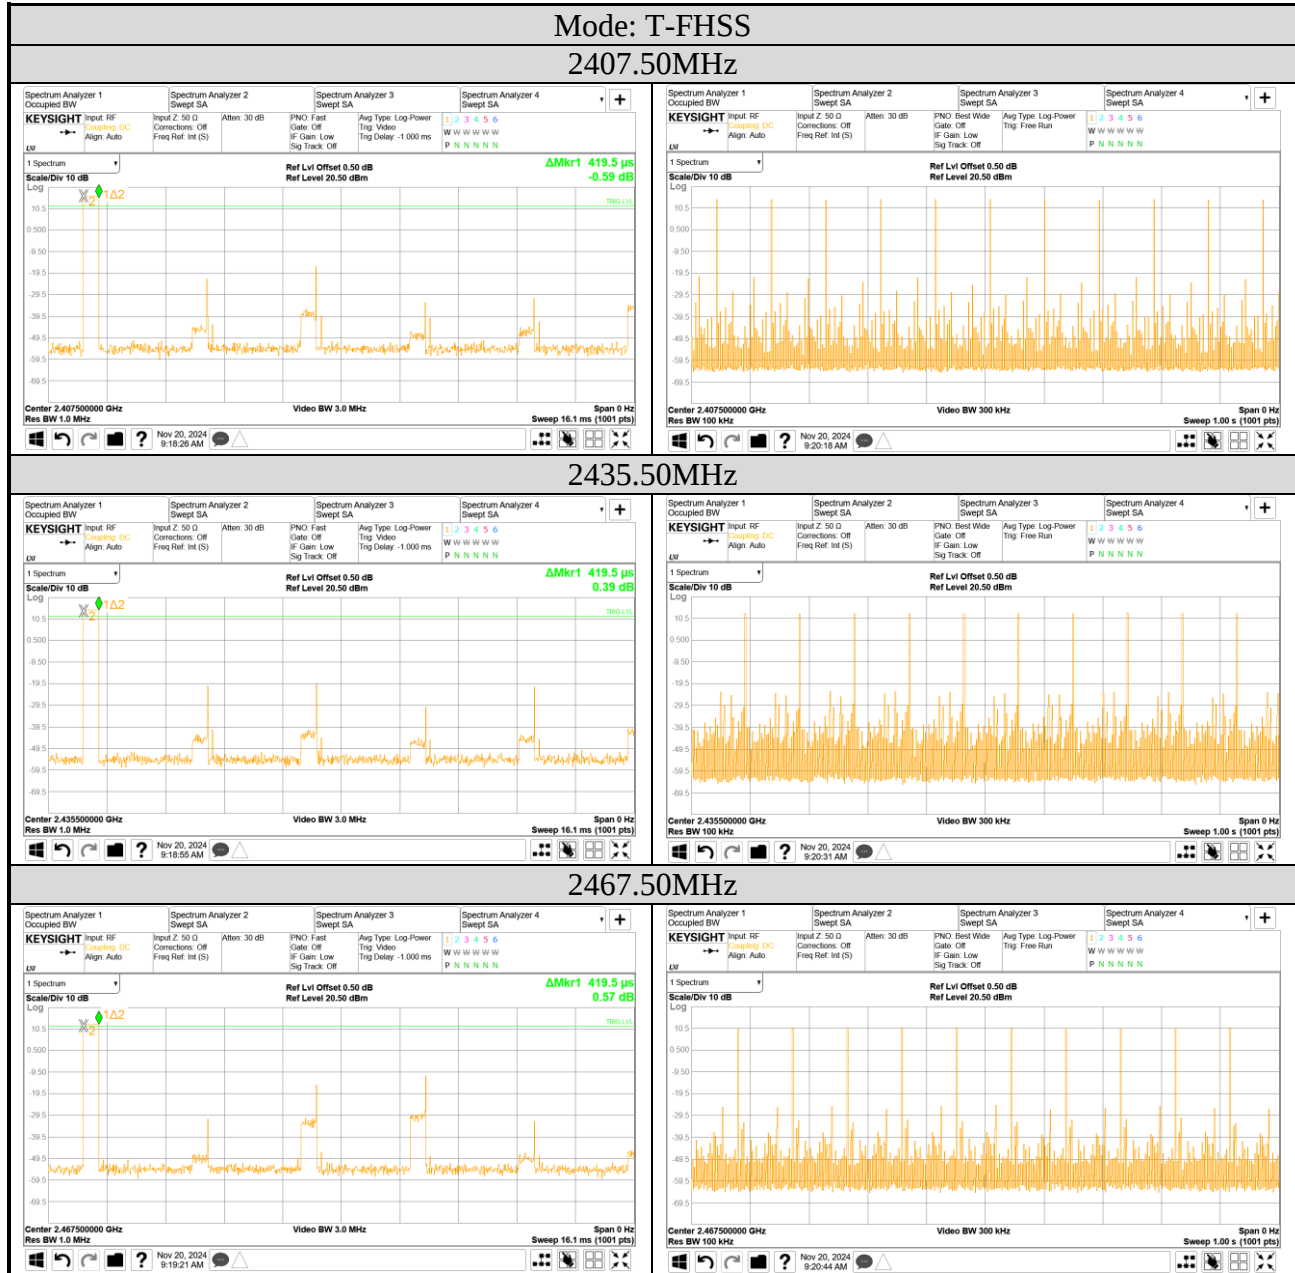

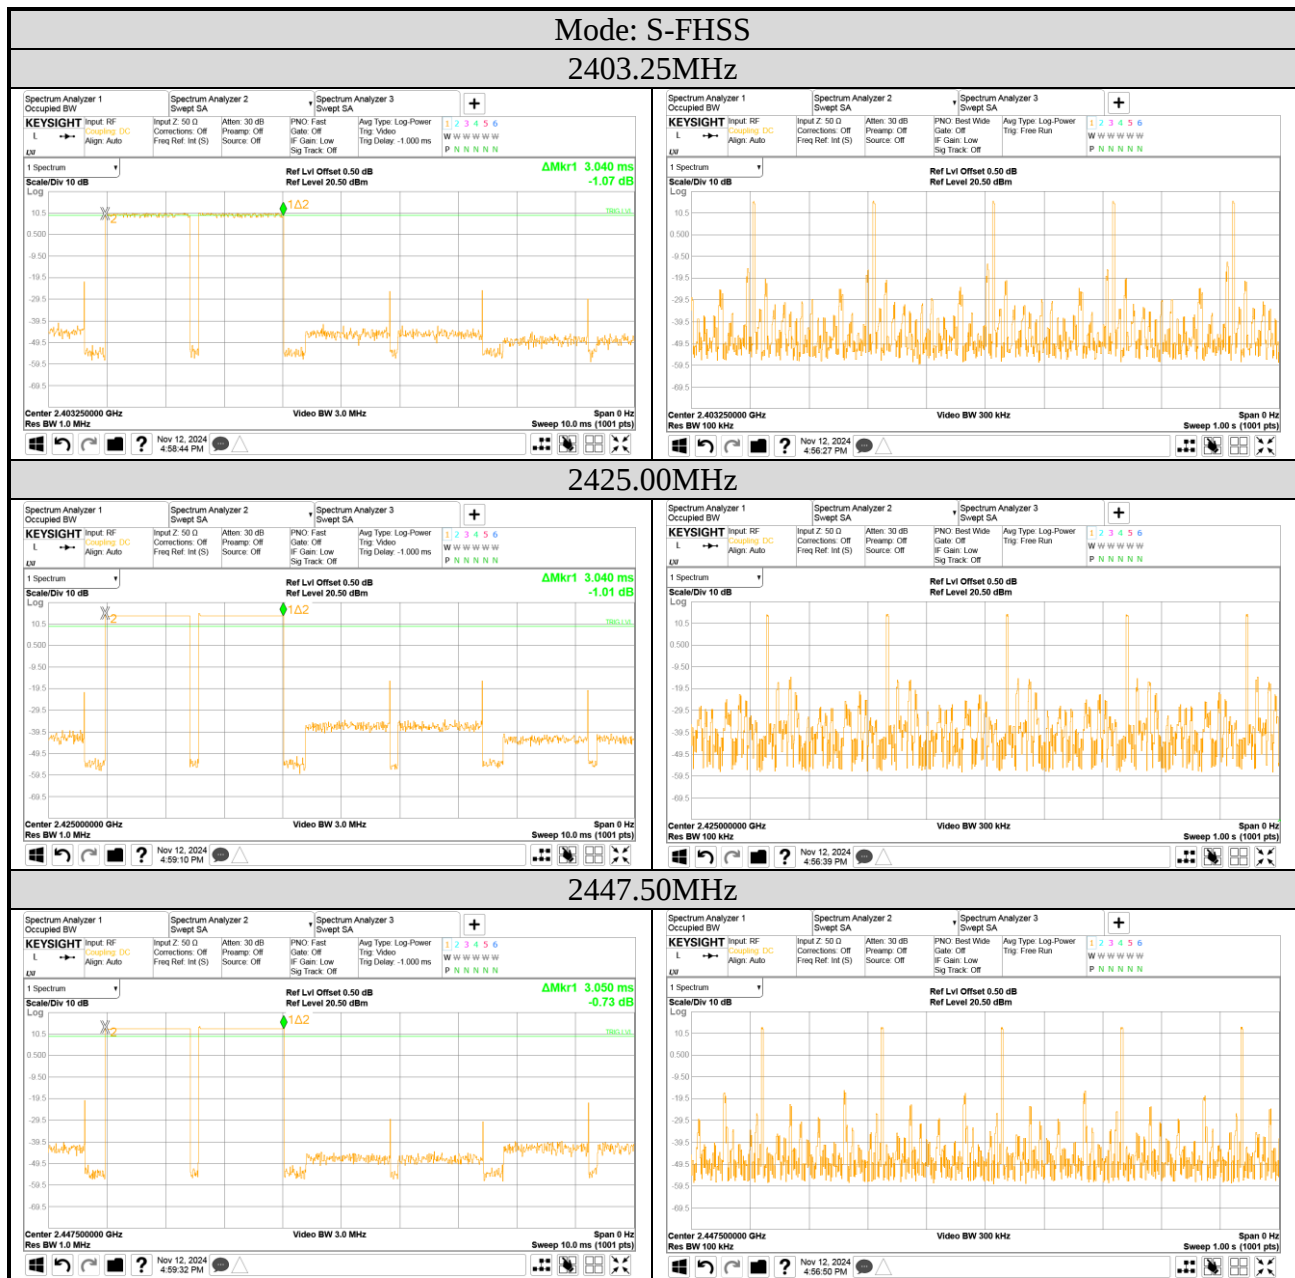

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

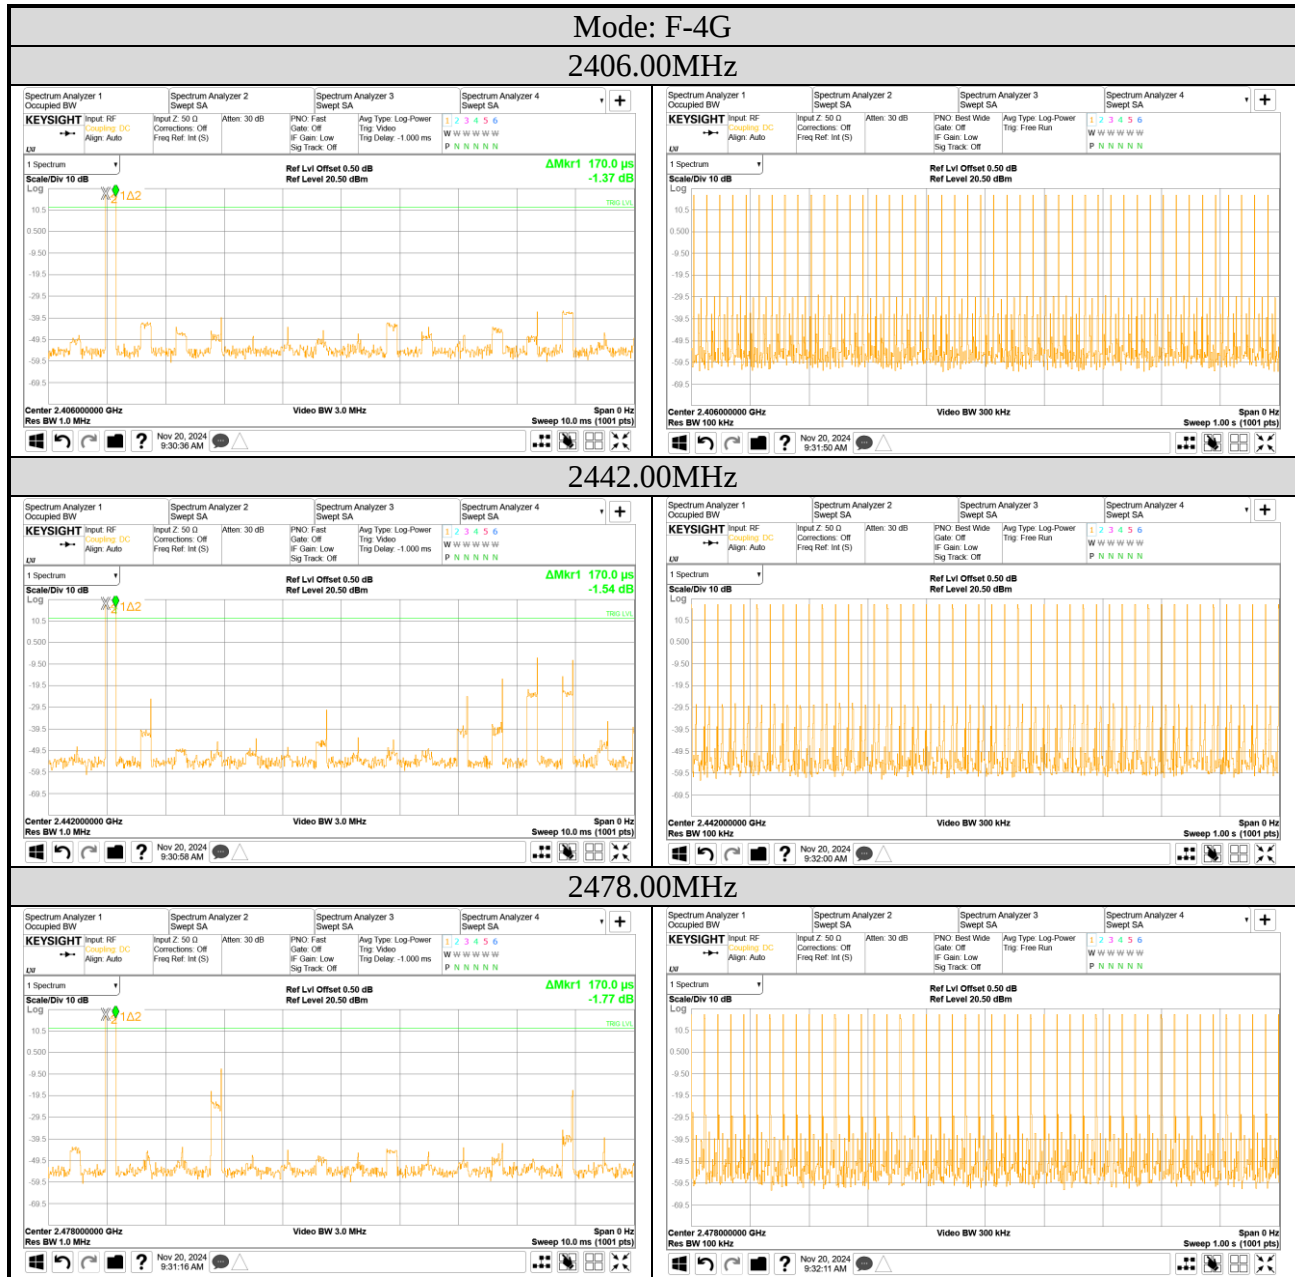


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.6 NUMBER OF HOPPING CHANNELS


Test Date	2024/11/12~20	Temp./Hum.	21~24°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		

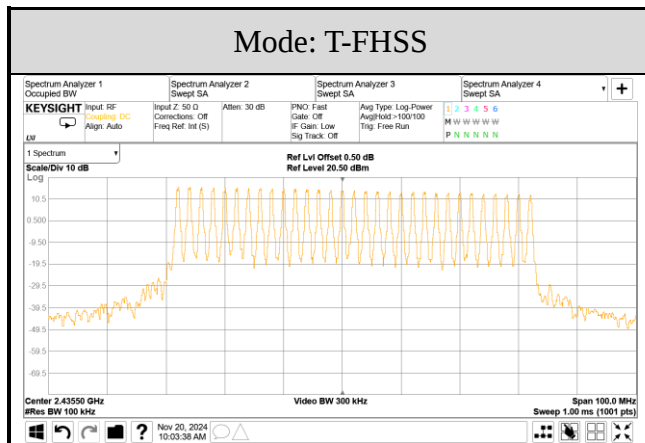

The number hopping channel is 31.

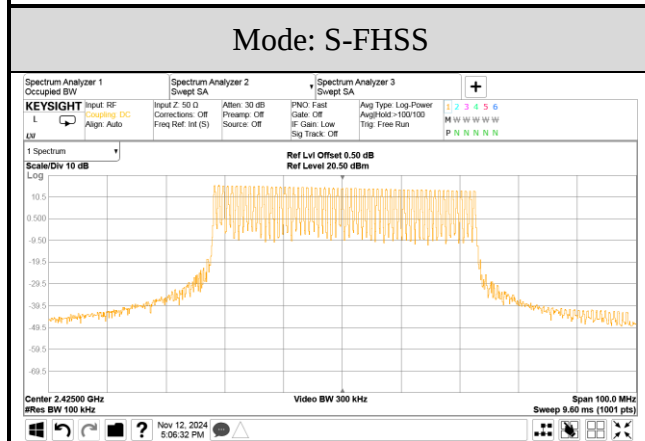

The number hopping channel is 60.

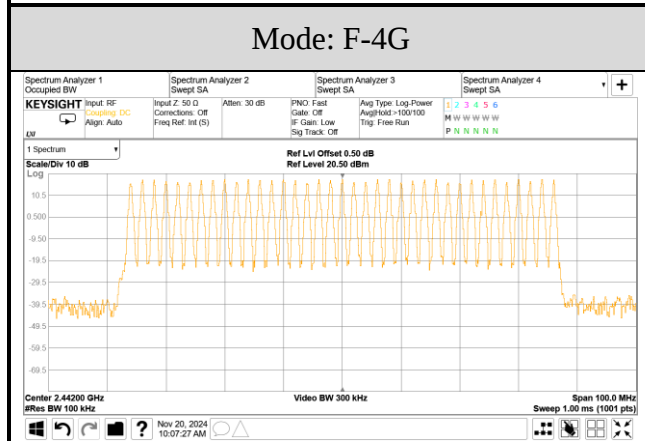

The number hopping channel is 37.

A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	2024/11/12	Temp./Hum.	21°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		

A.7.1 Maximum Peak Output Power

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
T-FHSS	2407.50	16.56	0.045	< 21dBm (0.125W)
	2435.50	14.87	0.031	
	2467.50	14.56	0.029	
S-FHSS	2403.25	18.09	0.064	
	2425.00	16.53	0.045	
	2447.50	15.34	0.034	
F-4G	2406.00	12.03	0.016	
	2442.00	13.06	0.020	
	2478.00	13.76	0.024	

A.7.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)	Duty cycle factor (dB) 10log (1/x)	Maximum Average Output Power		Limit
				(dBm)	(W)	
T-FHSS	2407.50	7.90	8.570	16.47	0.044	< 21dBm (0.125W)
	2435.50	6.20	8.570	14.77	0.030	
	2467.50	4.12	8.570	12.69	0.019	
S-FHSS	2403.25	15.92	0.448	16.37	0.043	
	2425.00	14.54	0.448	14.99	0.032	
	2447.50	13.30	0.448	13.75	0.024	
F-4G	2406.00	5.77	5.436	11.21	0.013	
	2442.00	6.63	5.436	12.07	0.016	
	2478.00	7.10	5.436	12.54	0.018	


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.8 EMISSION LIMITATIONS MEASUREMENT


Test Date	2024/11/12~20	Temp./Hum.	21~24°C/58%
Cable Loss	0.50dB	Tested By	Kuper Hsu
Test Voltage	DC 6.0V(Via AAA Batteryx4)		

A.8.1 Band Edge

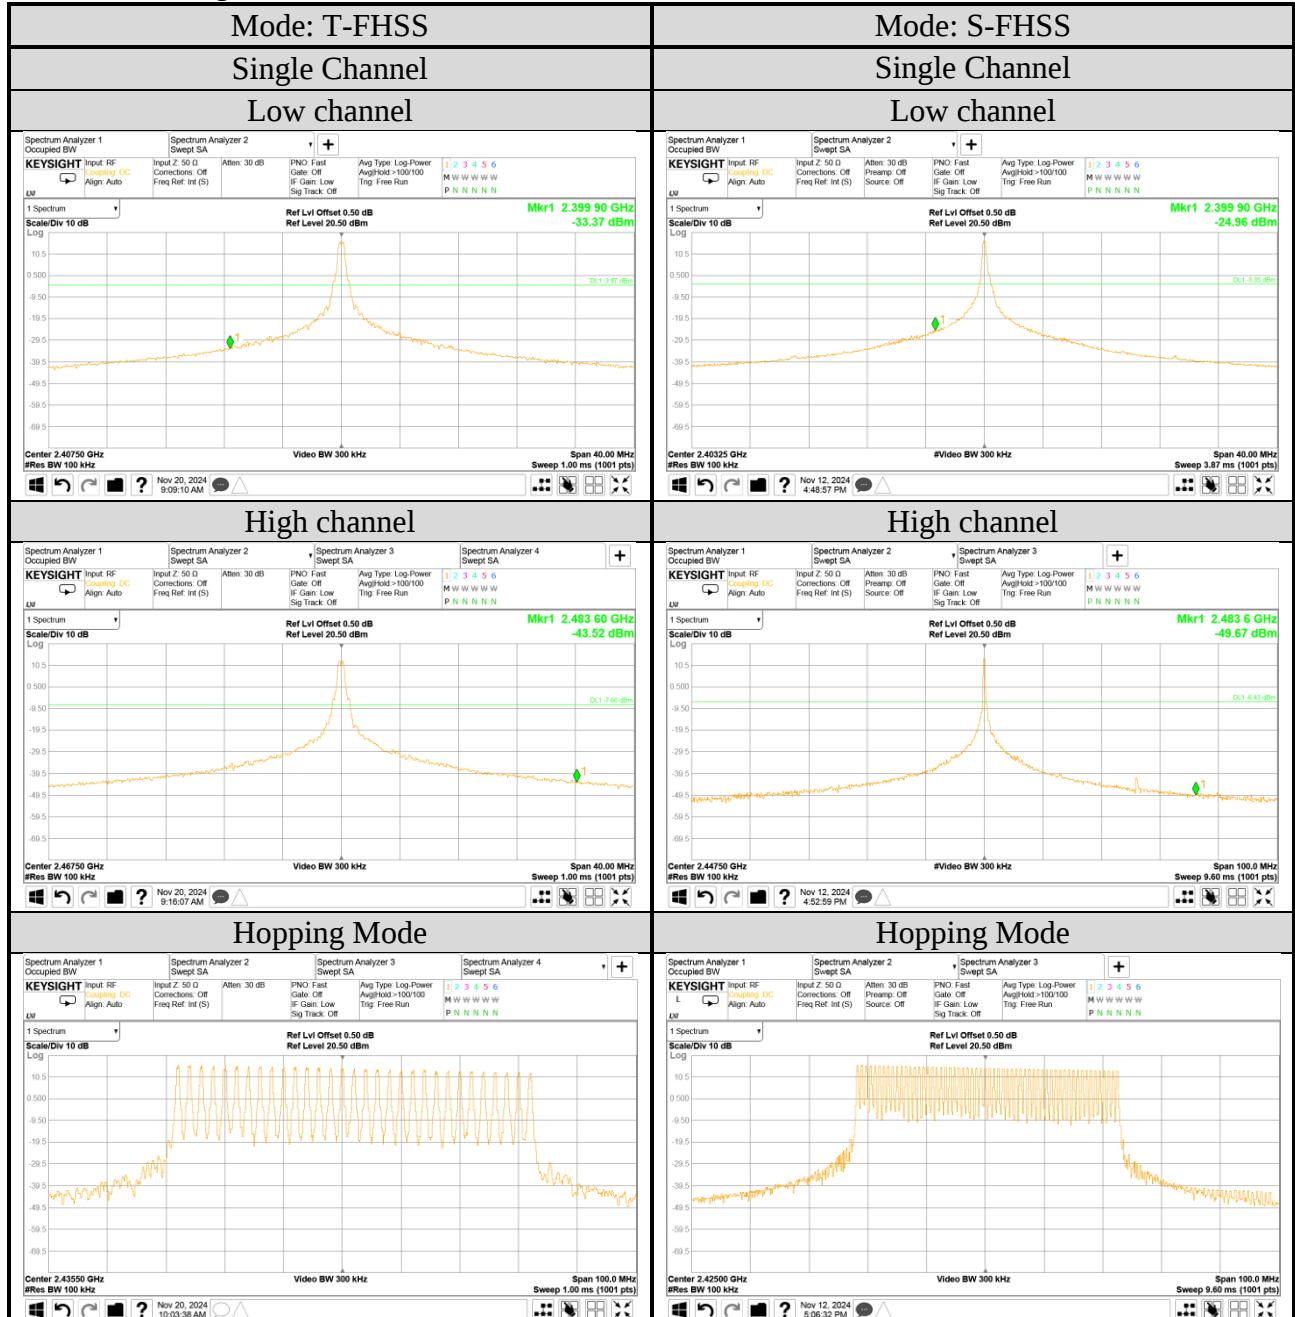

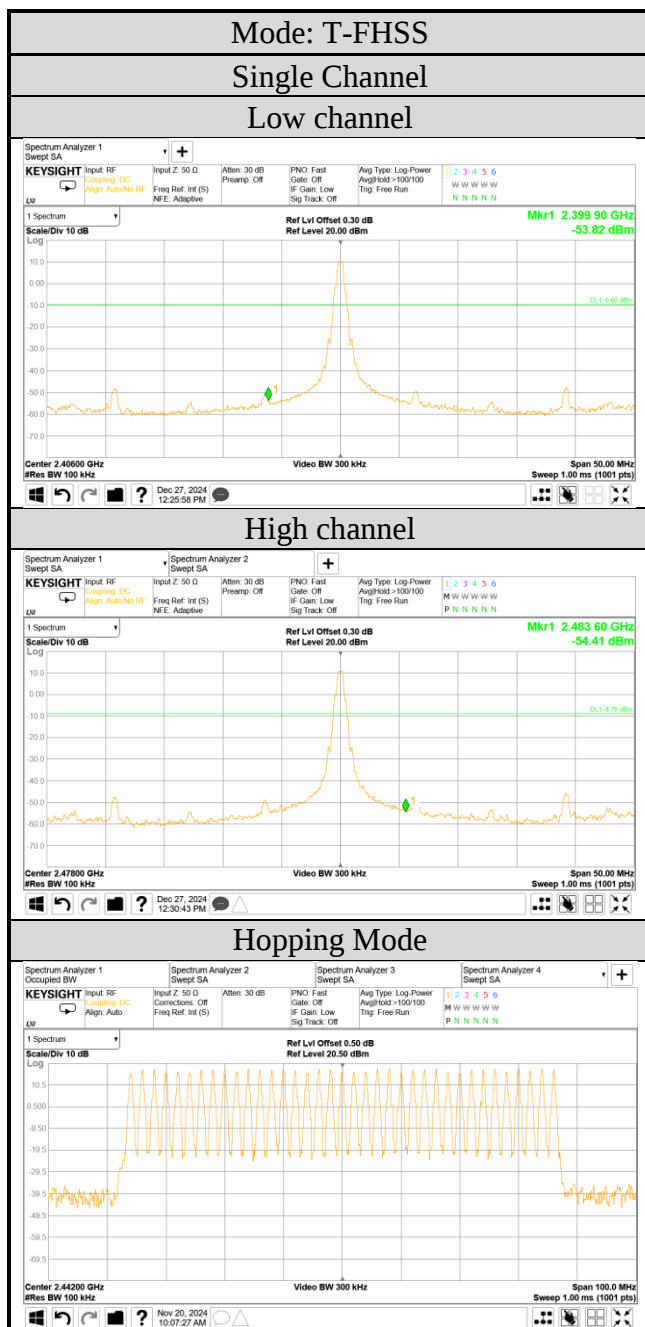


A.8.2 Spurious Emission (30MHz –25GHz)

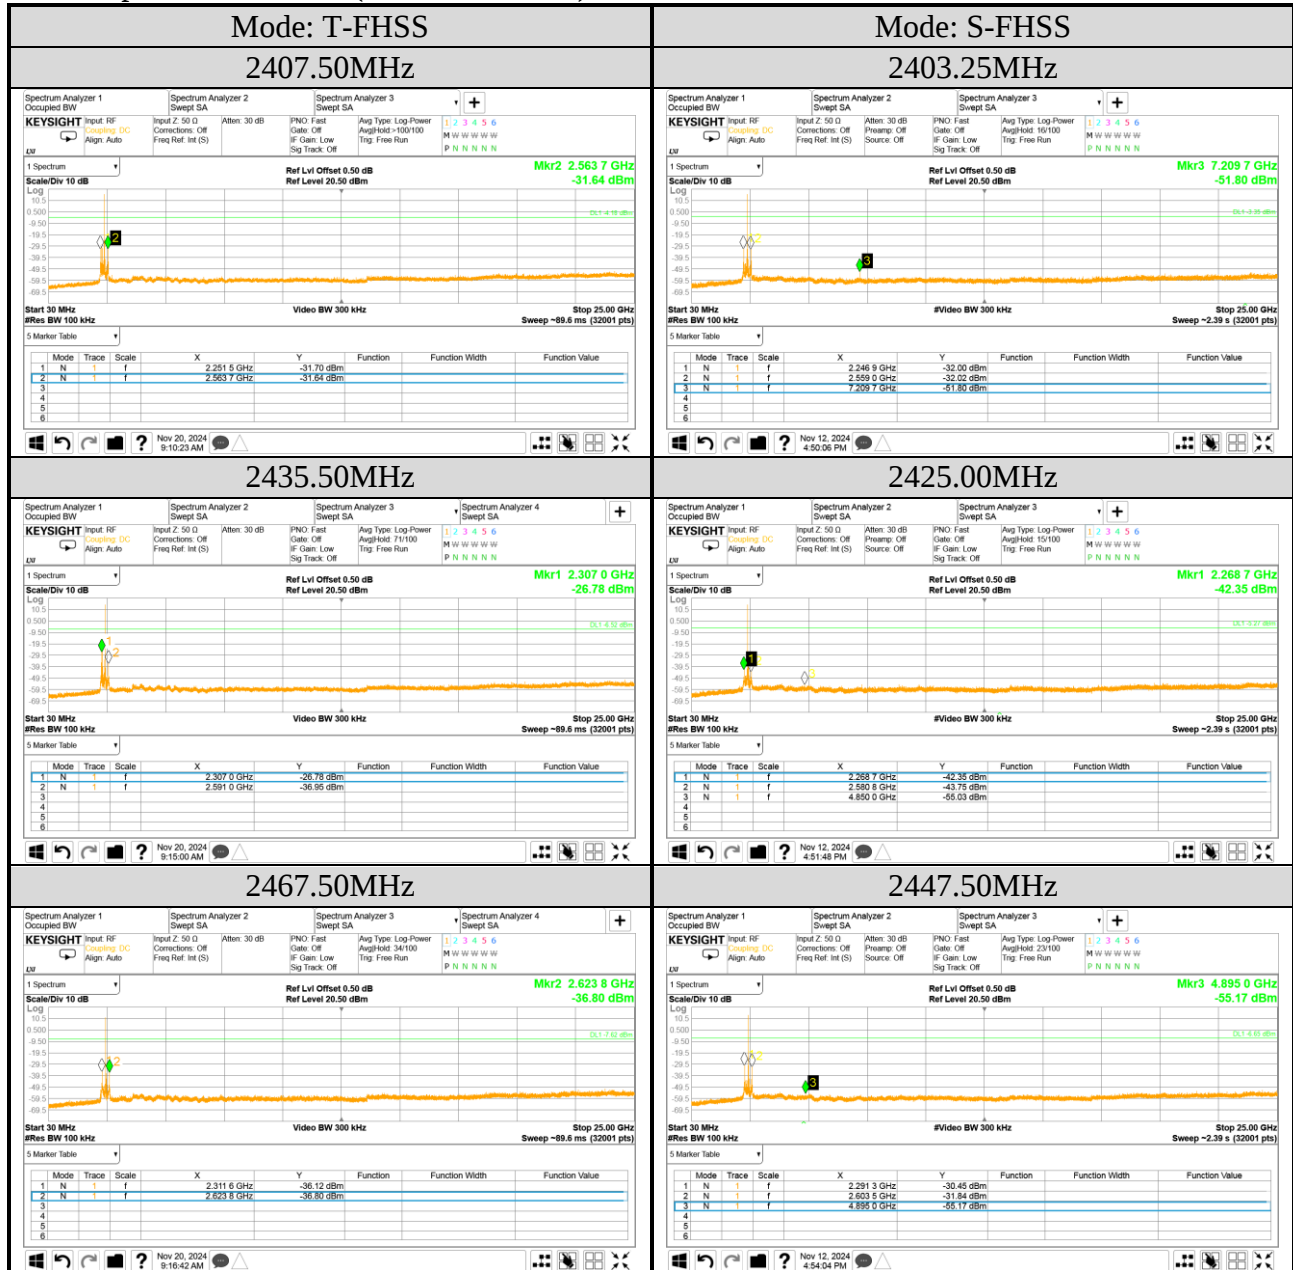

Note: All results have been included cable loss.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

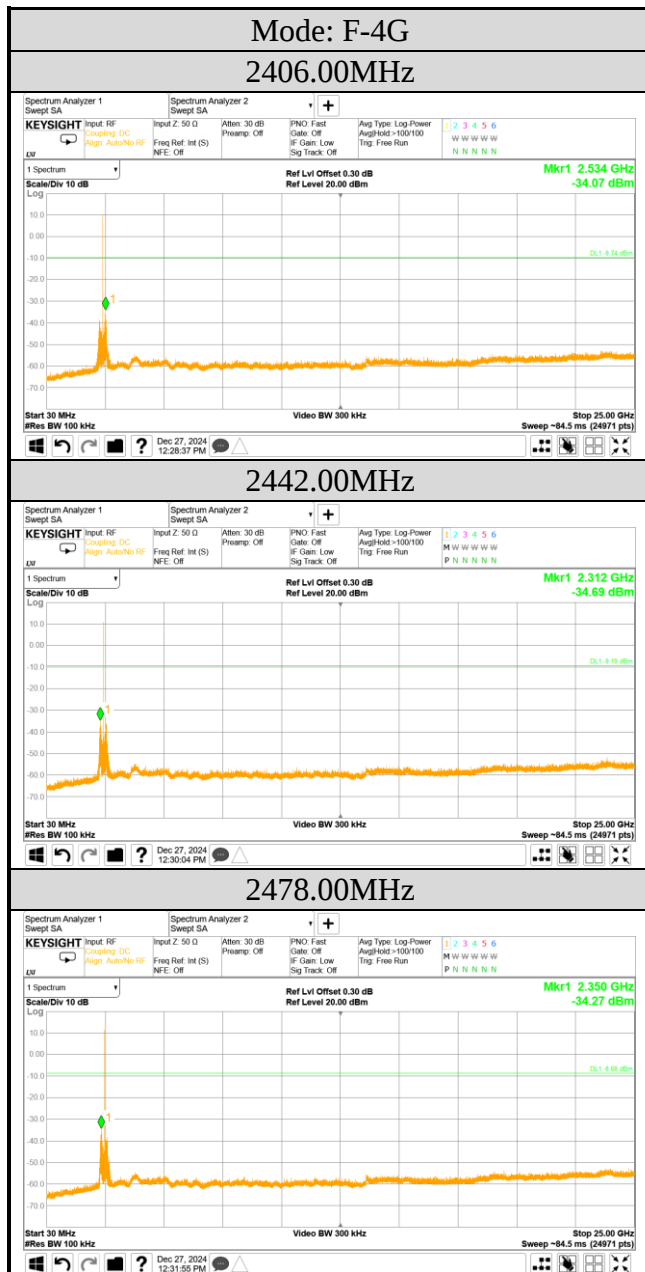

Note: All results have been included cable loss.