

FCC ID: B32OMNI3600

Exhibit 2

Engineering Report

c) Bandwidth (2.1049) Bandwidth Limitations (2.1047)

Author Data Masud S. Attayi	Date April 8, 1999	Document No. 01947-CERT-FCC-TEST-BW_MASK
Approved	Rev	File / Reference BW_MASK

OCCUPIED BANDWIDTH/BANDWIDTH LIMITATIONS

TEST PROCEDURE:

The Research In Motion Limited R902M-2-O radio modem device was connected together with a radio monitor board 02120-001, host computer, external power supply, a 20 dB external attenuator, and a coaxial cable. The R902M-2-O antenna output terminal was connected to the input of a 50 Ω spectrum analyzer through a matched 20 dB attenuator and a coaxial cable. The R902M-2-O transmitter was operating at full and low output power with and without internal data modulation.

TEST RESULTS:

UNMODULATED CARRIER, High Power: **11.97 dBm** with a 20 dB external attenuator and a 1 m coaxial cable.

- a) Internal Modulation: Please refer to the attached spectrum analyzer plots. 100% of the in-band modulation is below the specified mask per 90.210(j)

UNMODULATED CARRIER, Low Power: **-2.53 dBm** with a 20 dB external attenuator and 1 m coaxial cable.

- b) Internal Modulation: Please refer to the attached spectrum analyzer plots. 100% of the in-band modulation is below the specified mask per 90.210(j)

Below is the **description of the mask** for band 896-901/935-940 MHz (Mobitex) : 2 Watts transmitter

<u>Frequency (MHz)</u>	<u>Formula</u>	<u>Upper Limit (dB)</u>	<u>Lower Limit (dB)</u>
-26500	50+10 log (P)	-53	-175
-0.0115	157 log (f _d /5.3)	-53	-175
-0.0095	157 log (f _d /5.3) or 103 log(f _d /3.9)	-39.8	-175
-0.0062	103 log (f _d /3.9) or 53 log (f _d /2.5)	-21.1	-175
-0.0025	53 log (f _d /2.5)	0.0	-175
0.0025	53 log (f _d /2.5)	0.0	-175
0.0062	103 log (f _d /3.9) or 53 log (f _d /2.5)	-21.1	-175


Date	Rev	Document No.
April 8, 1999		01947-CERT-FCC-TEST-BW_MASK

0.0095	157 log $(f_d/5.3)$ or 103 log $(f_d/3.9)$	-39.8	-175
0.0115	157 log $(f_d/5.3)$	-53	-175
26500	50+10 log (P)	-53	-175

EQUIPMENT:


- H.P. 8563E Spectrum Analyzer 9.0 KHz - 26.5 GHz
- HP6632A DC POWER SUPPLY
- Mini Circuits 20 dB att. # NAT-20 0 Hz - 1.5 GHz

SETTING: RBW: 300 Hz; VBW: 3 MHz; SPAN: 25 KHz; SWP: 10 Sec

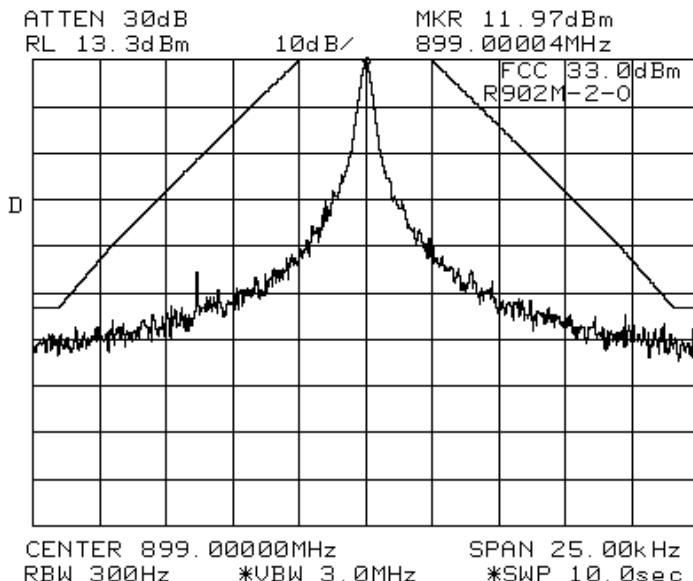
**OCCUPIED BANDWIDTH/BANDWIDTH LIMITATIONS
UNMODULATED CARRIER – HIGH POWER**


Date	Rev	Document No.
April 8, 1999		01947-CERT-FCC-TEST-BW_MASK

OCCUPIED BANDWIDTH/BANDWIDTH LIMITATIONS UNMODULATED CARRIER – LOW POWER

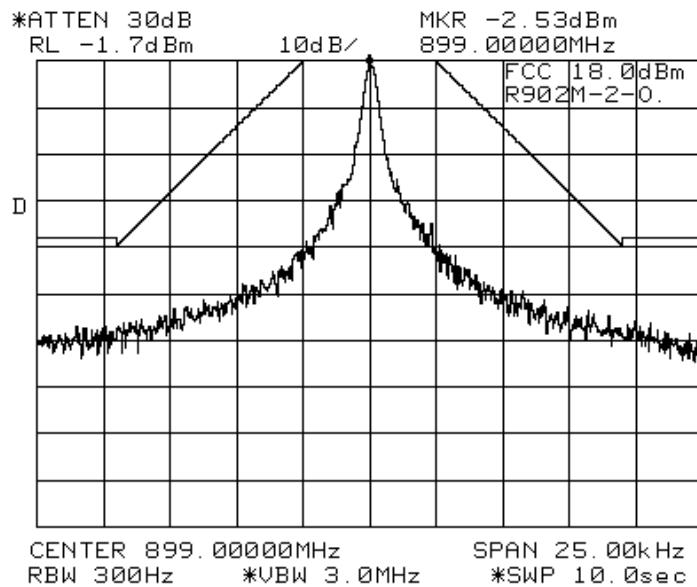

OCCUPIED BANDWIDTH/BANDWIDTH LIMITATIONS MODULATED CARRIER – HIGH POWER

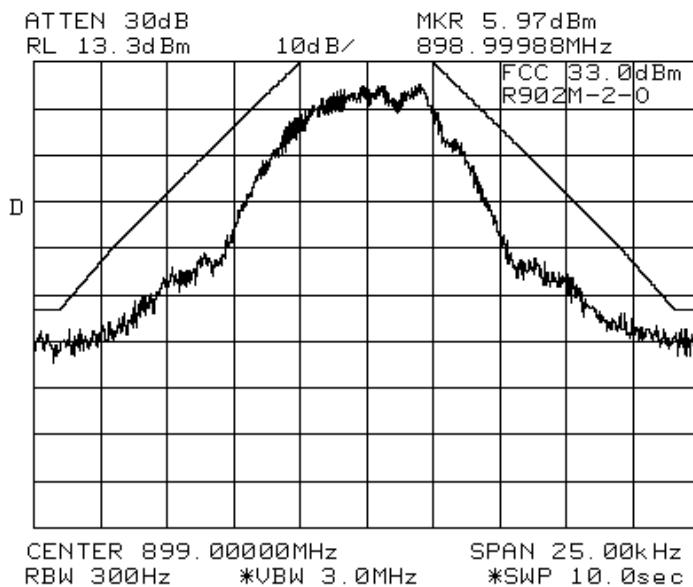



Date	Rev	Document No.
April 8, 1999		01947-CERT-FCC-TEST-BW_MASK

OCCUPIED BANDWIDTH/BANDWIDTH LIMITATIONS MODULATED CARRIER – LOW POWER

