



TEST REPORT

Report No. : CHTEW21120242R1 Report verification: 

Project No. : SHT2111139402EW

FCC ID : B32T650M

Applicant's name : VeriFone Inc

Address : Suite 200 1400 W Stanford Ranch Rd Rocklin CA 95765

Test item description : Point of Sale Terminal

Trade Mark : Verifone

Model/Type reference : T650m

Listed Model(s) : T650m-2

Standard : FCC 47 CFR Part2.1093
IEEE Std C95.1, 1999 Edition
IEEE 1528: 2013

Date of receipt of test sample : Dec.06, 2021

Date of testing : Dec.07, 2021- Dec.28 2021

Date of issue : Dec.29 2021

Result : PASS

Compiled by
(position+printedname+signature).... : File administrators Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Test Engineer: Patrick Qiu

Patrick Qiu

Approved by
(position+printedname+signature).... : Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genny Road, Tianliao,
Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Statement of Compliance</u>	<u>3</u>
<u>2.</u>	<u>Test Standards and Report version</u>	<u>4</u>
2.1.	Test Standards	4
2.2.	Report version	4
<u>3.</u>	<u>Summary</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	RF Specification Description	5
3.4.	Testing Laboratory Information	8
3.5.	Environmental conditions	8
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>9</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>10</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>11</u>
6.1.	SAR Measurement Set-up	11
6.2.	DASY5 E-field Probe System	12
6.3.	Phantoms	13
6.4.	Device Holder	13
<u>7.</u>	<u>SAR Test Procedure</u>	<u>14</u>
7.1.	Scanning Procedure	14
7.2.	Data Storage and Evaluation	16
<u>8.</u>	<u>Dielectric Property Measurements & System Check</u>	<u>18</u>
8.1.	Tissue Dielectric Parameters	18
8.2.	System Check	20
<u>9.</u>	<u>SAR Exposure Limits</u>	<u>31</u>
<u>10.</u>	<u>Conducted Power Measurement Results</u>	<u>32</u>
10.1.	GSM	32
10.2.	WCDMA	33
10.3.	LTE	36
10.4.	Wi-Fi	56
10.5.	Bluetooth	58
<u>11.</u>	<u>Maximum Tune-up Limit</u>	<u>59</u>
<u>12.</u>	<u>Antenna Location</u>	<u>71</u>
<u>13.</u>	<u>Measured and Reported SAR Results</u>	<u>72</u>
<u>14.</u>	<u>SAR Measurement Variability</u>	<u>99</u>
<u>15.</u>	<u>Simultaneous Transmission analysis</u>	<u>100</u>

1. Statement of Compliance

Maximum Reported SAR (W/kg @1g)				
RF Exposure Conditions	PCB	DTS	NII	Simultaneous TX
Body(Dist.= 10mm)	0.761	0.035	0.115	0.876

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Test Standards and Report version

2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

[941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

2.2. Report version

Revision No.	Date of issue	Description
N/A	2021-07-06	Original
R1	2021-12-29	Upgrade the motherboard, hardware version, do a difference test based on the report CHTEW21070013(2021-07-06)

3. Summary

3.1. Client Information

Applicant:	VeriFone Inc
Address:	Suite 200 1400 W Stanford Ranch Rd Rocklin CA 95765
Manufacturer:	Verifone Systems (China) Inc.
Address:	Rm 318, south of Bld C18, Startup Headquarters Base, North of Fuyuan Road, Wuqing Development Area, Tianjin, China, 301700
Factory:	Cal-Comp Electronics (Thailand) Public Co., Ltd.
Address:	No. 138, Village No. 4, Phetchakasem Road, Sa Phang Subdistrict, Khao Yoi District, 76140, Phetchaburi Province, Thailand

3.2. Product Description

Main unit	
Name of EUT:	Point of Sale Terminal
Trade Mark:	Verifone
Model No.:	T650m
Listed Model(s):	T650m-2
Device Category:	Portable
Product stage:	Production unit
Battery Information:	DC 3.7V, 2800mAh
RF Exposure Environment:	General Population/Uncontrolled
HTW test sample No.:	YPHT21111394007
Hardware version:	DVT3
Software version:	1A.0.0
Device Dimension:	Overall (Length x Width x Thickness):160 x 80 x 15 mm

3.3. RF Specification Description

GSM	
Operation Band:	GSM850 PCS1900
Support Network:	GSM GPRS EGPRS
Operating Mode:	GSM:GMSK GPRS:GMSK EGPRS:8PSK
Device Class:	B
GPRS Multi-Slot Class:	12
GPRS Multi-Slot Class:	12
Antenna Type:	FPC Antenna
Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No	

WCDMA	
Operation Band:	FDD Band II FDD Band IV FDD Band V
Power Class:	Class 3
Operating Mode:	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA
Antenna Type:	FPC Antenna
LTE	
Operation Band:	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 25 FDD Band 26
Power Class:	Class 3
Operating Mode:	QPSK 16QAM
Antenna Type:	FPC Antenna
Does this device support Carrier Aggregation (CA)? ☐ Yes ☒ No	
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No	
Wi-Fi 2.4G	
Operating Mode:	802.11b 802.11g 802.11n(HT20)
Antenna Type:	FPC Antenna
Does this device 2.4GHz Wi-Fi support hotspot operation? ☒ Yes ☐ No	
Wi-Fi 5G	
Operation Band:	U-NII-1 U-NII-2A U-NII-2C U-NII-3
Operating Mode:	802.11a 802.11n(HT20) 802.11n(HT40)
Antenna Type:	FPC Antenna
Does this device 5GHz Wi-Fi support hotspot operation? ☐ Yes ☒ No	
Bluetooth	
Bluetooth version:	V4.0
Support function:	EDR
Operating Mode:	GFSK $\pi/4$ DQPSK 8DPSK
Antenna Type:	FPC Antenna

Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
Bluetooth	
Bluetooth version:	V4.0
Support function:	BLE
Operating Mode:	GFSK
Antenna Type:	FPC Antenna
Does this device support Bluetooth Tethering? ☒ Yes ☐ No	
<i>Remark:</i> <i>The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power.</i> <i>The Test EUT support two SIM card(SIM1,SIM2),so all the tests are performed at each SIM card (SIM1,SIM2) mode, the datum recorded is the worst case for all the mode at SIM1 Card mode.</i>	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Ambient temperature	18 °C to 25 °C
Ambient humidity	30%RH to 70%RH
Air Pressure	950-1050mbar

4. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date (YY-MM-DD)	Due date (YY-MM-DD)
●	Data Acquisition Electronics DAEx	SPEAG	DAE4	1549	2021/03/23	2022/03/22
●	E-field Probe	SPEAG	EX3DV4	7494	2021/04/09	2022/04/08
●	Universal Radio Communication Tester	R&S	CMW500	137681	2021/05/27	2022/05/26
● Tissue-equivalent liquids Validation						
●	Dielectric Assessment Kit	SPEAG	DAK-3.5	1267	N/A	N/A
○	Dielectric Assessment Kit	SPEAG	DAK-12	1130	N/A	N/A
●	Network analyzer	Keysight	E5071C	MY46733048	2021/09/17	2022/09/16
● System Validation						
○	System Validation Antenna	SPEAG	CLA-150	4024	2021/01/25	2024/01/24
○	System Validation Dipole	SPEAG	D450V3	1102	2021/01/20	2024/01/19
●	System Validation Dipole	SPEAG	D750V3	1180	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D835V2	4d238	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1750V2	1164	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D1900V2	5d226	2021/01/22	2024/01/21
●	System Validation Dipole	SPEAG	D2450V2	1009	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D2600V2	1150	2021/01/25	2024/01/24
●	System Validation Dipole	SPEAG	D5GHzV2	1273	2021/01/26	2024/01/25
●	Signal Generator	R&S	SMB100A	114360	2021/08/05	2022/08/04
●	Power Viewer for Windows	R&S	N/A	N/A	N/A	N/A
●	Power sensor	R&S	NRP18A	101010	2021/08/05	2022/08/04
●	Power sensor	R&S	NRP18A	101386	2021/05/27	2022/05/26
●	Power Amplifier	BONN	BLWA 0160-2M	1811887	2021/11/11	2022/11/10
●	Dual Directional Coupler	Mini-Circuits	ZHDC-10-62-S+	F975001814	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-3W2+	1819	2021/11/11	2022/11/10
●	Attenuator	Mini-Circuits	VAT-10W2+	1741	2021/11/11	2022/11/10

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

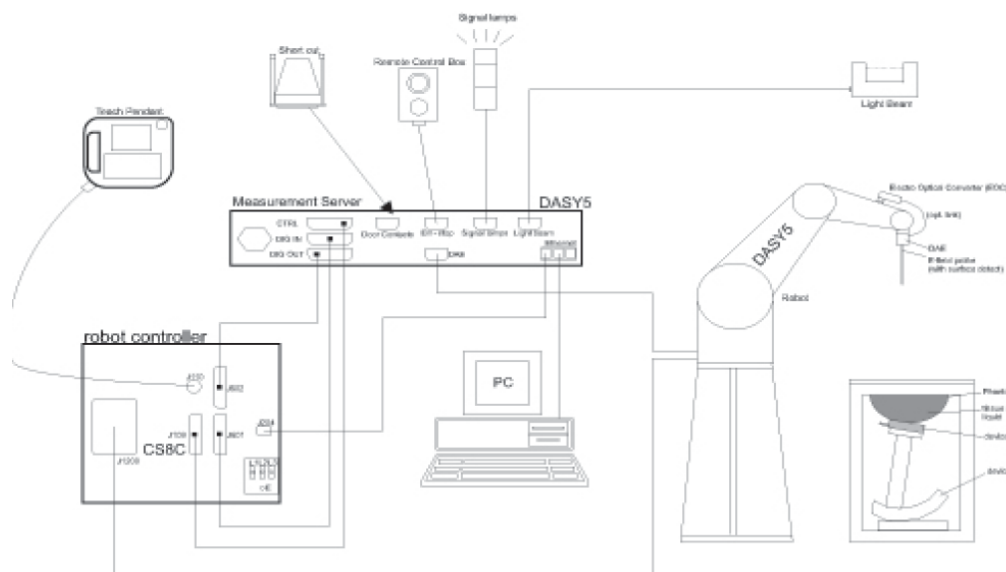

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

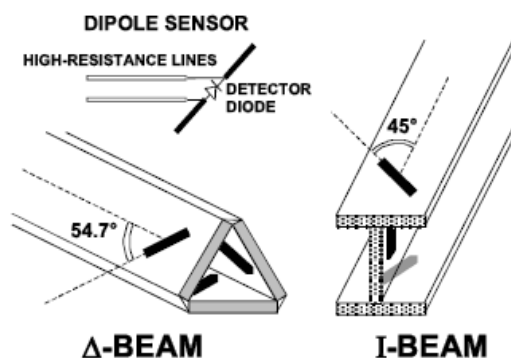

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM-Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Resolutions per FCC KDB Publication 865664 D01v04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within $\pm 5 \%$.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Dielectric Property Measurements & System Check

8.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Tissue dielectric parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:


Dielectric performance of Head tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (S/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	40.99	0.890	0.899	-2.16%	1.01%	±5%	22.0	2021/12/20
835	41.50	42.70	0.900	0.914	2.89%	1.56%	±5%	22.0	2021/12/21
1750	40.10	38.89	1.370	1.351	-3.02%	-1.39%	±5%	22.0	2021/12/20
1900	40.00	38.67	1.400	1.462	-3.34%	4.43%	±5%	22.0	2021/12/22
2450	39.20	38.06	1.800	1.842	-2.91%	2.33%	±5%	22.0	2021/12/23
2600	39.00	37.78	1.960	1.949	-3.13%	-0.56%	±5%	22.0	2021/12/23
5250	35.93	35.00	4.706	4.760	-2.59%	1.15%	±5%	22.0	2021/12/24
5600	35.53	34.65	5.065	5.248	-2.49%	3.61%	±5%	22.0	2021/12/24
5750	35.36	35.02	5.219	5.251	-0.96%	0.61%	±5%	22.0	2021/12/24

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
- For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- The results are normalized to 1 W input power.

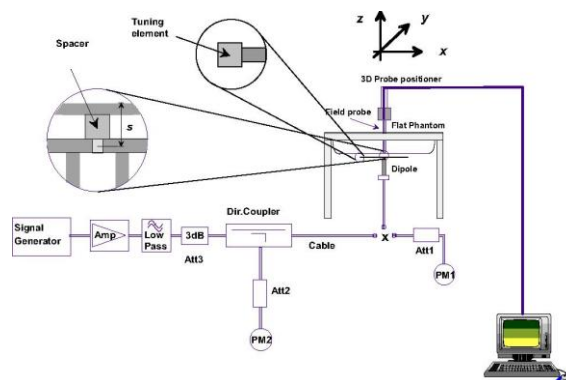

System Performance Check Setup

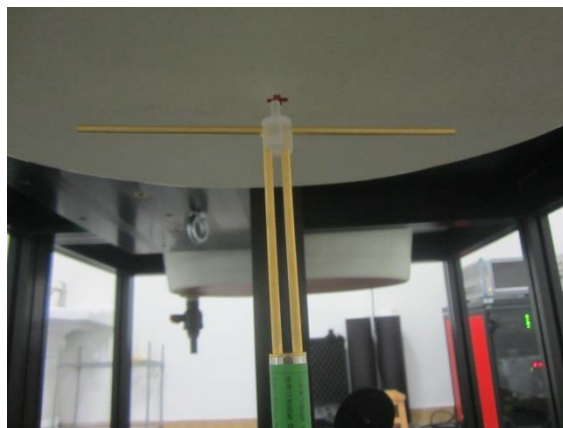


Photo of Dipole Setup

System Check Result:

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target.

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 250mW	Target 1W	Normalize to 1W	Measured 250mW					
750	8.43	8.52	2.13	5.59	5.56	1.39	1.07%	-0.54%	$\pm 10\%$	22.4	2021/12/20
835	9.39	9.80	2.45	6.14	6.40	1.60	4.37%	4.23%	$\pm 10\%$	22.4	2021/12/21
1750	36.40	36.52	9.13	19.20	19.44	4.86	0.33%	1.25%	$\pm 10\%$	22.4	2021/12/20
1900	39.80	42.40	10.60	20.30	21.96	5.49	6.53%	8.18%	$\pm 10\%$	22.4	2021/12/22
2450	52.00	54.80	13.70	23.90	25.32	6.33	5.38%	5.94%	$\pm 10\%$	22.4	2021/12/23
2600	56.50	57.60	14.40	25.00	25.88	6.47	1.95%	3.52%	$\pm 10\%$	22.4	2021/12/23

Head											
Frequency (MHz)	1g SAR			10g SAR			Delta (1g)	Delta (10g)	Limit	Temp (°C)	Date
	Target 1W	Normalize to 1W	Measured 100mW	Target 1W	Normalize to 1W	Measured 100mW					
5250	78.20	81.00	8.10	22.30	23.40	2.34	3.58%	4.93%	$\pm 10\%$	22.4	2021/12/24
5600	81.60	87.90	8.79	23.30	25.40	2.54	7.72%	9.01%	$\pm 10\%$	22.4	2021/12/24
5750	79.30	84.70	8.47	22.50	24.10	2.41	6.81%	7.11%	$\pm 10\%$	22.4	2021/12/24

Plots of System Performance Check

SystemPerformanceCheck-Head 750MHz

Communication System: UID 0, A-CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 40.994$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.9°C ; Liquid Temperature: 22.2°C ;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.7, 10.7, 10.7) @ 750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (51x121x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.49 W/kg

Head/d=15mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.11 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.13 W/kg ; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.51 W/kg

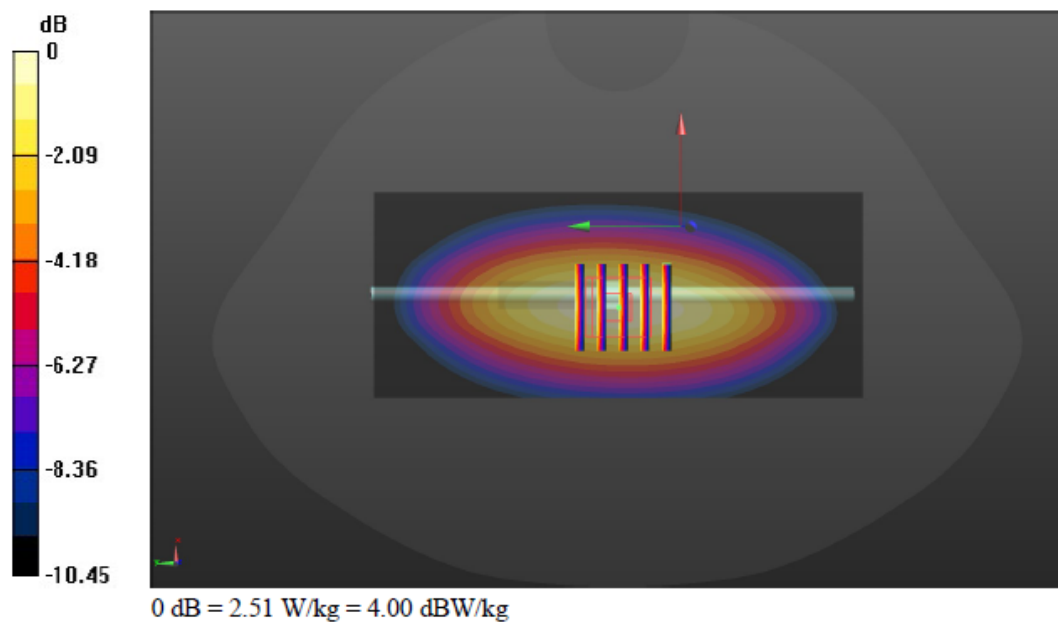

SystemPerformanceCheck-Head 835MHz

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.70$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: $^{\circ}\text{C}34.5$; Liquid Temperature: 34.1°C ;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.41, 10.41, 10.41) @ 835 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=15mm, Pin=250mW/Area Scan (41x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.91 W/kg


Head/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.33 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.45 W/kg ; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

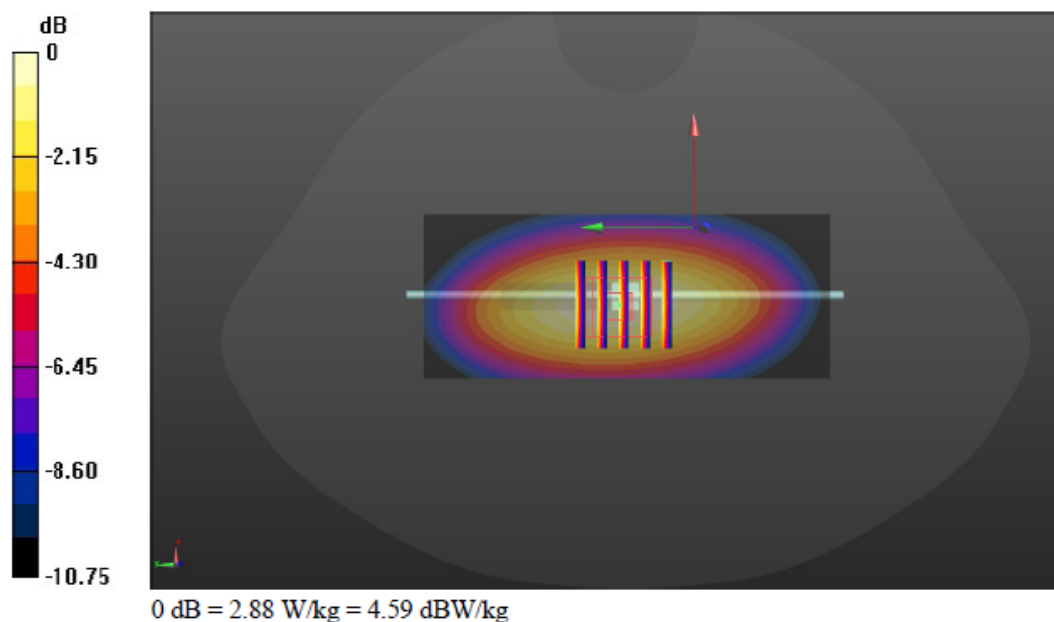

SystemPerformanceCheck-Head 1750MHz

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 38.888$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.88, 8.88, 8.88) @ 1750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm,Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.8 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.10 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.13 W/kg; SAR(10 g) = 4.86 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

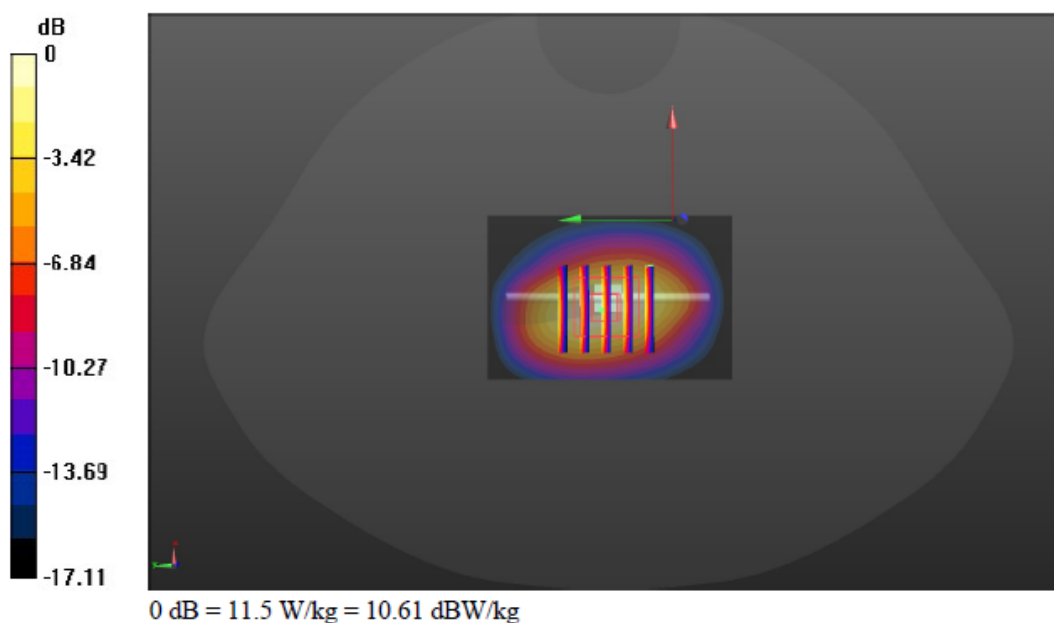

SystemPerformanceCheck-Head 1900MHz

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 38.665$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW /Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.2 W/kg


Head/d=10mm, Pin=250mW /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.87 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 19.4 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.49 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

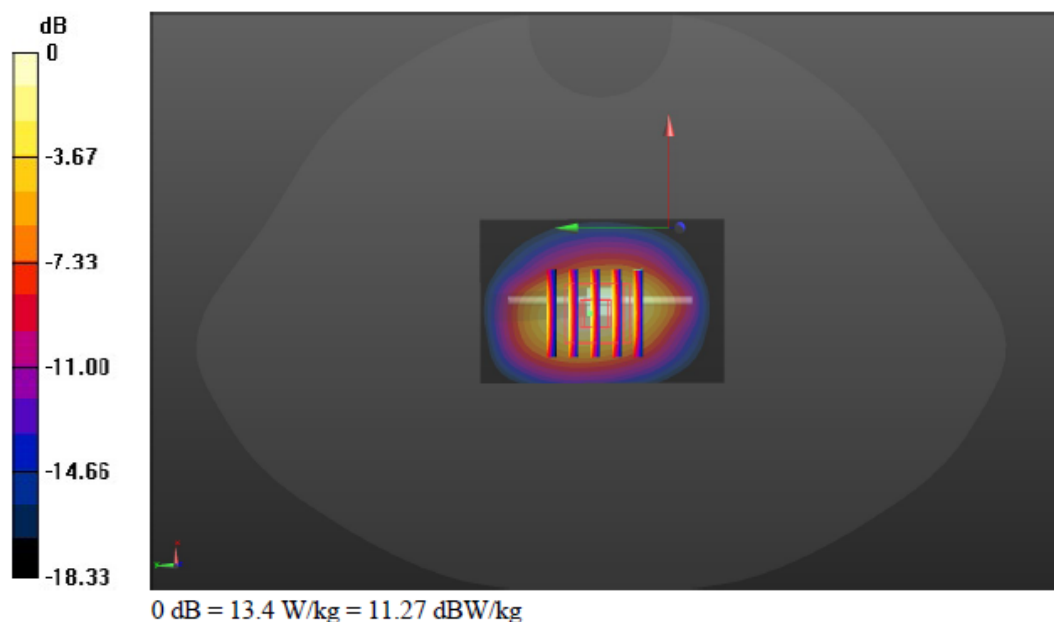

SystemPerformanceCheck-Head 2450MHz

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 23.5°C; Liquid Temperature: 23.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.97, 7.97, 7.97) @ 2450 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=250mW/Area Scan (41x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.90 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.33 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

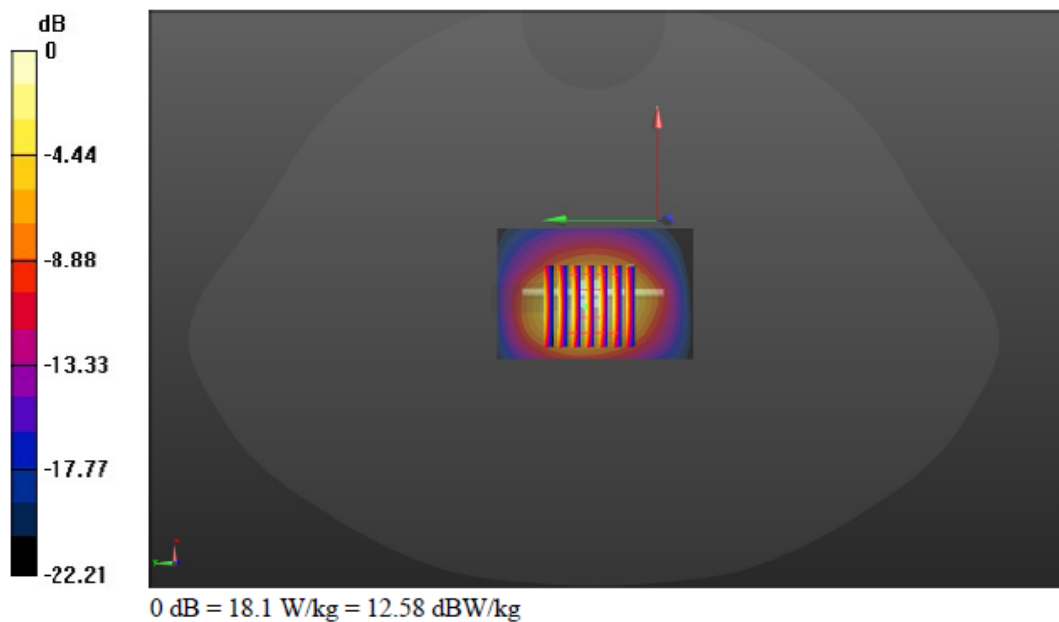

SystemPerformanceCheck-Head 2600MHz

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.949 \text{ S/m}$; $\epsilon_r = 37.781$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.8°C; Liquid Temperature: 22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm,Pin=250mW/Area Scan (41x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 26.0 W/kg


Head/d=10mm,Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.47 W/kg

Maximum value of SAR (measured) = 24.6 W/kg

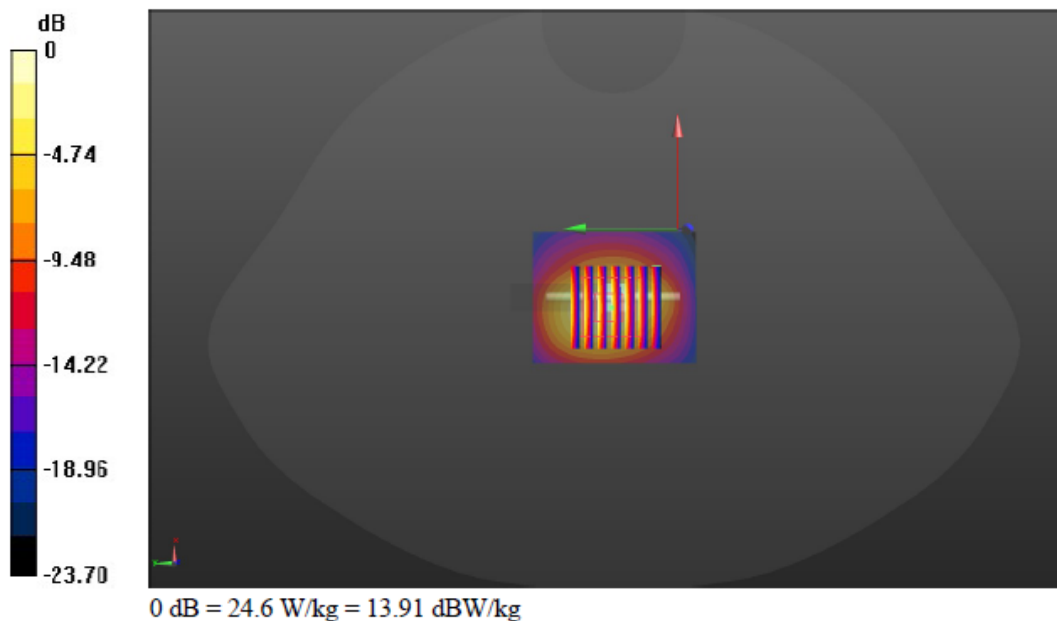

SystemPerformanceCheck-Head 5250MHz

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250 \text{ MHz}$; $\sigma = 4.76 \text{ S/m}$; $\epsilon_r = 35$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(5.65, 5.65, 5.65) @ 5250 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, pin=100mW /Area Scan (41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.3 W/kg


Head/d=10mm, pin=100mW /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.49 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.34 W/kg

SystemPerformanceCheck-Head 5600MHz
Maximum value of SAR (measured) = 19.1 W/kg

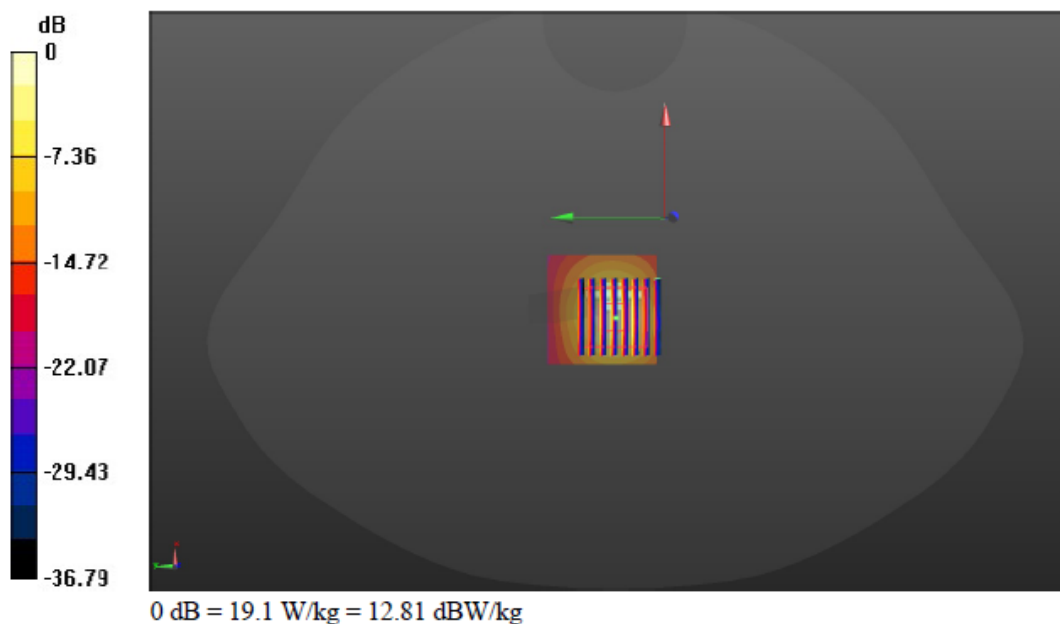

SystemPerformanceCheck-Head 5600MHz

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.248$ S/m; $\epsilon_r = 34.645$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C; Liquid Temperature: 22.4°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW, f=5600 MHz /Area Scan (51x41x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 23.2 W/kg

Head/d=10mm, Pin=100mW, f=5600 MHz /Zoom Scan (8x8x7)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 35.6 W/kg

SAR(1 g) = 8.79 W/kg; SAR(10 g) = 2.54 W/kg

Maximum value of SAR (measured) = 21.3 W/kg

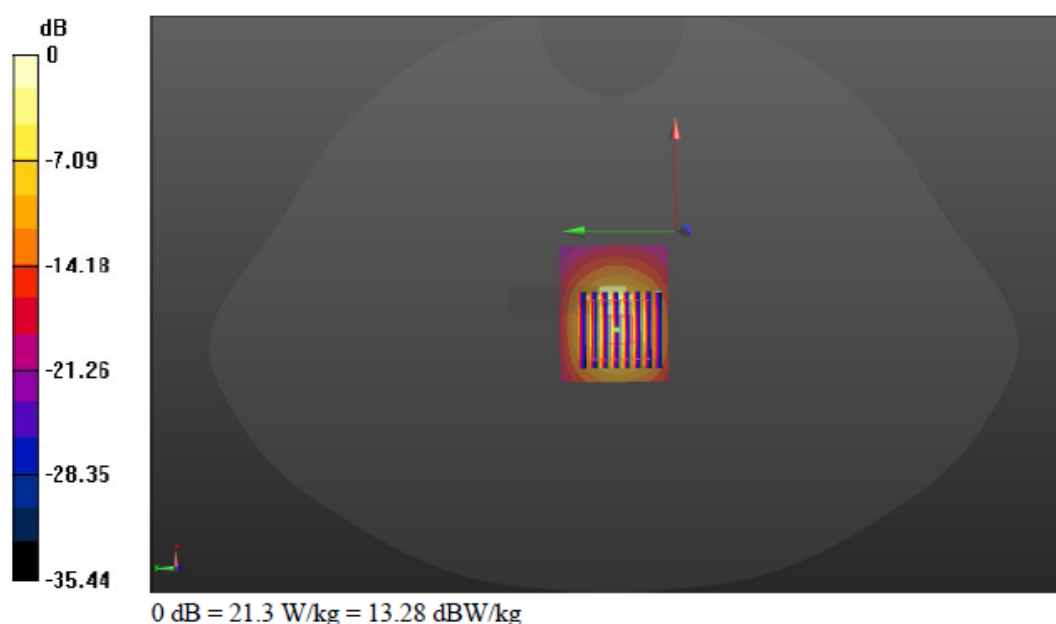

SystemPerformanceCheck-Head 5750MHz

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.022$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 23.5°C; Liquid Temperature: 22.8°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(4.86, 4.86, 4.86) @ 5750 MHz; Calibrated: 4/9/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 3/23/2021
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head/d=10mm, Pin=100mW/Area Scan (41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.8 W/kg


Head/d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 50.00 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 8.47 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

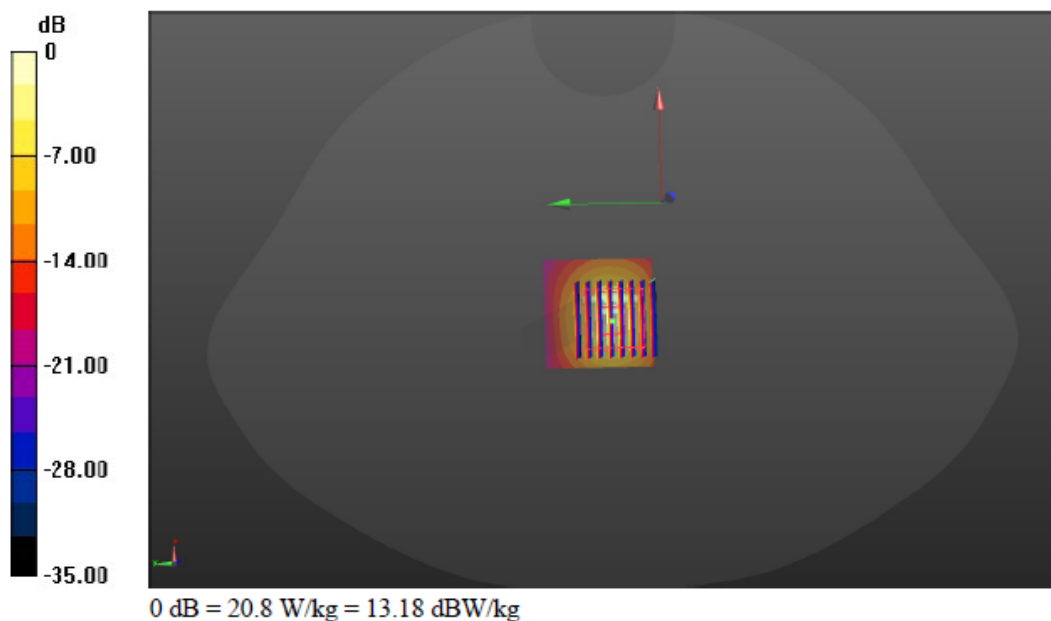

9. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

Type Exposure	Limit (W/kg)	
	General Population/ Uncontrolled Exposure Environment	Occupational/ Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

10. Conducted Power Measurement Results

10.1. GSM

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and further SAR test reduction.
2. Per KDB 941225 D01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Per KDB941225 D01, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Mode: GSM850		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH128	CH190	CH251		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM Voice		32.73	32.79	32.70	-9.03	23.70	23.76	23.67
GPRS (GMSK)	1TXslot	33.10	33.03	33.14	-9.03	24.07	24.00	24.11
	2TXslots	32.47	32.52	32.64	-6.02	26.45	26.50	26.62
	3TXslots	30.57	30.44	30.55	-4.26	26.31	26.18	26.29
	4TXslots	29.58	29.45	29.52	-3.01	26.57	26.44	26.51
EGPRS (8PSK)	1TXslot	27.54	27.40	27.48	-9.03	18.51	18.37	18.45
	2TXslots	27.14	27.00	26.99	-6.02	21.12	20.98	20.97
	3TXslots	25.10	24.71	24.93	-4.26	20.84	20.45	20.67
	4TXslots	24.03	23.90	23.95	-3.01	21.02	20.89	20.94
Mode: PCS1900		Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
		CH512	CH661	CH810		CH512	CH661	CH810
		1850.2MHz	1880MHz	1909.8MHz		1850.2MHz	1880MHz	1909.8MHz
GSM Voice		30.09	30.34	30.17	-9.03	21.06	21.31	21.14
GPRS (GMSK)	1TXslot	30.03	30.30	30.13	-9.03	21.00	21.27	21.10
	2TXslots	29.82	29.99	29.00	-6.02	23.80	23.97	22.98
	3TXslots	28.05	28.25	28.25	-4.26	23.79	23.99	23.99
	4TXslots	26.56	26.73	26.73	-3.01	23.55	23.72	23.72
EGPRS (8PSK)	1TXslot	26.03	25.98	25.95	-9.03	17.00	16.95	16.92
	2TXslots	24.65	24.79	24.85	-6.02	18.63	18.77	18.83
	3TXslots	23.27	23.20	23.15	-4.26	19.01	18.94	18.89
	4TXslots	21.93	21.98	22.01	-3.01	18.92	18.97	19.00

Note:

1) Division Factors

To Frame-Average Power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> Burst Average Power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> Burst Average Power divided by (8/4) => -3.01dB

10.2. WCDMA

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
- Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
- Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
- Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band II			WCDMA Band IV		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH9262	CH9400	CH9538	CH1312	CH1413	CH1513
		1852.4MHz	1880MHz	1907.6MHz	1712.4MHz	1732.6MHz	1752.6MHz
AMR 12.2K		22.73	22.72	22.78	23.10	23.28	23.38
RMC 12.2K		22.76	22.75	22.81	23.13	23.31	23.42
HSDPA	Subtest-1	22.63	22.63	22.59	22.83	22.95	23.10
	Subtest-2	22.20	22.19	22.16	22.34	22.58	22.59
	Subtest-3	22.23	22.23	22.19	22.34	22.49	22.64
	Subtest-4	22.23	22.24	22.20	22.34	22.53	22.64
HSUPA	Subtest-1	22.47	22.02	22.00	22.20	22.44	22.79
	Subtest-2	20.59	20.57	20.58	20.69	20.83	21.01
	Subtest-3	21.62	21.28	21.53	21.47	21.71	21.71
	Subtest-4	21.03	20.97	21.04	21.24	21.48	21.52
	Subtest-5	22.57	22.49	22.48	22.63	22.87	22.92

Mode		WCDMA Band V		
		Conducted Power (dBm)		
		CH4132	CH4183	CH4233
		826.4MHz	836.6MHz	846.6MHz
AMR 12.2K		23.48	23.67	23.53
RMC 12.2K		23.52	23.71	23.57
HSDPA	Subtest-1	23.32	23.36	23.31
	Subtest-2	22.89	23.00	22.85
	Subtest-3	22.83	23.04	22.87
	Subtest-4	22.82	23.03	22.86
HSUPA	Subtest-1	22.96	23.18	22.09
	Subtest-2	21.02	21.15	21.13
	Subtest-3	21.70	22.53	22.10
	Subtest-4	21.57	21.75	21.71
	Subtest-5	23.13	23.38	23.13

10.3. LTE

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
 - LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
 - LTE Band 5 (824-849 MHz) is covered by LTE Band 26 (814-849 MHz)
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18607	18900	19193
				1850.7MHz	1880MHz	1909.3MHz
1.4MHz	QPSK	1	0	24.17	24.20	24.20
			2	24.48	24.29	24.16
			5	24.38	24.27	24.25
		3	0	24.19	24.25	24.33
			1	24.19	24.25	24.32
			3	24.23	24.25	24.22
		6	0	23.27	23.37	23.33
	16QAM	1	0	23.51	23.47	22.81
			2	23.67	23.61	23.19
			5	23.53	23.45	23.47
		3	0	22.83	23.25	23.35
			1	22.91	22.95	23.51
			3	22.91	23.22	23.39
		6	0	22.37	22.33	22.30
Band-width	Modulation	RB allocation	RB offset	18615	18900	19185
				1851.5MHz	1880MHz	1908.5MHz
3MHz	QPSK	1	0	24.31	24.66	24.59
			8	24.25	24.39	24.18
			14	24.41	24.63	24.27
		8	0	23.55	23.58	23.52
			4	23.75	23.60	23.42
			7	23.64	23.51	23.33
		15	0	23.60	23.56	23.36
	16QAM	1	0	23.42	23.50	23.54
			8	23.48	23.64	23.25
			14	23.58	23.86	23.34
		8	0	22.76	22.72	22.41
			4	22.84	22.71	22.40
			7	22.73	22.77	22.29
		15	0	22.67	22.54	22.22

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18625	18900	19175
				1852.5MHz	1880MHz	1907.5MHz
5MHz	QPSK	1	0	24.49	24.73	24.22
			12	24.46	24.55	24.12
			24	24.60	24.85	24.33
		12	0	23.56	23.64	23.55
			7	23.57	23.66	23.56
			13	23.61	23.60	23.44
		25	0	23.54	23.68	23.52
	16QAM	1	0	23.57	23.66	22.98
			12	23.53	23.62	23.31
			24	23.51	23.60	23.51
		12	0	22.57	22.67	22.60
			7	22.47	22.74	22.60
			13	22.71	22.70	22.51
		25	0	22.57	22.68	22.53
Band-width	Modulation	RB allocation	RB offset	18650	18900	19150
				1855MHz	1880MHz	1905MHz
10MHz	QPSK	1	0	24.55	24.80	24.76
			24	24.42	24.57	24.37
			49	24.54	24.59	24.15
		25	0	23.58	23.74	23.72
			24	23.59	23.68	23.61
			49	23.65	23.64	23.61
		50	0	23.55	23.76	23.59
	16QAM	1	0	23.57	23.65	23.87
			24	23.84	23.50	23.66
			49	23.86	23.61	23.41
		25	0	22.65	22.83	22.63
			24	22.57	22.77	22.62
			49	22.56	22.72	22.49
		50	0	22.71	22.82	22.58

LTE-FDD Band 2				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	18675	18900	19125
				1857.5MHz	1880MHz	1902.5MHz
15MHz	QPSK	1	0	24.71	24.66	24.66
			38	24.32	24.42	24.43
			74	24.88	24.81	24.44
		38	0	23.31	23.92	23.15
			18	23.06	23.58	23.71
			37	23.60	23.96	23.15
		75	0	23.57	23.69	23.64
	16QAM	1	0	23.73	23.98	23.49
			38	23.36	23.77	24.09
			74	23.67	23.89	23.62
		38	0	23.33	23.92	23.38
			18	23.05	23.64	23.17
			37	23.47	23.88	23.06
		75	0	22.62	22.78	22.71
Band-width	Modulation	RB allocation	RB offset	18700	18900	19100
				1860MHz	1880MHz	1900MHz
20MHz	QPSK	1	0	25.01	25.01	24.90
			49	24.68	24.51	24.84
			99	24.89	24.75	24.41
		50	0	23.57	23.72	23.63
			25	23.57	23.74	23.64
			50	23.62	23.61	23.65
		100	0	23.52	23.58	23.62
	16QAM	1	0	23.78	24.16	24.09
			49	23.33	23.77	24.02
			99	23.55	23.95	23.92
		50	0	22.84	22.73	22.74
			25	22.81	22.73	22.73
			50	22.65	22.60	22.79
		100	0	22.56	22.63	22.68

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19957	20175	20393
				1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	24.10	24.25	24.21
			2	24.21	24.46	24.32
			5	24.15	24.36	24.20
		3	0	24.10	24.23	24.23
			1	24.10	24.24	24.25
			3	24.33	24.27	24.30
		6	0	23.30	23.38	23.31
	16QAM	1	0	23.18	22.93	23.45
			2	23.27	23.26	23.45
			5	23.21	23.22	23.46
		3	0	22.79	23.13	23.11
			1	22.80	23.13	23.22
			3	23.30	22.97	23.27
		6	0	22.25	22.33	22.42
Band-width	Modulation	RB allocation	RB offset	19965	20175	20385
				1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	24.29	24.51	24.18
			8	24.11	24.42	24.07
			14	24.31	24.56	24.31
		8	0	23.15	23.42	23.42
			4	23.16	23.27	23.50
			7	23.25	23.48	23.36
		15	0	23.08	23.28	23.32
	16QAM	1	0	23.42	23.33	23.53
			8	23.41	23.35	23.44
			14	23.38	23.47	23.58
		8	0	22.21	22.47	22.51
			4	22.20	22.32	22.41
			7	22.31	22.41	22.46
		15	0	22.05	22.17	22.39

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	19975	20175	20375
				1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	24.25	24.22	24.29
			12	24.21	24.45	24.05
			24	24.51	24.48	24.35
		12	0	23.16	23.34	23.25
			7	23.17	23.34	23.25
			13	23.23	23.30	23.29
		25	0	23.26	23.31	23.38
	16QAM	1	0	23.35	23.27	22.85
			12	23.06	23.23	22.75
			24	23.02	23.24	22.77
		12	0	22.27	22.41	22.18
			7	22.28	22.42	22.37
			13	22.34	22.46	22.24
		25	0	22.27	22.39	22.43
Band-width	Modulation	RB allocation	RB offset	20000	20175	20350
				1715MHz	1732.5MHz	1750MHz
10MHz	QPSK	1	0	24.31	24.33	24.29
			24	24.16	24.33	24.26
			49	24.15	24.58	24.41
		25	0	23.30	23.34	23.27
			24	23.27	23.35	23.32
			49	23.22	23.31	23.29
		50	0	23.24	23.28	23.32
	16QAM	1	0	23.43	23.18	23.24
			24	23.48	23.31	23.40
			49	23.36	23.37	23.11
		25	0	22.34	22.42	22.32
			24	22.33	22.41	22.32
			49	22.29	22.56	22.32
		50	0	22.29	22.33	22.33

LTE-FDD Band 4				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20025	20175	20325
				1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	24.22	24.47	24.62
			38	23.96	24.07	24.12
			74	24.36	24.50	24.63
		38	0	23.02	23.66	23.62
			18	23.68	23.17	23.00
			37	23.14	23.88	23.80
		75	0	23.20	23.26	23.37
	16QAM	1	0	23.09	23.58	24.03
			38	23.07	23.45	23.14
			74	23.24	23.64	23.35
		38	0	23.03	23.64	23.64
			18	23.72	23.43	23.02
			37	23.04	23.79	23.82
		75	0	22.23	22.32	22.41
Band-width	Modulation	RB allocation	RB offset	20050	20175	20300
				1720MHz	1732.5MHz	1745MHz
20MHz	QPSK	1	0	24.42	24.71	24.36
			49	24.30	24.33	24.03
			99	24.45	24.41	24.22
		50	0	23.23	23.24	23.30
			25	23.33	23.24	23.19
			50	23.16	23.15	23.07
		100	0	23.30	23.22	23.15
	16QAM	1	0	23.27	24.02	23.39
			49	23.31	23.45	23.19
			99	23.11	23.49	23.37
		50	0	22.47	22.30	22.37
			25	22.45	22.22	22.28
			50	22.27	22.20	22.25
		100	0	22.35	22.26	22.20

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20407	20525	20643
				8.4.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	23.35	23.62	23.54
			2	23.52	23.66	23.66
			5	23.31	23.60	23.50
		3	0	23.39	23.67	23.64
			1	23.38	23.66	23.47
			3	23.32	23.62	23.44
		6	0	22.39	22.55	22.57
	16QAM	1	0	22.78	22.84	22.58
			2	22.97	22.78	22.72
			5	22.76	22.83	22.86
		3	0	22.26	22.65	22.54
			1	22.25	22.64	22.46
			3	22.21	22.59	22.43
		6	0	21.49	21.49	21.60
Band-width	Modulation	RB allocation	RB offset	20415	20525	20635
				825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	23.36	23.45	23.48
			8	23.11	23.23	23.49
			14	23.21	23.34	23.42
		8	0	22.45	22.63	22.62
			4	22.56	22.58	22.70
			7	22.49	22.56	22.62
		15	0	22.53	22.54	22.64
	16QAM	1	0	22.41	22.52	22.63
			8	22.19	22.45	22.69
			14	22.42	22.37	22.62
		8	0	21.65	21.62	21.72
			4	21.73	21.63	21.77
			7	21.64	21.62	21.79
		15	0	21.50	21.35	21.70

LTE-FDD Band 5				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20425	20525	20625
				826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	23.33	23.24	23.25
			12	23.26	23.20	23.33
			24	23.36	23.23	23.32
		12	0	22.44	22.45	22.42
			7	22.43	22.44	22.43
			13	22.46	22.36	22.46
		25	0	22.44	22.43	22.38
	16QAM	1	0	21.71	22.43	21.81
			12	21.92	22.32	21.62
			24	21.99	22.40	21.70
		12	0	21.31	21.55	21.47
			7	21.30	21.54	21.47
			13	21.23	21.32	21.50
		25	0	21.47	21.34	21.45
Band-width	Modulation	RB allocation	RB offset	20450	20525	20600
				829MHz	836.5MHz	844MHz
10MHz	QPSK	1	0	23.36	23.51	23.38
			24	23.47	23.45	23.48
			49	23.51	23.38	23.40
		25	0	22.43	22.63	22.56
			24	22.44	22.62	22.47
			49	22.54	22.44	22.44
		50	0	22.48	22.54	22.52
	16QAM	1	0	22.59	22.73	22.30
			24	22.89	22.76	22.45
			49	22.45	22.68	22.42
		25	0	21.30	21.69	21.42
			24	21.40	21.69	21.42
			49	21.39	21.62	21.38
		50	0	21.47	21.51	21.46

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20775	21100	21425
				2502.5MHz	2535MHz	2567.5MHz
5MHz	QPSK	1	0	23.25	23.32	23.77
			12	23.20	23.45	23.82
			24	23.43	23.59	23.93
		12	0	22.49	22.32	22.82
			7	22.40	22.31	22.81
			13	22.46	22.43	22.87
		25	0	22.56	22.34	22.86
	16QAM	1	0	22.45	22.29	22.63
			12	22.46	22.19	22.73
			24	22.58	22.23	22.76
		12	0	21.35	21.52	21.78
			7	21.36	21.52	21.88
			13	21.64	21.56	21.78
		25	0	21.63	21.35	21.84
Band-width	Modulation	RB allocation	RB offset	20800	21100	21400
				2505MHz	2535MHz	2565MHz
10MHz	QPSK	1	0	23.41	23.68	23.64
			24	23.36	23.71	23.68
			49	23.26	23.63	23.88
		25	0	22.58	22.42	22.74
			24	22.58	22.40	22.72
			49	22.49	22.51	22.96
		50	0	22.49	22.42	22.70
	16QAM	1	0	22.12	22.90	22.64
			24	22.69	22.52	22.93
			49	22.60	22.60	23.02
		25	0	21.68	21.49	21.73
			24	21.68	21.49	21.73
			49	21.52	21.50	21.90
		50	0	21.58	21.47	21.72

LTE-FDD Band 7				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	20825	21100	21375
				2507.5MHz	2535MHz	2562.5MHz
15MHz	QPSK	1	0	23.21	23.29	23.50
			38	23.18	23.24	23.28
			74	23.06	23.65	23.80
		38	0	22.84	22.11	22.55
			18	22.07	22.11	22.26
			37	22.23	22.56	22.88
		75	0	22.29	22.26	22.54
	16QAM	1	0	22.52	22.21	22.55
			38	22.63	22.12	22.31
			74	22.16	22.57	22.89
		38	0	22.61	22.02	22.72
			18	22.34	22.18	22.27
			37	22.22	22.49	22.90
		75	0	21.39	21.22	21.54
Band-width	Modulation	RB allocation	RB offset	20850	21100	21350
				2510MHz	2535MHz	2560MHz
20MHz	QPSK	1	0	23.52	23.49	23.59
			49	23.25	23.47	23.62
			99	23.10	23.62	23.93
		50	0	22.50	22.36	22.58
			25	22.35	22.43	22.61
			50	21.87	22.54	22.74
		100	0	22.13	22.43	22.62
	16QAM	1	0	22.03	22.57	22.68
			49	22.08	22.55	22.95
			99	22.17	22.80	22.74
		50	0	21.45	21.42	21.72
			25	21.41	21.47	21.72
			50	21.05	21.55	21.73
		100	0	21.16	21.40	21.58

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23017	23095	23173
				699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	23.09	23.38	23.52
			2	23.53	23.24	23.45
			5	23.46	23.30	23.55
		3	0	23.19	23.33	23.36
			1	23.18	23.37	23.38
			3	23.27	23.37	23.44
		6	0	22.17	22.45	22.48
	16QAM	1	0	22.72	22.07	22.11
			2	22.85	22.44	22.44
			5	22.64	22.20	22.67
		3	0	22.04	22.28	22.24
			1	22.03	22.33	22.24
			3	21.76	22.30	22.27
		6	0	21.22	21.35	21.28
Band-width	Modulation	RB allocation	RB offset	23025	23095	23165
				700.5MHz	707.5MHz	714.5MHz
3MHz	QPSK	1	0	22.11	23.48	23.46
			8	22.44	23.30	23.31
			14	22.67	23.40	23.53
		8	0	22.24	22.51	22.51
			4	22.24	22.52	22.53
			7	22.27	22.50	22.49
		15	0	21.28	22.49	22.42
	16QAM	1	0	22.13	22.64	22.79
			8	22.18	22.46	22.48
			14	22.53	22.36	22.31
		8	0	21.57	21.54	21.53
			4	21.69	21.54	21.67
			7	21.66	21.54	21.69
		15	0	21.44	21.36	21.54

LTE-FDD Band 12				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23035	23095	23155
				701.5MHz	707.5MHz	713.5MHz
5MHz	QPSK	1	0	23.35	23.55	23.32
			12	23.41	23.64	23.24
			24	23.38	23.43	23.71
		12	0	22.41	22.46	22.54
			7	22.32	22.47	22.56
			13	22.47	22.41	22.56
		25	0	22.58	22.44	22.46
	16QAM	1	0	22.46	22.45	21.95
			12	22.24	22.60	22.38
			24	22.53	22.31	21.75
		12	0	21.29	21.41	21.25
			7	21.29	21.41	21.56
			13	21.62	21.35	21.57
		25	0	21.56	21.50	21.49
Band-width	Modulation	RB allocation	RB offset	23060	23095	23130
				704MHz	707.5MHz	711MHz
10MHz	QPSK	1	0	23.24	23.56	23.72
			24	23.64	23.80	23.74
			49	23.44	23.40	23.44
		25	0	22.35	22.54	22.50
			24	22.47	22.53	22.51
			49	22.52	22.40	22.53
		50	0	22.43	22.46	22.53
	16QAM	1	0	22.43	22.42	22.45
			24	22.71	22.91	22.40
			49	22.01	22.25	22.48
		25	0	21.31	21.48	21.50
			24	21.40	21.48	21.51
			49	21.23	21.34	21.54
		50	0	21.58	21.34	21.53

LTE-FDD Band 13				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	23205	23230	23255
				779.5MHz	782MHz	784.5MHz
5MHz	QPSK	1	0	23.62	23.38	23.68
			12	23.29	23.38	23.45
			24	23.38	23.42	23.46
		12	0	22.58	22.54	22.61
			7	22.48	22.43	22.52
			13	22.45	22.46	22.34
		25	0	22.55	22.51	22.58
	16QAM	1	0	21.84	22.59	22.42
			12	21.93	22.58	22.37
			24	21.97	22.62	22.43
		12	0	21.40	21.35	21.58
			7	21.40	21.63	21.58
			13	21.48	21.65	21.49
		25	0	21.57	21.46	21.64
Band-width	Modulation	RB allocation	RB offset			
10MHz	QPSK	1	0			
			24			
			49			
		25	0			
			24			
			49			
		50	0			
	16QAM	1	0			
			24			
			49			
		25	0			
			24			
			49			
		50	0			

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26047	26365	26683
				1850.7MHz	1882.5MHz	1914.3MHz
1.4MHz	QPSK	1	0	22.70	23.01	22.60
			2	23.14	22.96	22.76
			5	23.13	23.13	22.76
		3	0	22.95	23.23	22.80
			1	22.86	23.05	22.76
			3	22.89	22.99	22.95
		6	0	22.00	22.11	21.83
	16QAM	1	0	22.36	21.71	21.72
			2	22.45	22.29	21.67
			5	22.30	22.29	21.52
		3	0	21.89	22.21	22.10
			1	21.49	22.20	21.57
			3	21.67	21.95	21.91
		6	0	21.07	20.95	20.92
Band-width	Modulation	RB allocation	RB offset	26055	26365	26675
				1851.5MHz	1882.5MHz	1913.5MHz
3MHz	QPSK	1	0	22.77	22.85	22.85
			8	22.94	22.86	22.87
			14	23.08	22.89	22.91
		8	0	21.95	22.14	21.84
			4	22.16	22.06	21.89
			7	22.03	21.96	22.02
		15	0	21.94	22.11	21.84
	16QAM	1	0	21.71	21.90	21.84
			8	21.94	21.90	21.80
			14	21.77	21.81	21.74
		8	0	21.12	21.09	20.94
			4	21.12	21.11	20.94
			7	21.09	21.11	21.05
		15	0	20.84	21.18	20.93

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26065	26365	26665
				1852.5MHz	1882.5MHz	1912.5MHz
5MHz	QPSK	1	0	22.79	22.69	22.78
			12	22.71	22.93	22.51
			24	22.80	22.91	22.63
		12	0	21.93	22.04	21.88
			7	21.94	22.05	21.80
			13	21.98	22.01	21.85
		25	0	22.00	21.97	21.83
	16QAM	1	0	21.90	21.69	21.33
			12	21.79	21.98	21.14
			24	21.99	22.06	21.77
		12	0	21.04	20.79	20.74
			7	21.03	20.78	20.74
			13	21.07	20.88	20.89
		25	0	20.91	20.72	20.90
Band-width	Modulation	RB allocation	RB offset	26090	26365	26640
				1855MHz	1882.5MHz	1910MHz
10MHz	QPSK	1	0	22.98	23.21	23.04
			24	23.28	23.39	22.83
			49	22.88	22.94	22.85
		25	0	22.10	22.12	22.14
			24	22.08	22.17	22.02
			49	22.05	22.13	21.80
		50	0	21.96	22.10	22.02
	16QAM	1	0	22.21	22.29	21.99
			24	22.19	22.11	22.03
			49	22.07	22.06	21.97
		25	0	21.16	21.20	20.88
			24	20.95	21.14	20.87
			49	20.99	21.09	20.83
		50	0	21.00	21.07	21.03

LTE-FDD Band 25				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26115	26365	26615
				1857.5MHz	1882.5MHz	1907.5MHz
15MHz	QPSK	1	0	22.98	23.47	23.16
			38	22.77	23.04	22.93
			74	23.08	23.11	22.67
		38	0	21.80	21.22	21.48
			18	21.68	21.84	21.86
			37	21.36	21.88	21.18
		75	0	22.02	22.13	22.03
	16QAM	1	0	22.22	22.54	22.33
			38	22.02	22.03	21.94
			74	22.07	21.90	21.69
		38	0	21.82	22.13	22.01
			18	21.66	21.85	21.86
			37	22.33	21.88	21.67
		75	0	21.00	21.19	20.97
Band-width	Modulation	RB allocation	RB offset	26140	26365	26590
				1860MHz	1882.5MHz	1905MHz
20MHz	QPSK	1	0	23.28	23.26	22.99
			49	23.46	23.07	23.24
			99	23.12	22.95	22.70
		50	0	21.99	22.13	22.17
			25	22.01	22.12	22.01
			50	22.21	22.01	21.87
		100	0	22.03	22.13	21.97
	16QAM	1	0	22.25	22.32	22.06
			49	22.20	22.27	21.95
			99	22.13	22.18	21.79
		50	0	21.03	21.04	21.08
			25	21.03	21.05	21.09
			50	21.23	20.98	20.92
		100	0	21.05	21.16	21.00

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26697	26865	27033
				814.7MHz	831.5MHz	848.3MHz
1.4MHz	QPSK	1	0	23.60	23.39	23.46
			2	23.33	23.51	23.24
			5	23.46	23.34	23.36
		3	0	23.39	23.61	23.48
			1	23.51	23.60	23.39
			3	23.37	23.57	23.28
		6	0	22.43	22.53	22.36
	16QAM	1	0	22.90	22.54	22.76
			2	22.99	22.74	22.60
			5	22.86	22.51	22.66
		3	0	22.52	22.15	22.33
			1	22.40	22.61	22.32
			3	22.37	22.57	22.25
		6	0	21.35	21.46	21.56
Band-width	Modulation	RB allocation	RB offset	26705	26865	27025
				815.5MHz	831.5MHz	847.5MHz
3MHz	QPSK	1	0	23.48	23.41	23.45
			8	23.13	23.23	23.30
			14	23.30	23.46	23.33
		8	0	22.60	22.62	22.63
			4	22.58	22.61	22.53
			7	22.45	22.48	22.43
		15	0	22.36	22.47	22.44
	16QAM	1	0	22.63	22.52	22.61
			8	22.23	22.54	22.46
			14	22.24	22.39	22.46
		8	0	21.60	21.68	21.58
			4	21.59	21.68	21.52
			7	21.57	21.58	21.55
		15	0	21.38	21.46	21.52

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26715	26865	27015
				816.5MHz	831.5MHz	846.5MHz
5MHz	QPSK	1	0	23.50	23.36	23.41
			12	23.21	23.21	23.29
			24	23.35	23.46	23.20
		12	0	22.37	22.42	22.46
			7	22.28	22.42	22.37
			13	22.31	22.35	22.28
		25	0	22.28	22.41	22.41
	16QAM	1	0	21.98	22.56	21.85
			12	21.91	22.53	21.75
			24	22.35	22.12	21.75
		12	0	21.36	21.44	21.44
			7	21.36	21.45	21.44
			13	21.30	21.23	21.35
		25	0	21.40	21.10	21.49
Band-width	Modulation	RB allocation	RB offset	26740	26865	26990
				819MHz	831.5MHz	844MHz
10MHz	QPSK	1	0	23.52	23.93	23.45
			24	23.18	23.73	23.52
			49	23.63	23.65	23.27
		25	0	22.31	22.54	22.49
			24	22.32	22.43	22.41
			49	22.49	22.41	22.43
		50	0	22.44	22.41	22.43
	16QAM	1	0	22.69	22.69	22.57
			24	22.50	22.54	22.85
			49	22.75	22.53	22.71
		25	0	21.42	21.43	21.35
			24	21.42	21.43	21.36
			49	21.68	21.30	21.28
		50	0	21.45	21.39	21.30

LTE-FDD Band 26				Conducted Power(dBm)		
Band-width	Modulation	RB allocation	RB offset	26765	26865	26965
				821.5MHz	831.5MHz	841.5MHz
15MHz	QPSK	1	0	23.69	23.49	23.69
			38	23.39	23.19	23.20
			74	23.58	23.32	23.50
		38	0	22.34	22.72	22.62
			18	22.08	22.21	22.74
			37	22.32	22.49	22.56
		75	0	22.41	22.40	22.43
	16QAM	1	0	22.49	22.79	22.92
			38	22.35	22.48	22.43
			74	22.41	22.51	22.40
		38	0	22.32	22.65	22.87
			18	22.03	22.08	22.31
			37	22.11	22.50	22.83
		75	0	21.34	21.49	21.51

10.4. Wi-Fi

For 2.4GHz Wi-Fi SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Wi-Fi 2.4G				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
802.11b	1	2412	16.05	13.61
	6	2437	16.71	14.30
	11	2462	15.74	13.31
802.11g	1	2412	16.48	13.64
	6	2437	16.96	14.55
	11	2462	15.91	13.39
802.11n (HT20)	1	2412	15.55	12.87
	6	2437	16.11	13.45
	11	2462	14.98	12.34

Wi-Fi 5G U-NII-1			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11n (HT20)	36	5180	14.47
	40	5220	15.17
	48	5240	15.31
802.11a	36	5180	14.35
	40	5220	14.40
	48	5240	15.33
802.11n (HT40)	38	5190	13.16
	46	5230	14.20

Wi-Fi 5G U-NII-2A			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11n (HT20)	52	5260	11.97
	56	5280	13.77
	64	5320	14.95
802.11a	52	5260	12.89
	56	5280	13.86
	64	5320	14.88
802.11n (HT40)	54	5270	8.39
	62	5310	11.94

Wi-Fi 5G U-NII-2C			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11n (HT20)	100	5500	14.25
	120	5600	12.44
	140	5700	10.97
802.11a	100	5500	14.00
	120	5600	12.09
	140	5700	11.19
802.11n (HT40)	102	5510	12.59
	118	5590	12.29
	134	5670	11.66

Wi-Fi 5G U-NII-3			
Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
802.11n (HT20)	149	5745	14.12
	157	5785	13.91
	165	5825	13.44
802.11a	149	5745	14.04
	157	5785	13.66
	165	5825	13.29
802.11n (HT40)	151	5755	13.35
	159	5795	12.47

10.5. Bluetooth

Bluetooth				
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)
GFSK	0	2402	6.49	6.47
	39	2441	6.17	6.16
	78	2480	5.55	5.52
$\pi/4$ QPSK	0	2402	7.35	7.34
	39	2441	7.27	7.25
	78	2480	6.60	6.58
8DPSK	0	2402	7.62	7.60
	39	2441	7.52	7.49
	78	2480	6.79	6.77
BLE	0	2402	2.82	2.80
	19	2440	2.83	2.82
	39	2480	1.88	1.86

11. Maximum Tune-up Limit

GSM		
Mode	Maximum Tune-up (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	33.00	30.50
GPRS (GMSK, 1Tx Slot)	33.50	30.50
GPRS (GMSK, 2Tx Slots)	33.00	30.00
GPRS (GMSK, 3Tx Slots)	31.00	28.50
GPRS (GMSK, 4Tx Slots)	30.00	27.00
EGPRS (8PSK, 1Tx Slot)	28.00	26.50
EGPRS (8PSK, 2Tx Slots)	27.50	25.00
EGPRS (8PSK, 3Tx Slots)	25.50	23.50
EGPRS (8PSK, 4Tx Slots)	24.50	22.50

WCDMA			
Mode	Maximum Tune-up (dBm)		
	FDD Band II	FDD Band IV	FDD Band V
AMR 12.2Kbps	23.00	23.50	23.50
RMC 12.2Kbps	23.00	23.50	23.50
HSDPA Subtest-1	23.00	23.50	23.50
HSDPA Subtest-2	22.50	23.00	23.00
HSDPA Subtest-3	22.50	23.00	23.00
HSDPA Subtest-4	22.50	23.00	23.00
HSUPA Subtest-1	22.50	23.00	23.00
HSUPA Subtest-2	21.00	21.50	21.50
HSUPA Subtest-3	22.00	22.00	22.00
HSUPA Subtest-4	21.50	22.00	22.00
HSUPA Subtest-5	23.00	23.00	23.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 2	1.4	QPSK	1	24.50
			3	24.50
			6	23.50
		16QAM	1	24.00
			3	24.00
			6	22.50
	3	QPSK	1	25.00
			8	24.00
			15	24.00
		16QAM	1	24.00
			8	23.00
			15	23.00
	5	QPSK	1	25.00
			12	24.00
			25	24.00
		16QAM	1	24.00
			12	23.00
			25	23.00
	10	QPSK	1	25.00
			25	24.00
			50	24.00
		16QAM	1	24.00
			25	23.00
			50	23.00
	15	QPSK	1	25.00
			38	24.00
			75	24.00
		16QAM	1	24.50
			38	24.00
			75	23.00
	20	QPSK	1	25.50
			50	24.00
			100	24.00
		16QAM	1	24.50
			50	23.00
			100	23.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 4	1.4	QPSK	1	24.50
			3	24.50
			6	23.50
		16QAM	1	23.50
			3	23.50
			6	22.50
	3	QPSK	1	25.00
			8	24.00
			15	23.50
		16QAM	1	24.00
			8	23.00
			15	22.50
	5	QPSK	1	25.00
			12	23.50
			25	23.50
		16QAM	1	23.50
			12	22.50
			25	22.50
	10	QPSK	1	25.00
			25	23.50
			50	23.50
		16QAM	1	23.50
			25	23.00
			50	22.50
	15	QPSK	1	25.00
			38	24.00
			75	23.50
		16QAM	1	24.50
			38	24.00
			75	22.50
	20	QPSK	1	25.00
			50	23.50
			100	23.50
		16QAM	1	24.50
			50	22.50
			100	22.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 5	1.4	QPSK	1	24.00
			3	24.00
			6	23.00
		16QAM	1	23.00
			3	23.00
			6	22.00
	3	QPSK	1	23.50
			8	23.00
			15	23.00
		16QAM	1	23.00
			8	22.00
			15	22.00
	5	QPSK	1	23.50
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	22.00
			25	21.50
	10	QPSK	1	24.00
			25	23.00
			50	23.00
		16QAM	1	23.00
			25	22.00
			50	22.00

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 7	5	QPSK	1	24.00
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	22.00
			25	22.00
	10	QPSK	1	24.00
			25	23.00
			50	23.00
		16QAM	1	23.50
			25	22.00
			50	22.00
	15	QPSK	1	24.00
			38	23.00
			75	23.00
		16QAM	1	23.00
			38	23.00
			75	22.00
	20	QPSK	1	24.00
			50	23.00
			100	23.00
		16QAM	1	23.00
			50	22.00
			100	22.00

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 12	1.4	QPSK	1	24.00
			3	23.50
			6	22.50
		16QAM	1	23.00
			3	22.50
			6	21.50
	3	QPSK	1	24.00
			8	23.00
			15	22.50
		16QAM	1	23.00
			8	22.00
			15	22.00
	5	QPSK	1	24.00
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	22.00
			25	22.00
	10	QPSK	1	24.00
			25	23.00
			50	23.00
		16QAM	1	23.00
			25	22.00
			50	22.00

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 13	5	QPSK	1	24.00
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	22.00
			25	22.00
	10	QPSK	1	23.50
			25	23.00
			50	22.50
		16QAM	1	23.00
			25	21.50
			50	21.50

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 25	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	22.50
			3	22.50
			6	21.50
	3	QPSK	1	23.50
			8	22.50
			15	22.50
		16QAM	1	22.00
			8	21.50
			15	21.50
	5	QPSK	1	23.00
			12	22.50
			25	22.50
		16QAM	1	22.50
			12	21.50
			25	21.00
	10	QPSK	1	23.50
			25	22.50
			50	22.50
		16QAM	1	22.50
			25	21.50
			50	21.50
	15	QPSK	1	23.50
			38	22.00
			75	22.50
		16QAM	1	23.00
			38	22.50
			75	21.50
	20	QPSK	1	23.50
			50	22.50
			100	22.50
		16QAM	1	22.50
			50	21.50
			100	21.50

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
FDD Band 26	1.4	QPSK	1	24.00
			3	24.00
			6	23.00
		16QAM	1	23.00
			3	23.00
			6	22.00
	3	QPSK	1	23.50
			8	23.00
			15	22.50
		16QAM	1	23.00
			8	22.00
			15	22.00
	5	QPSK	1	24.00
			12	22.50
			25	22.50
		16QAM	1	23.00
			12	21.50
			25	21.50
	10	QPSK	1	24.00
			25	23.00
			50	22.50
		16QAM	1	23.00
			25	22.00
			50	21.50
	15	QPSK	1	24.00
			38	23.00
			75	22.50
		16QAM	1	23.00
			38	23.00
			75	22.00

The allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

Wi-Fi 2.4G		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11b	1	14.00
	6	14.50
	11	13.50
802.11g	1	14.00
	6	15.00
	11	13.50
802.11n(HT20)	1	13.00
	6	13.50
	11	12.50

Wi-Fi 5G U-NII-1		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11n (HT20)	36	14.50
	40	15.50
	48	15.50
802.11a	36	14.50
	40	14.50
	48	15.50
802.11n (HT40)	38	13.50
	46	14.50

Wi-Fi 5G U-NII-2A		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11n (HT20)	52	12.00
	56	14.00
	64	15.00
802.11a	52	13.00
	56	14.00
	64	15.00
802.11n (HT40)	54	8.50
	62	12.00

Wi-Fi 5G U-NII-2C		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11n (HT20)	100	14.50
	120	12.50
	140	11.00
802.11a	100	14.00
	120	12.50
	140	11.50
802.11n (HT40)	102	13.00
	118	12.50
	134	12.00

Wi-Fi 5G U-NII-3		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
802.11n (HT20)	149	14.50
	157	14.00
	165	13.50
802.11a	149	14.50
	157	14.00
	165	13.50
802.11n (HT40)	151	13.50
	159	12.50

Bluetooth		
Mode	Channel	Maximum Tune-up (dBm) Conducted Average Power
GFSK	0	6.50
	39	6.50
	78	6.00
$\pi/4$ QPSK	0	7.50
	39	7.50
	78	7.00
8DPSK	0	8.00
	39	7.50
	78	7.00
BLE	0	3.00
	19	3.00
	39	2.00

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:


$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

Band/Mode	F(GHz)	Position	Separation Distance (mm)	Exclusion Thresholds	SAR test exclusion
Bluetooth	2.45	Body	10	1.0	yes

Per KDB 447498 D01, when the minimum test separation distance is <5mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

12. Antenna Location

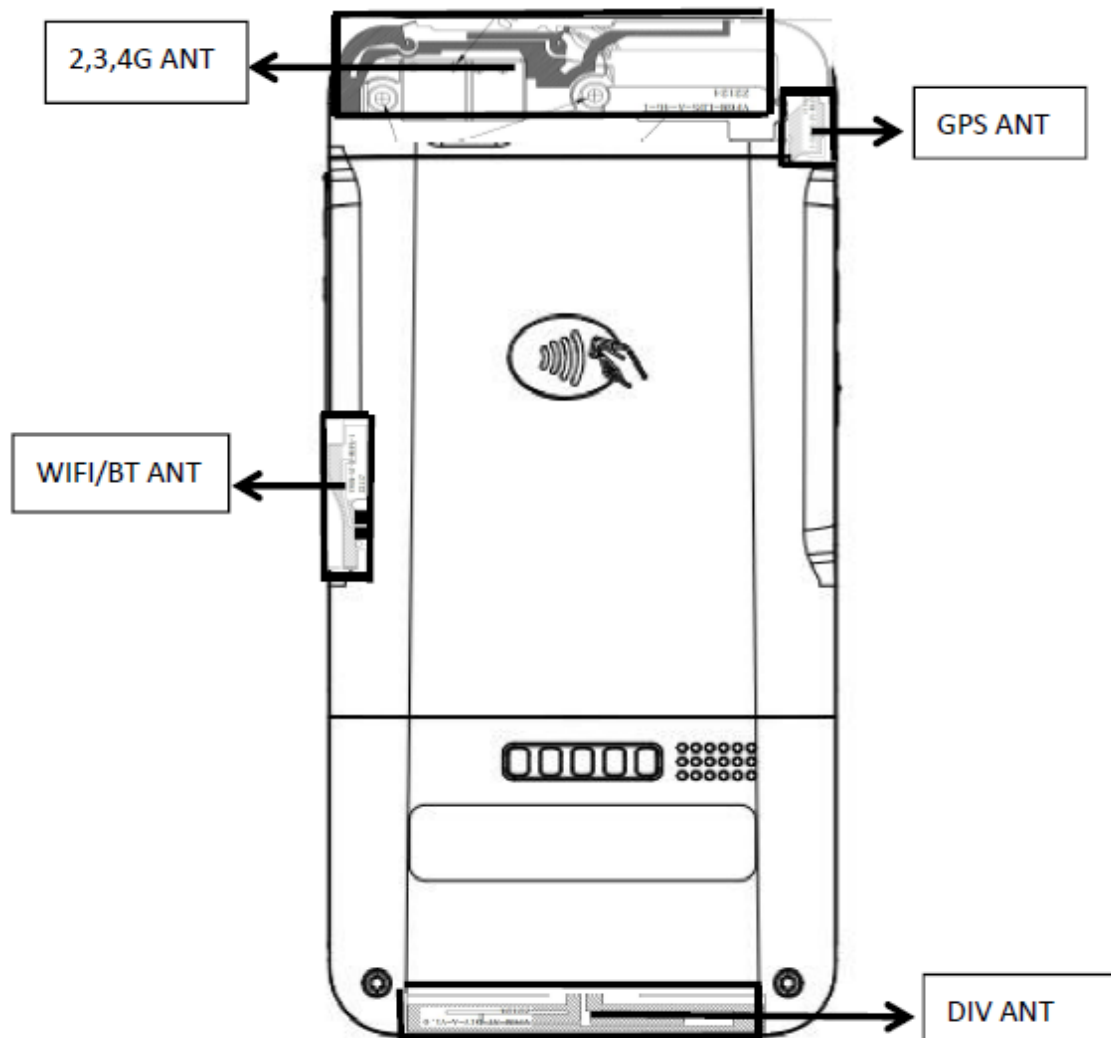

13. Measured and Reported SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G SAR Test Reduction Procedure:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

GSM Guidance

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Please refer to section 9. for GSM power verification.

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

W-CDMA Guidance

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC (Head) and other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC (Body-Worn Accessory) as the primary mode.

SAR measurement is not required for the HSDPA, HSUPA, DC-HSDPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM and 64-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.

- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11:

When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 2Tx slots	Front	128	824.2	32.47	33.00	1.130	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.64	33.00	1.086	-0.12	0.368	0.400	-
	Rear	128	824.2	32.47	33.00	1.130	0.07	0.411	0.464	-
		190	836.6	32.52	33.00	1.117	-0.14	0.415	0.463	-
		251	848.8	32.64	33.00	1.086	0.03	0.449	0.488	1
	Left	128	824.2	32.47	33.00	1.130	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.64	33.00	1.086	-0.08	0.289	0.314	-
	Right	128	824.2	32.47	33.00	1.130	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.64	33.00	1.086	0.07	0.335	0.364	-
	Top	128	824.2	32.47	33.00	1.130	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.64	33.00	1.086	-0.05	0.422	0.458	-
	Bottom	128	824.2	32.47	33.00	1.130	-	-	-	-
		190	836.6	32.52	33.00	1.117	-	-	-	-
		251	848.8	32.64	33.00	1.086	0.02	0.184	0.200	-

GSM1900

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	512	1850.2	28.05	28.50	1.109	-	-	-	-
		661	1880.0	28.25	28.50	1.059	-0.15	0.226	0.239	-
		810	1909.8	28.25	28.50	1.059	-	-	-	-
	Rear	512	1850.2	28.05	28.50	1.109	0.09	0.217	0.241	-
		661	1880.0	28.25	28.50	1.059	-0.21	0.245	0.260	2
		810	1909.8	28.25	28.50	1.059	-0.06	0.240	0.254	-
	Left	512	1850.2	28.05	28.50	1.109	-	-	-	-
		661	1880.0	28.25	28.50	1.059	-0.11	0.125	0.132	-
		810	1909.8	28.25	28.50	1.059	-	-	-	-
	Right	512	1850.2	28.05	28.50	1.109	-	-	-	-
		661	1880.0	28.25	28.50	1.059	0.09	0.189	0.200	-
		810	1909.8	28.25	28.50	1.059	-	-	-	-
	Top	512	1850.2	28.05	28.50	1.109	-	-	-	-
		661	1880.0	28.25	28.50	1.059	0.05	0.232	0.246	-
		810	1909.8	28.25	28.50	1.059	-	-	-	-
	Bottom	512	1850.2	28.05	28.50	1.109	-	-	-	-
		661	1880.0	28.25	28.50	1.059	-0.13	0.086	0.091	-
		810	1909.8	28.25	28.50	1.059	-	-	-	-

WCDMA Band II

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2K	Front	9262	1852.4	22.76	23.00	1.057	-	-	-	-
		9400	1880.0	22.75	23.00	1.059	-	-	-	-
		9538	1907.6	22.81	23.00	1.045	-0.05	0.586	0.612	-
	Rear	9262	1852.4	22.76	23.00	1.057	-0.14	0.641	0.677	-
		9400	1880.0	22.75	23.00	1.059	0.05	0.637	0.675	-
		9538	1907.6	22.81	23.00	1.045	-0.09	0.662	0.692	3
	Left	9262	1852.4	22.76	23.00	1.057	-	-	-	-
		9400	1880.0	22.75	23.00	1.059	-	-	-	-
		9538	1907.6	22.81	23.00	1.045	-0.02	0.412	0.430	-
	Right	9262	1852.4	22.76	23.00	1.057	-	-	-	-
		9400	1880.0	22.75	23.00	1.059	-	-	-	-
		9538	1907.6	22.81	23.00	1.045	-0.08	0.453	0.473	-
	Top	9262	1852.4	22.76	23.00	1.057	-	-	-	-
		9400	1880.0	22.75	23.00	1.059	-	-	-	-
		9538	1907.6	22.81	23.00	1.045	-0.10	0.623	0.651	-
	Bottom	9262	1852.4	22.76	23.00	1.057	-	-	-	-
		9400	1880.0	22.75	23.00	1.059	-	-	-	-
		9538	1907.6	22.81	23.00	1.045	-0.13	0.388	0.405	-

WCDMA Band IV

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2K	Front	1312	1712.4	23.13	23.50	1.089	-	-	-	-
		1413	1732.6	23.31	23.50	1.045	-	-	-	-
		1413	1752.6	23.42	23.50	1.019	-0.11	0.526	0.536	-
	Rear	1312	1712.4	23.13	23.50	1.089	0.16	0.544	0.592	-
		1413	1732.6	23.31	23.50	1.045	0.03	0.551	0.576	-
		1413	1752.6	23.42	23.50	1.019	-0.09	0.585	0.596	4
	Left	1312	1712.4	23.13	23.50	1.089	-	-	-	-
		1413	1732.6	23.31	23.50	1.045	-	-	-	-
		1413	1752.6	23.42	23.50	1.019	-0.05	0.412	0.420	-
	Right	1312	1712.4	23.13	23.50	1.089	-	-	-	-
		1413	1732.6	23.31	23.50	1.045	-	-	-	-
		1413	1752.6	23.42	23.50	1.019	-0.13	0.455	0.463	-
	Top	1312	1712.4	23.13	23.50	1.089	-	-	-	-
		1413	1732.6	23.31	23.50	1.045	-	-	-	-
		1413	1752.6	23.42	23.50	1.019	-0.04	0.542	0.552	-
	Bottom	1312	1712.4	23.13	23.50	1.089	-	-	-	-
		1413	1732.6	23.31	23.50	1.045	-	-	-	-
		1413	1752.6	23.42	23.50	1.019	-0.12	0.387	0.394	-

WCDMA Band V

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2K	Front	4132	826.4	23.52	24.00	1.117	-	-	-	-
		4183	836.6	23.71	24.00	1.069	-0.09	0.634	0.678	-
		4233	846.6	23.57	24.00	1.104	-	-	-	-
	Rear	4132	826.4	23.52	24.00	1.117	0.07	0.674	0.753	-
		4183	836.6	23.71	24.00	1.069	-0.02	0.712	0.761	5
		4233	846.6	23.57	24.00	1.104	-0.12	0.677	0.747	-
	Left	4132	826.4	23.52	24.00	1.117	-	-	-	-
		4183	836.6	23.71	24.00	1.069	-0.04	0.562	0.601	-
		4233	846.6	23.57	24.00	1.104	-	-	-	-
	Right	4132	826.4	23.52	24.00	1.117	-	-	-	-
		4183	836.6	23.71	24.00	1.069	-0.11	0.587	0.628	-
		4233	846.6	23.57	24.00	1.104	-	-	-	-
	Top	4132	826.4	23.52	24.00	1.117	-	-	-	-
		4183	836.6	23.71	24.00	1.069	-0.06	0.675	0.722	-
		4233	846.6	23.57	24.00	1.104	-	-	-	-
	Bottom	4132	826.4	23.52	24.00	1.117	-	-	-	-
		4183	836.6	23.71	24.00	1.069	-0.13	0.368	0.393	-
		4233	846.6	23.57	24.00	1.104	-	-	-	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	18700	1860	25.01	25.50	1.119	-	-	-	-
		18900	1880	25.01	25.50	1.119	0.06	0.478	0.535	-
		19100	1900	24.90	25.50	1.148	-	-	-	-
	Rear	18700	1860	25.01	25.50	1.119	-0.16	0.639	0.715	-
		18900	1880	25.01	25.50	1.119	0.10	0.645	0.722	6
		19100	1900	24.90	25.50	1.148	0.08	0.622	0.714	-
	Left	18700	1860	25.01	25.50	1.119	-	-	-	-
		18900	1880	25.01	25.50	1.119	0.08	0.154	0.172	-
		19100	1900	24.90	25.50	1.148	-	-	-	-
	Right	18700	1860	25.01	25.50	1.119	-	-	-	-
		18900	1880	25.01	25.50	1.119	-0.11	0.433	0.485	-
		19100	1900	24.90	25.50	1.148	-	-	-	-
	Top	18700	1860	25.01	25.50	1.119	-	-	-	-
		18900	1880	25.01	25.50	1.119	-0.07	0.536	0.600	-
		19100	1900	24.90	25.50	1.148	-	-	-	-
	Bottom	18700	1860	25.01	25.50	1.119	-	-	-	-
		18900	1880	25.01	25.50	1.119	-0.13	0.112	0.125	-
		19100	1900	24.90	25.50	1.148	-	-	-	-
20M QPSK 50RB	Front	18700	1860	23.57	24.00	1.104	-	-	-	-
		18900	1880	23.74	24.00	1.062	-0.05	0.510	0.541	-
		19100	1900	23.64	24.00	1.086	-	-	-	-
	Rear	18700	1860	23.57	24.00	1.104	-	-	-	-
		18900	1880	23.74	24.00	1.062	-0.09	0.588	0.624	-
		19100	1900	23.64	24.00	1.086	-	-	-	-
	Left	18700	1860	23.57	24.00	1.104	-	-	-	-

		18900	1880	23.74	24.00	1.062	-0.03	0.455	0.483	-
		19100	1900	23.64	24.00	1.086	-	-	-	-
	Right	18700	1860	23.57	24.00	1.104	-	-	-	-
		18900	1880	23.74	24.00	1.062	0.05	0.486	0.516	-
		19100	1900	23.64	24.00	1.086	-	-	-	-
	Top	18700	1860	23.57	24.00	1.104	-	-	-	-
		18900	1880	23.74	24.00	1.062	0.11	0.532	0.565	-
		19100	1900	23.64	24.00	1.086	-	-	-	-
	Bottom	18700	1860	23.57	24.00	1.104	-	-	-	-
		18900	1880	23.74	24.00	1.062	-0.13	0.096	0.102	-
		19100	1900	23.64	24.00	1.086	-	-	-	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measure d SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20050	1720	24.42	25.00	1.143	-	-	-	-
		20175	1732.5	24.71	25.00	1.069	-0.05	0.418	0.447	-
		20300	1745	24.36	25.00	1.159	-	-	-	-
	Rear	20050	1720	24.42	25.00	1.143	-0.14	0.425	0.486	-
		20175	1732.5	24.71	25.00	1.069	0.02	0.463	0.495	7
		20300	1745	24.36	25.00	1.159	0.06	0.419	0.486	-
	Left	20050	1720	24.42	25.00	1.143	-	-	-	-
		20175	1732.5	24.71	25.00	1.069	-0.03	0.254	0.272	-
		20300	1745	24.36	25.00	1.159	-	-	-	-
	Right	20050	1720	24.42	25.00	1.143	-	-	-	-
		20175	1732.5	24.71	25.00	1.069	-0.10	0.389	0.416	-
		20300	1745	24.36	25.00	1.159	-	-	-	-
	Top	20050	1720	24.42	25.00	1.143	-	-	-	-
		20175	1732.5	24.71	25.00	1.069	0.09	0.436	0.466	-
		20300	1745	24.36	25.00	1.159	-	-	-	-
	Bottom	20050	1720	24.42	25.00	1.143	-	-	-	-
		20175	1732.5	24.71	25.00	1.069	-0.13	0.125	0.134	-
		20300	1745	24.36	25.00	1.159	-	-	-	-
20M QPSK 50RB	Front	20050	1720	23.33	23.50	1.040	-0.11	0.325	0.338	-
		20175	1732.5	23.24	23.50	1.062	-	-	-	-
		20300	1745	23.19	23.50	1.074	-	-	-	-
	Rear	20050	1720	23.33	23.50	1.040	-0.04	0.411	0.427	-
		20175	1732.5	23.24	23.50	1.062	-	-	-	-
		20300	1745	23.19	23.50	1.074	-	-	-	-
	Left	20050	1720	23.33	23.50	1.040	-0.02	0.228	0.237	-

		2017 5	1732. 5	23.24	23.50	1.062	-	-	-	-
		2030 0	1745	23.19	23.50	1.074	-	-	-	-
	Right	2005 0	1720	23.33	23.50	1.040	-0.08	0.347	0.361	-
		2017 5	1732. 5	23.24	23.50	1.062	-	-	-	-
		2030 0	1745	23.19	23.50	1.074	-	-	-	-
	Top	2005 0	1720	23.33	23.50	1.040	-0.09	0.364	0.379	-
		2017 5	1732. 5	23.24	23.50	1.062	-	-	-	-
		2030 0	1745	23.19	23.50	1.074	-	-	-	-
	Bottom	2005 0	1720	23.33	23.50	1.040	-0.03	0.102	0.106	-
		2017 5	1732. 5	23.24	23.50	1.062	-	-	-	-
		2030 0	1745	23.19	23.50	1.074	-	-	-	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829	23.36	24.00	1.159	-	-	-	-
		20525	836.5	23.51	24.00	1.119	-0.10	0.352	0.394	-
		20600	844	23.38	24.00	1.153	-	-	-	-
	Rear	20450	829	23.36	24.00	1.159	-0.06	0.401	0.465	-
		20525	836.5	23.51	24.00	1.119	0.04	0.418	0.468	8
		20600	844	23.38	24.00	1.153	0.15	0.399	0.460	-
	Left	20450	829	23.36	24.00	1.159	-	-	-	-
		20525	836.5	23.51	24.00	1.119	-0.03	0.274	0.307	-
		20600	844	23.38	24.00	1.153	-	-	-	-
	Right	20450	829	23.36	24.00	1.159	-	-	-	-
		20525	836.5	23.51	24.00	1.119	-0.11	0.316	0.354	-
		20600	844	23.38	24.00	1.153	-	-	-	-
	Top	20450	829	23.36	24.00	1.159	-	-	-	-
		20525	836.5	23.51	24.00	1.119	0.08	0.395	0.442	-
		20600	844	23.38	24.00	1.153	-	-	-	-
	Bottom	20450	829	23.36	24.00	1.159	-	-	-	-
		20525	836.5	23.51	24.00	1.119	-0.06	0.125	0.140	-
		20600	844	23.38	24.00	1.153	-	-	-	-
10M QPSK 25RB	Front	20450	829	22.48	23.00	1.127	-	-	-	-
		20525	836.5	22.54	23.00	1.112	-0.09	0.335	0.372	-
		20600	844	22.52	23.00	1.117	-	-	-	-
	Rear	20450	829	22.48	23.00	1.127	-	-	-	-
		20525	836.5	22.54	23.00	1.112	0.05	0.403	0.448	-
		20600	844	22.52	23.00	1.117	-	-	-	-
	Left	20450	829	22.48	23.00	1.127	-	-	-	-

		20525	836.5	22.54	23.00	1.112	-0.08	0.254	0.282	-
		20600	844	22.52	23.00	1.117	-	-	-	-
	Right	20450	829	22.48	23.00	1.127	-	-	-	-
		20525	836.5	22.54	23.00	1.112	-0.12	0.310	0.345	-
		20600	844	22.52	23.00	1.117	-	-	-	-
	Top	20450	829	22.48	23.00	1.127	-	-	-	-
		20525	836.5	22.54	23.00	1.112	-0.02	0.371	0.412	-
		20600	844	22.52	23.00	1.117	-	-	-	-
	Bottom	20450	829	22.48	23.00	1.127	-	-	-	-
		20525	836.5	22.54	23.00	1.112	-0.03	0.102	0.113	-
		20600	844	22.52	23.00	1.117	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20580	2510	23.10	24.00	1.230	-	-	-	-
		21100	2535	23.62	24.00	1.091	-	-	-	-
		21350	2560	23.93	24.00	1.016	-0.10	0.524	0.533	-
	Rear	20580	2510	23.10	24.00	1.230	0.06	0.482	0.593	-
		21100	2535	23.62	24.00	1.091	0.02	0.545	0.595	-
		21350	2560	23.93	24.00	1.016	-0.12	0.599	0.609	9
	Left	20580	2510	23.10	24.00	1.230	-	-	-	-
		21100	2535	23.62	24.00	1.091	-	-	-	-
		21350	2560	23.93	24.00	1.016	-0.15	0.328	0.333	-
	Right	20580	2510	23.10	24.00	1.230	-	-	-	-
		21100	2535	23.62	24.00	1.091	-	-	-	-
		21350	2560	23.93	24.00	1.016	-0.08	0.456	0.463	-
	Top	20580	2510	23.10	24.00	1.230	-	-	-	-
		21100	2535	23.62	24.00	1.091	-	-	-	-
		21350	2560	23.93	24.00	1.016	-0.05	0.546	0.555	-
	Bottom	20580	2510	23.10	24.00	1.230	-	-	-	-
		21100	2535	23.62	24.00	1.091	-	-	-	-
		21350	2560	23.93	24.00	1.016	-0.04	0.112	0.114	-
20M QPSK 50RB	Front	20580	2510	21.87	23.00	1.297	-	-	-	-
		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.14	0.418	0.444	-
	Rear	20580	2510	21.87	23.00	1.297	-	-	-	-
		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.06	0.476	0.505	-
	Left	20580	2510	21.87	23.00	1.297	-	-	-	-

		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.03	0.249	0.264	-
	Right	20580	2510	21.87	23.00	1.297	-	-	-	-
		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.02	0.291	0.309	-
	Top	20580	2510	21.87	23.00	1.297	-	-	-	-
		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.09	0.422	0.448	-
	Bottom	20580	2510	21.87	23.00	1.297	-	-	-	-
		21100	2535	22.54	23.00	1.112	-	-	-	-
		21350	2560	22.74	23.00	1.062	-0.11	0.072	0.076	-

LTE Band 12

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	23060	704	23.64	24.00	1.086	-	-	-	-
		23095	707.5	23.80	24.00	1.047	0.12	0.219	0.229	-
		23130	711	23.74	24.00	1.062	-	-	-	-
	Rear	23060	704	23.64	24.00	1.086	-0.11	0.261	0.284	-
		23095	707.5	23.80	24.00	1.047	0.20	0.287	0.301	10
		23130	711	23.74	24.00	1.062	0.09	0.267	0.283	-
	Left	23060	704	23.64	24.00	1.086	-	-	-	-
		23095	707.5	23.80	24.00	1.047	-0.06	0.135	0.141	-
		23130	711	23.74	24.00	1.062	-	-	-	-
	Right	23060	704	23.64	24.00	1.086	-	-	-	-
		23095	707.5	23.80	24.00	1.047	0.16	0.186	0.195	-
		23130	711	23.74	24.00	1.062	-	-	-	-
	Top	23060	704	23.64	24.00	1.086	-	-	-	-
		23095	707.5	23.80	24.00	1.047	0.09	0.255	0.267	-
		23130	711	23.74	24.00	1.062	-	-	-	-
	Bottom	23060	704	23.64	24.00	1.086	-	-	-	-
		23095	707.5	23.80	24.00	1.047	-0.05	0.087	0.091	-
		23130	711	23.74	24.00	1.062	-	-	-	-
10M QPSK 25RB	Front	23060	704	22.35	23.00	1.161	-	-	-	-
		23095	707.5	22.54	23.00	1.112	0.04	0.178	0.198	-
		23130	711	22.50	23.00	1.122	-	-	-	-
	Rear	23060	704	22.35	23.00	1.161	-	-	-	-
		23095	707.5	22.54	23.00	1.112	-0.10	0.215	0.239	-
		23130	711	22.50	23.00	1.122	-	-	-	-
	Left	23060	704	22.35	23.00	1.161	-	-	-	-

		23095	707.5	22.54	23.00	1.112	0.11	0.116	0.129	-
		23130	711	22.50	23.00	1.122	-	-	-	-
	Right	23060	704	22.35	23.00	1.161	-	-	-	-
		23095	707.5	22.54	23.00	1.112	-0.03	0.159	0.177	-
		23130	711	22.50	23.00	1.122	-	-	-	-
	Top	23060	704	22.35	23.00	1.161	-	-	-	-
		23095	707.5	22.54	23.00	1.112	-0.07	0.182	0.202	-
		23130	711	22.50	23.00	1.122	-	-	-	-
	Bottom	23060	704	22.35	23.00	1.161	-	-	-	-
		23095	707.5	22.54	23.00	1.112	0.05	0.045	0.050	-
		23130	711	22.50	23.00	1.122	-	-	-	-

LTE Band 13

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	23230	782	23.42	23.50	1.019	-0.04	0.258	0.263	-
	Rear	23230	782	23.41	23.50	1.021	0.08	0.296	0.302	11
	Left	23230	782	23.23	23.50	1.064	-0.10	0.167	0.178	-
	Right	23230	782	23.42	23.50	1.019	-0.12	0.231	0.235	-
	Top	23230	782	23.41	23.50	1.021	0.05	0.275	0.281	-
	Bottom	23230	782	23.23	23.50	1.064	-0.02	0.113	0.120	-
10M QPSK 25RB	Front	23230	782	23.42	23.50	1.019	-0.14	0.235	0.239	-
	Rear	23230	782	23.41	23.50	1.021	-0.06	0.288	0.294	-
	Left	23230	782	23.23	23.50	1.064	-0.09	0.152	0.162	-
	Right	23230	782	23.42	23.50	1.019	-0.02	0.217	0.221	-
	Top	23230	782	23.41	23.50	1.021	-0.07	0.254	0.259	-
	Bottom	23230	782	23.23	23.50	1.064	0.05	0.096	0.102	-

LTE Band 25

Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measure d SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	26140	1860	23.46	23.50	1.009	-0.12	0.354	0.357	-
		26365	1882.5	23.07	23.50	1.104	-	-	-	-
		26590	1905	23.24	23.50	1.062	-	-	-	-
	Rear	26140	1860	23.46	23.50	1.009	0.02	0.403	0.407	12
		26365	1882.5	23.07	23.50	1.104	-0.01	0.324	0.358	-
		26590	1905	23.24	23.50	1.062	0.06	0.365	0.388	-
	Left	26140	1860	23.46	23.50	1.009	-0.09	0.287	0.290	-
		26365	1882.5	23.07	23.50	1.104	-	-	-	-
		26590	1905	23.24	23.50	1.062	-	-	-	-
	Right	26140	1860	23.46	23.50	1.009	-0.06	0.326	0.329	-
		26365	1882.5	23.07	23.50	1.104	-	-	-	-
		26590	1905	23.24	23.50	1.062	-	-	-	-
	Top	26140	1860	23.46	23.50	1.009	-0.05	0.385	0.389	-
		26365	1882.5	23.07	23.50	1.104	-	-	-	-
		26590	1905	23.24	23.50	1.062	-	-	-	-
	Bottom	26140	1860	23.46	23.50	1.009	-0.10	0.116	0.117	-
		26365	1882.5	23.07	23.50	1.104	-	-	-	-
		26590	1905	23.24	23.50	1.062	-	-	-	-
20M QPSK 50RB	Front	26140	1860	22.21	22.50	1.069	-0.15	0.274	0.293	-
		26365	1882.5	22.01	22.50	1.119	-	-	-	-
		26590	1905	21.87	22.50	1.156	-	-	-	-
	Rear	26140	1860	22.21	22.50	1.069	0.08	0.345	0.369	-
		26365	1882.5	22.01	22.50	1.119	-	-	-	-
		26590	1905	21.87	22.50	1.156	-	-	-	-
	Left	26140	1860	22.21	22.50	1.069	-0.11	0.234	0.250	-

		2636 5	1882. 5	22.01	22.50	1.119	-	-	-	-
		2659 0	1905	21.87	22.50	1.156	-	-	-	-
	Right	2614 0	1860	22.21	22.50	1.069	-0.05	0.236	0.252	-
		2636 5	1882. 5	22.01	22.50	1.119	-	-	-	-
		2659 0	1905	21.87	22.50	1.156	-	-	-	-
	Top	2614 0	1860	22.21	22.50	1.069	-0.02	0.223	0.238	-
		2636 5	1882. 5	22.01	22.50	1.119	-	-	-	-
		2659 0	1905	21.87	22.50	1.156	-	-	-	-
	Bottom	2614 0	1860	22.21	22.50	1.069	-0.07	0.075	0.080	-
		2636 5	1882. 5	22.01	22.50	1.119	-	-	-	-
		2659 0	1905	21.87	22.50	1.156	-	-	-	-

LTE Band 26										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
15M QPSK 1RB	Front	26765	821.5	23.69	24.00	1.074	0.04	0.227	0.244	-
		26865	831.5	23.49	24.00	1.125	-	-	-	-
		26965	841.5	23.69	24.00	1.074	-	-	-	-
	Rear	26765	821.5	23.69	24.00	1.074	0.05	0.264	0.284	13
		26865	831.5	23.49	24.00	1.125	-0.15	0.251	0.282	-
		26965	841.5	23.69	24.00	1.074	0.06	0.258	0.277	-
	Left	26765	821.5	23.69	24.00	1.074	0.13	0.126	0.135	-
		26865	831.5	23.49	24.00	1.125	-	-	-	-
		26965	841.5	23.69	24.00	1.074	-	-	-	-
	Right	26765	821.5	23.69	24.00	1.074	-0.09	0.165	0.177	-
		26865	831.5	23.49	24.00	1.125	-	-	-	-
		26965	841.5	23.69	24.00	1.074	-	-	-	-
	Top	26765	821.5	23.69	24.00	1.074	-0.02	0.243	0.261	-
		26865	831.5	23.49	24.00	1.125	-	-	-	-
		26965	841.5	23.69	24.00	1.074	-	-	-	-
	Bottom	26765	821.5	23.69	24.00	1.074	-0.11	0.086	0.092	-
		26865	831.5	23.49	24.00	1.125	-	-	-	-
		26965	841.5	23.69	24.00	1.074	-	-	-	-
15M QPSK 38RB	Front	26765	821.5	22.08	23.00	1.236	-	-	-	-
		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	-0.15	0.196	0.208	-
	Rear	26765	821.5	22.08	23.00	1.236	-	-	-	-
		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	0.08	0.238	0.253	-
	Left	26765	821.5	22.08	23.00	1.236	-	-	-	-

		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	-0.03	0.102	0.108	-
	Right	26765	821.5	22.08	23.00	1.236	-	-	-	-
		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	0.05	0.145	0.154	-
	Top	26765	821.5	22.08	23.00	1.236	-	-	-	-
		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	-0.10	0.215	0.228	-
	Bottom	26765	821.5	22.08	23.00	1.236	-	-	-	-
		26865	831.5	22.21	23.00	1.199	-	-	-	-
		26965	841.5	22.74	23.00	1.062	0.07	0.065	0.069	-

WIFI 2.4G												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11b 1Mbps	Front	1	2412	13.61	14.00	1.094	97.60%	1.02	-	-	-	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.05	0.024	0.026	-
		11	2462	13.31	13.50	1.045	97.60%	1.02	-	-	-	-
	Rear	1	2412	13.61	14.00	1.094	97.60%	1.02	-0.11	0.028	0.031	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.08	0.033	0.035	14
		11	2462	13.31	13.50	1.045	97.60%	1.02	-0.16	0.025	0.027	-
	Left	1	2412	13.61	14.00	1.094	97.60%	1.02	-	-	-	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.02	0.001	0.001	-
		11	2462	13.31	13.50	1.045	97.60%	1.02	-	-	-	-
	Right	1	2412	13.61	14.00	1.094	97.60%	1.02	-	-	-	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.11	0.020	0.021	-
		11	2462	13.31	13.50	1.045	97.60%	1.02	-	-	-	-
	Top	1	2412	13.61	14.00	1.094	97.60%	1.02	-	-	-	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.13	0.001	0.001	-
		11	2462	13.31	13.50	1.045	97.60%	1.02	-	-	-	-
	Bottom	1	2412	13.61	14.00	1.094	97.60%	1.02	-	-	-	-
		6	2437	14.30	14.50	1.047	97.60%	1.02	-0.06	0.001	0.001	-
		11	2462	13.31	13.50	1.045	97.60%	1.02	-	-	-	-

WIFI 5G U-NII-1												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11a	Front	36	5180	14.35	14.50	1.035	87.22%	1.15	-	-	-	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	-	-	-	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	-0.09	0.062	0.074	-
	Rear	36	5180	14.35	14.50	1.035	87.22%	1.15	0.09	0.052	0.062	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	0.06	0.056	0.066	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	-0.10	0.074	0.088	15
	Left	36	5180	14.35	14.50	1.035	87.22%	1.15	-	-	-	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	-	-	-	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	0.07	0.007	0.008	-
	Right	36	5180	14.35	14.50	1.035	87.22%	1.15	-	-	-	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	-	-	-	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	-0.02	0.048	0.057	-
	Top	36	5180	14.35	14.50	1.035	87.22%	1.15	-	-	-	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	-	-	-	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	-0.05	0.001	0.001	-
	Bottom	36	5180	14.35	14.50	1.035	87.22%	1.15	-	-	-	-
		44	5220	14.40	14.50	1.023	87.23%	1.15	-	-	-	-
		48	5240	15.33	15.50	1.040	87.15%	1.15	0.03	0.001	0.001	-

WIFI 5G U-NII-2A												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11n (HT20)	Front	52	5260	11.97	12.00	1.007	86.54%	1.16	-	-	-	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-	-	-	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	0.09	0.035	0.041	-
	Rear	52	5260	11.97	12.00	1.007	86.54%	1.16	0.08	0.025	0.029	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-0.06	0.039	0.048	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	-0.13	0.048	0.056	16
	Left	52	5260	11.97	12.00	1.007	86.54%	1.16	-	-	-	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-	-	-	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	0.03	0.001	0.001	-
	Right	52	5260	11.97	12.00	1.007	86.54%	1.16	-	-	-	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-	-	-	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	-0.05	0.028	0.033	-
	Top	52	5260	11.97	12.00	1.007	86.54%	1.16	-	-	-	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-	-	-	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	-0.10	0.001	0.001	-
	Bottom	52	5260	11.97	12.00	1.007	86.54%	1.16	-	-	-	-
		56	5280	13.77	14.00	1.054	86.38%	1.16	-	-	-	-
		64	5320	14.95	15.00	1.012	86.37%	1.16	-0.14	0.001	0.001	-

WIFI 5G U-NII-2C												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11n (HT20)	Front	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.03	0.038	0.047	-
		120	5600	12.44	12.50	1.014	86.46%	1.16	-	-	-	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-	-	-	-
	Rear	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.09	0.050	0.061	17
		120	5600	12.44	12.50	1.014	86.46%	1.16	-0.14	0.035	0.041	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-0.06	0.021	0.024	-
	Left	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.10	0.001	0.001	-
		120	5600	12.44	12.50	1.014	86.46%	1.16	-	-	-	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-	-	-	-
	Right	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.02	0.030	0.037	-
		120	5600	12.44	12.50	1.014	86.46%	1.16	-	-	-	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-	-	-	-
	Top	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.06	0.001	0.001	-
		120	5600	12.44	12.50	1.014	86.46%	1.16	-	-	-	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-	-	-	-
	Bottom	100	5500	14.25	14.50	1.059	86.38%	1.16	-0.09	0.001	0.001	-
		120	5600	12.44	12.50	1.014	86.46%	1.16	-	-	-	-
		140	5700	10.97	11.00	1.007	86.46%	1.16	-	-	-	-

WIFI 5G U-NII-3												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
802.11n (HT20)	Front	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.06	0.073	0.092	-
		157	5785	13.91	14.00	1.021	86.38%	1.16	-	-	-	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	-	-	-	-
	Rear	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.10	0.091	0.115	18
		157	5785	13.91	14.00	1.021	86.38%	1.16	-0.03	0.082	0.097	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	0.06	0.071	0.083	-
	Left	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.15	0.009	0.011	-
		157	5785	13.91	14.00	1.021	86.38%	1.16	-	-	-	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	-	-	-	-
	Right	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.03	0.062	0.078	-
		157	5785	13.91	14.00	1.021	86.38%	1.16	-	-	-	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	-	-	-	-
	Top	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.04	0.001	0.001	-
		157	5785	13.91	14.00	1.021	86.38%	1.16	-	-	-	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	-	-	-	-
	Bottom	149	5745	14.12	14.50	1.091	86.47%	1.16	-0.08	0.001	0.001	-
		157	5785	13.91	14.00	1.021	86.38%	1.16	-	-	-	-
		165	5825	13.44	13.50	1.014	86.47%	1.16	-	-	-	-

SAR Test Data Plots to the Appendix A.

14. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Frequency		Highest Measured SAR (W/kg)	First Repeated		Second Repeated	
		CH	MHz		Measured SAR(W/kg)	Largest to Smallest SAR Ratio	Measured SAR(W/kg)	Largest to Smallest SAR Ratio
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

15. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Body-worn
1	GSM(voice) + Bluetooth (data)	Yes
2	GSM(voice) + WIFI (data)	Yes
3	WCDMA(voice) + Bluetooth (data)	Yes
4	WCDMA(voice) + WIFI (data)	Yes
5	GPRS (data) + Bluetooth (data)	Yes
6	GPRS (data) + WIFI (data)	Yes
7	WCDMA (data) + Bluetooth (data)	Yes
8	WCDMA (data) + WIFI (data)	Yes
9	LTE + Bluetooth (data)	Yes
10	LTE + WIFI (data)	Yes

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Body
	Test separation	10mm
8.00dBm	Estimated SAR (W/kg)	0.130

PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.400	0.026	0.426
		Rear	0.488	0.035	0.523
		Left side	0.314	0.001	0.315
		Right side	0.364	0.021	0.385
		Top side	0.458	0.001	0.459
		Bottom side	0.200	0.001	0.201
	PCS1900	Front	0.239	0.026	0.265
		Rear	0.260	0.035	0.295
		Left side	0.132	0.001	0.133
		Right side	0.200	0.021	0.221
		Top side	0.246	0.001	0.247
		Bottom side	0.091	0.001	0.092
WCDMA	Band II	Front	0.612	0.026	0.638
		Rear	0.692	0.035	0.727
		Left side	0.430	0.001	0.431
		Right side	0.473	0.021	0.494
		Top side	0.651	0.001	0.652
		Bottom side	0.405	0.001	0.406
	Band IV	Front	0.536	0.026	0.562
		Rear	0.596	0.035	0.631
		Left side	0.420	0.001	0.421
		Right side	0.463	0.021	0.484
		Top side	0.552	0.001	0.553
		Bottom side	0.394	0.001	0.395
	Band V	Front	0.678	0.026	0.704

LTE		Rear	0.761	0.035	0.796
		Left side	0.601	0.001	0.602
		Right side	0.628	0.021	0.649
		Top side	0.722	0.001	0.723
		Bottom side	0.393	0.001	0.394
	B2 1RB	Front	0.535	0.026	0.561
		Rear	0.722	0.035	0.757
		Left side	0.172	0.001	0.173
		Right side	0.485	0.021	0.506
		Top side	0.600	0.001	0.601
		Bottom side	0.125	0.001	0.126
	B2 50RB	Front	0.541	0.026	0.567
		Rear	0.624	0.035	0.659
		Left side	0.483	0.001	0.484
		Right side	0.516	0.021	0.537
		Top side	0.565	0.001	0.566
		Bottom side	0.102	0.001	0.103
	B4 1RB	Front	0.447	0.026	0.473
		Rear	0.495	0.035	0.530
		Left side	0.272	0.001	0.273
		Right side	0.416	0.021	0.437
		Top side	0.466	0.001	0.467
		Bottom side	0.134	0.001	0.135
	B4 50RB	Front	0.338	0.026	0.364
		Rear	0.427	0.035	0.462
		Left side	0.237	0.001	0.238
		Right side	0.361	0.021	0.382
		Top side	0.379	0.001	0.380

		Bottom side	0.106	0.001	0.107
	B5 1RB	Front	0.394	0.026	0.420
		Rear	0.468	0.035	0.503
		Left side	0.307	0.001	0.308
		Right side	0.354	0.021	0.375
		Top side	0.442	0.001	0.443
		Bottom side	0.140	0.001	0.141
	B5 25RB	Front	0.372	0.026	0.398
		Rear	0.448	0.035	0.483
		Left side	0.282	0.001	0.283
		Right side	0.345	0.021	0.366
		Top side	0.412	0.001	0.413
		Bottom side	0.113	0.001	0.114
	B7 1RB	Front	0.533	0.026	0.559
		Rear	0.609	0.035	0.644
		Left side	0.333	0.001	0.334
		Right side	0.463	0.021	0.484
		Top side	0.555	0.001	0.556
		Bottom side	0.114	0.001	0.115
	B7 50RB	Front	0.444	0.026	0.470
		Rear	0.505	0.035	0.540
		Left side	0.264	0.001	0.265
		Right side	0.309	0.021	0.330
		Top side	0.448	0.001	0.449
		Bottom side	0.076	0.001	0.077
	B12 1RB	Front	0.229	0.026	0.255
		Rear	0.301	0.035	0.336
		Left side	0.141	0.001	0.142

		Right side	0.195	0.021	0.216
		Top side	0.267	0.001	0.268
		Bottom side	0.091	0.001	0.092
	B12 25RB	Front	0.198	0.026	0.224
		Rear	0.239	0.035	0.274
		Left side	0.129	0.001	0.130
		Right side	0.177	0.021	0.198
		Top side	0.202	0.001	0.203
		Bottom side	0.050	0.001	0.051
	B13 1RB	Front	0.263	0.026	0.289
		Rear	0.302	0.035	0.337
		Left side	0.178	0.001	0.179
		Right side	0.235	0.021	0.256
		Top side	0.281	0.001	0.282
		Bottom side	0.120	0.001	0.121
	B13 25RB	Front	0.239	0.026	0.265
		Rear	0.294	0.035	0.329
		Left side	0.162	0.001	0.163
		Right side	0.221	0.021	0.242
		Top side	0.259	0.001	0.260
		Bottom side	0.102	0.001	0.103
	B25 1RB	Front	0.357	0.026	0.383
		Rear	0.407	0.035	0.442
		Left side	0.290	0.001	0.291
		Right side	0.329	0.021	0.350
		Top side	0.389	0.001	0.390
		Bottom side	0.117	0.001	0.118
	B25 50RB	Front	0.293	0.026	0.319

		Rear	0.369	0.035	0.404
		Left side	0.250	0.001	0.251
		Right side	0.252	0.021	0.273
		Top side	0.238	0.001	0.239
		Bottom side	0.080	0.001	0.081
	B26 1RB	Front	0.244	0.026	0.270
		Rear	0.284	0.035	0.319
		Left side	0.135	0.001	0.136
		Right side	0.177	0.021	0.198
		Top side	0.261	0.001	0.262
		Bottom side	0.092	0.001	0.093
	B26 38RB	Front	0.208	0.026	0.234
		Rear	0.253	0.035	0.288
		Left side	0.108	0.001	0.109
		Right side	0.154	0.021	0.175
		Top side	0.228	0.001	0.229
		Bottom side	0.069	0.001	0.070

PCE + WLAN U-NII					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	WLAN U-NII	(W/kg)
GSM	GSM850	Front	0.400	0.092	0.492
		Rear	0.488	0.115	0.603
		Left side	0.314	0.011	0.325
		Right side	0.364	0.078	0.442
		Top side	0.458	0.001	0.459
		Bottom side	0.200	0.001	0.201
	PCS1900	Front	0.239	0.092	0.331
		Rear	0.260	0.115	0.375
		Left side	0.132	0.011	0.143
		Right side	0.200	0.078	0.278
		Top side	0.246	0.001	0.247
		Bottom side	0.091	0.001	0.092
WCDMA	Band II	Front	0.612	0.092	0.704
		Rear	0.692	0.115	0.807
		Left side	0.430	0.011	0.441
		Right side	0.473	0.078	0.551
		Top side	0.651	0.001	0.652
		Bottom side	0.405	0.001	0.406
	Band IV	Front	0.536	0.092	0.628
		Rear	0.596	0.115	0.711
		Left side	0.420	0.011	0.431
		Right side	0.463	0.078	0.541
		Top side	0.552	0.001	0.553
		Bottom side	0.394	0.001	0.395
	Band V	Front	0.678	0.092	0.770

LTE		Rear	0.761	0.115	0.876
		Left side	0.601	0.011	0.612
		Right side	0.628	0.078	0.706
		Top side	0.722	0.001	0.723
		Bottom side	0.393	0.001	0.394
	B2 1RB	Front	0.535	0.092	0.627
		Rear	0.722	0.115	0.837
		Left side	0.172	0.011	0.183
		Right side	0.485	0.078	0.563
		Top side	0.600	0.001	0.601
		Bottom side	0.125	0.001	0.126
	B2 50RB	Front	0.541	0.092	0.633
		Rear	0.624	0.115	0.739
		Left side	0.483	0.011	0.494
		Right side	0.516	0.078	0.594
		Top side	0.565	0.001	0.566
		Bottom side	0.102	0.001	0.103
	B4 1RB	Front	0.447	0.092	0.539
		Rear	0.495	0.115	0.610
		Left side	0.272	0.011	0.283
		Right side	0.416	0.078	0.494
		Top side	0.466	0.001	0.467
		Bottom side	0.134	0.001	0.135
	B4 50RB	Front	0.338	0.092	0.430
		Rear	0.427	0.115	0.542
		Left side	0.237	0.011	0.248
		Right side	0.361	0.078	0.439
		Top side	0.379	0.001	0.380

		Bottom side	0.106	0.001	0.107
	B5 1RB	Front	0.394	0.092	0.486
		Rear	0.468	0.115	0.583
		Left side	0.307	0.011	0.318
		Right side	0.354	0.078	0.432
		Top side	0.442	0.001	0.443
		Bottom side	0.140	0.001	0.141
	B5 25RB	Front	0.372	0.092	0.464
		Rear	0.448	0.115	0.563
		Left side	0.282	0.011	0.293
		Right side	0.345	0.078	0.423
		Top side	0.412	0.001	0.413
		Bottom side	0.113	0.001	0.114
	B7 1RB	Front	0.533	0.092	0.625
		Rear	0.609	0.115	0.724
		Left side	0.333	0.011	0.344
		Right side	0.463	0.078	0.541
		Top side	0.555	0.001	0.556
		Bottom side	0.114	0.001	0.115
	B7 50RB	Front	0.444	0.092	0.536
		Rear	0.505	0.115	0.620
		Left side	0.264	0.011	0.275
		Right side	0.309	0.078	0.387
		Top side	0.448	0.001	0.449
		Bottom side	0.076	0.001	0.077
	B12 1RB	Front	0.229	0.092	0.321
		Rear	0.301	0.115	0.416
		Left side	0.141	0.011	0.152

		Right side	0.195	0.078	0.273
		Top side	0.267	0.001	0.268
		Bottom side	0.091	0.001	0.092
	B12 25RB	Front	0.198	0.092	0.290
		Rear	0.239	0.115	0.354
		Left side	0.129	0.011	0.140
		Right side	0.177	0.078	0.255
		Top side	0.202	0.001	0.203
		Bottom side	0.050	0.001	0.051
	B13 1RB	Front	0.263	0.092	0.355
		Rear	0.302	0.115	0.417
		Left side	0.178	0.011	0.189
		Right side	0.235	0.078	0.313
		Top side	0.281	0.001	0.282
		Bottom side	0.120	0.001	0.121
	B13 25RB	Front	0.239	0.092	0.331
		Rear	0.294	0.115	0.409
		Left side	0.162	0.011	0.173
		Right side	0.221	0.078	0.299
		Top side	0.259	0.001	0.260
		Bottom side	0.102	0.001	0.103
	B25 1RB	Front	0.357	0.092	0.449
		Rear	0.407	0.115	0.522
		Left side	0.290	0.011	0.301
		Right side	0.329	0.078	0.407
		Top side	0.389	0.001	0.390
		Bottom side	0.117	0.001	0.118
	B25 50RB	Front	0.293	0.092	0.385

		Rear	0.369	0.115	0.484
		Left side	0.250	0.011	0.261
		Right side	0.252	0.078	0.330
		Top side	0.238	0.001	0.239
		Bottom side	0.080	0.001	0.081
	B26 1RB	Front	0.244	0.092	0.336
		Rear	0.284	0.115	0.399
		Left side	0.135	0.011	0.146
		Right side	0.177	0.078	0.255
		Top side	0.261	0.001	0.262
		Bottom side	0.092	0.001	0.093
	B26 38RB	Front	0.208	0.092	0.300
		Rear	0.253	0.115	0.368
		Left side	0.108	0.011	0.119
		Right side	0.154	0.078	0.232
		Top side	0.228	0.001	0.229
		Bottom side	0.069	0.001	0.070

PCE + BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			PCE	BT	(W/kg)
GSM	GSM850	Front	0.400	0.130	0.530
		Rear	0.488	0.130	0.618
		Left side	0.314	0.130	0.444
		Right side	0.364	0.130	0.494
		Top side	0.458	0.130	0.588
		Bottom side	0.200	0.130	0.330
	PCS1900	Front	0.239	0.130	0.369
		Rear	0.260	0.130	0.390
		Left side	0.132	0.130	0.262
		Right side	0.200	0.130	0.330
		Top side	0.246	0.130	0.376
		Bottom side	0.091	0.130	0.221
WCDMA	Band II	Front	0.612	0.130	0.742
		Rear	0.692	0.130	0.822
		Left side	0.430	0.130	0.560
		Right side	0.473	0.130	0.603
		Top side	0.651	0.130	0.781
		Bottom side	0.405	0.130	0.535
	Band IV	Front	0.536	0.130	0.666
		Rear	0.596	0.130	0.726
		Left side	0.420	0.130	0.550
		Right side	0.463	0.130	0.593
		Top side	0.552	0.130	0.682
		Bottom side	0.394	0.130	0.524
	Band V	Front	0.678	0.130	0.808

LTE		Rear	0.761	0.130	0.891
		Left side	0.601	0.130	0.731
		Right side	0.628	0.130	0.758
		Top side	0.722	0.130	0.852
		Bottom side	0.393	0.130	0.523
	B2 1RB	Front	0.535	0.130	0.665
		Rear	0.722	0.130	0.852
		Left side	0.172	0.130	0.302
		Right side	0.485	0.130	0.615
		Top side	0.600	0.130	0.730
		Bottom side	0.125	0.130	0.255
	B2 50RB	Front	0.541	0.130	0.671
		Rear	0.624	0.130	0.754
		Left side	0.483	0.130	0.613
		Right side	0.516	0.130	0.646
		Top side	0.565	0.130	0.695
		Bottom side	0.102	0.130	0.232
	B4 1RB	Front	0.447	0.130	0.577
		Rear	0.495	0.130	0.625
		Left side	0.272	0.130	0.402
		Right side	0.416	0.130	0.546
		Top side	0.466	0.130	0.596
		Bottom side	0.134	0.130	0.264
	B4 50RB	Front	0.338	0.130	0.468
		Rear	0.427	0.130	0.557
		Left side	0.237	0.130	0.367
		Right side	0.361	0.130	0.491
		Top side	0.379	0.130	0.509

		Bottom side	0.106	0.130	0.236
	B5 1RB	Front	0.394	0.130	0.524
		Rear	0.468	0.130	0.598
		Left side	0.307	0.130	0.437
		Right side	0.354	0.130	0.484
		Top side	0.442	0.130	0.572
		Bottom side	0.140	0.130	0.270
	B5 25RB	Front	0.372	0.130	0.502
		Rear	0.448	0.130	0.578
		Left side	0.282	0.130	0.412
		Right side	0.345	0.130	0.475
		Top side	0.412	0.130	0.542
		Bottom side	0.113	0.130	0.243
	B7 1RB	Front	0.533	0.130	0.663
		Rear	0.609	0.130	0.739
		Left side	0.333	0.130	0.463
		Right side	0.463	0.130	0.593
		Top side	0.555	0.130	0.685
		Bottom side	0.114	0.130	0.244
	B7 50RB	Front	0.444	0.130	0.574
		Rear	0.505	0.130	0.635
		Left side	0.264	0.130	0.394
		Right side	0.309	0.130	0.439
		Top side	0.448	0.130	0.578
		Bottom side	0.076	0.130	0.206
	B12 1RB	Front	0.229	0.130	0.359
		Rear	0.301	0.130	0.431
		Left side	0.141	0.130	0.271

		Right side	0.195	0.130	0.325
		Top side	0.267	0.130	0.397
		Bottom side	0.091	0.130	0.221
	B12 25RB	Front	0.198	0.130	0.328
		Rear	0.239	0.130	0.369
		Left side	0.129	0.130	0.259
		Right side	0.177	0.130	0.307
		Top side	0.202	0.130	0.332
		Bottom side	0.050	0.130	0.180
	B13 1RB	Front	0.263	0.130	0.393
		Rear	0.302	0.130	0.432
		Left side	0.178	0.130	0.308
		Right side	0.235	0.130	0.365
		Top side	0.281	0.130	0.411
		Bottom side	0.120	0.130	0.250
	B13 25RB	Front	0.239	0.130	0.369
		Rear	0.294	0.130	0.424
		Left side	0.162	0.130	0.292
		Right side	0.221	0.130	0.351
		Top side	0.259	0.130	0.389
		Bottom side	0.102	0.130	0.232
	B25 1RB	Front	0.357	0.130	0.487
		Rear	0.407	0.130	0.537
		Left side	0.290	0.130	0.420
		Right side	0.329	0.130	0.459
		Top side	0.389	0.130	0.519
		Bottom side	0.117	0.130	0.247
	B25 50RB	Front	0.293	0.130	0.423

		Rear	0.369	0.130	0.499
		Left side	0.250	0.130	0.380
		Right side	0.252	0.130	0.382
		Top side	0.238	0.130	0.368
		Bottom side	0.080	0.130	0.210
	B26 1RB	Front	0.244	0.130	0.374
		Rear	0.284	0.130	0.414
		Left side	0.135	0.130	0.265
		Right side	0.177	0.130	0.307
		Top side	0.261	0.130	0.391
		Bottom side	0.092	0.130	0.222
	B26 38RB	Front	0.208	0.130	0.338
		Rear	0.253	0.130	0.383
		Left side	0.108	0.130	0.238
		Right side	0.154	0.130	0.284
		Top side	0.228	0.130	0.358
		Bottom side	0.069	0.130	0.199

-----End of Report-----