



FCC RF Test Report

APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sale Terminal
BRAND NAME : Verifone or VERIFONE or verifone
MODEL NAME : UX600-4G-A, UX600-T-A
FCC ID : B32UX6004GA
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Mar. 14, 2025 ~ May 02, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 Hopping Channel Separation Measurement	12
3.3 Dwell Time Measurement.....	13
3.4 20dB and 99% Bandwidth Measurement	14
3.5 Output Power Measurement.....	15
3.6 Conducted Band Edges Measurement.....	16
3.7 Conducted Spurious Emission Measurement	17
3.8 Radiated Band Edges and Spurious Emission Measurement	18
3.9 AC Conducted Emission Measurement.....	22
3.10 Antenna Requirements.....	24
4 LIST OF MEASURING EQUIPMENT.....	25
5 MEASUREMENT UNCERTAINTY	26
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR522406A	Rev. 01	Initial issue of report	May 23, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 12.21 dB at 561.08 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.91 dB at 0.400 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.2 Manufacturer

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sale Terminal
Brand Name	Verifone or VERIFONE or verifone
Model Name	UX600-4G-A, UX600-T-A
FCC ID	B32UX6004GA
SN Code	Conducted: E14K5BC06000082 Conduction: E14K5B80800205 Radiation: E14K5BC06000081 for Sample 1 E14K5BR100000064 for Sample 2
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples under test: Sample 1(UX600-4G-A) supports PSCR, Sample 2(UX600-T-A) doesn't support. According to the difference, we evaluate Sample 1 to perform full test, and Sample 2 to verify the worse cases of RSE.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 9.76 dBm (0.0095 W) Bluetooth EDR (2Mbps) : 8.78 dBm (0.0076 W) Bluetooth EDR (3Mbps) : 9.12 dBm (0.0082 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.875MHz Bluetooth EDR (2Mbps) : 1.166MHz Bluetooth EDR (3Mbps) : 1.151MHz
Antenna Type / Gain	PIFA Antenna type with gain 1.59 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, only the worst Y plane test cases were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π/4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz for Sample 1 Mode 2: CH39_2441 MHz for Sample 1 Mode 3: CH78_2480 MHz for Sample 1 Mode 4: CH78_2480 MHz for Sample 2		
AC Conducted Emission	Mode 1 : LTE Band 5 Idle + BT Link + WLAN (2.4G) Link + PSCR/SAM-1 Cards looping + (Color Bar or H pattern) + Micro SD R/W + USB Type B with cable + USB R/Wx2 + Camera looping + Metal tool + Earphone + GNSS Rx+ Lan Port With Load + Adaptor 1 + SIM + E-SIM On		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performance with Adaptor 1 and Earphone.			

2.3 Connection Diagram of Test System

AC Conducted Emission:

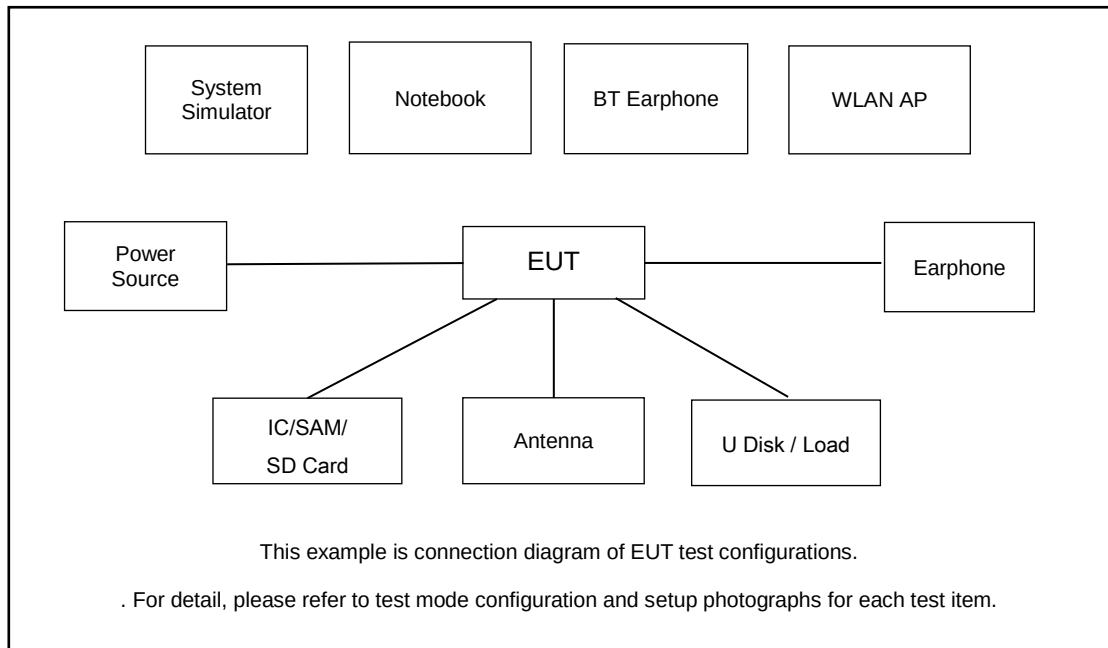

Radiated Emission:

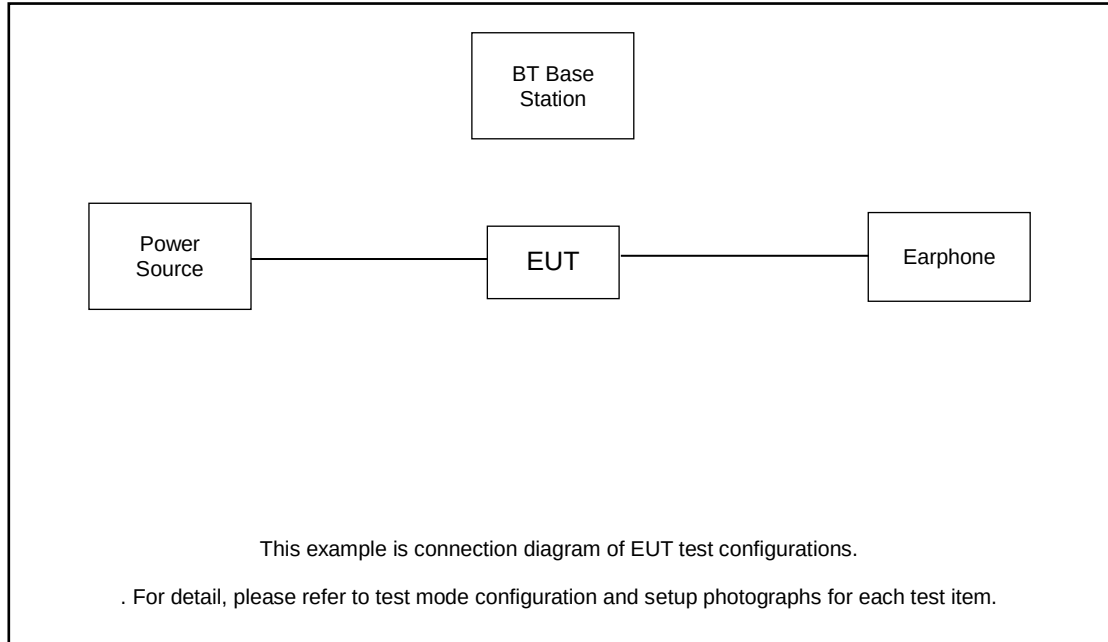

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
5.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
6.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
7.	U Disk	SanDisk	SDCZ50-008G	N/A	N/A	N/A
8.	IC Card	N/A	N/A	N/A	N/A	N/A
9.	SAM Card	N/A	N/A	N/A	N/A	N/A
10.	SD Card	N/A	N/A	N/A	N/A	N/A
11.	RJ45 to RS232 cable	Verifone or VERIFONE or verifone	CBL000-016-01-A	N/A	N/A	N/A
12.	RJ45 USB Host cable	Verifone or VERIFONE or verifone	CBL132-003-01-A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the Bluetooth Earphone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.31 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.31 + 20 = 22.31 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

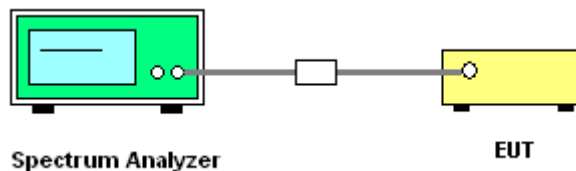

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

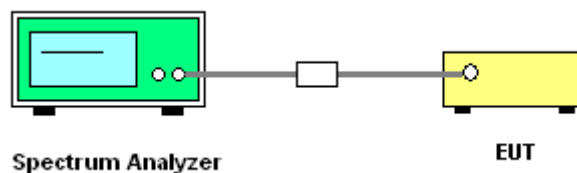

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

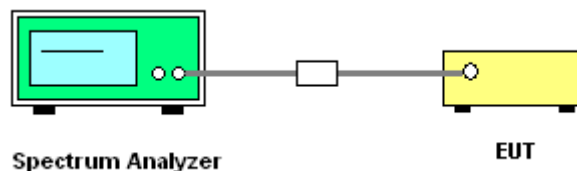

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

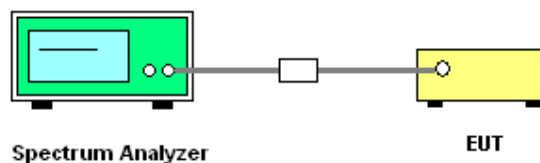

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

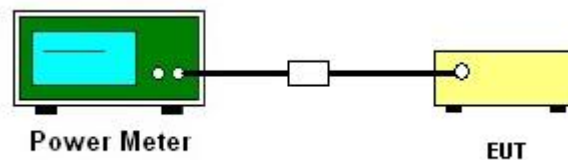

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

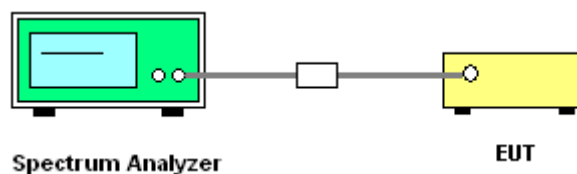

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

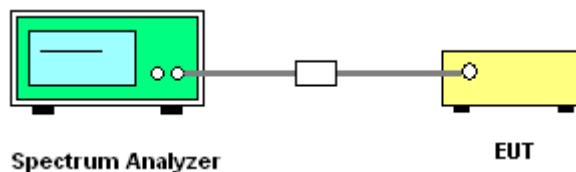

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1\text{ GHz}$, RBW=1MHz for $f > 1\text{ GHz}$; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

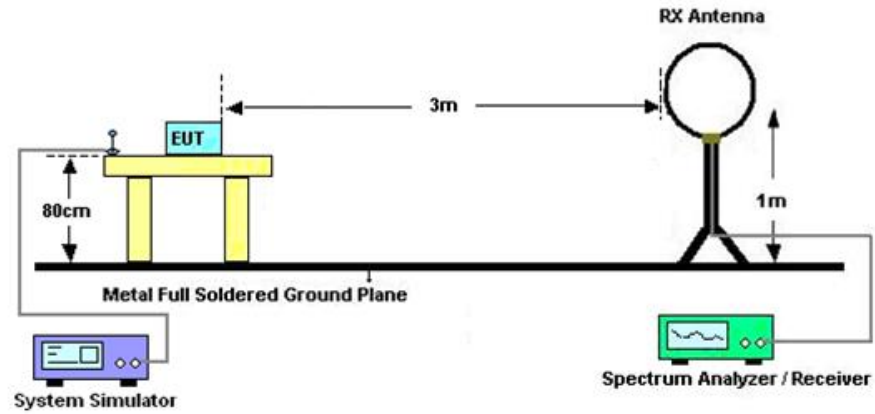

For radiated emissions from 30MHz to 1GHz

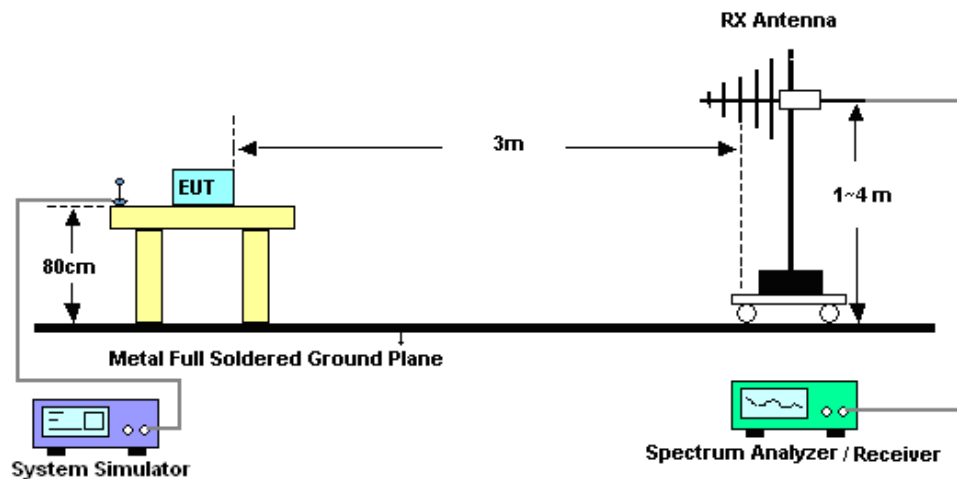

For radiated emissions above 1GHz

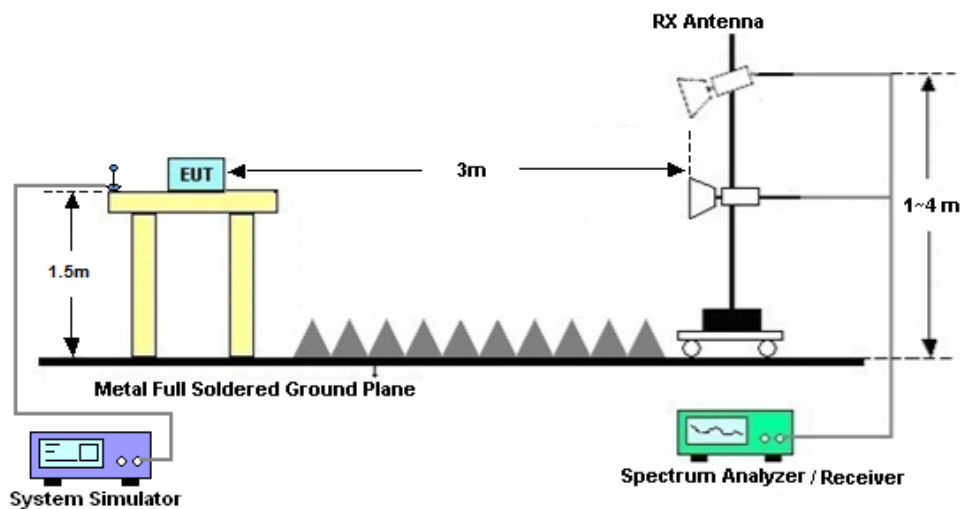

**3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

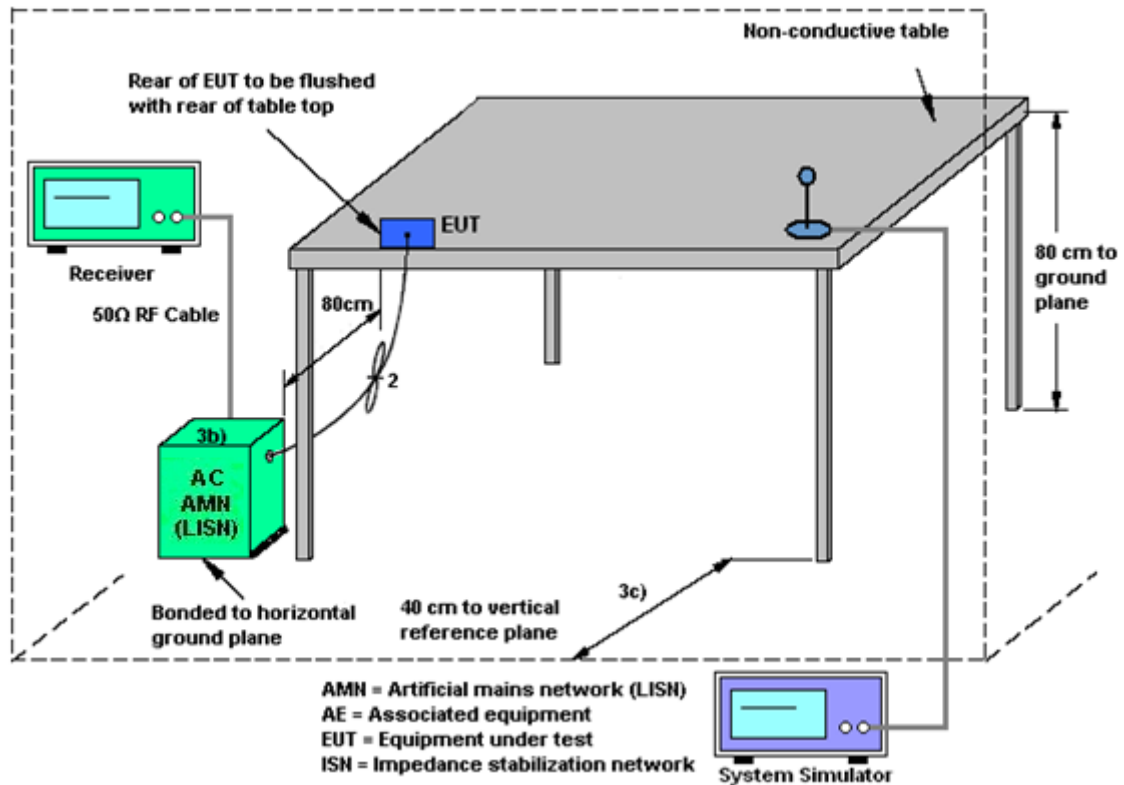

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Mar. 14, 2025~ Mar. 18, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Mar. 14, 2025~ Mar. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Mar. 14, 2025~ Mar. 18, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 04, 2024	Apr. 15, 2025	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz, MAX 30dB	Oct. 10, 2024	Apr. 15, 2025	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Apr. 15, 2025	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 18, 2024	Apr. 15, 2025	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 10, 2025	Apr. 15, 2025	Apr. 09, 2026	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Apr. 15, 2025	Oct. 21, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Apr. 15, 2025	Jul. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Apr. 15, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Jan. 02, 2025	Apr. 15, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 02, 2025	Apr. 15, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 15, 2025	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 15, 2025	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 15, 2025	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2025	May 02, 2025	Apr. 17, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	May 02, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2025	May 02, 2025	Apr. 17, 2026	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	May 02, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Frequency	±0.04ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.02dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.34dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.3.14~2025.3.18

Test Engineer: Jiang Jun


20dB Emission Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.54	2402.49	---	---
		2441	0.95	2440.54	2441.48	---	---
		2480	0.95	2479.53	2480.48	---	---
2DH1	Ant1	2402	1.27	2401.37	2402.63	---	---
		2441	1.27	2440.36	2441.63	---	---
		2480	1.29	2479.34	2480.63	---	---
3DH1	Ant1	2402	1.24	2401.39	2402.63	---	---
		2441	1.25	2440.38	2441.63	---	---
		2480	1.26	2479.37	2480.63	---	---





Test Graphs

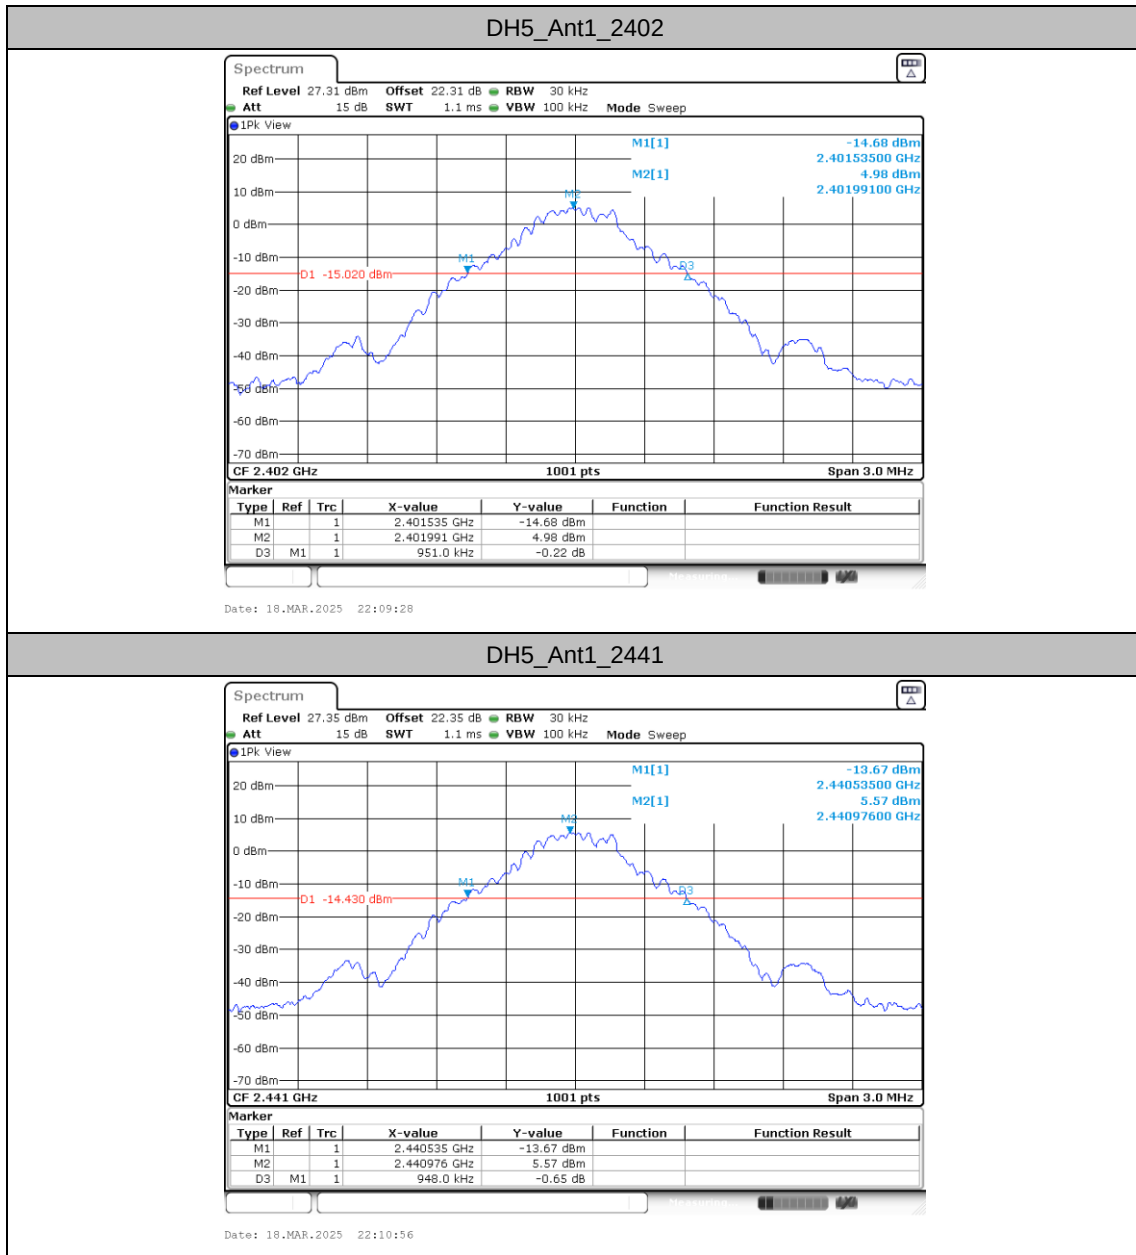

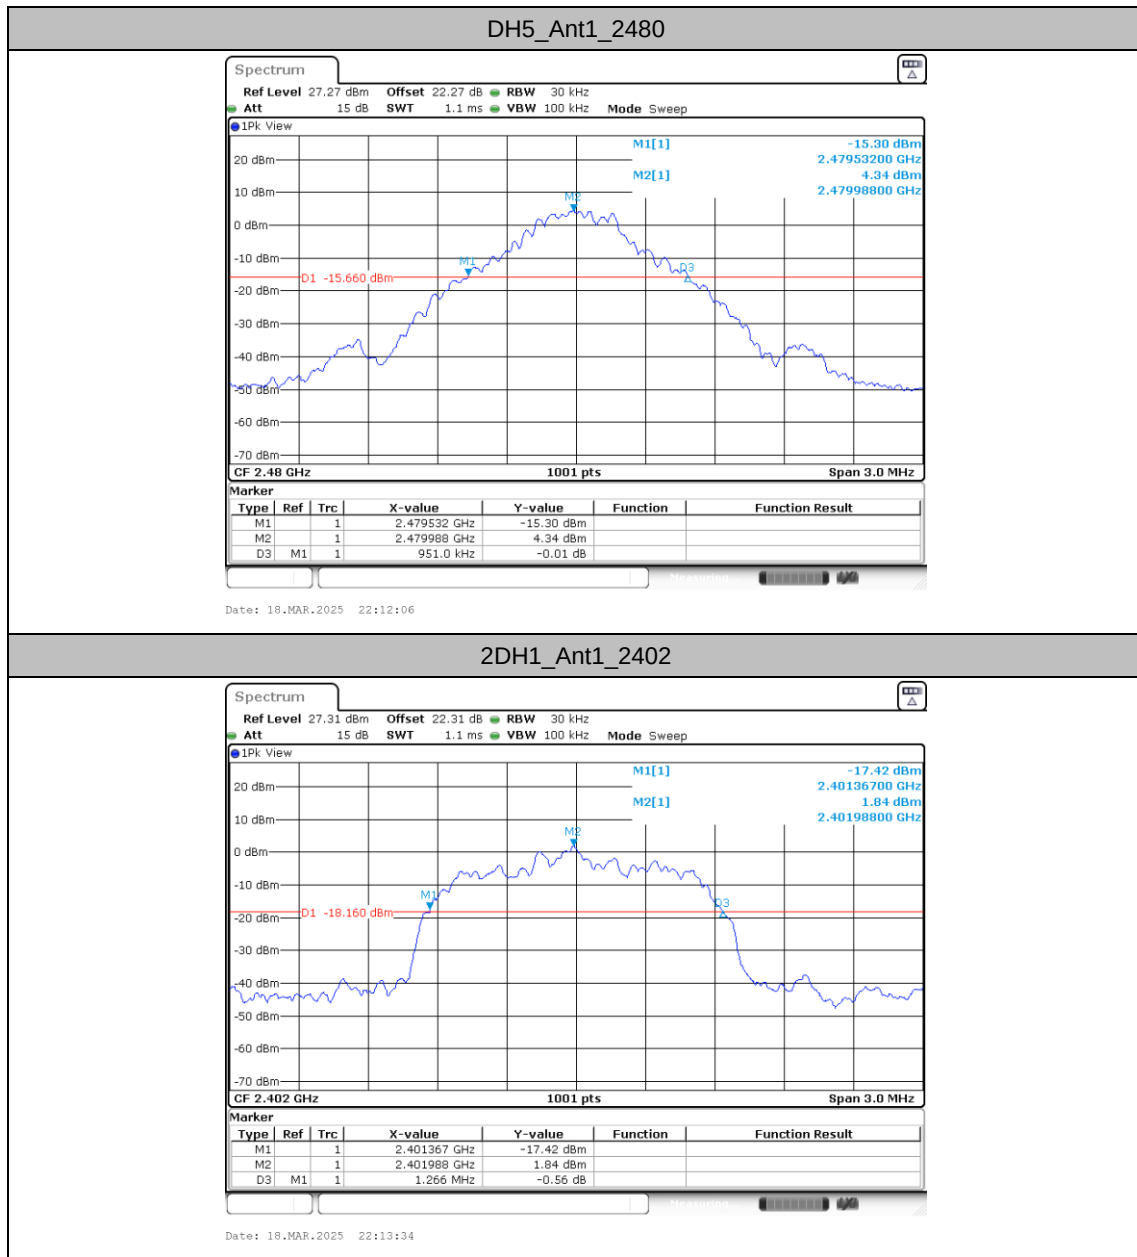

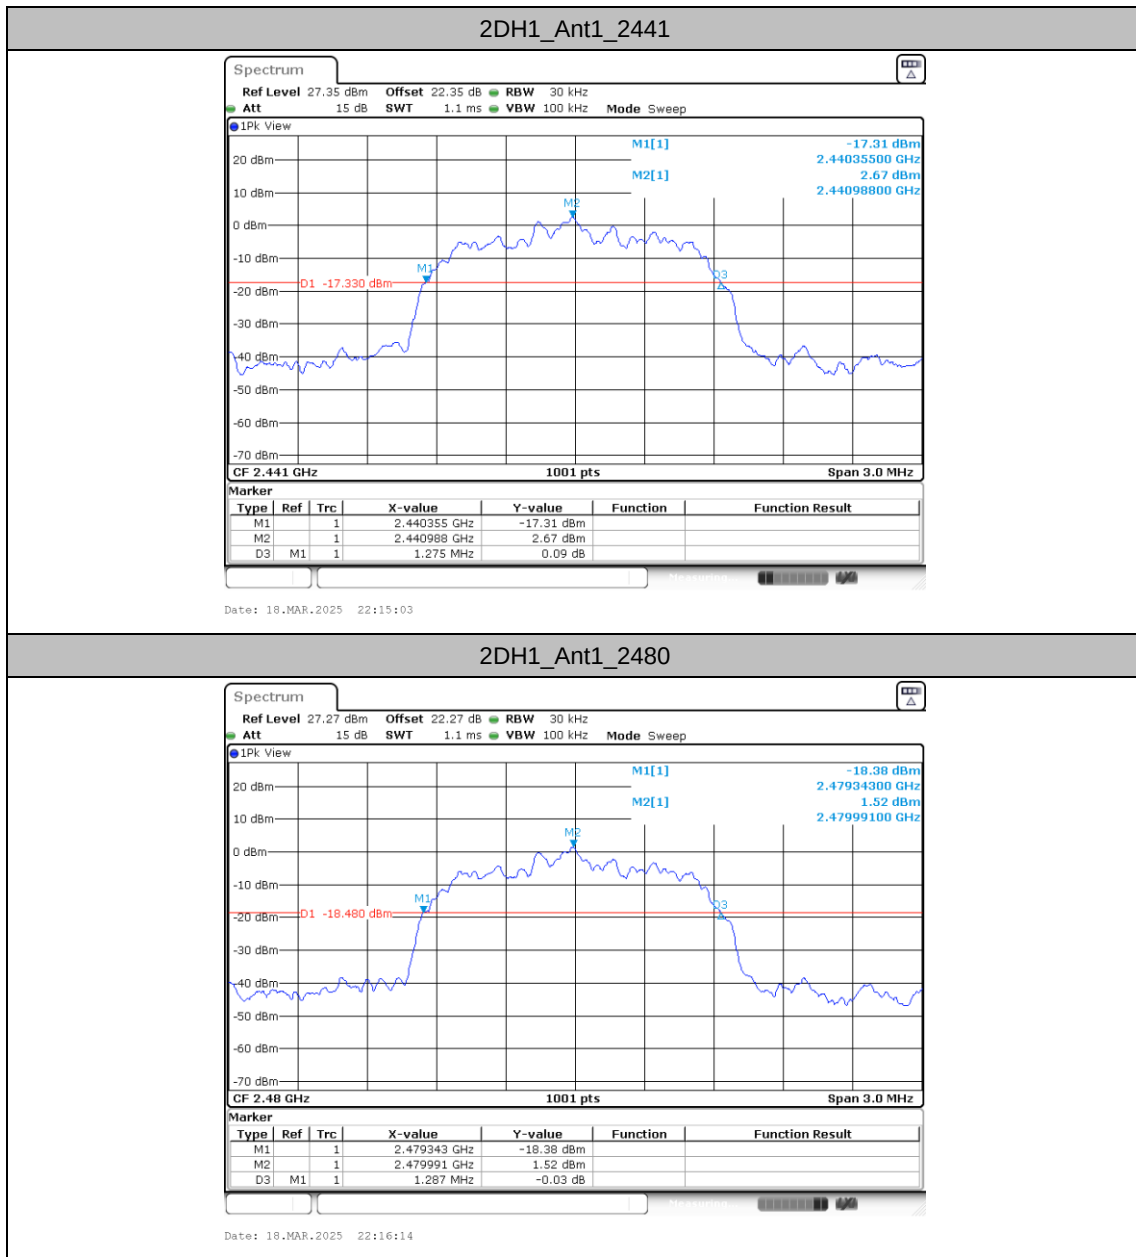

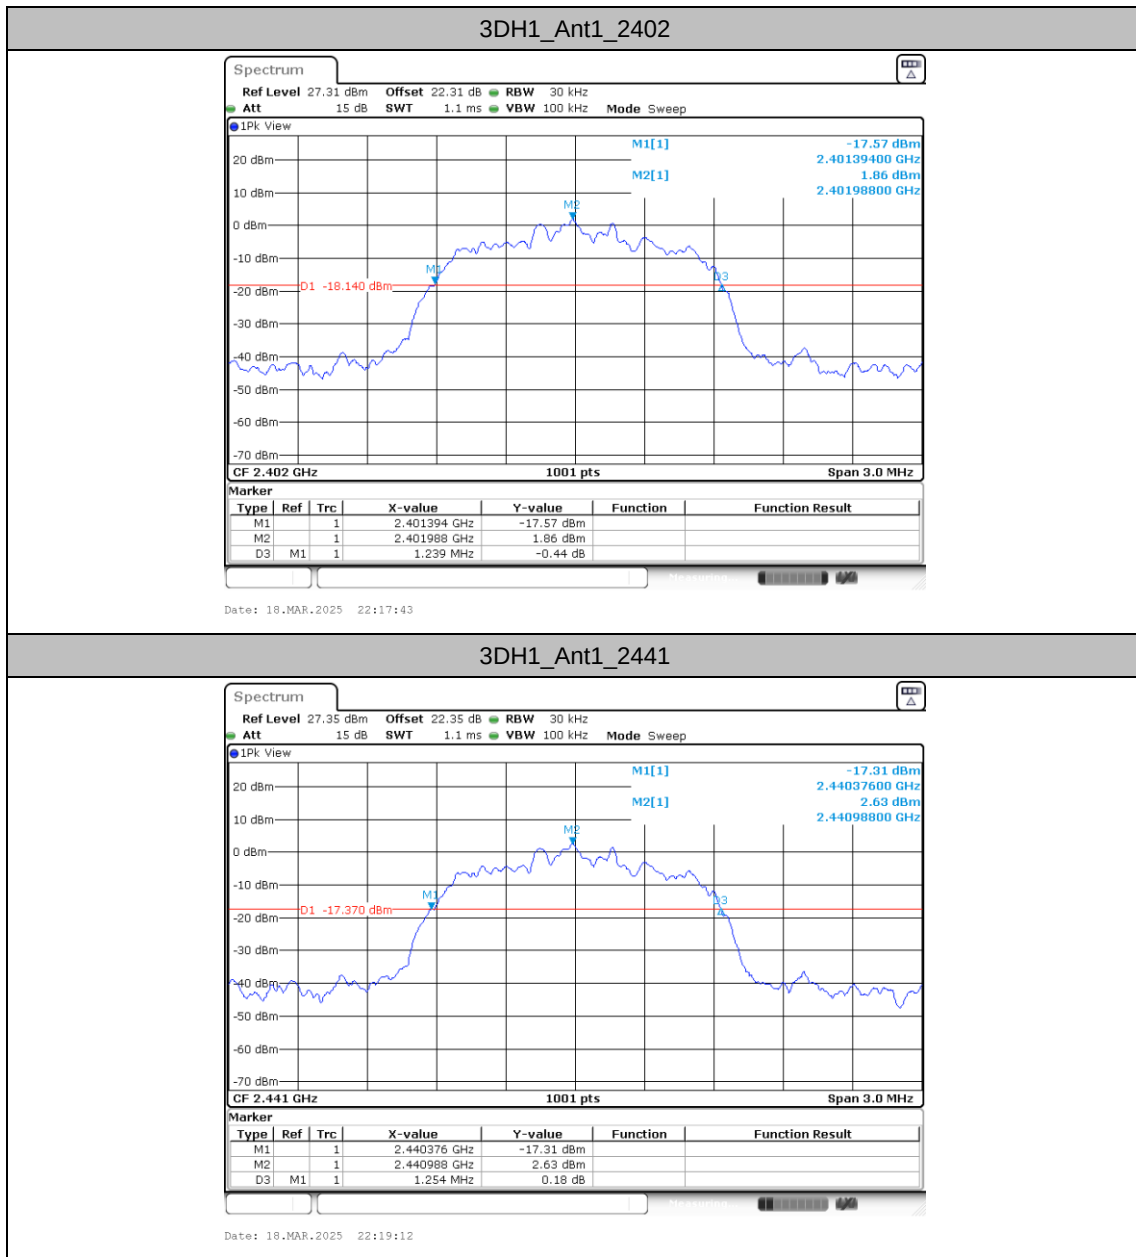

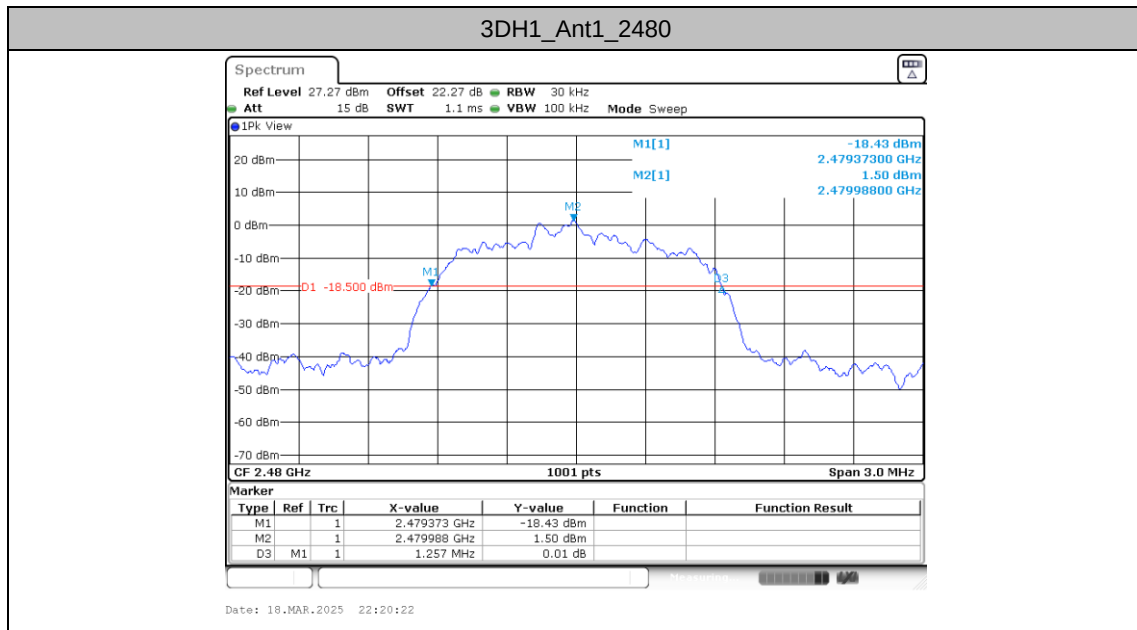




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.869	2401.5684	2402.4376	---	---
		2441	0.875	2440.5624	2441.4376	---	---
		2480	0.869	2479.5624	2480.4316	---	---
2DH1	Ant1	2402	1.166	2401.4096	2402.5754	---	---
		2441	1.166	2440.4096	2441.5754	---	---
		2480	1.166	2479.4066	2480.5724	---	---
3DH1	Ant1	2402	1.148	2401.4366	2402.5844	---	---
		2441	1.151	2440.4336	2441.5844	---	---
		2480	1.151	2479.4306	2480.5814	---	---





Test Graphs

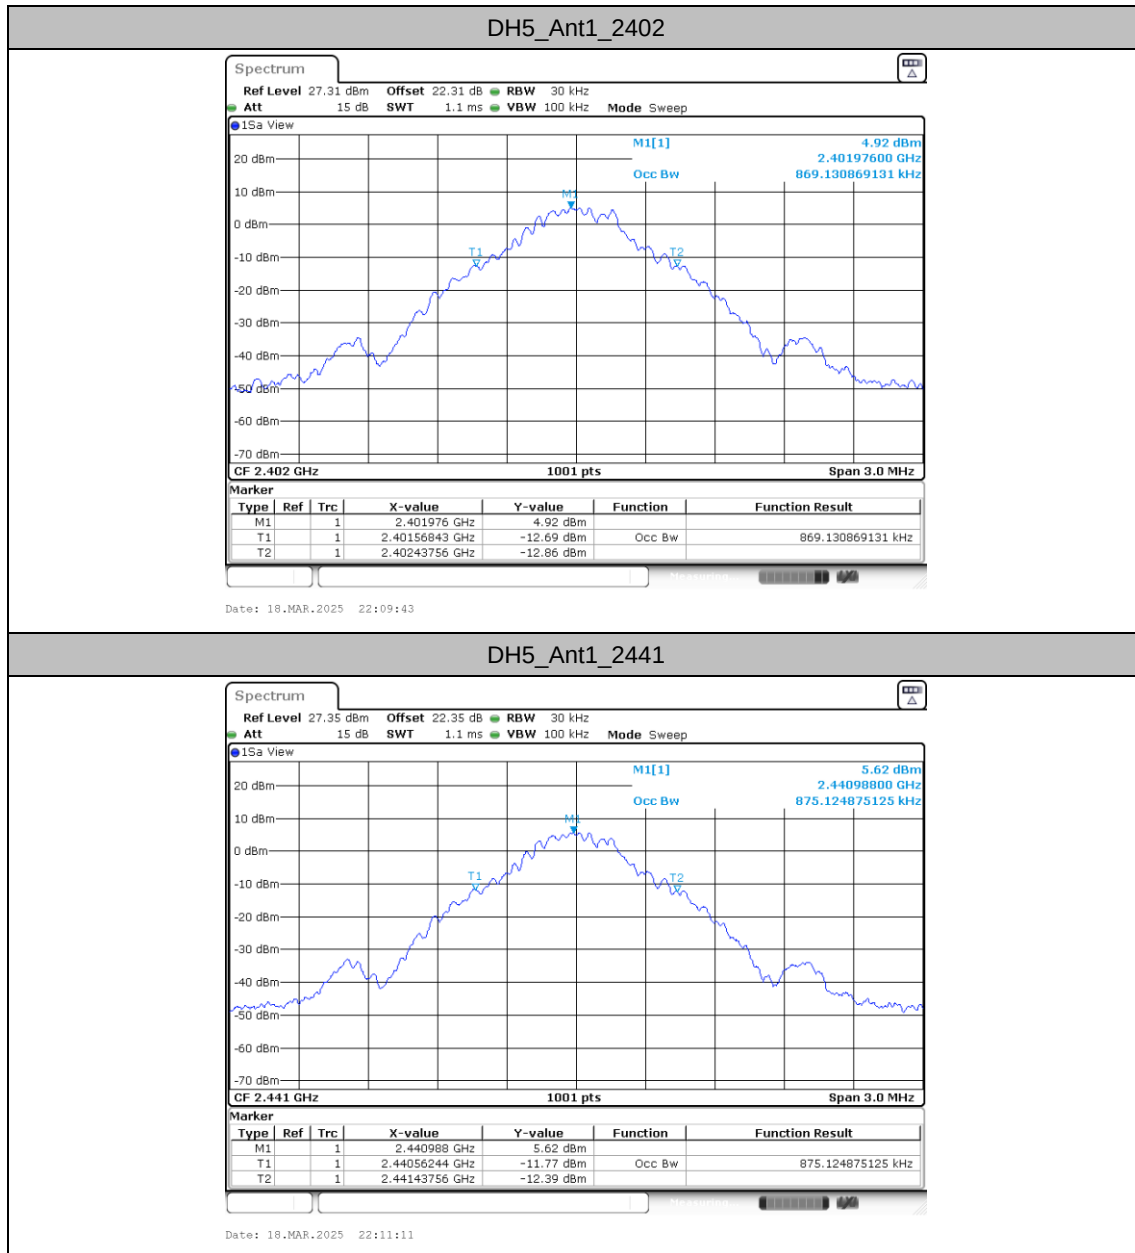

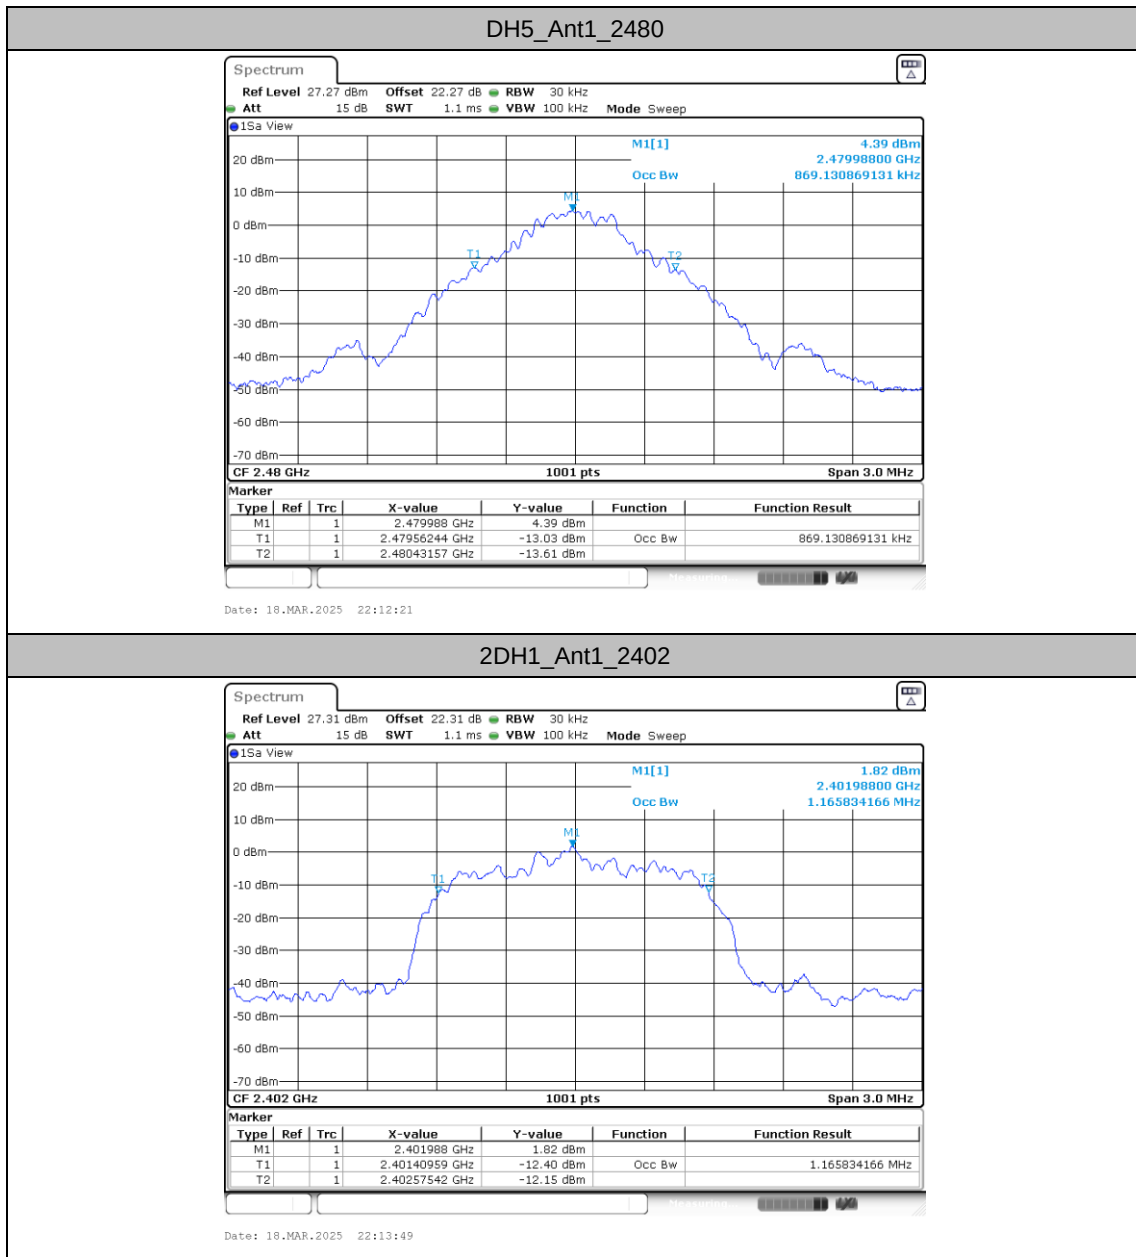

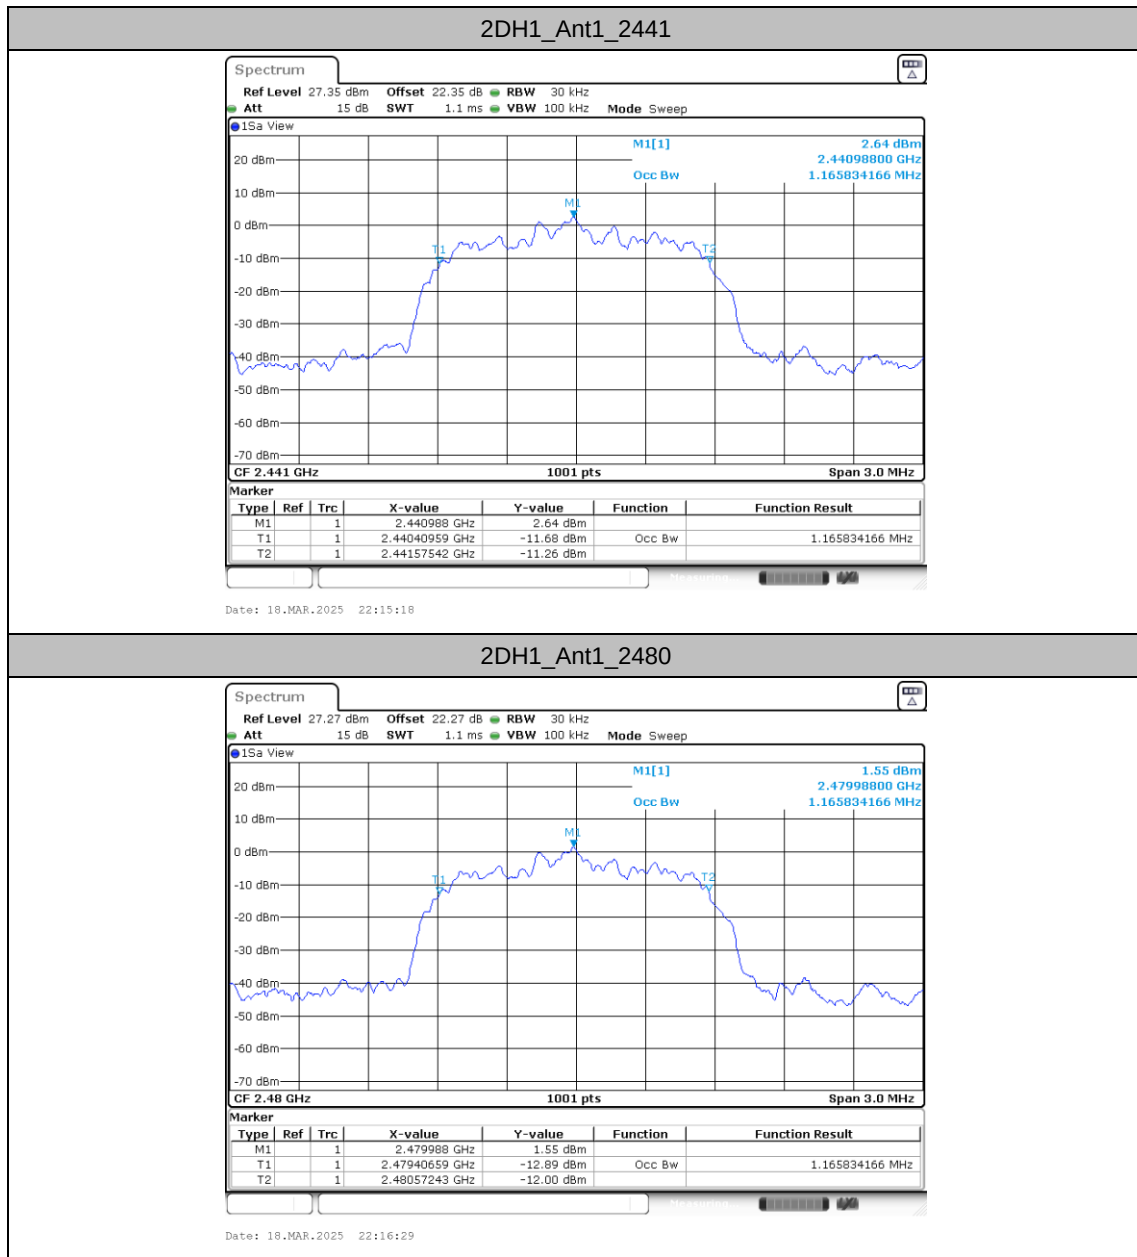

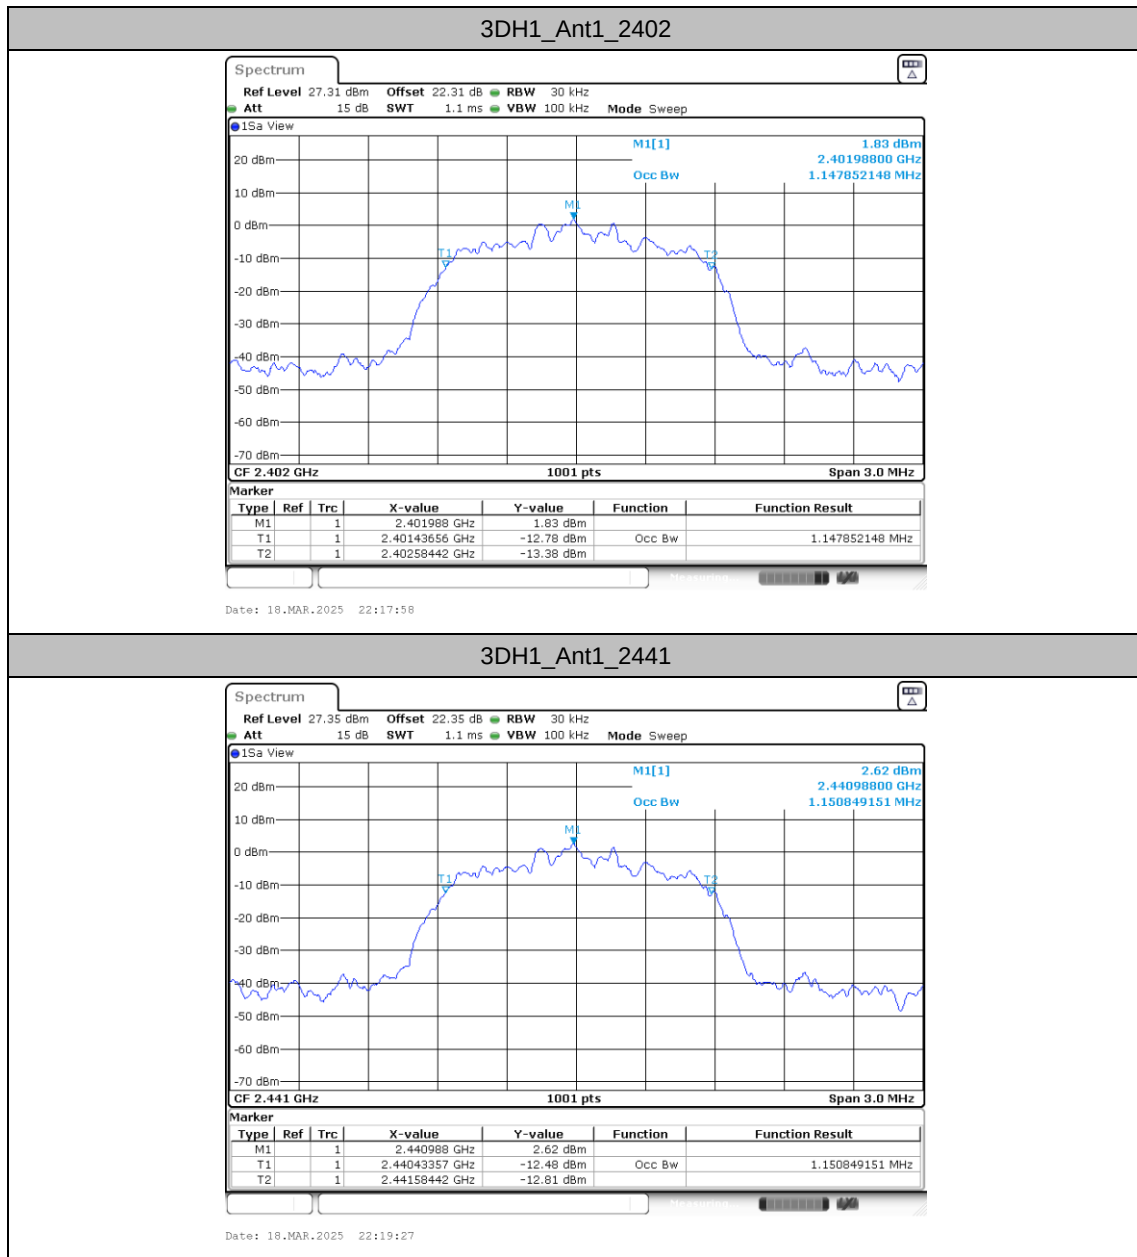

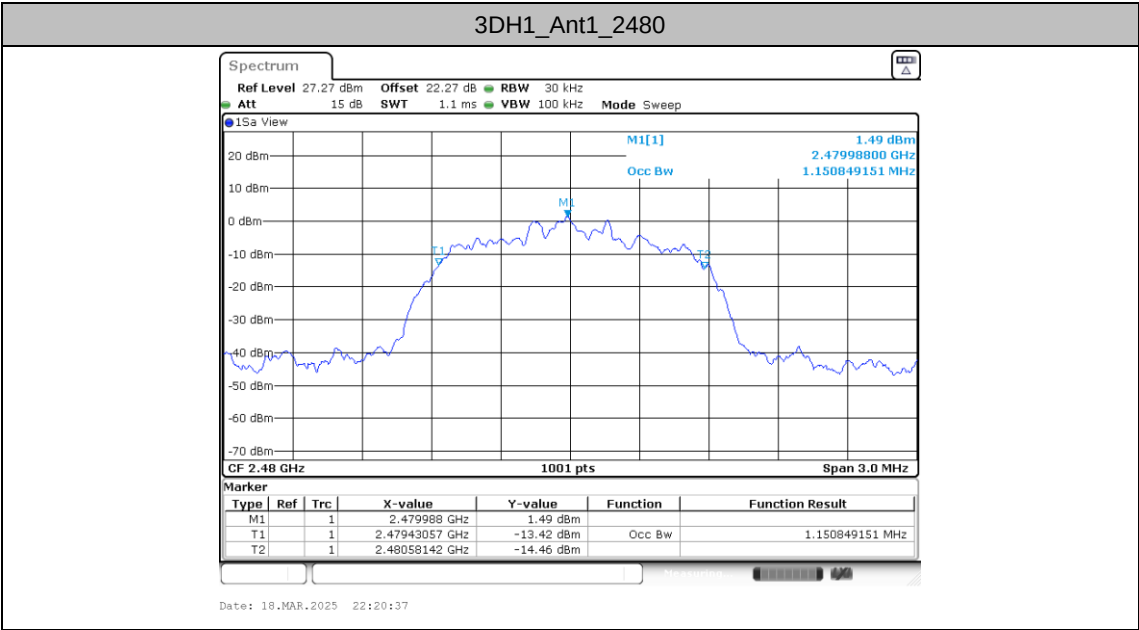



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Power (dBm)	Power Limit (dBm)	Pass/Fail
DH5	Ant1	0	8.98	20.97	Pass
		39	9.76	20.97	Pass
		78	8.08	20.97	Pass
2DH1	Ant1	0	8.12	20.97	Pass
		39	8.78	20.97	Pass
		78	7.18	20.97	Pass
3DH1	Ant1	0	8.36	20.97	Pass
		39	9.12	20.97	Pass
		78	7.52	20.97	Pass

Note: Power setting is default.


Carrier frequency separation


Test Result


TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.991	≥0.633	PASS
		2441	1.013	≥0.633	PASS
		2480	1.017	≥0.633	PASS
2DH1	Ant1	2402	0.987	≥0.847	PASS
		2441	1.004	≥0.847	PASS
		2480	0.991	≥0.860	PASS
3DH1	Ant1	2402	1.013	≥0.827	PASS
		2441	0.996	≥0.833	PASS
		2480	1.000	≥0.840	PASS





Test Graphs

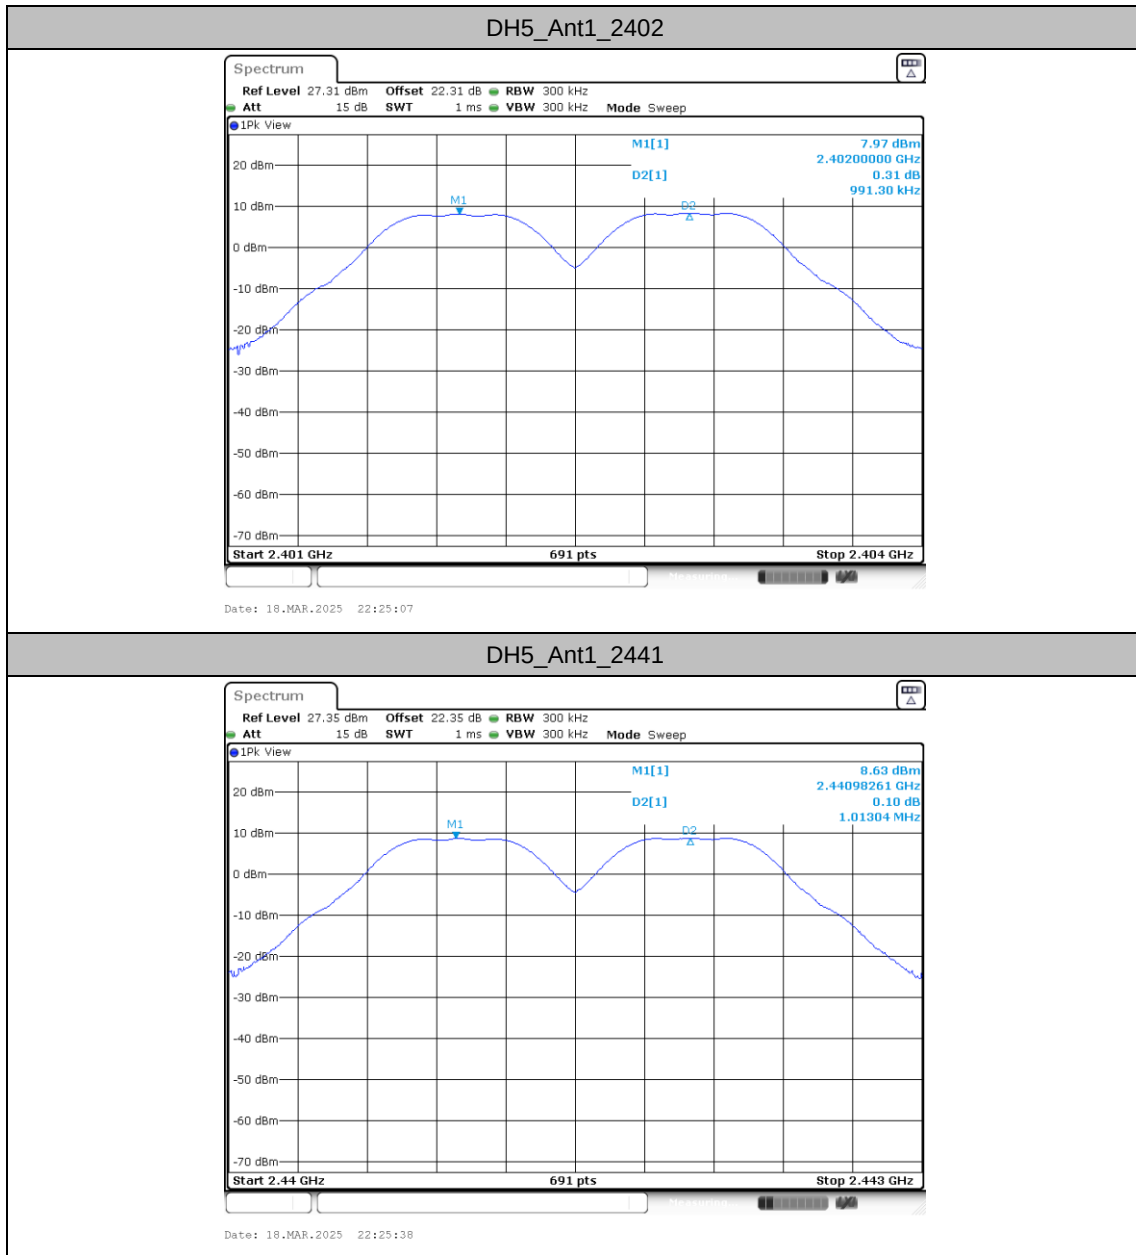

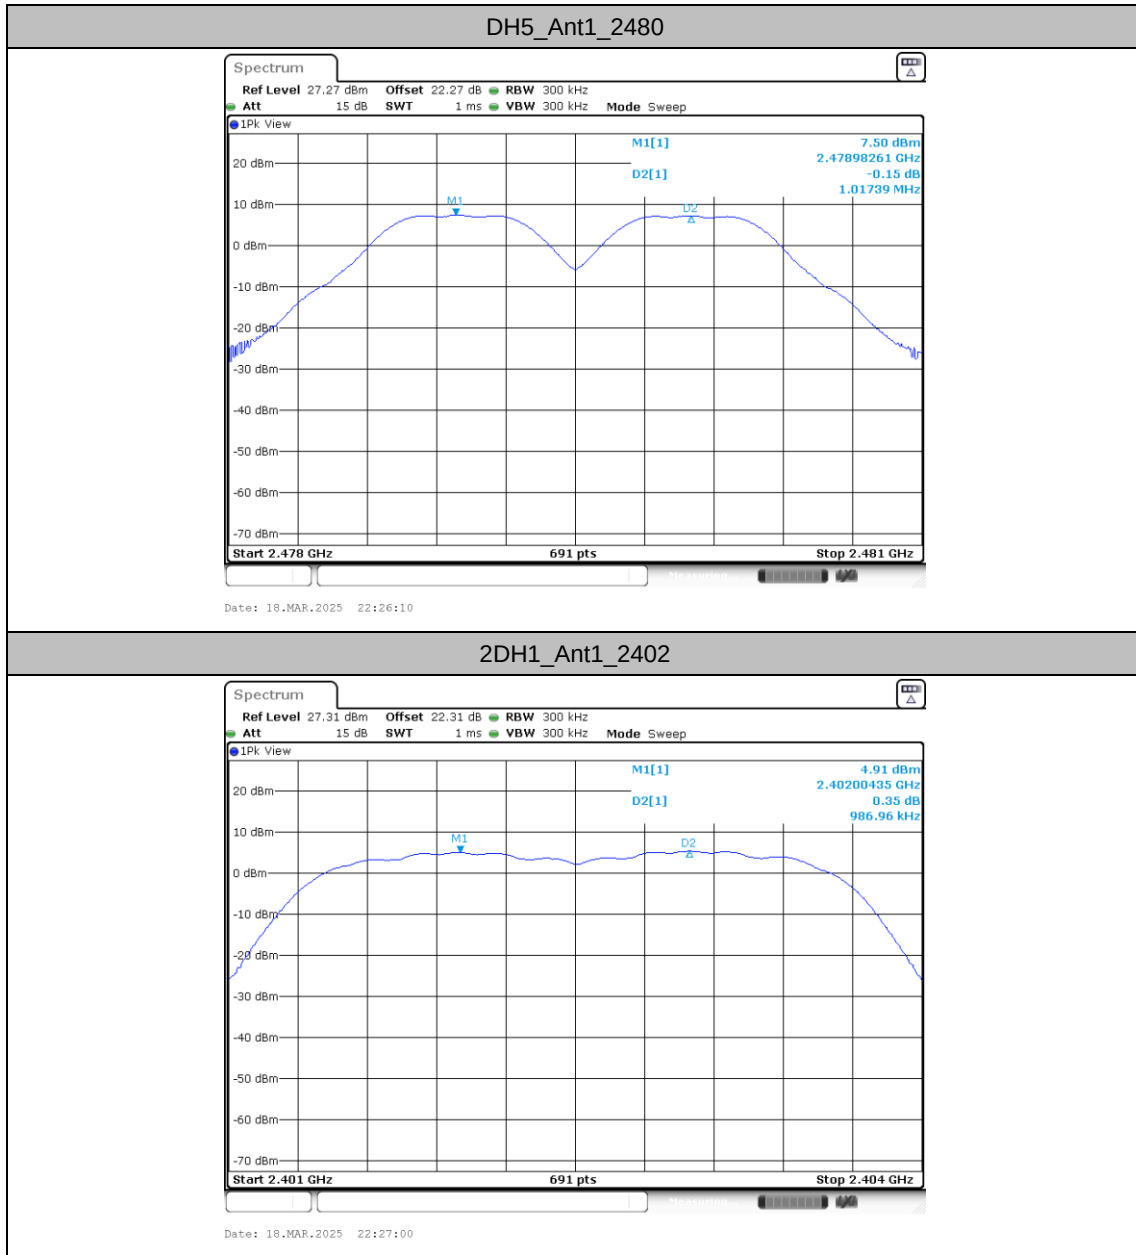

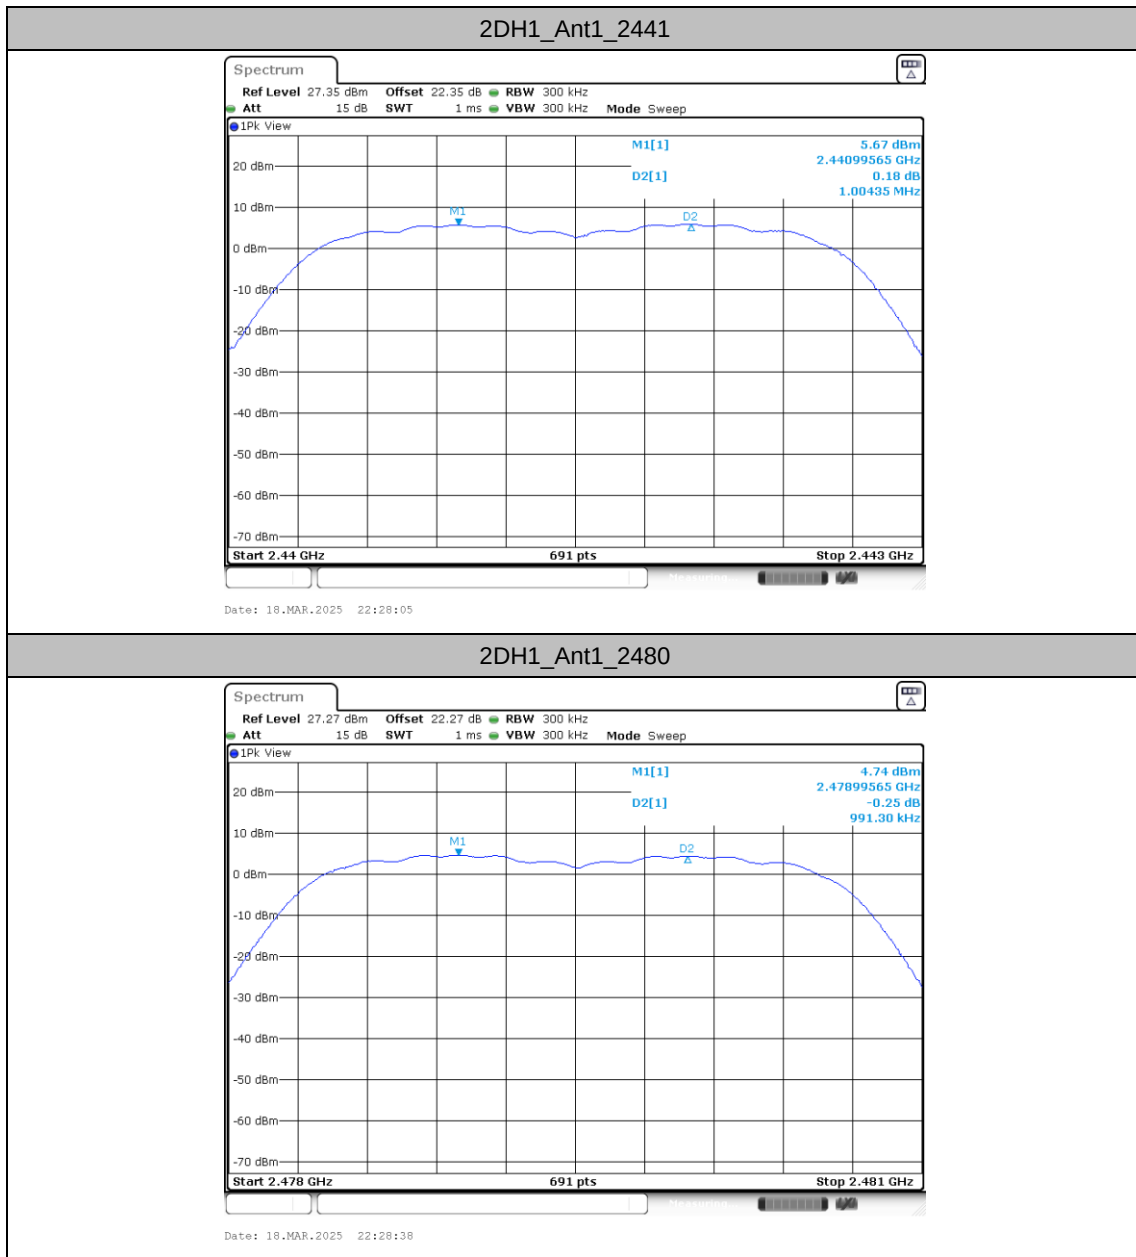

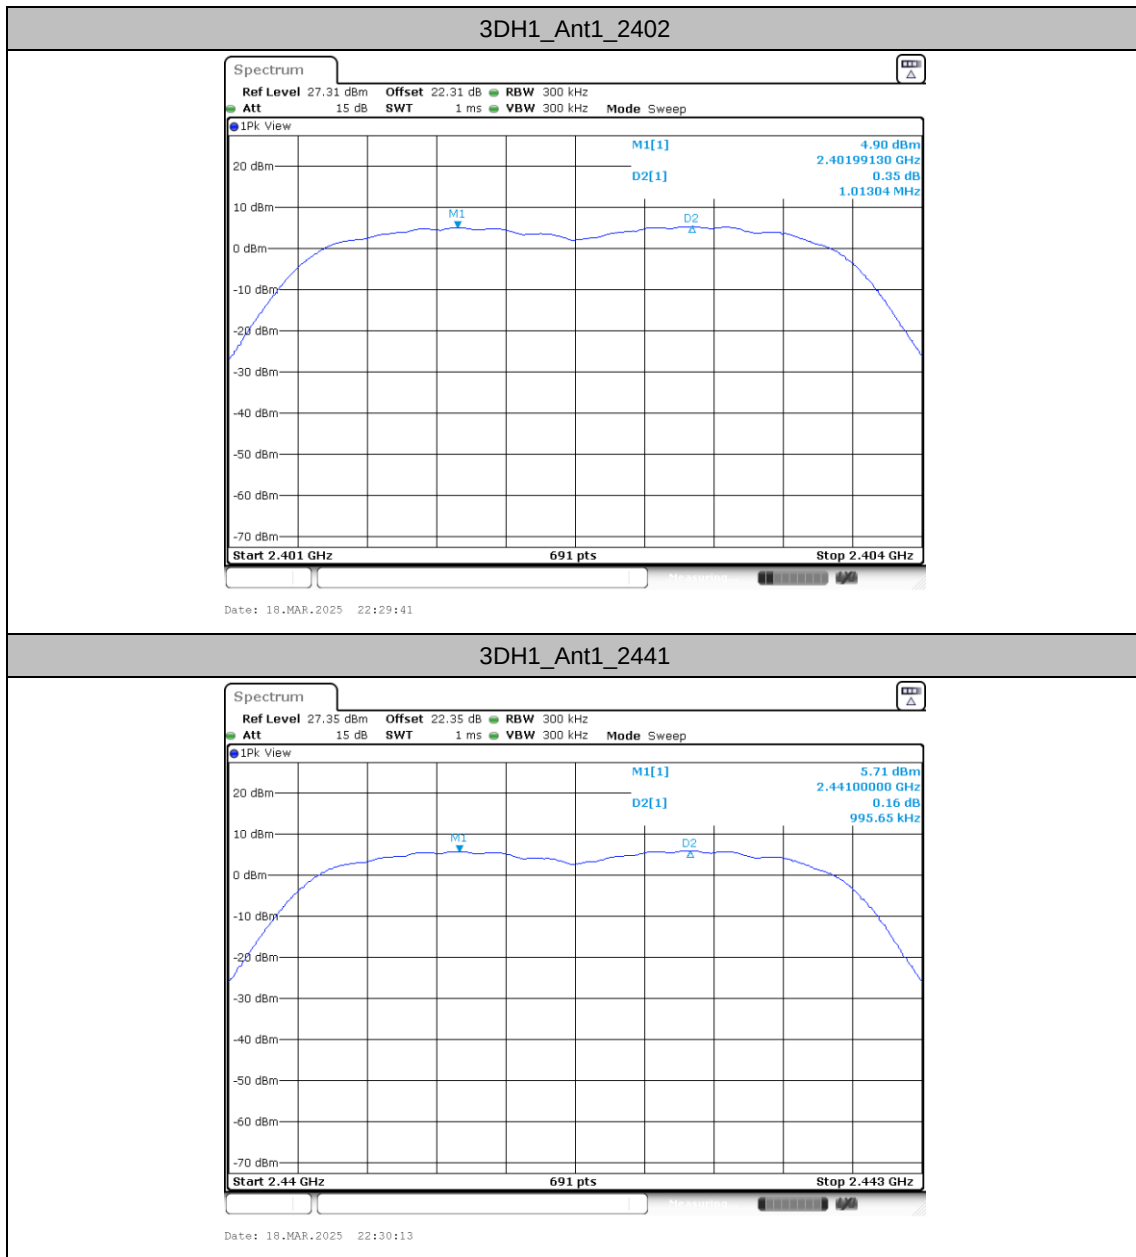

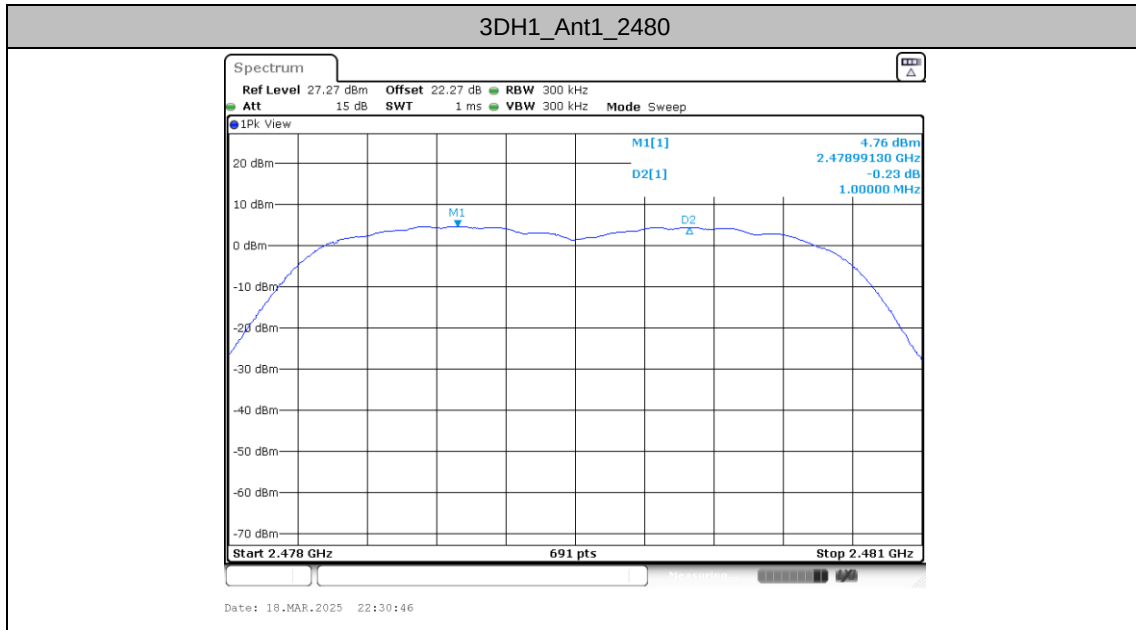



Time of occupancy

Test Result


TestMode	Antenna	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	Ant1	79	106.67	2.9101	0.31	0.4	Pass
AFH	Ant1	20	53.33	2.9101	0.16	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot)
in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Test Graphs

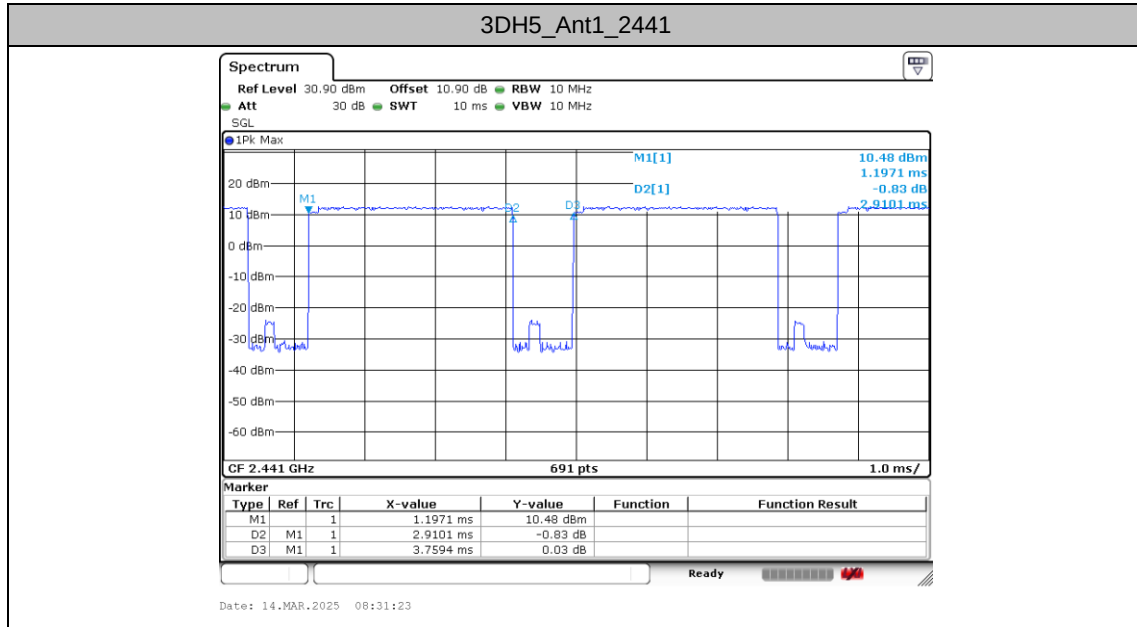




Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

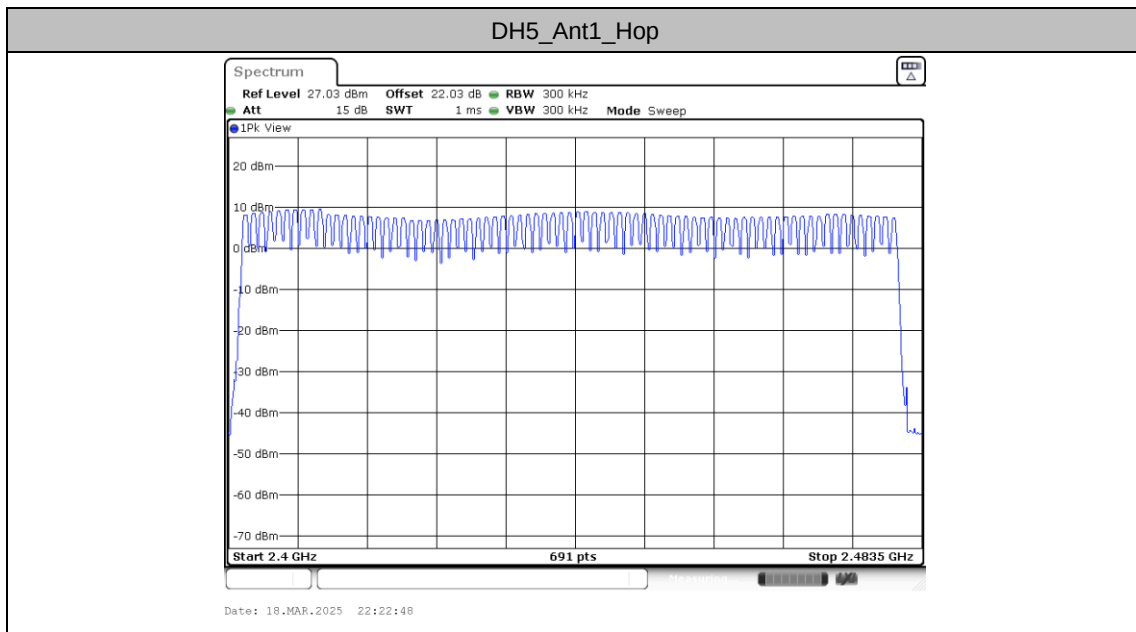




Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	8.03	-45.40	≤-11.97	PASS
		High	2480	7.35	-48.00	≤-12.65	PASS
		Low	Hop_2402	7.84	-48.66	≤-12.16	PASS
		High	Hop_2480	7.78	-48.10	≤-12.22	PASS
2DH1	Ant1	Low	2402	4.94	-47.58	≤-15.06	PASS
		High	2480	4.52	-48.03	≤-15.48	PASS
		Low	Hop_2402	5.25	-48.56	≤-14.75	PASS
		High	Hop_2480	5.26	-47.31	≤-14.74	PASS
3DH1	Ant1	Low	2402	4.92	-47.01	≤-15.08	PASS
		High	2480	4.49	-47.61	≤-15.51	PASS
		Low	Hop_2402	5.11	-48.62	≤-14.89	PASS
		High	Hop_2480	5.36	-47.44	≤-14.64	PASS




Test Graphs

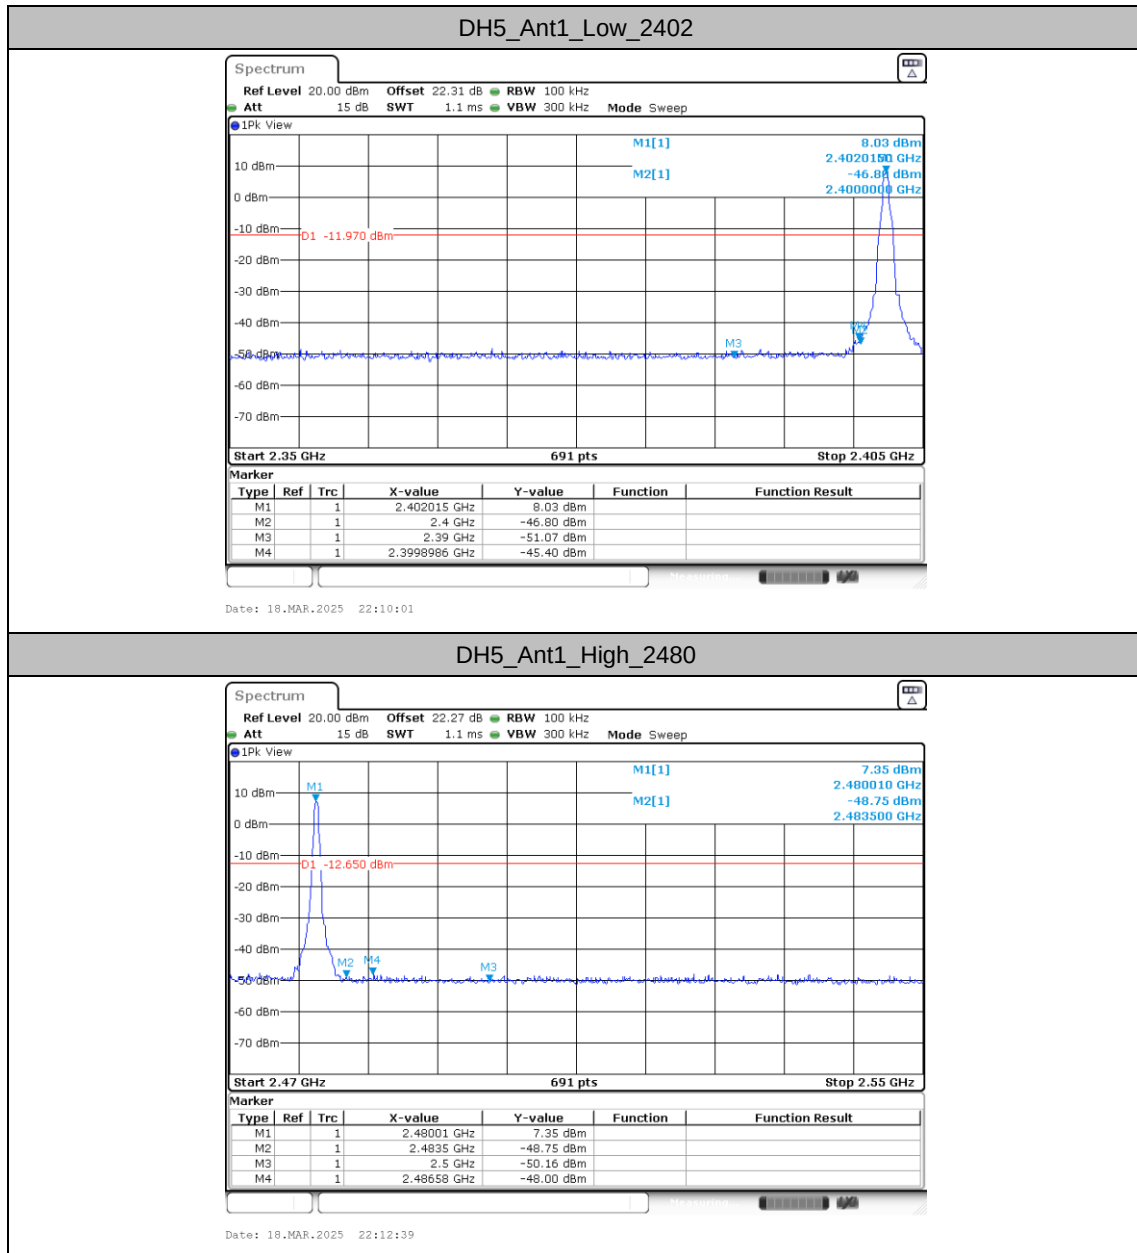

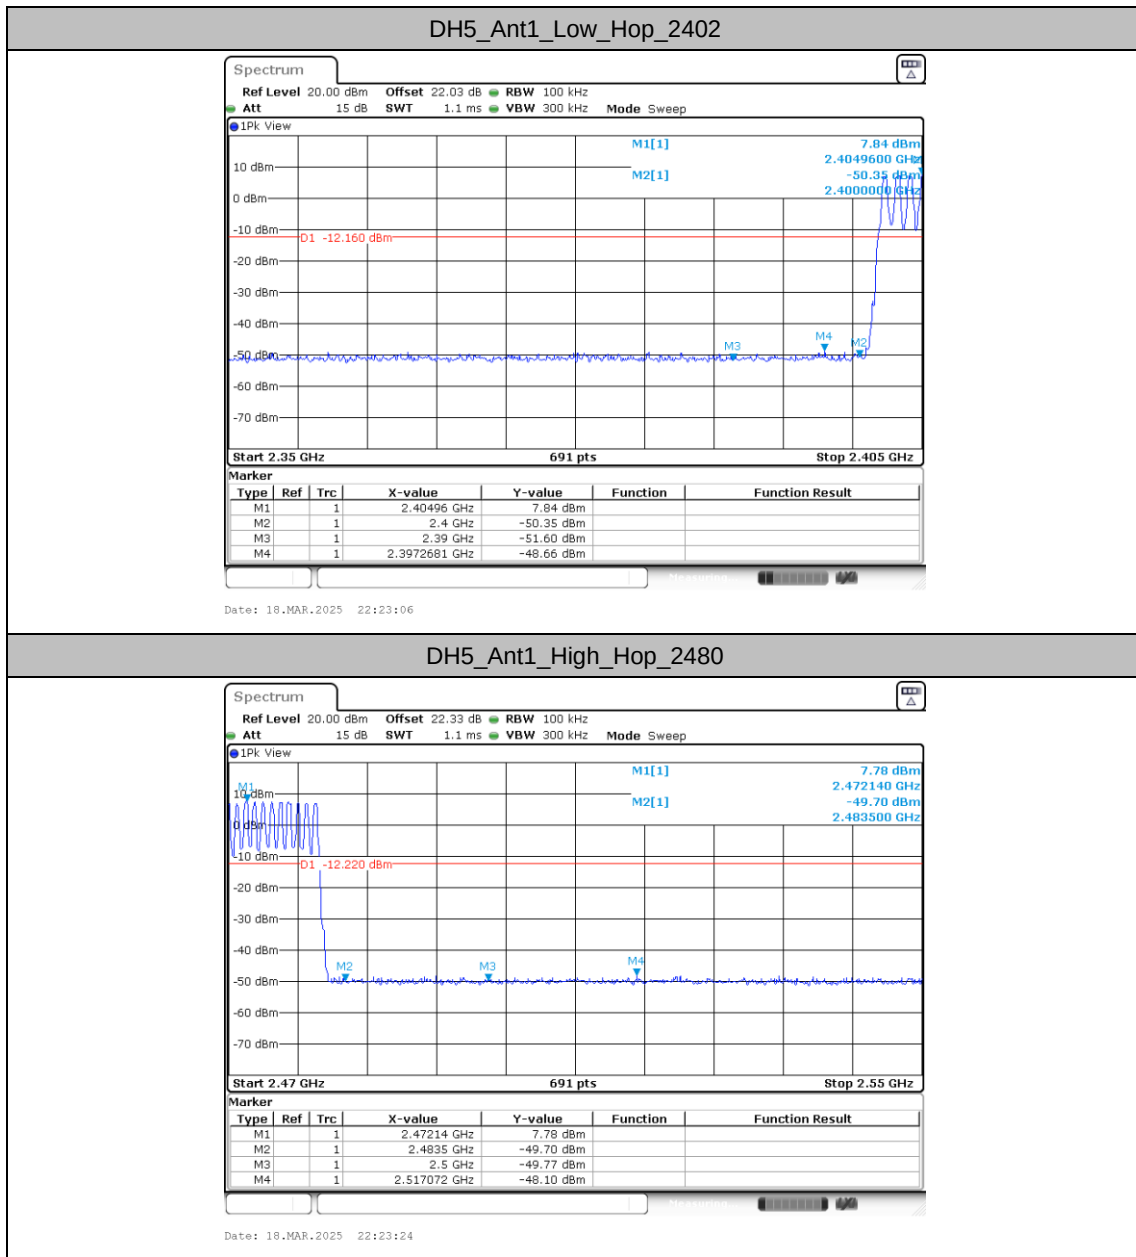






2DH1_Ant1_Low_2402

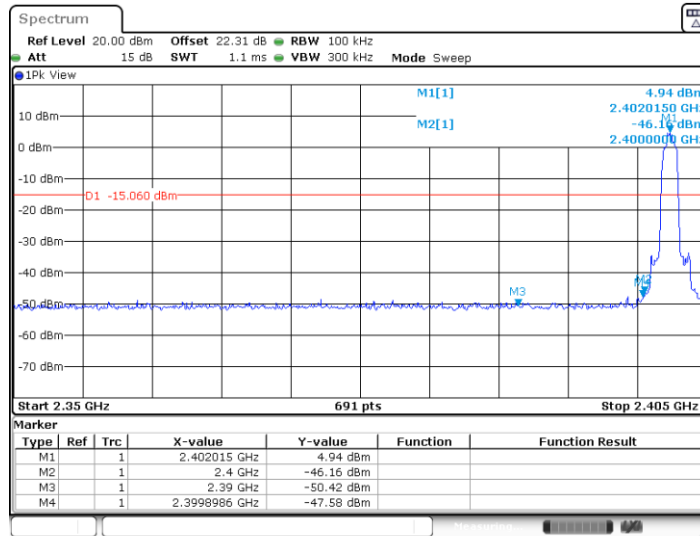


2DH1_Ant1_High_2480

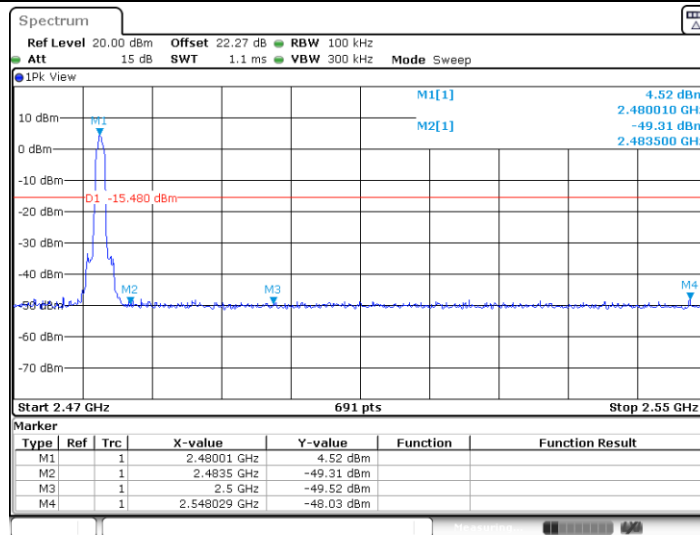

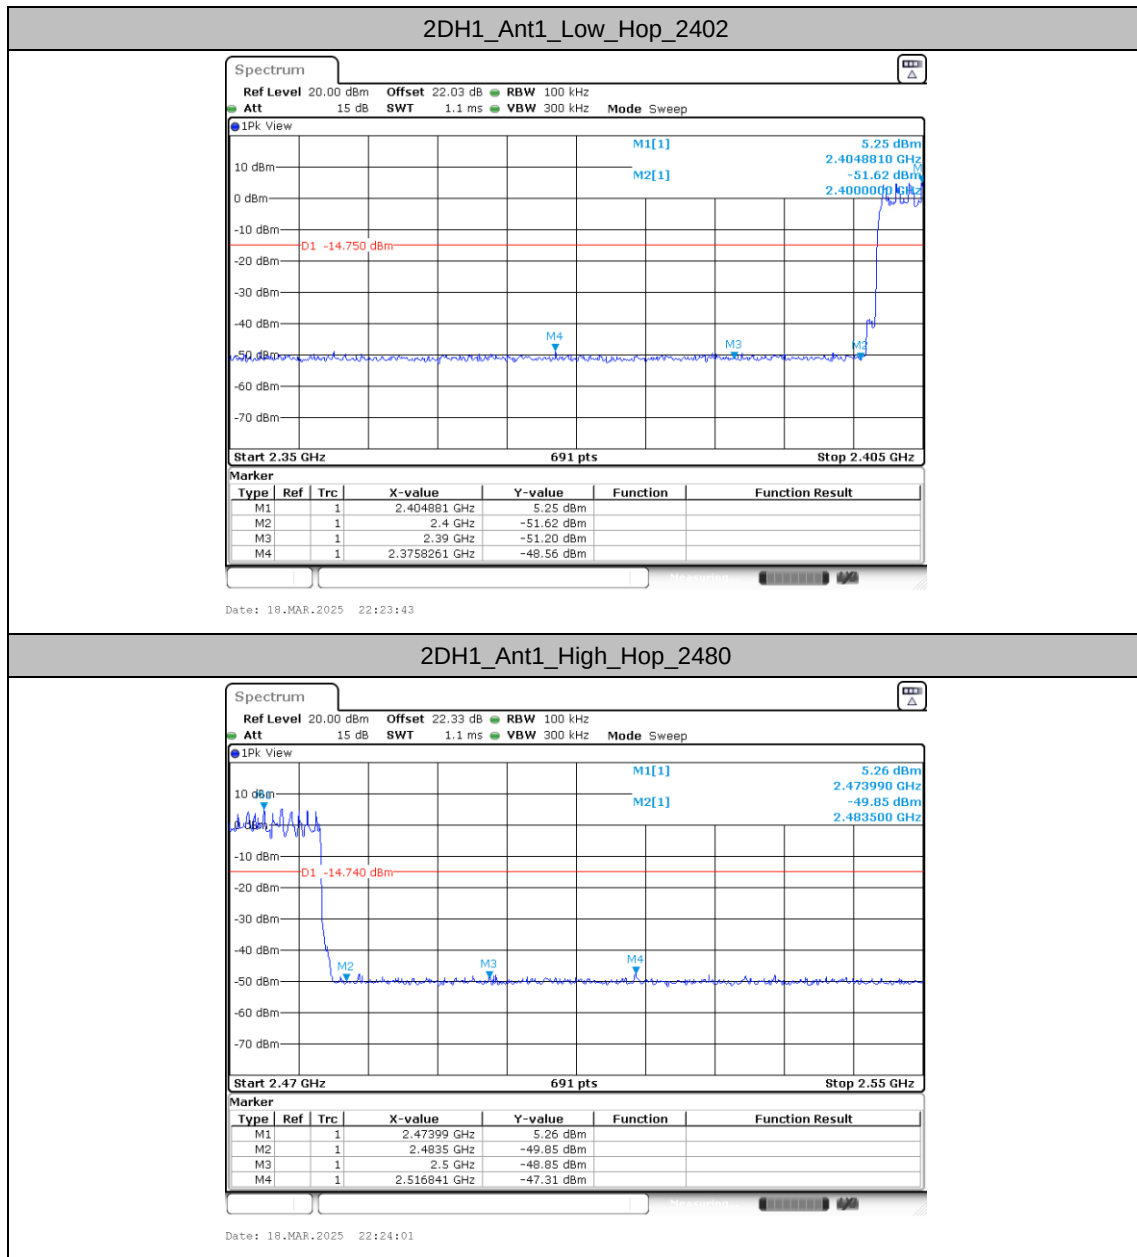

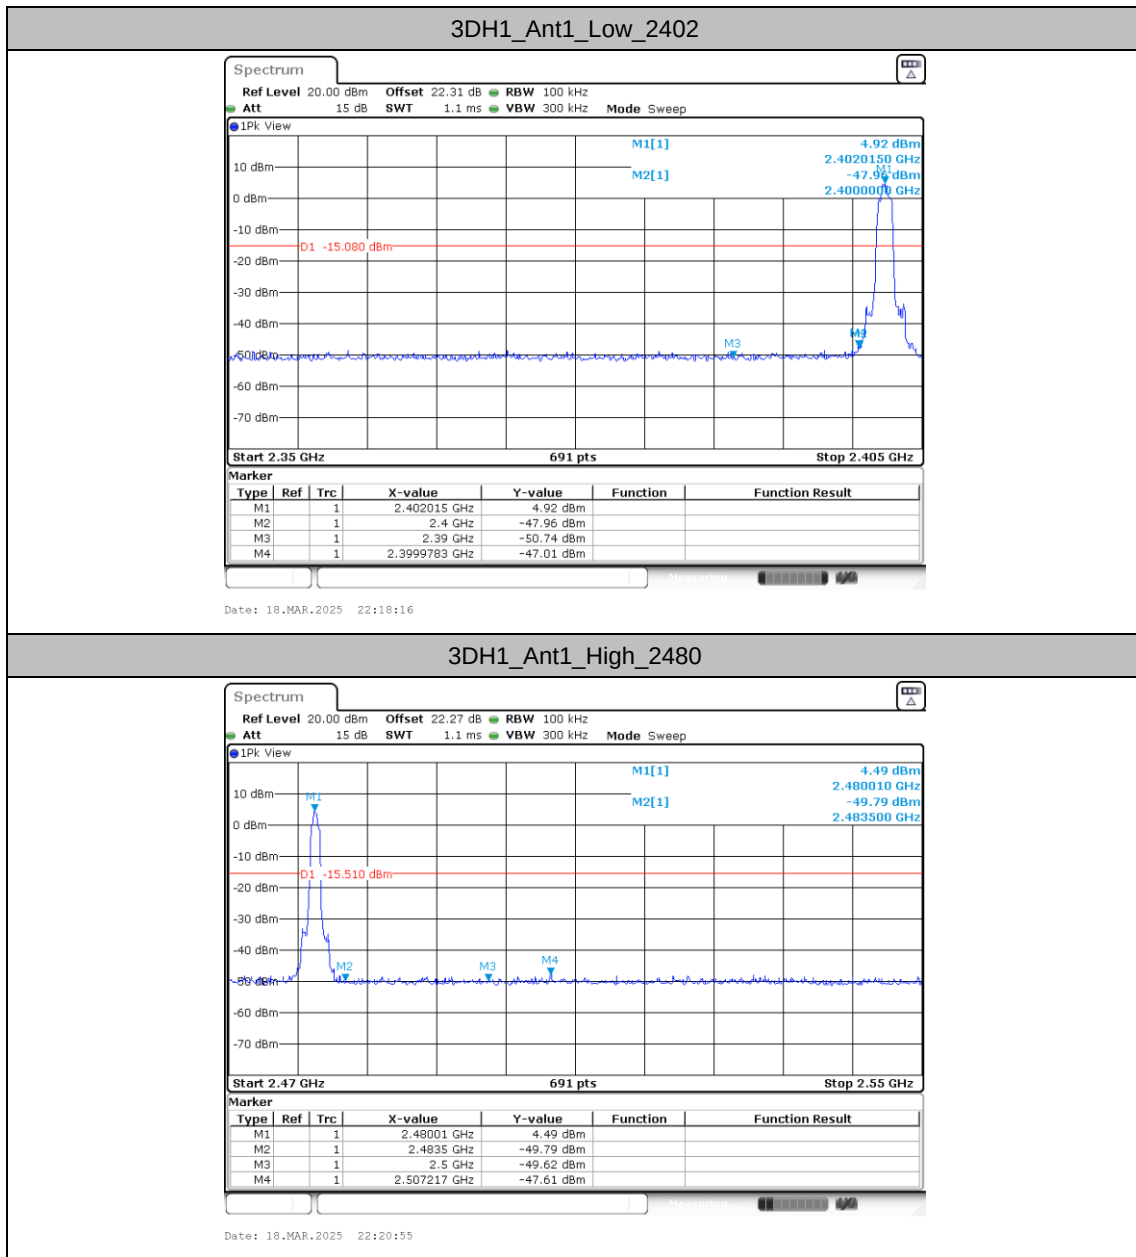

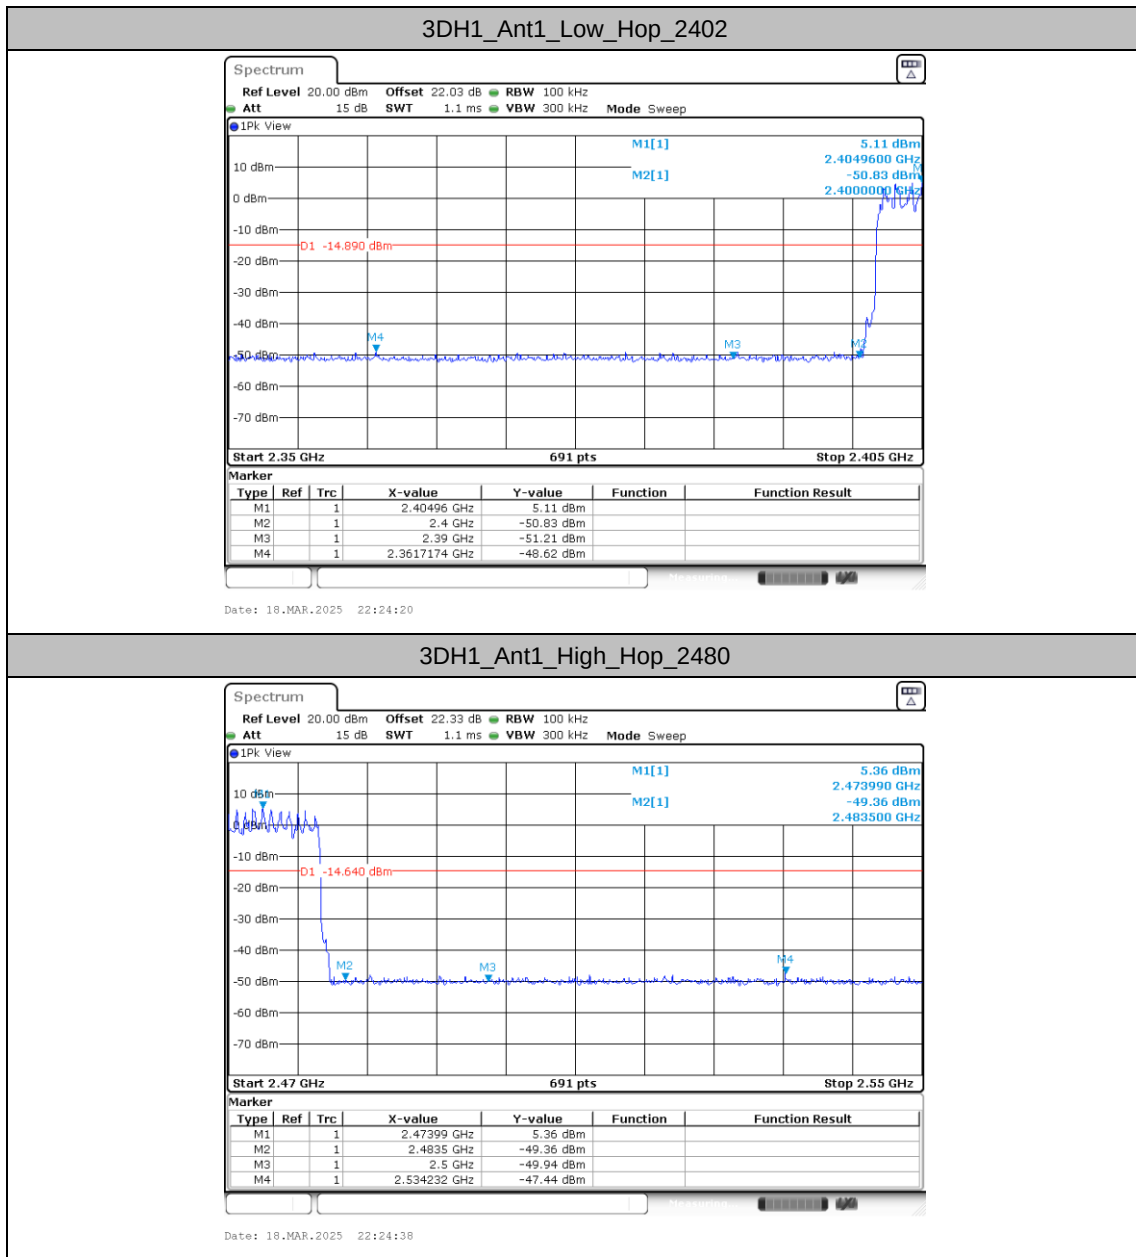


Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	7.93	7.93	---	PASS
			30~1000	7.93	-49.15	≤-12.07	PASS
			1000~26500	7.93	-44.05	≤-12.07	PASS
		2441	Reference	8.63	8.63	---	PASS
			30~1000	8.63	-49.59	≤-11.37	PASS
			1000~26500	8.63	-43.95	≤-11.37	PASS
		2480	Reference	7.41	7.41	---	PASS
			30~1000	7.41	-49.54	≤-12.59	PASS
			1000~26500	7.41	-43.92	≤-12.59	PASS
2DH1	Ant1	2402	Reference	4.83	4.83	---	PASS
			30~1000	4.83	-49.7	≤-15.17	PASS
			1000~26500	4.83	-43.83	≤-15.17	PASS
		2441	Reference	5.71	5.71	---	PASS
			30~1000	5.71	-49.8	≤-14.29	PASS
			1000~26500	5.71	-44.37	≤-14.29	PASS
		2480	Reference	4.59	4.59	---	PASS
			30~1000	4.59	-49.91	≤-15.41	PASS
			1000~26500	4.59	-44.39	≤-15.41	PASS
3DH1	Ant1	2402	Reference	4.85	4.85	---	PASS
			30~1000	4.85	-49.5	≤-15.15	PASS
			1000~26500	4.85	-43.49	≤-15.15	PASS
		2441	Reference	5.69	5.69	---	PASS
			30~1000	5.69	-49.57	≤-14.31	PASS
			1000~26500	5.69	-43.86	≤-14.31	PASS
		2480	Reference	4.55	4.55	---	PASS
			30~1000	4.55	-50.04	≤-15.45	PASS
			1000~26500	4.55	-43.74	≤-15.45	PASS





Test Graphs

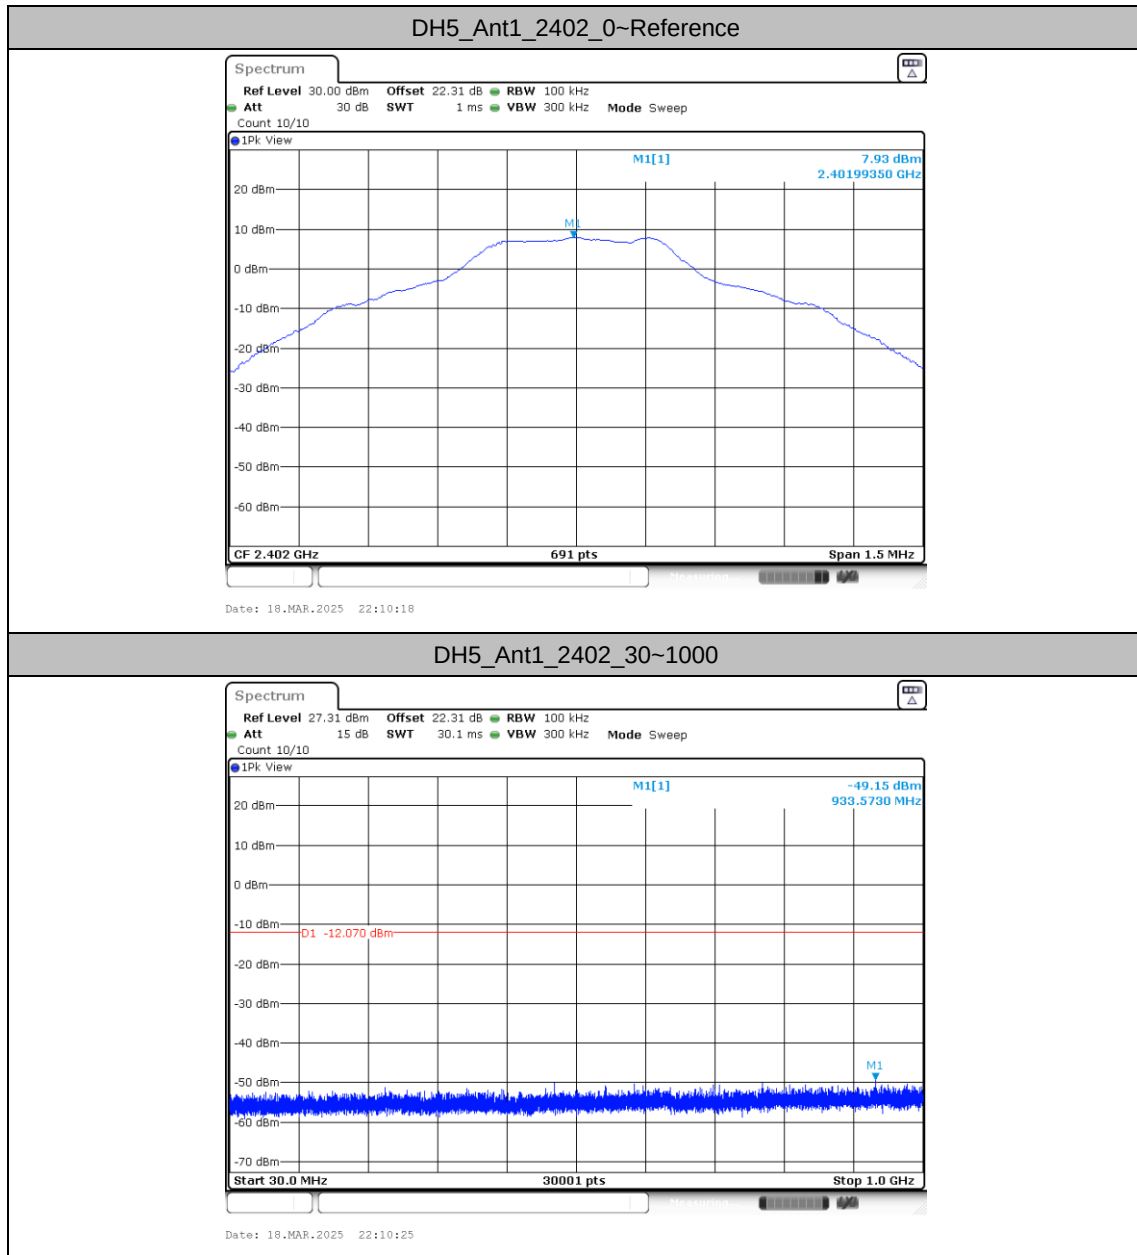


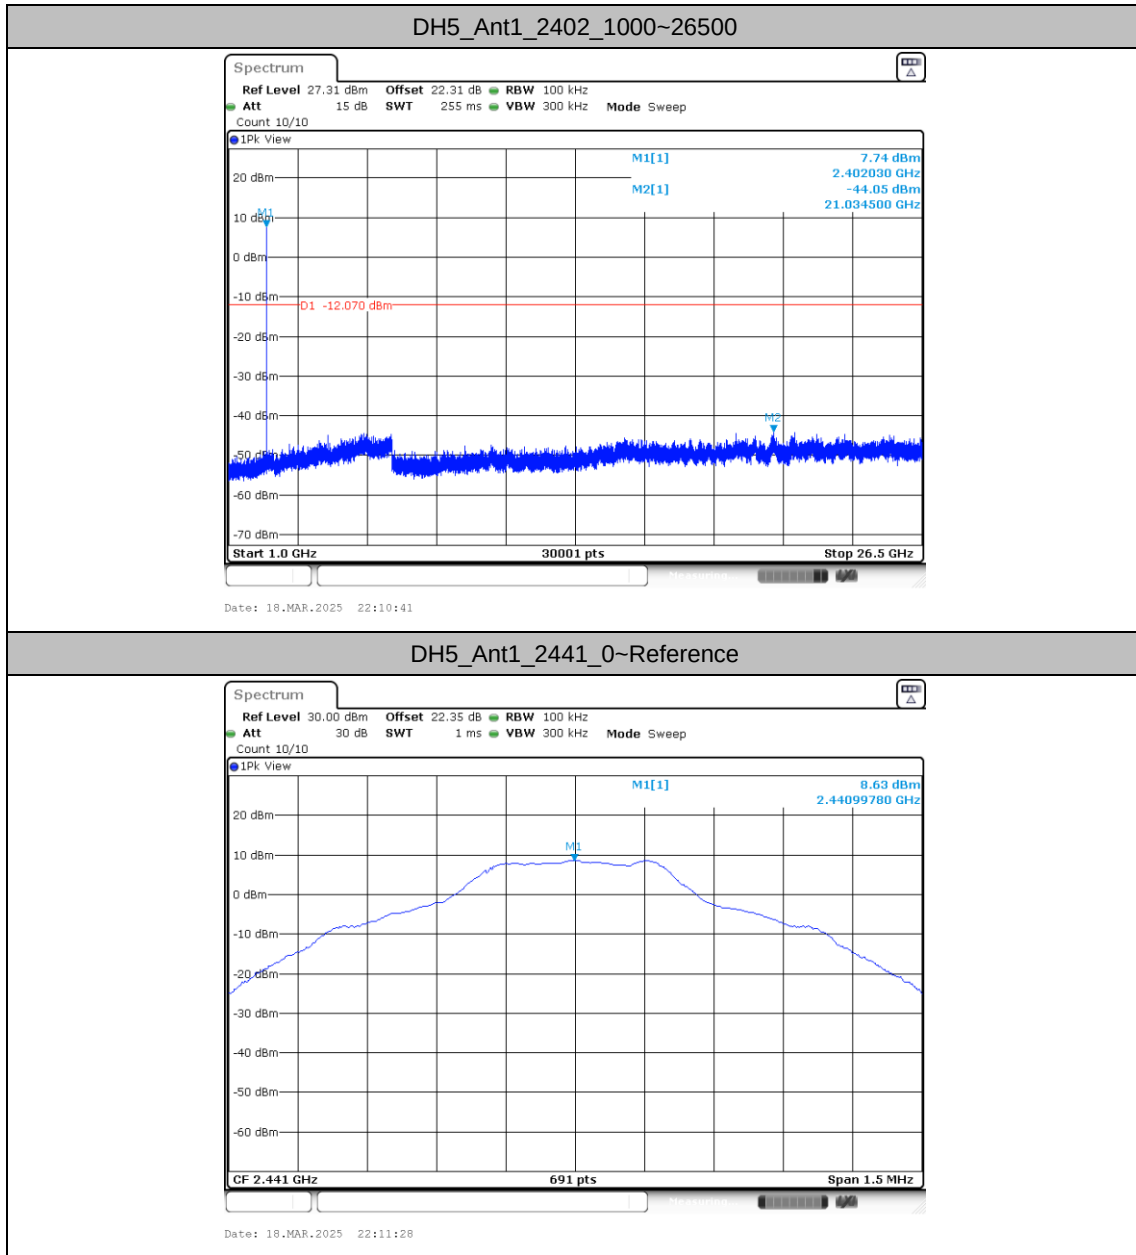


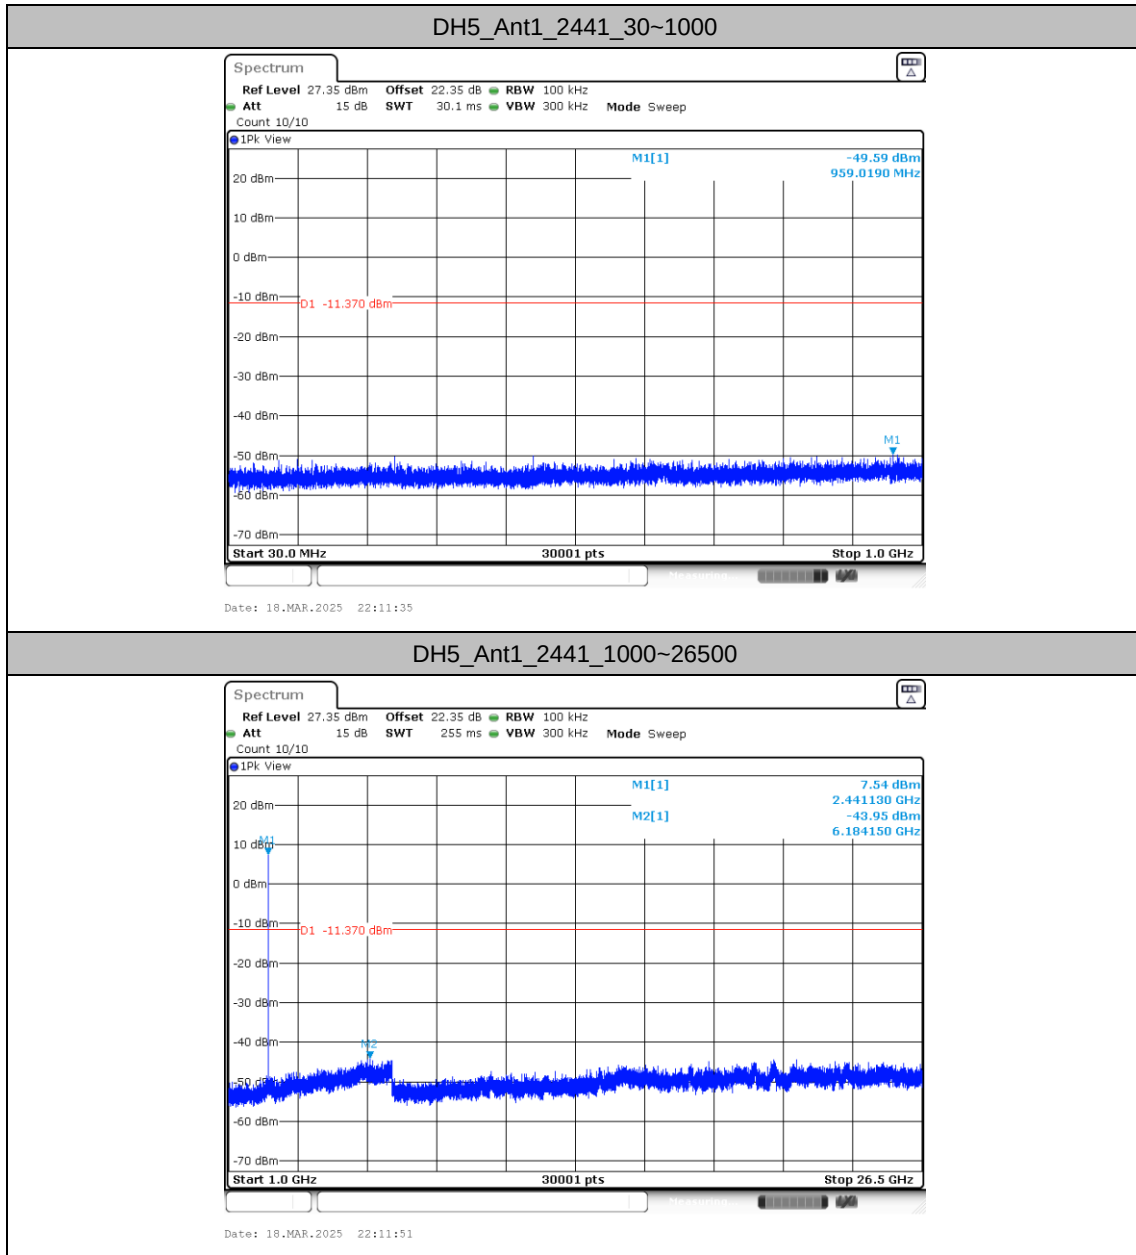


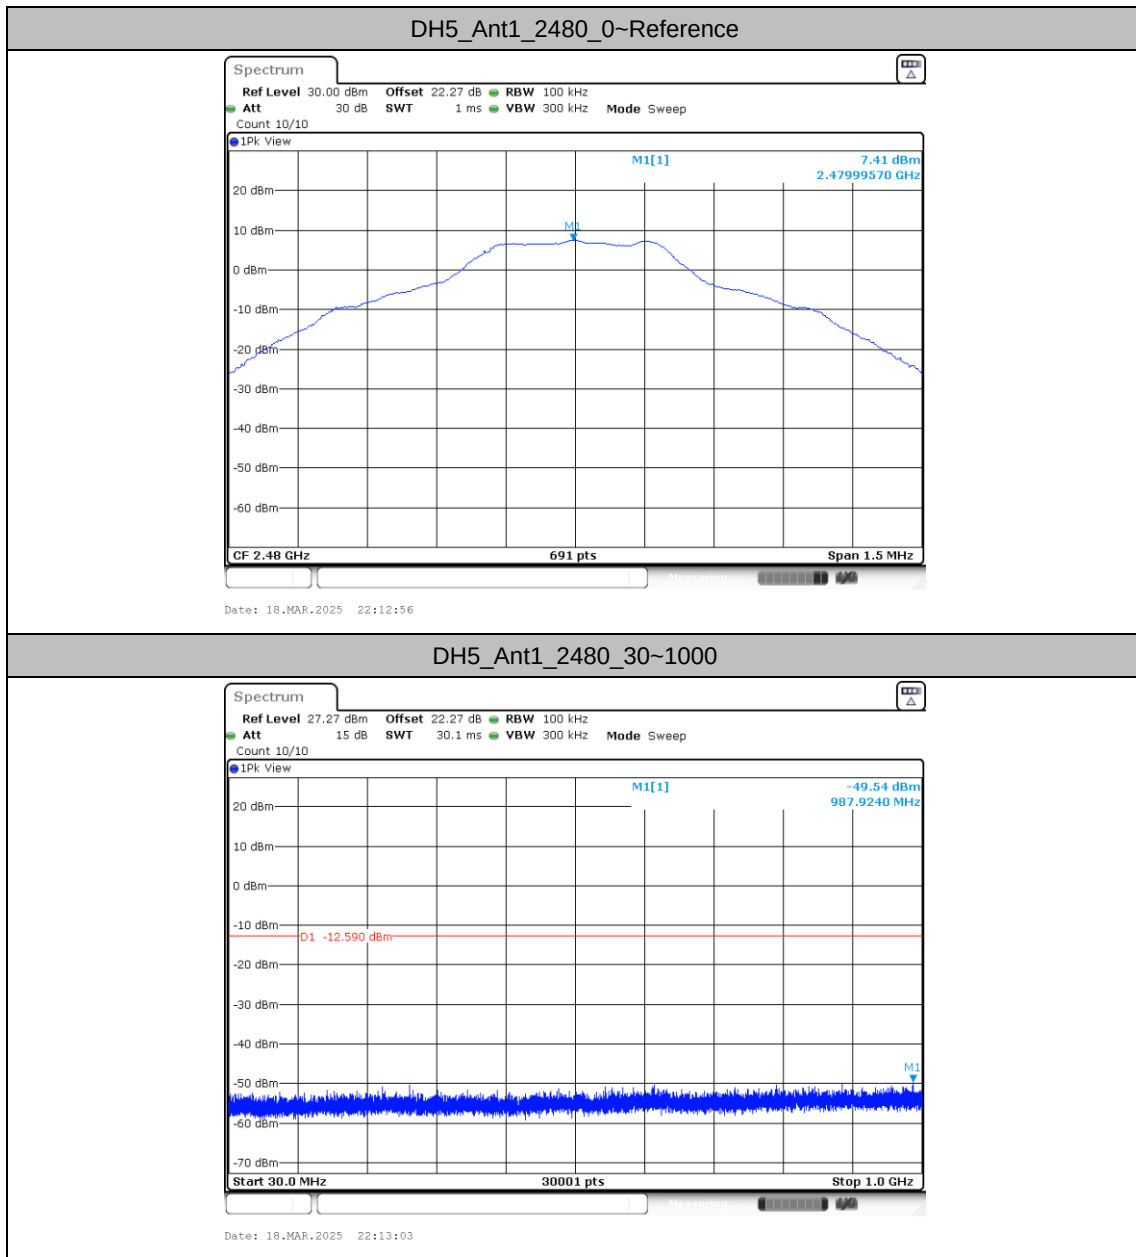


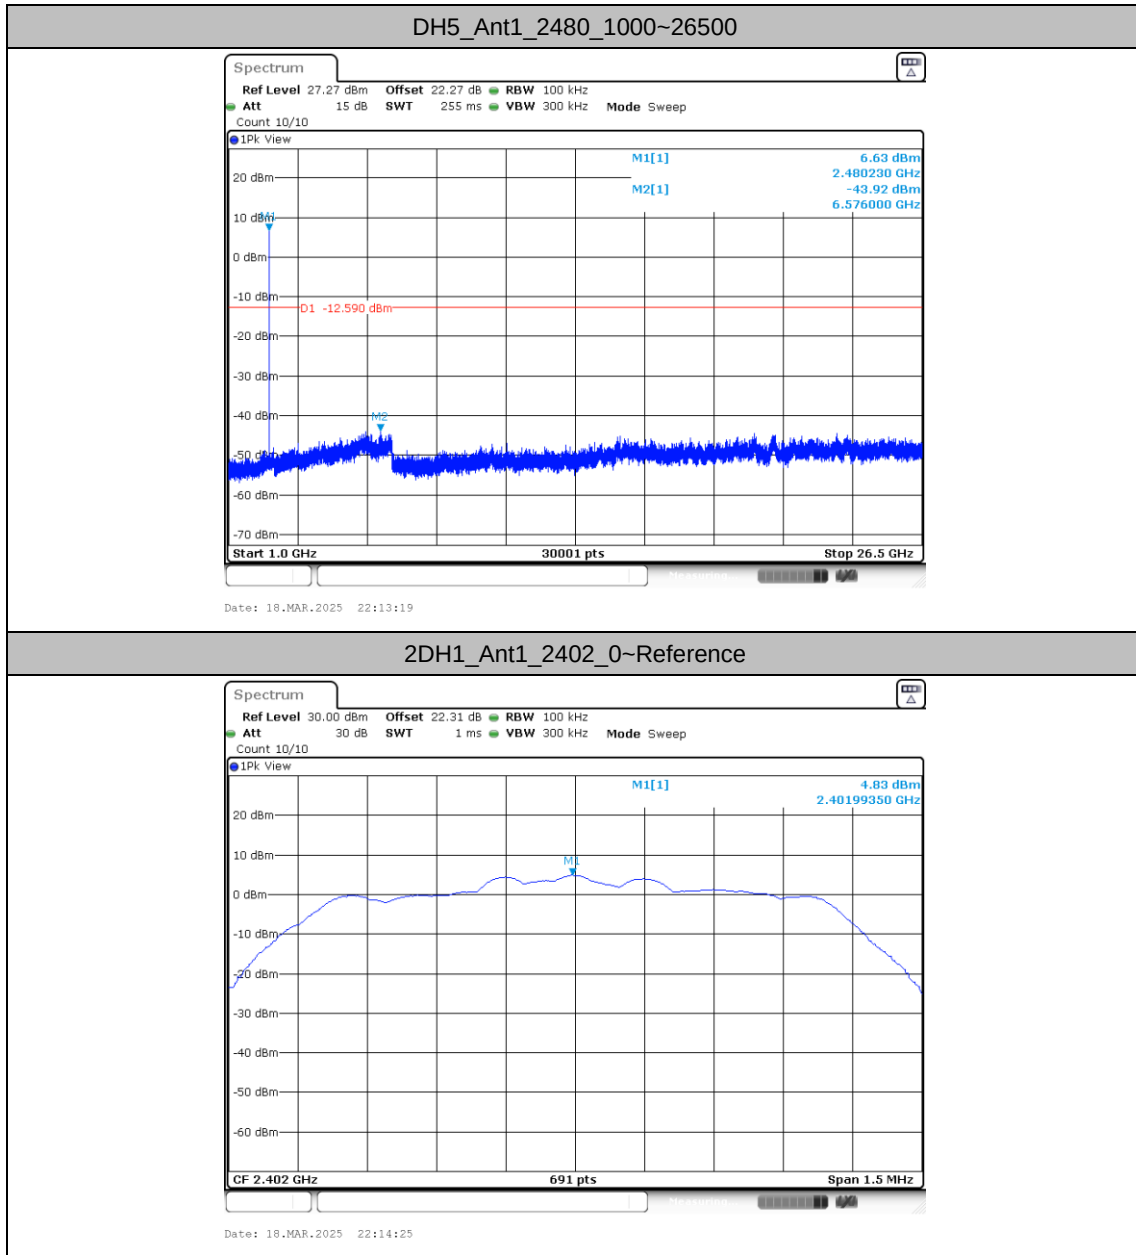


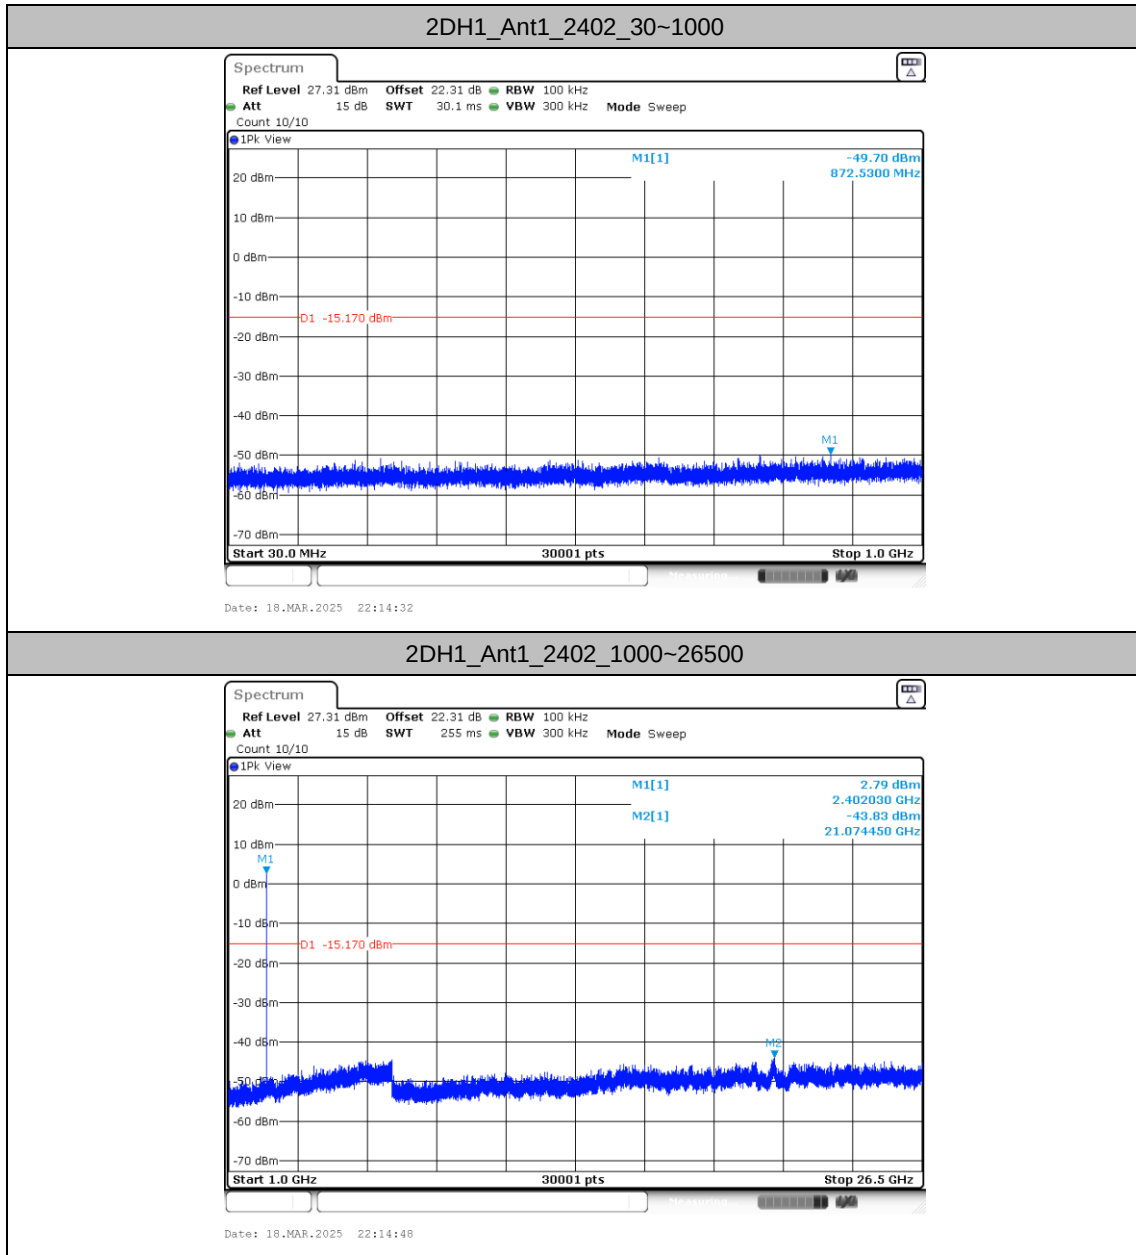


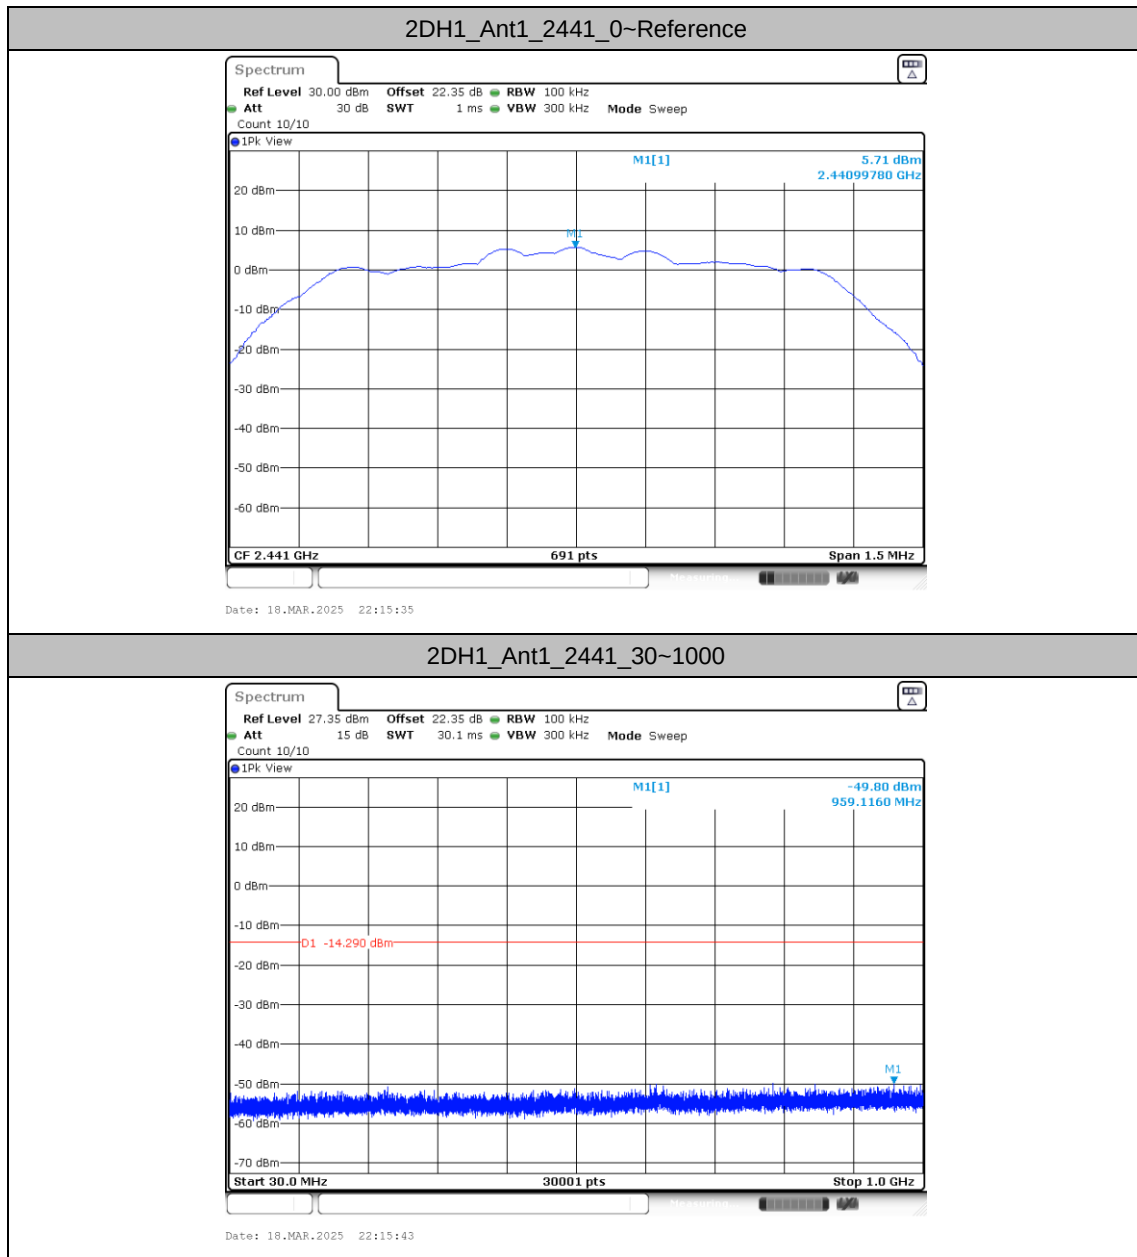


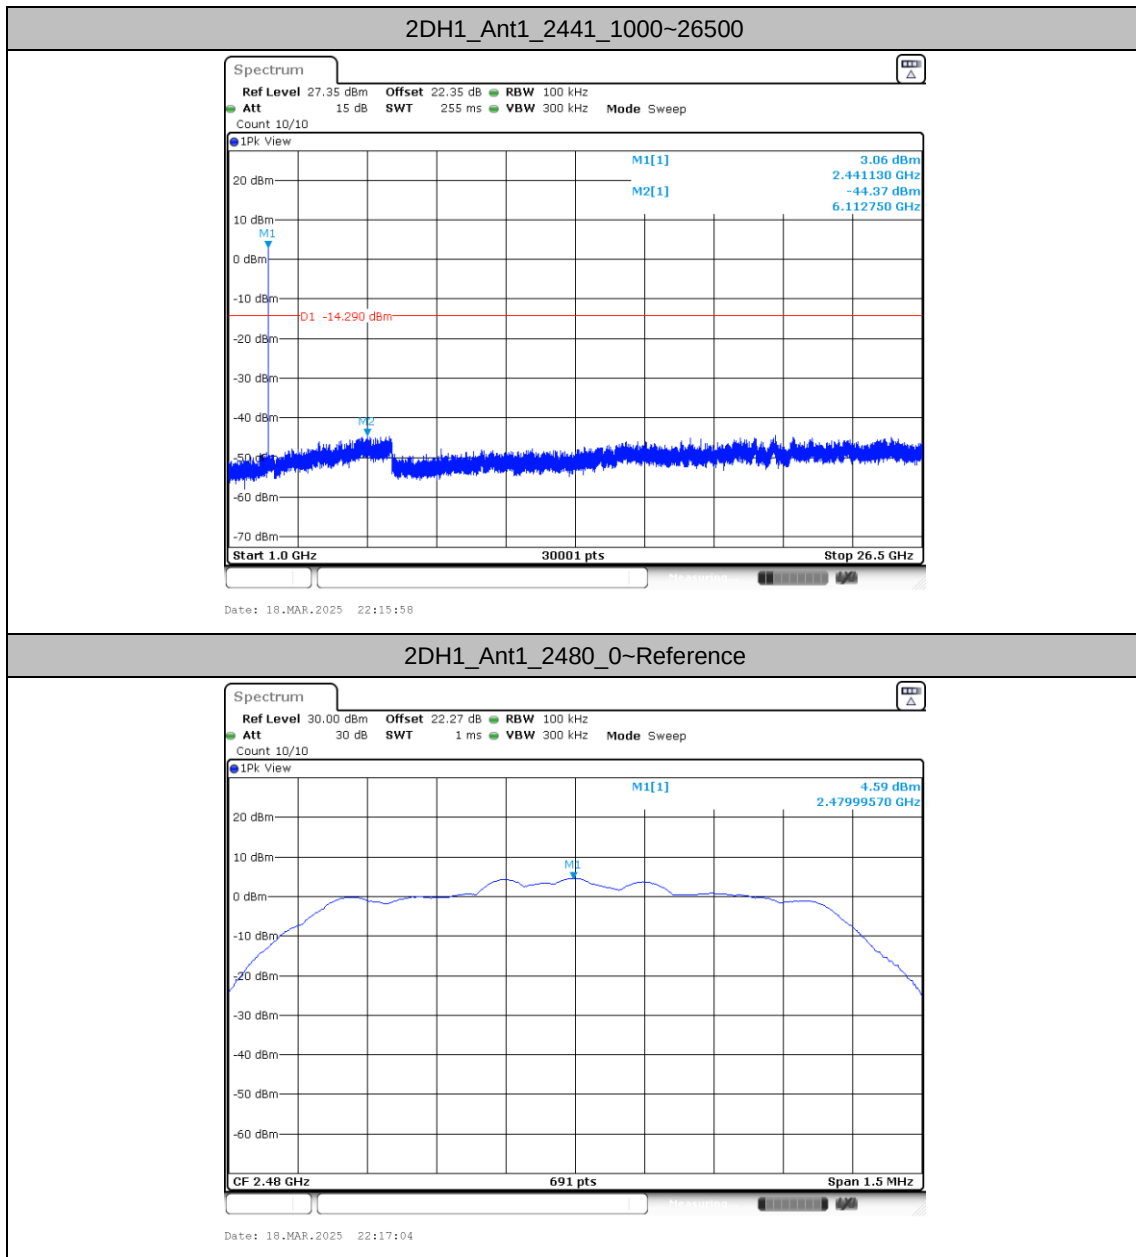


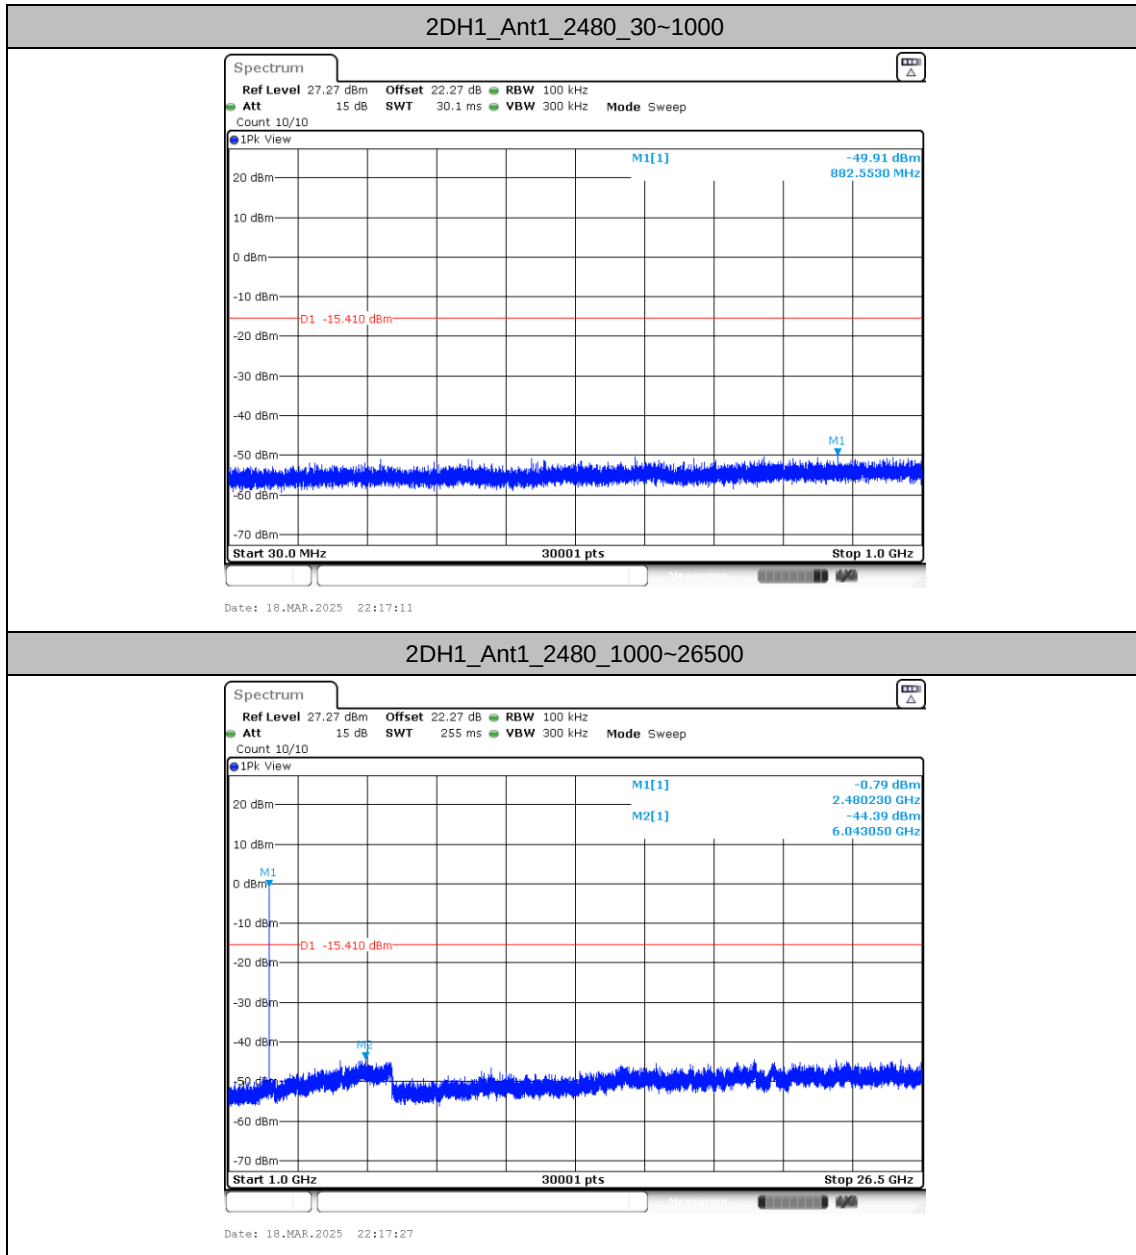


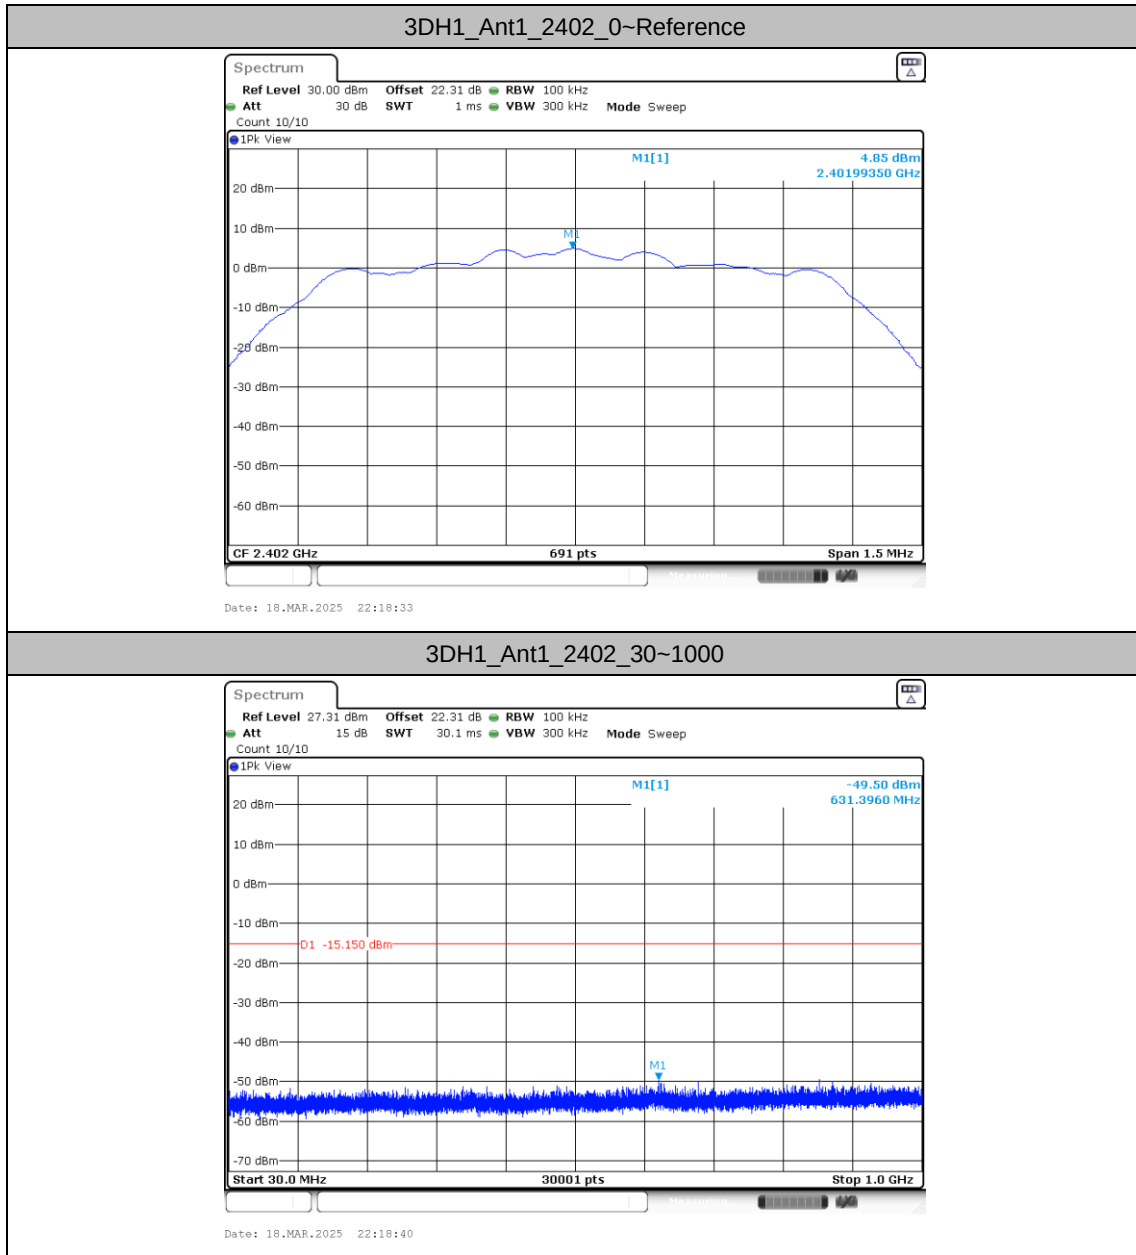

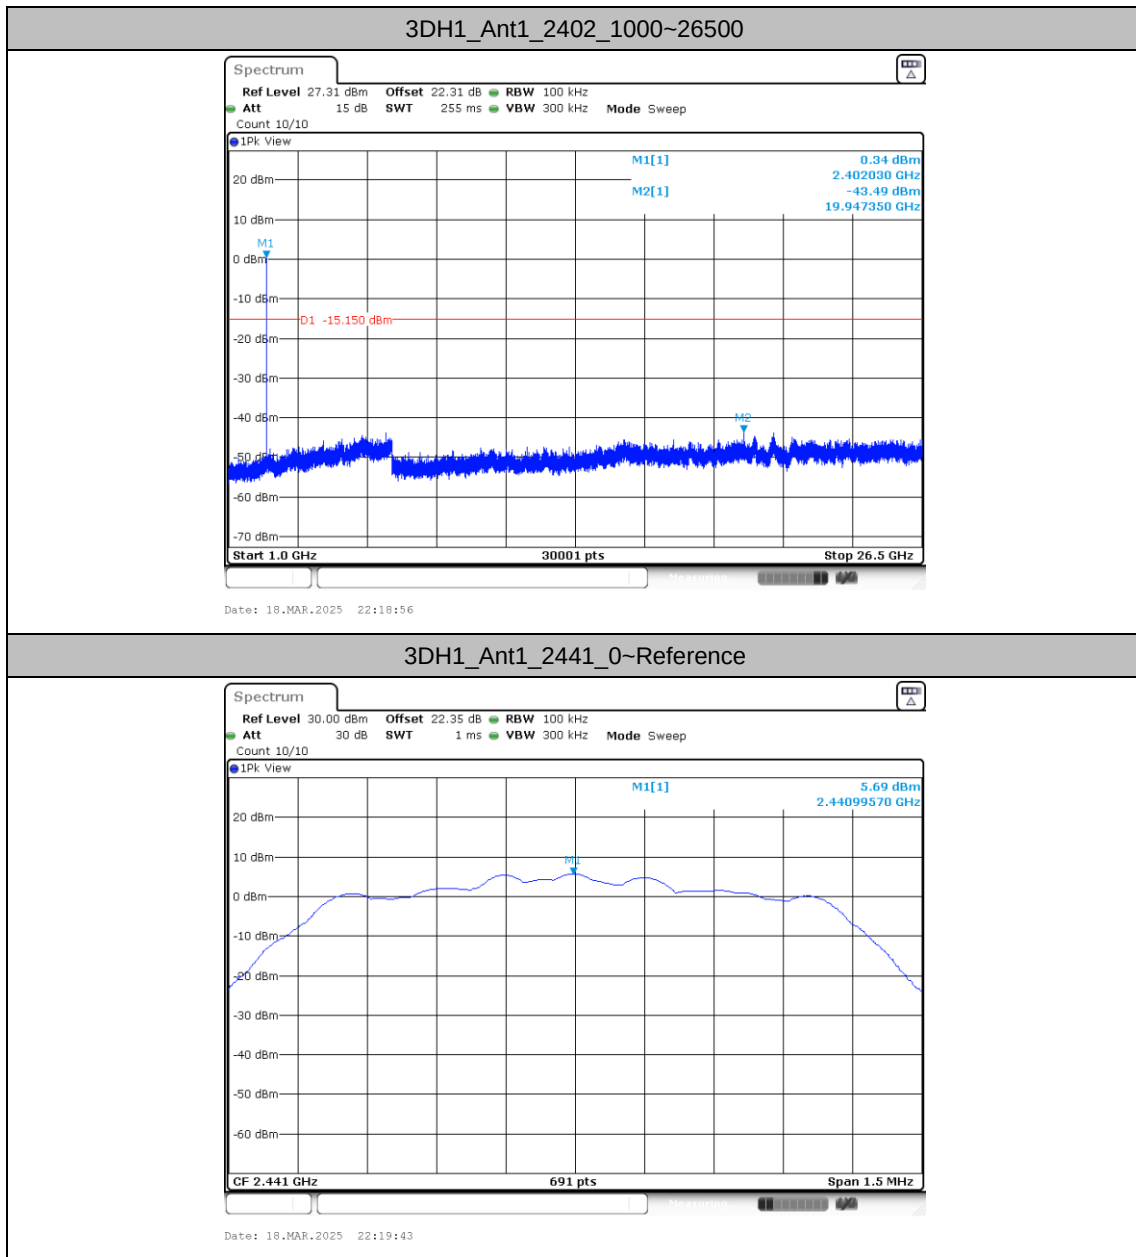

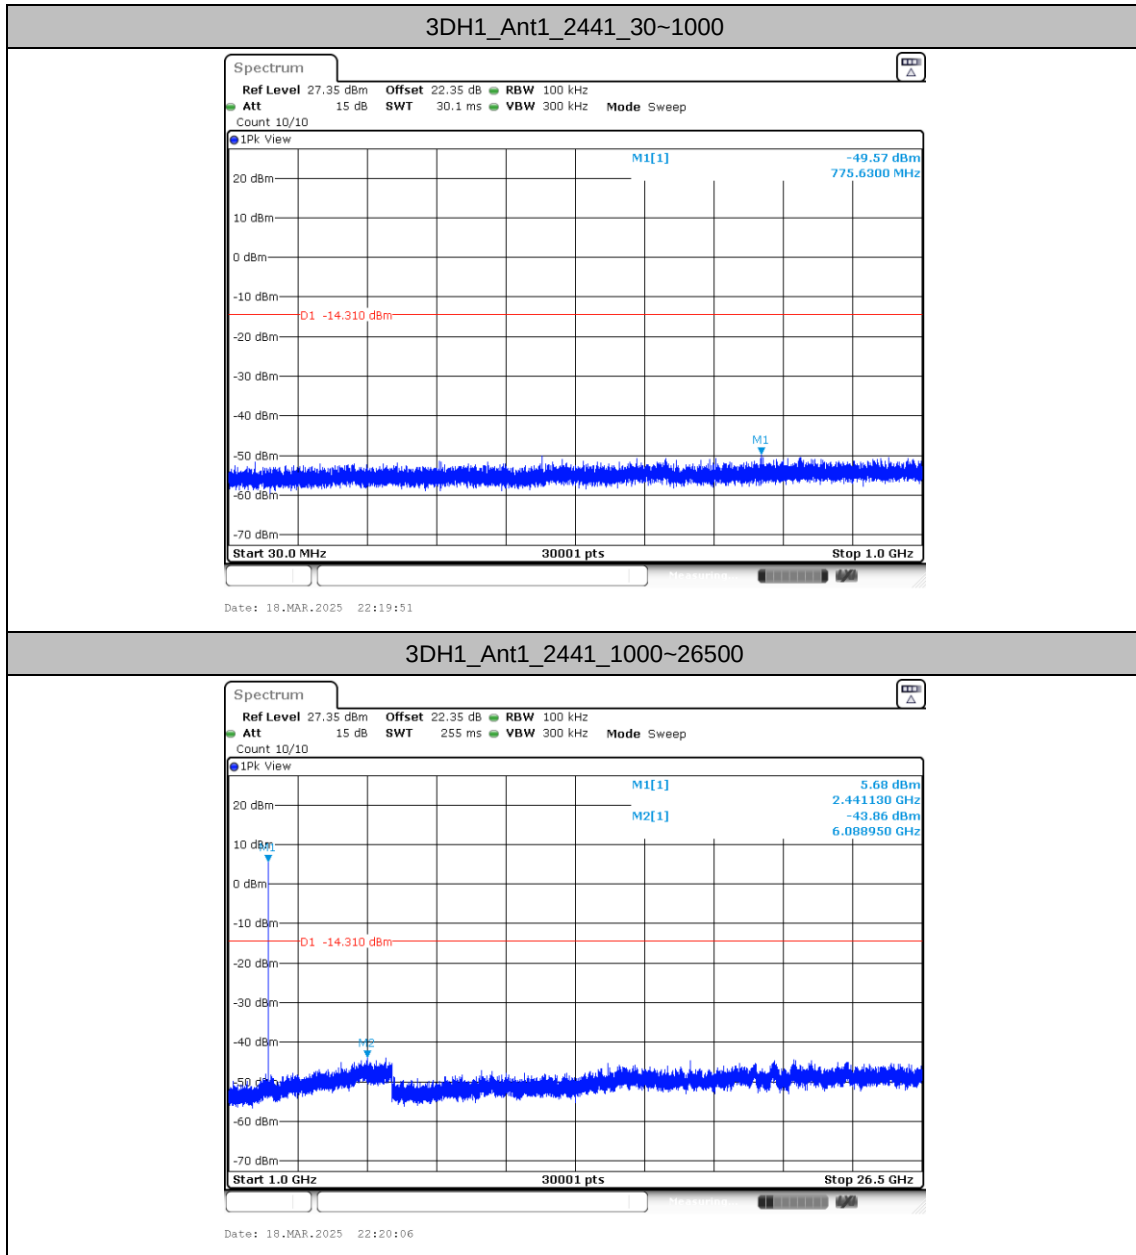

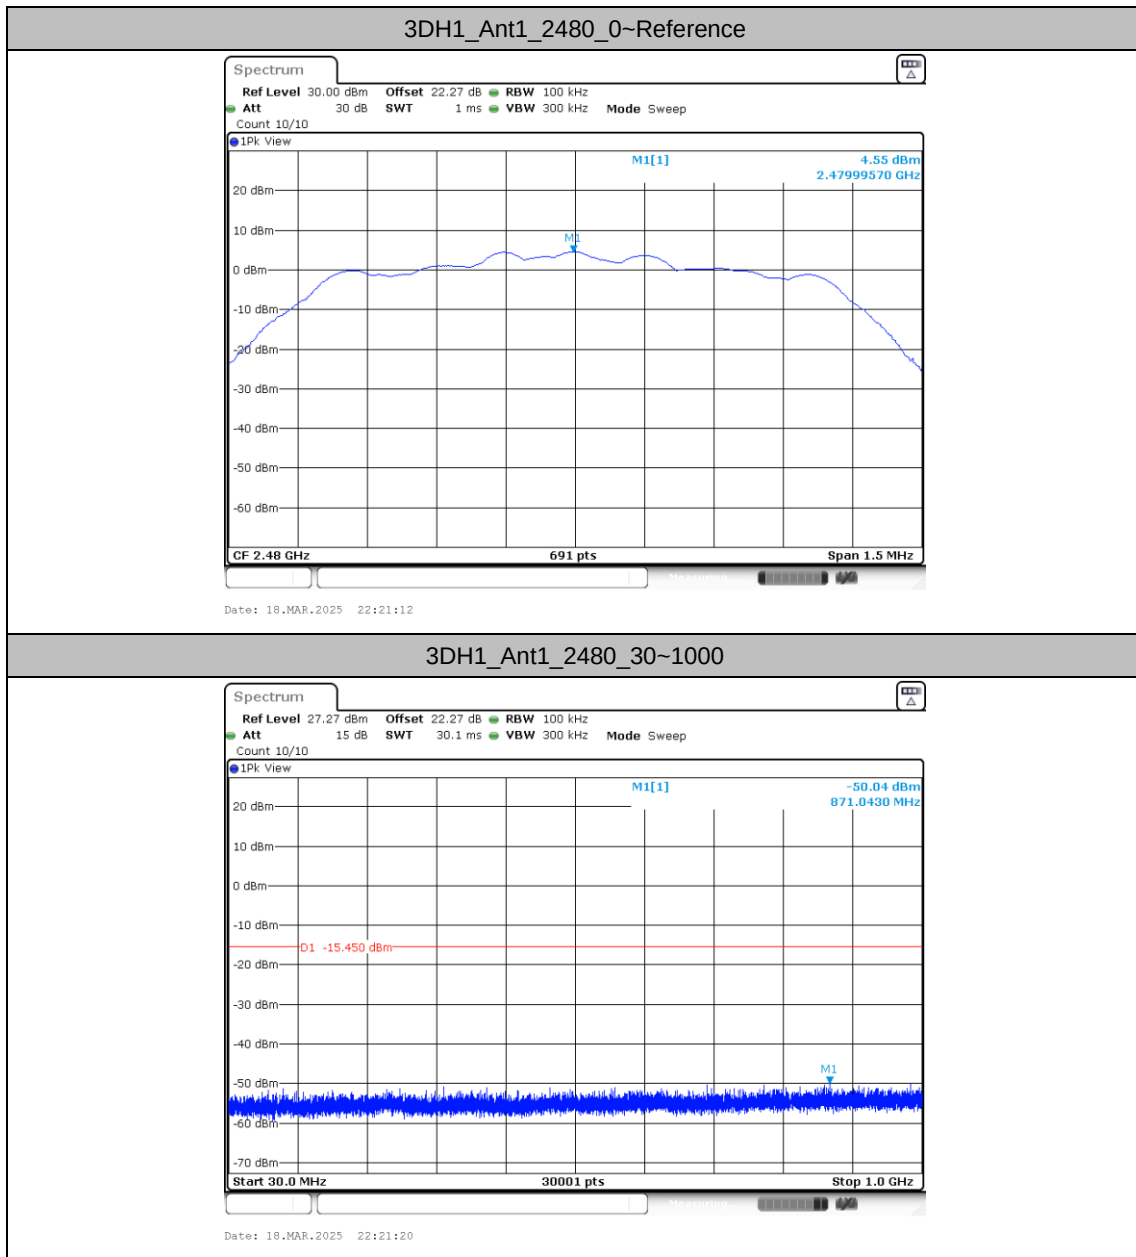


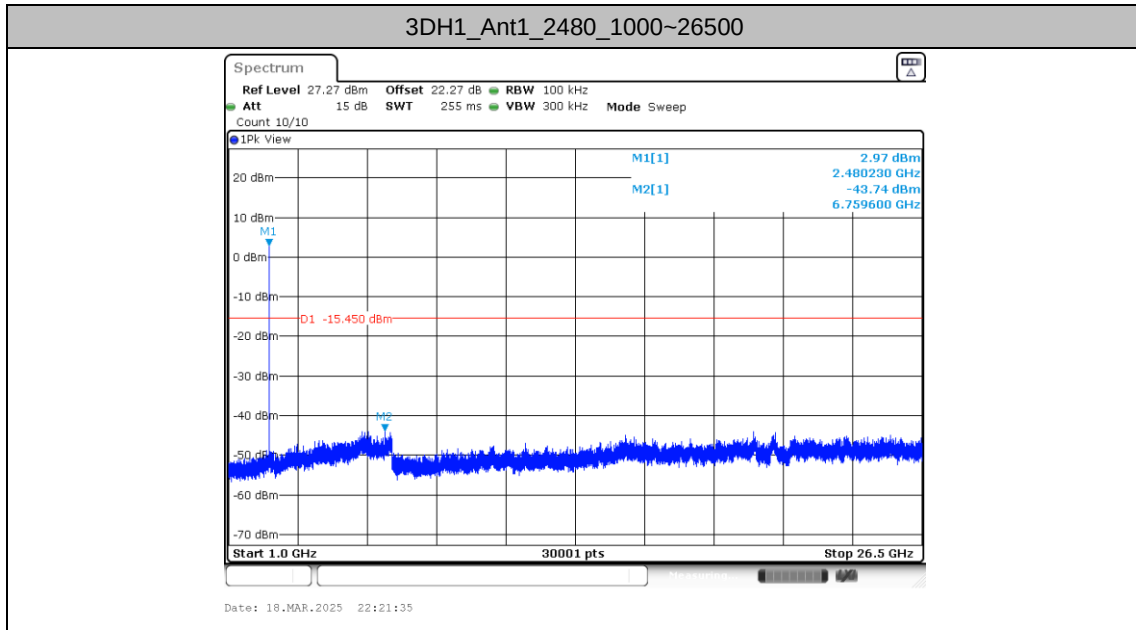



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6℃
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

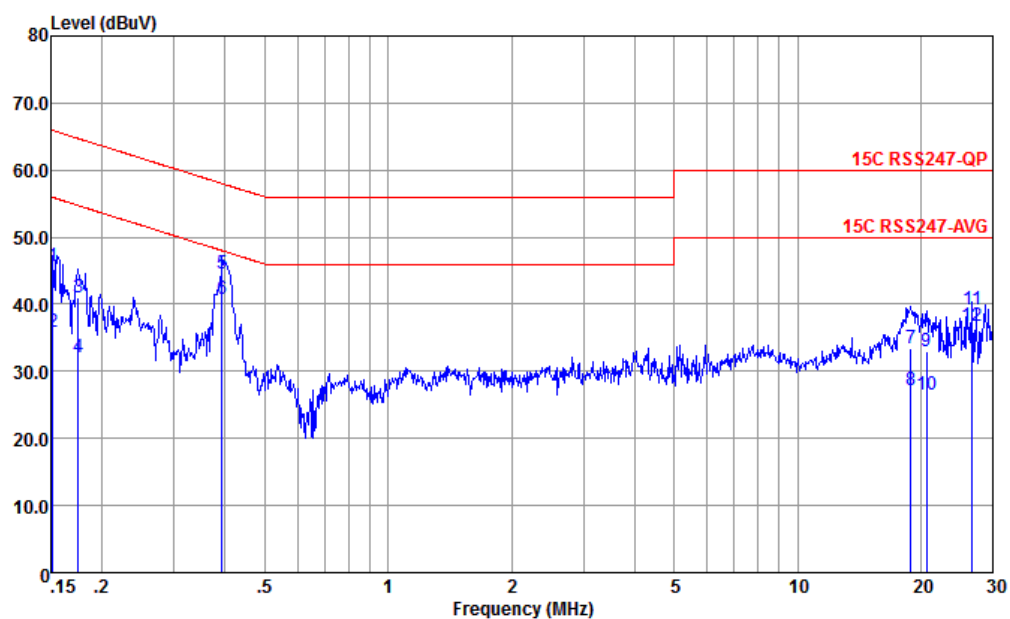


Site : CO01-KS

Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	45.67	-20.24	65.91	35.10	0.12	10.45	QP
2	0.152	35.87	-20.04	55.91	25.30	0.12	10.45	Average
3	0.175	41.05	-23.67	64.72	30.49	0.10	10.46	QP
4	0.175	32.15	-22.57	54.72	21.59	0.10	10.46	Average
5	0.393	44.67	-13.32	57.99	34.20	-0.02	10.49	QP
6 *	0.393	40.77	-7.22	47.99	30.30	-0.02	10.49	Average
7	18.920	33.40	-26.60	60.00	23.50	-0.40	10.30	QP
8	18.920	27.10	-22.90	50.00	17.20	-0.40	10.30	Average
9	20.704	33.09	-26.91	60.00	23.20	-0.44	10.33	QP
10	20.704	26.49	-23.51	50.00	16.60	-0.44	10.33	Average
11	26.699	39.27	-20.73	60.00	29.19	-0.40	10.48	QP
12	26.699	36.87	-13.13	50.00	26.79	-0.40	10.48	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6℃
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

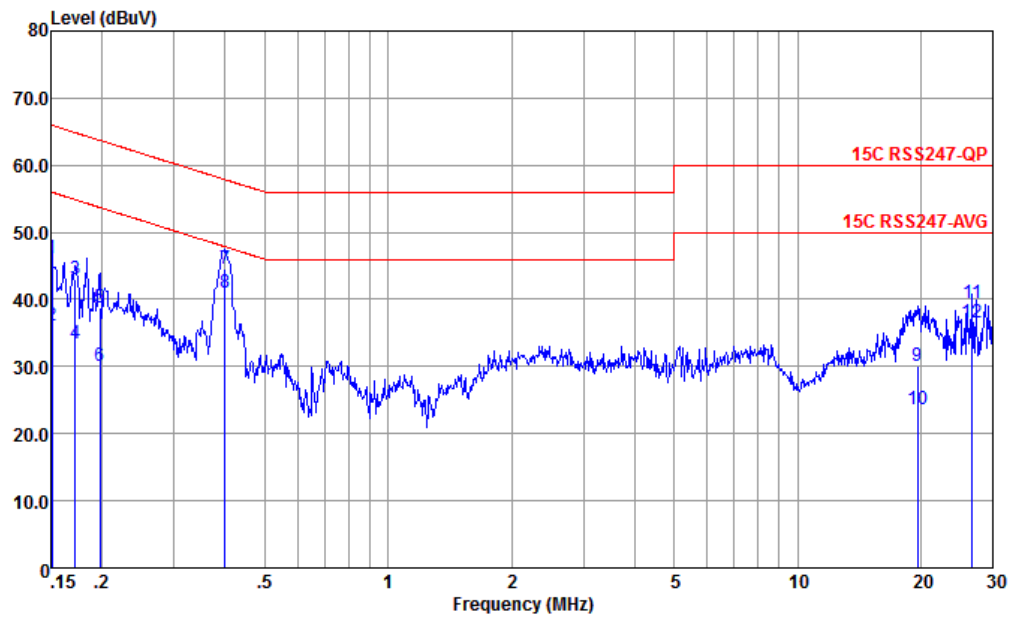

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.151	46.07	-19.89	65.96	35.50	0.12	10.45	QP
2	0.151	36.07	-19.89	55.96	25.50	0.12	10.45	Average
3	0.172	43.08	-21.78	64.86	32.51	0.12	10.45	QP
4	0.172	33.48	-21.38	54.86	22.91	0.12	10.45	Average
5	0.198	38.79	-24.92	63.71	28.20	0.13	10.46	QP
6	0.198	30.19	-23.52	53.71	19.60	0.13	10.46	Average
7	0.400	44.55	-13.31	57.86	34.20	-0.14	10.49	QP
8 *	0.400	40.95	-6.91	47.86	30.60	-0.14	10.49	Average
9	19.635	30.16	-29.84	60.00	20.20	-0.34	10.30	QP
10	19.635	23.56	-26.44	50.00	13.60	-0.34	10.30	Average
11	26.699	39.49	-20.51	60.00	29.50	-0.49	10.48	QP
12	26.699	36.59	-13.41	50.00	26.60	-0.49	10.48	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	0	2402	1Mbps	-	Sample1
Mode 2	2400-2483.5	1	Bluetooth BR_GFSK	39	2441	1Mbps	-	Sample1
Mode 3	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	-	Sample1
Mode 4	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	-	Sample2



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	0	2389.82	49.59	74.00	-24.41	H	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	0	4804.00	40.61	74.00	-33.39	H	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
	Bluetooth BR_GFSK	39	7323.00	42.46	74.00	-31.54	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.54	55.09	74.00	-18.91	H	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	78	7440.00	43.13	74.00	-30.87	H	PEAK	Pass	Harmonic
4	Bluetooth BR_GFSK	78	2483.60	56.65	74.00	-17.35	H	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	78	7440.00	43.11	74.00	-30.89	H	PEAK	Pass	Harmonic





Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>41.27</td><td>32.20</td><td>7.11</td><td>36.99</td><td>6.00</td><td>121</td><td>341 PEAK</td></tr><tr><td>2</td><td>2389.82</td><td>24.83</td><td>54.00</td><td>-29.17</td><td>16.51</td><td>32.20</td><td>7.11</td><td>36.99</td><td>6.00</td><td>121</td><td>341 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	49.59	74.00	-24.41	41.27	32.20	7.11	36.99	6.00	121	341 PEAK	2	2389.82	24.83	54.00	-29.17	16.51	32.20	7.11	36.99	6.00	121	341 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2389.82	49.59	74.00	-24.41	41.27	32.20	7.11	36.99	6.00	121	341 PEAK																																																									
2	2389.82	24.83	54.00	-29.17	16.51	32.20	7.11	36.99	6.00	121	341 AVERAGE																																																									
Fundamental																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.28</td><td>-----</td><td>-----</td><td>95.85</td><td>32.30</td><td>7.12</td><td>36.99</td><td>6.00</td><td>121</td><td>341 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>79.52</td><td>-----</td><td>-----</td><td>71.09</td><td>32.30</td><td>7.12</td><td>36.99</td><td>6.00</td><td>121</td><td>341 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.28	-----	-----	95.85	32.30	7.12	36.99	6.00	121	341 PEAK	2	2402.00	79.52	-----	-----	71.09	32.30	7.12	36.99	6.00	121	341 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2402.00	104.28	-----	-----	95.85	32.30	7.12	36.99	6.00	121	341 PEAK																																																									
2	2402.00	79.52	-----	-----	71.09	32.30	7.12	36.99	6.00	121	341 AVERAGE																																																									

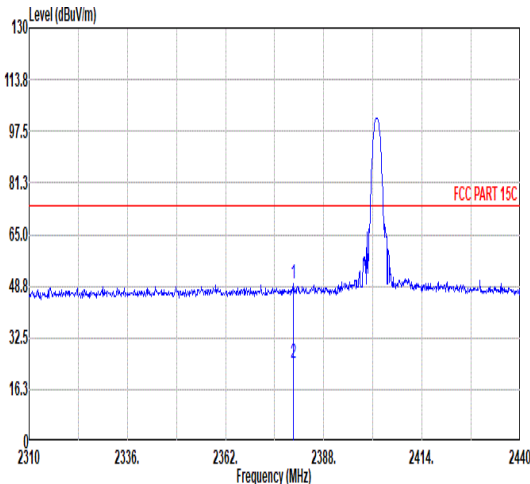
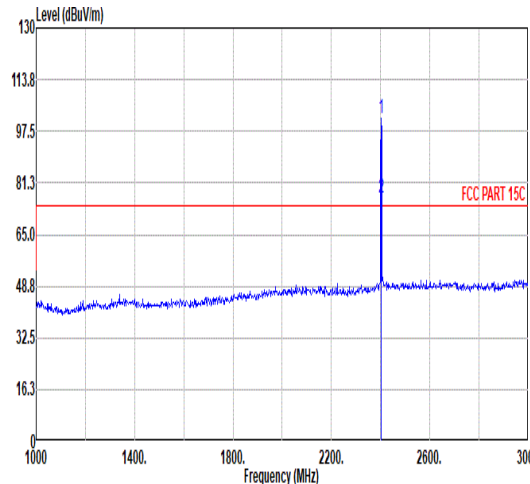


Mode	1																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.94</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>41.26</td><td>32.10</td><td>7.09</td><td>37.00</td><td>6.00</td><td>174</td><td>104 PEAK</td></tr><tr><td>2</td><td>2379.94</td><td>24.69</td><td>54.00</td><td>-29.31</td><td>16.50</td><td>32.10</td><td>7.09</td><td>37.00</td><td>6.00</td><td>174</td><td>104 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.94	49.45	74.00	-24.55	41.26	32.10	7.09	37.00	6.00	174	104 PEAK	2	2379.94	24.69	54.00	-29.31	16.50	32.10	7.09	37.00	6.00	174	104 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.53</td><td>-----</td><td>-----</td><td>93.10</td><td>32.30</td><td>7.12</td><td>36.99</td><td>6.00</td><td>174</td><td>104 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>76.77</td><td>-----</td><td>-----</td><td>68.34</td><td>32.30</td><td>7.12</td><td>36.99</td><td>6.00</td><td>174</td><td>104 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.53	-----	-----	93.10	32.30	7.12	36.99	6.00	174	104 PEAK	2	2402.00	76.77	-----	-----	68.34	32.30	7.12	36.99	6.00	174	104 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2379.94	49.45	74.00	-24.55	41.26	32.10	7.09	37.00	6.00	174	104 PEAK																																																																																																																		
2	2379.94	24.69	54.00	-29.31	16.50	32.10	7.09	37.00	6.00	174	104 AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2402.00	101.53	-----	-----	93.10	32.30	7.12	36.99	6.00	174	104 PEAK																																																																																																																		
2	2402.00	76.77	-----	-----	68.34	32.30	7.12	36.99	6.00	174	104 AVERAGE																																																																																																																		

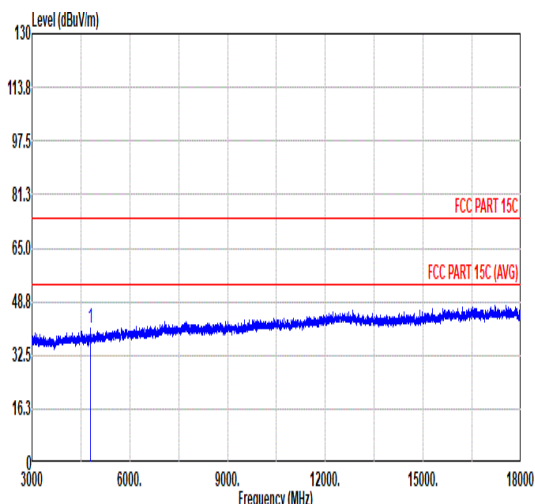
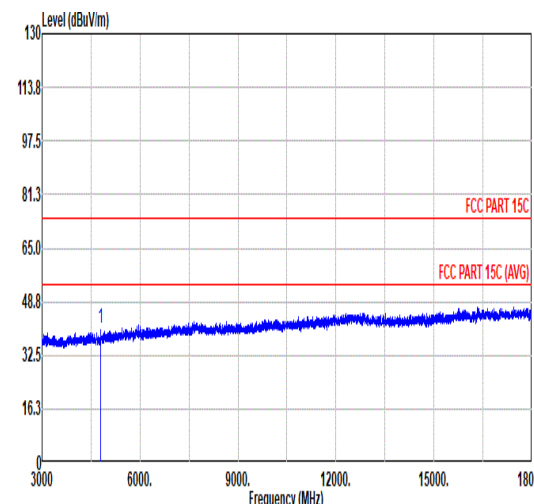


Mode	1																																																																																																								
	Harmonic																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																								
ANT	1																																																																																																								
Pol.	Horizontal						Vertical																																																																																																		
Peak Avg																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.61</td><td>74.00</td><td>-33.39</td><td>61.66</td><td>34.08</td><td>10.20</td><td>65.33</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	40.61	74.00	-33.39	61.66	34.08	10.20	65.33	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.51</td><td>74.00</td><td>-33.49</td><td>61.56</td><td>34.08</td><td>10.20</td><td>65.33</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	40.51	74.00	-33.49	61.56	34.08	10.20	65.33	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4804.00	40.61	74.00	-33.39	61.66	34.08	10.20	65.33	0.00	---	---	PEAK																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4804.00	40.51	74.00	-33.49	61.56	34.08	10.20	65.33	0.00	---	---	PEAK																																																																																													

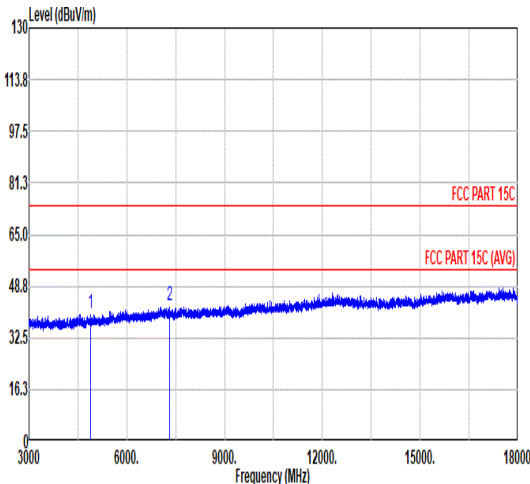
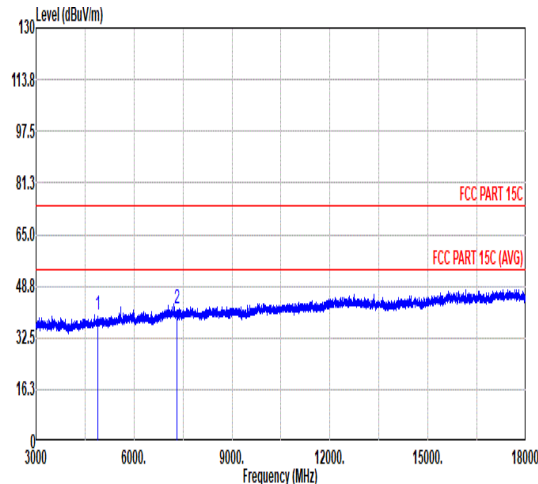


Mode	2																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>40.32</td><td>74.00</td><td>-33.68</td><td>61.69</td><td>33.90</td><td>10.30</td><td>65.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>60.17</td><td>35.58</td><td>12.72</td><td>66.01</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	40.32	74.00	-33.68	61.69	33.90	10.30	65.57	0.00	---	PEAK	2	7323.00	42.46	74.00	-31.54	60.17	35.58	12.72	66.01	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>39.89</td><td>74.00</td><td>-34.11</td><td>61.26</td><td>33.90</td><td>10.30</td><td>65.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>59.56</td><td>35.58</td><td>12.72</td><td>66.01</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	39.89	74.00	-34.11	61.26	33.90	10.30	65.57	0.00	---	PEAK	2	7323.00	41.85	74.00	-32.15	59.56	35.58	12.72	66.01	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4882.00	40.32	74.00	-33.68	61.69	33.90	10.30	65.57	0.00	---	PEAK																																																																																																																		
2	7323.00	42.46	74.00	-31.54	60.17	35.58	12.72	66.01	0.00	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4882.00	39.89	74.00	-34.11	61.26	33.90	10.30	65.57	0.00	---	PEAK																																																																																																																		
2	7323.00	41.85	74.00	-32.15	59.56	35.58	12.72	66.01	0.00	---	PEAK																																																																																																																		

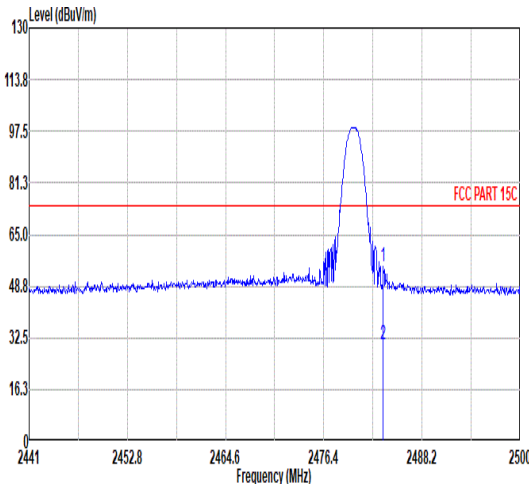
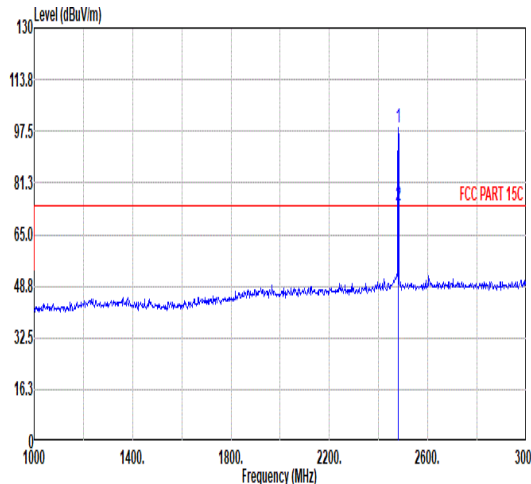


Mode	3																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>46.73</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>304</td><td>148 PEAK</td></tr><tr><td>2</td><td>2483.54</td><td>30.33</td><td>54.00</td><td>-23.67</td><td>21.97</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>304</td><td>148 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	55.09	74.00	-18.91	46.73	32.15	7.26	37.05	6.00	304	148 PEAK	2	2483.54	30.33	54.00	-23.67	21.97	32.15	7.26	37.05	6.00	304	148 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.77</td><td>-----</td><td>-----</td><td>90.43</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>304</td><td>148 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>74.01</td><td>-----</td><td>-----</td><td>65.67</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>304</td><td>148 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.77	-----	-----	90.43	32.14	7.25	37.05	6.00	304	148 PEAK	2	2480.00	74.01	-----	-----	65.67	32.14	7.25	37.05	6.00	304	148 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2483.54	55.09	74.00	-18.91	46.73	32.15	7.26	37.05	6.00	304	148 PEAK																																																																																																																		
2	2483.54	30.33	54.00	-23.67	21.97	32.15	7.26	37.05	6.00	304	148 AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2480.00	98.77	-----	-----	90.43	32.14	7.25	37.05	6.00	304	148 PEAK																																																																																																																		
2	2480.00	74.01	-----	-----	65.67	32.14	7.25	37.05	6.00	304	148 AVERAGE																																																																																																																		

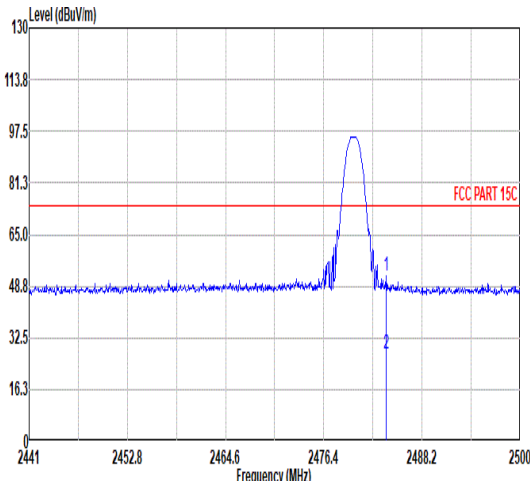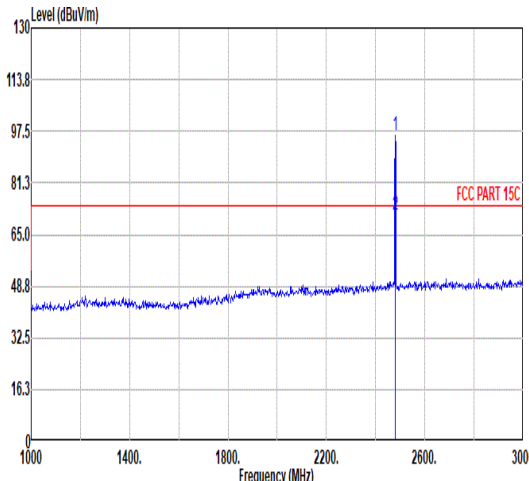

Mode	3																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																			
ANT	1																																																																			
Pol.	Vertical																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.89</td><td>52.23</td><td>74.00</td><td>-21.77</td><td>43.87</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>301 PEAK</td></tr><tr><td>2</td><td>2483.89</td><td>27.47</td><td>54.00</td><td>-26.53</td><td>19.11</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>301 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.89	52.23	74.00	-21.77	43.87	32.15	7.26	37.05	6.00	100	301 PEAK	2	2483.89	27.47	54.00	-26.53	19.11	32.15	7.26	37.05	6.00	100	301 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2483.89	52.23	74.00	-21.77	43.87	32.15	7.26	37.05	6.00	100	301 PEAK																																																									
2	2483.89	27.47	54.00	-26.53	19.11	32.15	7.26	37.05	6.00	100	301 AVERAGE																																																									
																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.03</td><td>-----</td><td>-----</td><td>87.69</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>301 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>71.27</td><td>-----</td><td>-----</td><td>62.93</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>301 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.03	-----	-----	87.69	32.14	7.25	37.05	6.00	100	301 PEAK	2	2480.00	71.27	-----	-----	62.93	32.14	7.25	37.05	6.00	100	301 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2480.00	96.03	-----	-----	87.69	32.14	7.25	37.05	6.00	100	301 PEAK																																																									
2	2480.00	71.27	-----	-----	62.93	32.14	7.25	37.05	6.00	100	301 AVERAGE																																																									

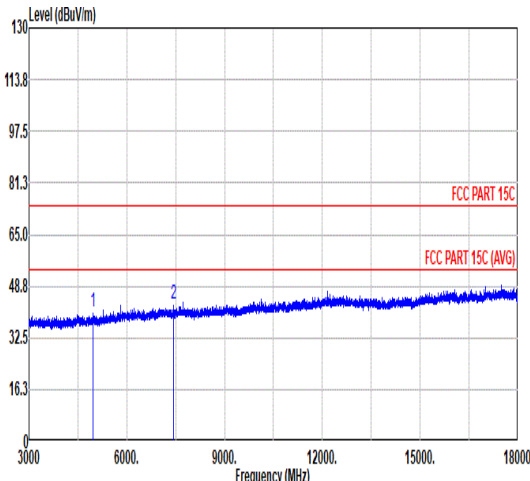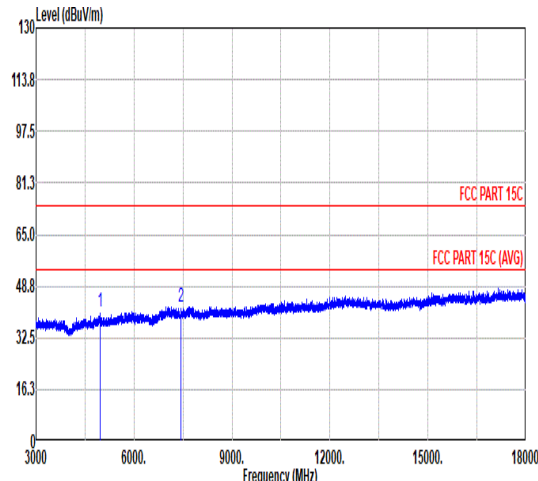

Mode	3																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>61.75</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.13</td><td>74.00</td><td>-30.87</td><td>61.00</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.63	74.00	-33.37	61.75	33.90	10.40	65.42	0.00	--- PEAK	2	7440.00	43.13	74.00	-30.87	61.00	35.54	12.78	66.27	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4960.00	40.63	74.00	-33.37	61.75	33.90	10.40	65.42	0.00	--- PEAK																																																								
2	7440.00	43.13	74.00	-30.87	61.00	35.54	12.78	66.27	0.00	--- PEAK																																																								
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.62</td><td>74.00</td><td>-33.38</td><td>61.74</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.24</td><td>74.00</td><td>-31.76</td><td>60.19</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.62	74.00	-33.38	61.74	33.90	10.40	65.42	0.00	--- PEAK	2	7440.00	42.24	74.00	-31.76	60.19	35.54	12.78	66.27	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4960.00	40.62	74.00	-33.38	61.74	33.90	10.40	65.42	0.00	--- PEAK																																																								
2	7440.00	42.24	74.00	-31.76	60.19	35.54	12.78	66.27	0.00	--- PEAK																																																								





Mode	3	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	The plot shows the average power spectrum for the horizontal polarization. The y-axis is labeled 'Level (dBuV/m)' and ranges from 0 to 130 in increments of 16.3. The x-axis is labeled 'Frequency (MHz)' and ranges from 18000 to 25000 in increments of 400. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: the upper line is at 81.3 dBuV/m and the lower line is at 65.0 dBuV/m. The measured signal is well below the lower limit.	The plot shows the average power spectrum for the vertical polarization. The y-axis is labeled 'Level (dBuV/m)' and ranges from 0 to 130 in increments of 16.3. The x-axis is labeled 'Frequency (MHz)' and ranges from 18000 to 25000 in increments of 400. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: the upper line is at 81.3 dBuV/m and the lower line is at 65.0 dBuV/m. The measured signal is well below the lower limit.





Mode	3																																																																																																																																																																																																																							
	30M-1G																																																																																																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																																							
ANT	1																																																																																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																																																																																	
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line (Part 15C) and a blue signal line. Peaks are labeled 1 through 6. <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr><tr><td>1</td><td>31.94</td><td>19.54</td><td>40.00</td><td>-20.46</td><td>26.75</td><td>24.14</td><td>0.86</td><td>32.21</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>98.39</td><td>19.02</td><td>43.50</td><td>-24.48</td><td>33.85</td><td>15.70</td><td>1.51</td><td>32.04</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>191.99</td><td>21.35</td><td>43.50</td><td>-22.15</td><td>36.62</td><td>14.71</td><td>2.10</td><td>32.08</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>327.31</td><td>24.02</td><td>46.00</td><td>-21.98</td><td>33.82</td><td>19.57</td><td>2.76</td><td>32.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>384.05</td><td>25.73</td><td>46.00</td><td>-20.27</td><td>33.69</td><td>21.14</td><td>2.99</td><td>32.09</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>748.04</td><td>28.53</td><td>46.00</td><td>-17.47</td><td>28.04</td><td>28.10</td><td>4.16</td><td>31.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Peak	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	31.94	19.54	40.00	-20.46	26.75	24.14	0.86	32.21	--	--	Peak	2	98.39	19.02	43.50	-24.48	33.85	15.70	1.51	32.04	--	--	Peak	3	191.99	21.35	43.50	-22.15	36.62	14.71	2.10	32.08	--	--	Peak	4	327.31	24.02	46.00	-21.98	33.82	19.57	2.76	32.13	--	--	Peak	5	384.05	25.73	46.00	-20.27	33.69	21.14	2.99	32.09	--	--	Peak	6	748.04	28.53	46.00	-17.47	28.04	28.10	4.16	31.77	--	--	Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line (Part 15C) and a blue signal line. Peaks are labeled 1 through 6. <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr><tr><td>1</td><td>45.04</td><td>23.38</td><td>40.00</td><td>-16.62</td><td>37.73</td><td>16.81</td><td>1.02</td><td>32.18</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>104.21</td><td>21.86</td><td>43.50</td><td>-21.64</td><td>35.93</td><td>16.43</td><td>1.56</td><td>32.06</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>250.92</td><td>17.86</td><td>46.00</td><td>-28.14</td><td>28.72</td><td>18.56</td><td>2.42</td><td>31.84</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>561.08</td><td>33.79</td><td>46.00</td><td>-12.21</td><td>36.54</td><td>26.01</td><td>3.60</td><td>32.36</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>591.63</td><td>24.51</td><td>46.00</td><td>-21.49</td><td>27.24</td><td>25.58</td><td>3.70</td><td>32.01</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>847.71</td><td>29.33</td><td>46.00</td><td>-16.67</td><td>26.88</td><td>29.52</td><td>4.42</td><td>31.49</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Peak	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	45.04	23.38	40.00	-16.62	37.73	16.81	1.02	32.18	--	--	Peak	2	104.21	21.86	43.50	-21.64	35.93	16.43	1.56	32.06	--	--	Peak	3	250.92	17.86	46.00	-28.14	28.72	18.56	2.42	31.84	--	--	Peak	4	561.08	33.79	46.00	-12.21	36.54	26.01	3.60	32.36	--	--	Peak	5	591.63	24.51	46.00	-21.49	27.24	25.58	3.70	32.01	--	--	Peak	6	847.71	29.33	46.00	-16.67	26.88	29.52	4.42	31.49	--	--	Peak
	Peak	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																														
1	31.94	19.54	40.00	-20.46	26.75	24.14	0.86	32.21	--	--	Peak																																																																																																																																																																																																													
2	98.39	19.02	43.50	-24.48	33.85	15.70	1.51	32.04	--	--	Peak																																																																																																																																																																																																													
3	191.99	21.35	43.50	-22.15	36.62	14.71	2.10	32.08	--	--	Peak																																																																																																																																																																																																													
4	327.31	24.02	46.00	-21.98	33.82	19.57	2.76	32.13	--	--	Peak																																																																																																																																																																																																													
5	384.05	25.73	46.00	-20.27	33.69	21.14	2.99	32.09	--	--	Peak																																																																																																																																																																																																													
6	748.04	28.53	46.00	-17.47	28.04	28.10	4.16	31.77	--	--	Peak																																																																																																																																																																																																													
Peak	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																														
1	45.04	23.38	40.00	-16.62	37.73	16.81	1.02	32.18	--	--	Peak																																																																																																																																																																																																													
2	104.21	21.86	43.50	-21.64	35.93	16.43	1.56	32.06	--	--	Peak																																																																																																																																																																																																													
3	250.92	17.86	46.00	-28.14	28.72	18.56	2.42	31.84	--	--	Peak																																																																																																																																																																																																													
4	561.08	33.79	46.00	-12.21	36.54	26.01	3.60	32.36	--	--	Peak																																																																																																																																																																																																													
5	591.63	24.51	46.00	-21.49	27.24	25.58	3.70	32.01	--	--	Peak																																																																																																																																																																																																													
6	847.71	29.33	46.00	-16.67	26.88	29.52	4.42	31.49	--	--	Peak																																																																																																																																																																																																													

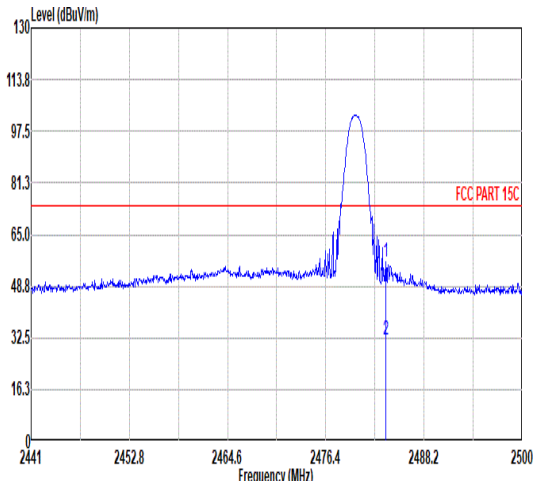
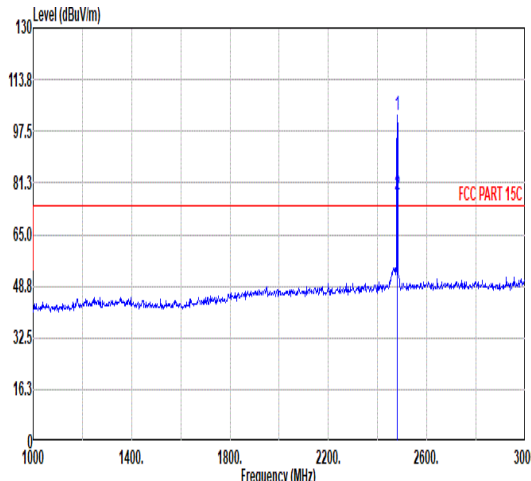


Mode	4																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>48.29</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>317 PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>31.86</td><td>54.00</td><td>-22.14</td><td>23.50</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>317 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	56.65	74.00	-17.35	48.29	32.15	7.26	37.05	6.00	100	317 PEAK	2	2483.60	31.86	54.00	-22.14	23.50	32.15	7.26	37.05	6.00	100	317 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.52</td><td>-----</td><td>-----</td><td>94.18</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>317 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>77.73</td><td>-----</td><td>-----</td><td>69.39</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>317 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.52	-----	-----	94.18	32.14	7.25	37.05	6.00	100	317 PEAK	2	2480.00	77.73	-----	-----	69.39	32.14	7.25	37.05	6.00	100	317 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2483.60	56.65	74.00	-17.35	48.29	32.15	7.26	37.05	6.00	100	317 PEAK																																																																																																																		
2	2483.60	31.86	54.00	-22.14	23.50	32.15	7.26	37.05	6.00	100	317 AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2480.00	102.52	-----	-----	94.18	32.14	7.25	37.05	6.00	100	317 PEAK																																																																																																																		
2	2480.00	77.73	-----	-----	69.39	32.14	7.25	37.05	6.00	100	317 AVERAGE																																																																																																																		

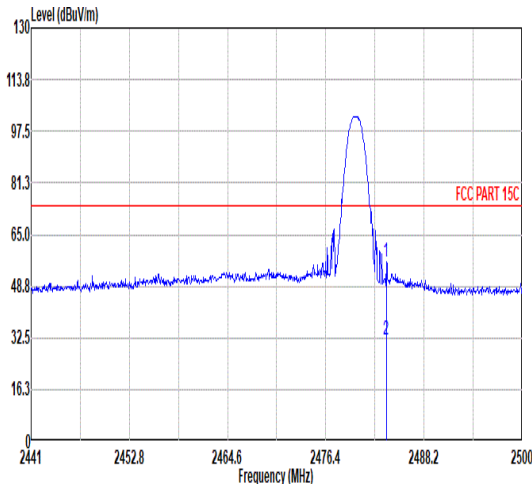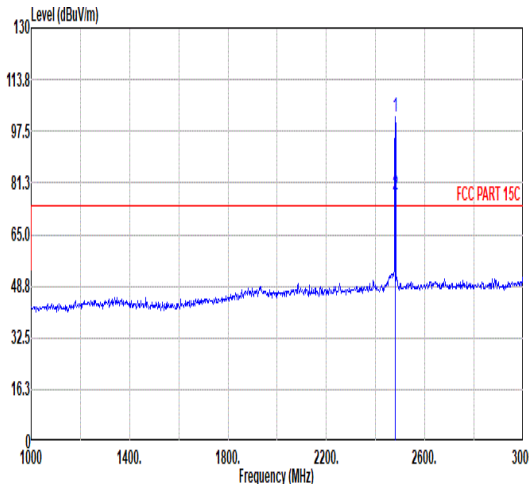

Mode	4																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>48.16</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>334 PEAK</td></tr><tr><td>2</td><td>2483.66</td><td>31.73</td><td>54.00</td><td>-22.27</td><td>23.37</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>334 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	56.52	74.00	-17.48	48.16	32.15	7.26	37.05	6.00	100	334 PEAK	2	2483.66	31.73	54.00	-22.27	23.37	32.15	7.26	37.05	6.00	100	334 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.20</td><td>-----</td><td>-----</td><td>93.86</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>334 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>77.41</td><td>-----</td><td>-----</td><td>69.07</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>334 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.20	-----	-----	93.86	32.14	7.25	37.05	6.00	100	334 PEAK	2	2480.00	77.41	-----	-----	69.07	32.14	7.25	37.05	6.00	100	334 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2483.66	56.52	74.00	-17.48	48.16	32.15	7.26	37.05	6.00	100	334 PEAK																																																																																																																		
2	2483.66	31.73	54.00	-22.27	23.37	32.15	7.26	37.05	6.00	100	334 AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	2480.00	102.20	-----	-----	93.86	32.14	7.25	37.05	6.00	100	334 PEAK																																																																																																																		
2	2480.00	77.41	-----	-----	69.07	32.14	7.25	37.05	6.00	100	334 AVERAGE																																																																																																																		

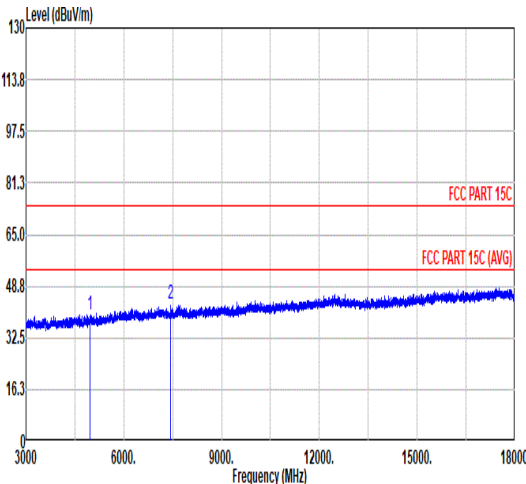
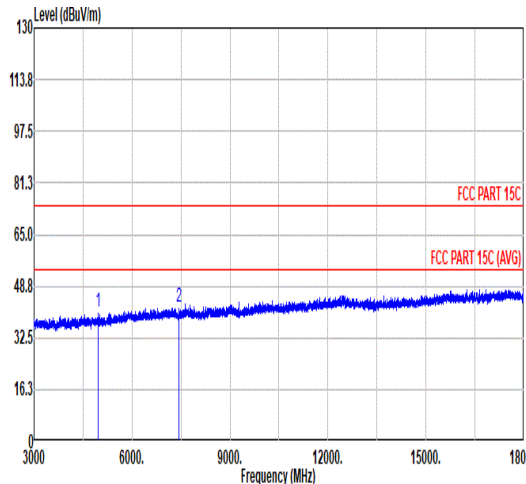


Mode	4																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																													
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>39.91</td><td>74.00</td><td>-34.09</td><td>61.03</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>61.06</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	39.91	74.00	-34.09	61.03	33.90	10.40	65.42	0.00	---	---	PEAK	2	7440.00	43.11	74.00	-30.89	61.06	35.54	12.78	66.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.76</td><td>74.00</td><td>-33.24</td><td>61.88</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.42</td><td>74.00</td><td>-31.58</td><td>60.37</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.76	74.00	-33.24	61.88	33.90	10.40	65.42	0.00	---	---	PEAK	2	7440.00	42.42	74.00	-31.58	60.37	35.54	12.78	66.27	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4960.00	39.91	74.00	-34.09	61.03	33.90	10.40	65.42	0.00	---	---	PEAK																																																																																																																								
2	7440.00	43.11	74.00	-30.89	61.06	35.54	12.78	66.27	0.00	---	---	PEAK																																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4960.00	40.76	74.00	-33.24	61.88	33.90	10.40	65.42	0.00	---	---	PEAK																																																																																																																								
2	7440.00	42.42	74.00	-31.58	60.37	35.54	12.78	66.27	0.00	---	---	PEAK																																																																																																																								




Mode	4	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	The plot shows the average power level in dBuV/m versus frequency in MHz for horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m with major ticks every 16.3 dB. The x-axis ranges from 18000 to 25000 MHz with major ticks every 400 MHz. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: one at 81.3 dBuV/m and another at 65.0 dBuV/m. The measured signal is well below both limits.	The plot shows the average power level in dBuV/m versus frequency in MHz for vertical polarization. The y-axis ranges from 0 to 130 dBuV/m with major ticks every 16.3 dB. The x-axis ranges from 18000 to 25000 MHz with major ticks every 400 MHz. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: one at 81.3 dBuV/m and another at 65.0 dBuV/m. The measured signal is well below both limits.

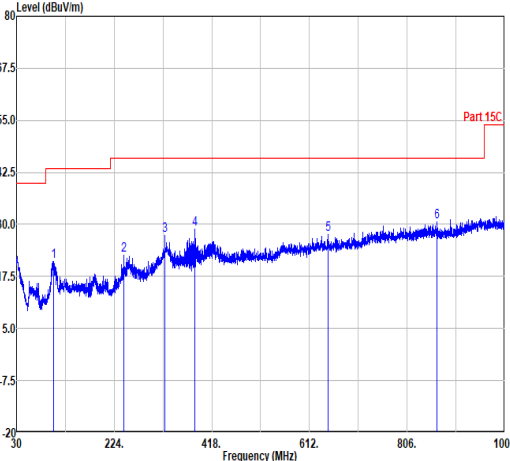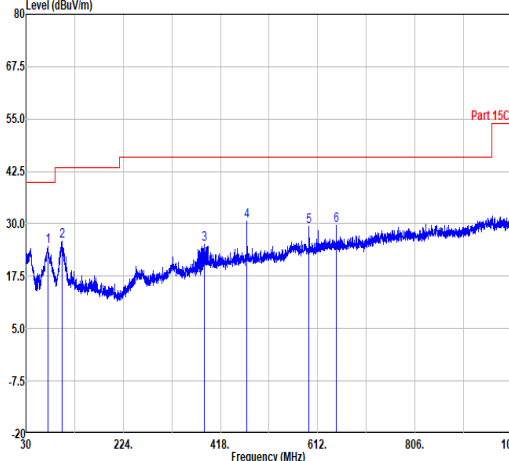


Mode	4																																																																																																											
	30M-1G																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>103.72</td><td>21.06</td><td>43.50</td><td>-22.44</td><td>36.30</td><td>16.36</td><td>1.05</td><td>32.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>242.43</td><td>22.66</td><td>46.00</td><td>-23.34</td><td>36.33</td><td>17.55</td><td>1.65</td><td>32.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>324.40</td><td>27.44</td><td>46.00</td><td>-18.56</td><td>38.75</td><td>19.63</td><td>1.90</td><td>32.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>384.05</td><td>28.87</td><td>46.00</td><td>-17.13</td><td>38.57</td><td>21.19</td><td>2.08</td><td>32.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>648.86</td><td>27.70</td><td>46.00</td><td>-18.30</td><td>31.88</td><td>26.43</td><td>2.66</td><td>33.27</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>865.17</td><td>30.70</td><td>46.00</td><td>-15.30</td><td>31.32</td><td>28.81</td><td>3.07</td><td>32.50</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	103.72	21.06	43.50	-22.44	36.30	16.36	1.05	32.65	---	---	Peak	2	242.43	22.66	46.00	-23.34	36.33	17.55	1.65	32.87	---	---	Peak	3	324.40	27.44	46.00	-18.56	38.75	19.63	1.90	32.84	---	---	Peak	4	384.05	28.87	46.00	-17.13	38.57	21.19	2.08	32.97	---	---	Peak	5	648.86	27.70	46.00	-18.30	31.88	26.43	2.66	33.27	---	---	Peak	6	865.17	30.70	46.00	-15.30	31.32	28.81	3.07	32.50	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	103.72	21.06	43.50	-22.44	36.30	16.36	1.05	32.65	---	---	Peak																																																																																																	
2	242.43	22.66	46.00	-23.34	36.33	17.55	1.65	32.87	---	---	Peak																																																																																																	
3	324.40	27.44	46.00	-18.56	38.75	19.63	1.90	32.84	---	---	Peak																																																																																																	
4	384.05	28.87	46.00	-17.13	38.57	21.19	2.08	32.97	---	---	Peak																																																																																																	
5	648.86	27.70	46.00	-18.30	31.88	26.43	2.66	33.27	---	---	Peak																																																																																																	
6	865.17	30.70	46.00	-15.30	31.32	28.81	3.07	32.50	---	---	Peak																																																																																																	
																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>73.17</td><td>24.60</td><td>40.00</td><td>-15.40</td><td>43.77</td><td>12.75</td><td>0.80</td><td>32.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>101.54</td><td>25.82</td><td>43.50</td><td>-17.68</td><td>41.30</td><td>16.12</td><td>1.05</td><td>32.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>385.99</td><td>25.06</td><td>46.00</td><td>-20.94</td><td>34.65</td><td>21.29</td><td>2.10</td><td>32.98</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>470.87</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>38.12</td><td>23.40</td><td>2.27</td><td>33.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>594.78</td><td>29.35</td><td>46.00</td><td>-16.65</td><td>34.08</td><td>26.01</td><td>2.56</td><td>33.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>648.86</td><td>29.63</td><td>46.00</td><td>-16.37</td><td>33.81</td><td>26.43</td><td>2.66</td><td>33.27</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	73.17	24.60	40.00	-15.40	43.77	12.75	0.80	32.72	---	---	Peak	2	101.54	25.82	43.50	-17.68	41.30	16.12	1.05	32.65	---	---	Peak	3	385.99	25.06	46.00	-20.94	34.65	21.29	2.10	32.98	---	---	Peak	4	470.87	30.69	46.00	-15.31	38.12	23.40	2.27	33.10	---	---	Peak	5	594.78	29.35	46.00	-16.65	34.08	26.01	2.56	33.30	---	---	Peak	6	648.86	29.63	46.00	-16.37	33.81	26.43	2.66	33.27	---	---	Peak
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	73.17	24.60	40.00	-15.40	43.77	12.75	0.80	32.72	---	---	Peak																																																																																																	
2	101.54	25.82	43.50	-17.68	41.30	16.12	1.05	32.65	---	---	Peak																																																																																																	
3	385.99	25.06	46.00	-20.94	34.65	21.29	2.10	32.98	---	---	Peak																																																																																																	
4	470.87	30.69	46.00	-15.31	38.12	23.40	2.27	33.10	---	---	Peak																																																																																																	
5	594.78	29.35	46.00	-16.65	34.08	26.01	2.56	33.30	---	---	Peak																																																																																																	
6	648.86	29.63	46.00	-16.37	33.81	26.43	2.66	33.27	---	---	Peak																																																																																																	

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 00

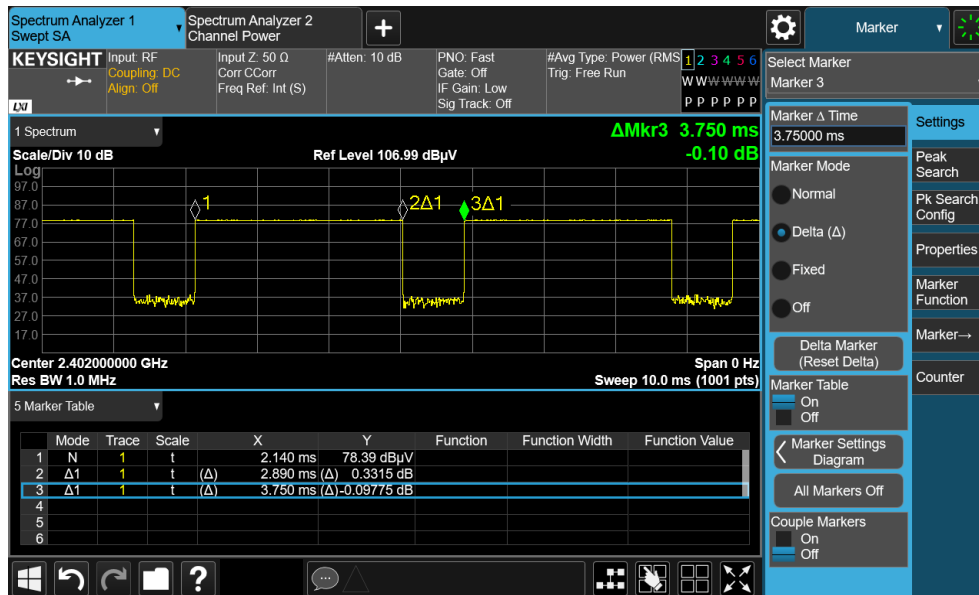

DH5 on time (Count Pulses) Plot on Channel 00

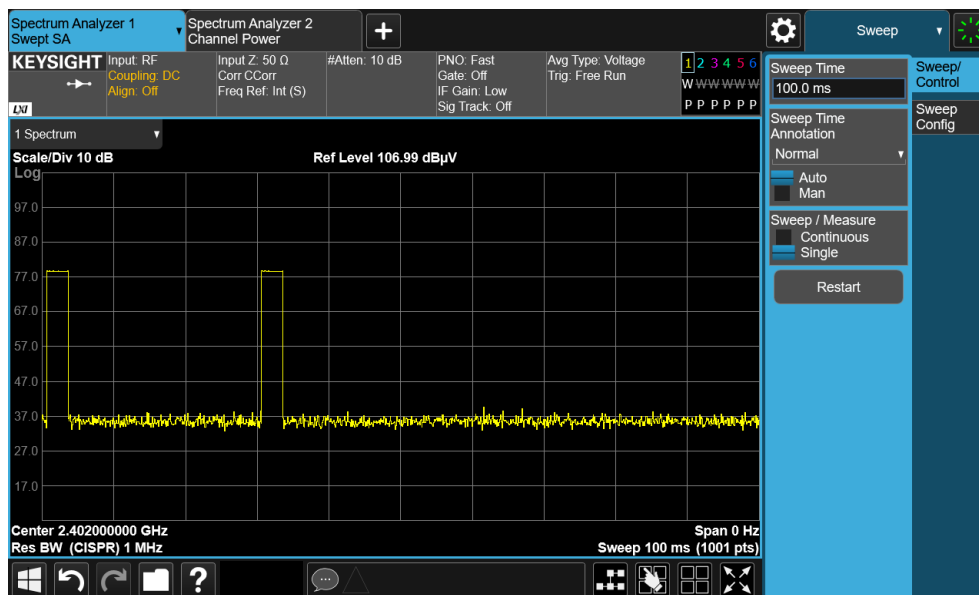

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.