


WALKIE TALKIES

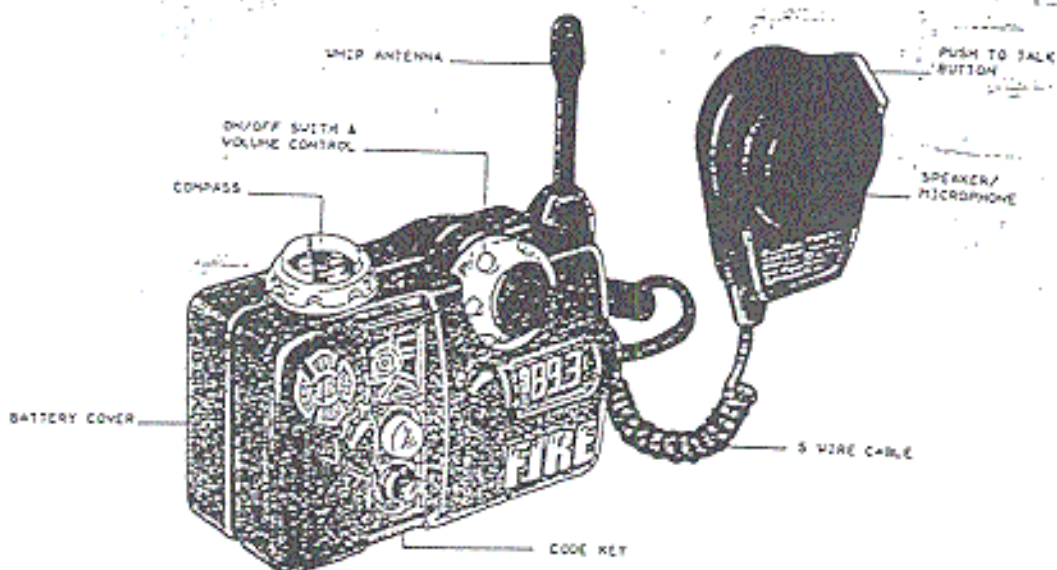

BATTERY INSTALLATION

1. Turn the ON/OFF SWITCH to the OFF position.
2. Open the BATTERY COVER by sliding it toward the bottom of the unit.
3. Snap a 9V battery firmly to the battery connector inside the compartment. Replace the BATTERY COVER. Alkaline battery is recommended for longer operating time.

NOTE: WEAK OR DEAD BATTERY MAY SWELL AND LEAK. TO AVOID DAMAGE TO THE UNIT, REMOVE BATTERY WHEN THE UNIT IS NOT TO BE USED FOR A LONG PERIOD OF TIME OR WHEN THE BATTERY BECOME EXHAUSTED.

TO OPERATE

1. Turn the ON/OFF SWITCH to ON. Continue to turn the control in the counter clockwise direction until a rushing sound is heard.
2. To transmit, press the 'PUSH TO TALK' button with the microphone at about 4" from your mouth. Speak in a normal voice.
NOTE: Do not touch antenna with your fingers or hand. This will cause weak transmission.
3. To receive, release the 'PUSH TO TALK' button.
4. To transmit code, depress the 'PUSH TO TALK' button and tap the CODE KEY to produce the desired coded characters.
5. To switch off the unit, turn the ON/OFF volume control in the clockwise direction until a click is heard.

IMPORTANT: ALWAYS SWITCH OFF THE UNIT AFTER USE TO SAVE BATTERY.

CARE AND MAINTENANCE

1. If your walkie talkie does not operate properly, try a new battery.
2. Your walkie talkie has been factory adjusted prior to shipment. Do not attempt to open the unit other than replacing the battery.
3. Clean your unit with a damp (never wet) cloth. Solvent or detergent should never be used.
4. Avoid leaving your unit in direct sunlight or in hot, humid, or dusty places.
5. Keep your unit away from heating appliances.
6. Never dispose batteries in fire, as they will explode.
7. Never attempt to recharge ordinary batteries.