



FCC TEST REPORT

FCC ID: B4O-MINIWKB

Product	:	Mini Wireless Keyboard
Model Name	:	BU10144
Brand	:	MakerSpot
Report No.	:	PTC22022501701E-FC01
Prepared for		
GT-tronics HK Limited		
B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : GT-tronics HK Limited
Address : B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong
Manufacture's name 1 : Dong Guan Zhao Bo Technology Limited
Address 1 : Block A11, Fu Min Industrial Area Feng Gang Town, Dong Guan City
Guang Dong Province, CHINA
Manufacture's name 2 : TIANCHANG LIMING ELECTRONICS CO., LTD.
Address 2 : NO.1 INDUSTRIAL ZONE, QINLAN TOWN, TIANCHANG, ANHUI,
CHINA 239341
Product name : Mini Wireless Keyboard
Model name : BU10144
Standards : FCC Part15 Subpart C, Paragraph 15.249
Test procedure : ANSI C63.10: 2013
Test Date : Mar. 10, 2022 to Mar. 21, 2022
Date of Issue : Mar. 21, 2022
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Abel Yu / Engineer

Technical Manager:

Wu Weimin / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION.....	2
2 TEST SUMMARY.....	5
2.1 TEST SITE.....	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF E.U.T.....	7
3.2 CHANNEL LIST.....	8
4 EQUIPMENT DURING TEST.....	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	10
4.3 DESCRIPTION OF SUPPORT UNITS.....	10
5 CONDUCTED EMISSION.....	11
5.1 E.U.T. OPERATION.....	11
5.2 EUT SETUP.....	11
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
5.4 MEASUREMENT PROCEDURE.....	12
5.5 CONDUCTED EMISSION LIMIT.....	12
5.6 MEASUREMENT DESCRIPTION.....	12
5.7 CONDUCTED EMISSION TEST RESULT.....	12
6 RADIATED EMISSION AND BAND EDGE.....	15
6.1 TEST STANDARD AND LIMIT.....	15
6.2 TEST SETUP.....	16
6.3 TEST PROCEDURE.....	17
6.4 TEST DATA.....	18
7 20DB BANDWIDTH TEST.....	24
7.1 TEST STANDARD AND LIMIT.....	24
7.2 TEST SETUP.....	24
7.3 TEST PROCEDURE.....	24
7.4 TEST DATA.....	25
8 ANTENNA REQUIREMENT.....	27
8.1 TEST STANDARD AND REQUIREMENT.....	27



Report No.: PTC22022501701E-FC01

8.2 ANTENNA CONNECTED CONSTRUCTION.....	27
9 APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
10 APPENDIX II -- EXTERNAL PHOTOGRAPH.....	28
11 APPENDIX III -- INTERNAL PHOTOGRAPH.....	33



2 Test Summary

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

Remark:N/A



Report No.: PTC22022501701E-FC01

2.1 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Mini Wireless Keyboard
Model Name	:	BU10144
Bluetooth Version	:	BLE
Operating frequency	:	2402-2480MHz
Number of Channels	:	40 channels
Type of Modulation	:	GFSK
Antenna installation	:	PCB Antenna
Antenna Gain	:	0dBi
Power supply	:	Input:DC 5V,300mA Battery:DC 3.7V,1020mAh
Hardware Version	:	N/A
Software Version	:	N/A



3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Aug. 21, 2021	Aug. 20, 2022	1 year
Spectrum Analyzer	Rohde&Schwarz	FSU26	1166.1660.26	Aug. 21, 2021	Aug. 20, 2022	1 year
Coaxial Cable	CDS	79254	46107086	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Meter	Anritsu	ML2495A	0949003	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Sensor	Anritsu	MA2411B	0917017	Aug. 21, 2021	Aug. 20, 2022	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug. 21, 2021	Aug. 20, 2022	1 year
Loop Antenna	Schwarzbeck	FMZB 1519	012	Aug. 21, 2021	Aug. 20, 2022	1 year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug. 21, 2021	Aug. 20, 2022	1 year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Aug. 21, 2021	Aug. 20, 2022	1 year
Cable	Schwarzbeck	PLF-100	549489	Aug. 21, 2021	Aug. 20, 2022	1 year
Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug. 21, 2021	Aug. 20, 2022	1 year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug. 21, 2021	Aug. 20, 2022	1 year
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	Aug. 21, 2021	Aug. 20, 2022	1 year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	Aug. 21, 2021	Aug. 20, 2022	1 year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	Aug. 21, 2021	Aug. 20, 2022	1 year
Cable	H+S	CBL-26	N/A	Aug. 21, 2021	Aug. 20, 2022	1 year
RF Cable	R&S	R204	R21X	Aug. 21, 2021	Aug. 20, 2022	1 year



Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Last calibration	Calibration Due	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug. 21, 2021	Aug. 20, 2022	1 year
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Aug. 21, 2021	Aug. 20, 2022	1 year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Aug. 21, 2021	Aug. 20, 2022	1 year

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 3.15\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	EP-TA50CBC	N/A

5 Conducted Emission

Test Requirement	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 25.0 °C
Humidity	: 60 % RH
Atmospheric Pressure	: 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

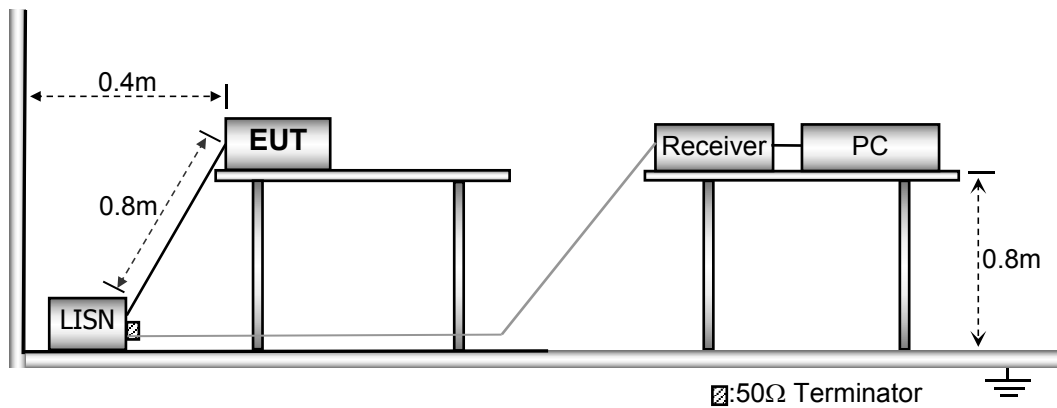

5.3 Test SET-UP (Block Diagram of Configuration)

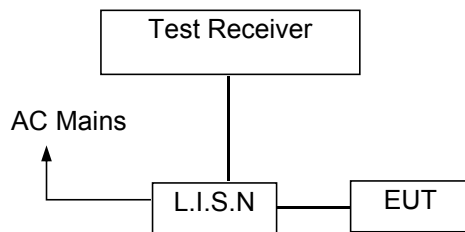

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits




Line:

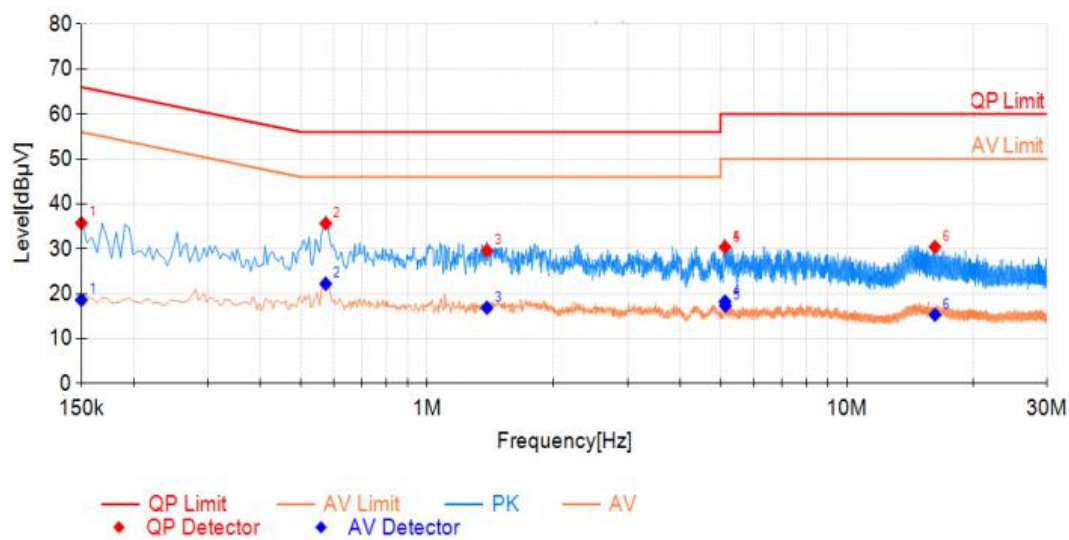**Final Data List**

NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.15	35.74	66.00	30.26	18.61	56.00	37.39	PASS
2	0.573	35.66	56.00	20.34	22.21	46.00	23.79	PASS
3	1.3875	29.64	56.00	26.36	16.89	46.00	29.11	PASS
4	5.1225	30.42	60.00	29.58	18.26	50.00	31.74	PASS
5	5.1315	30.21	60.00	29.79	17.34	50.00	32.66	PASS
6	16.206	30.44	60.00	29.56	15.33	50.00	34.67	PASS

Neutral:

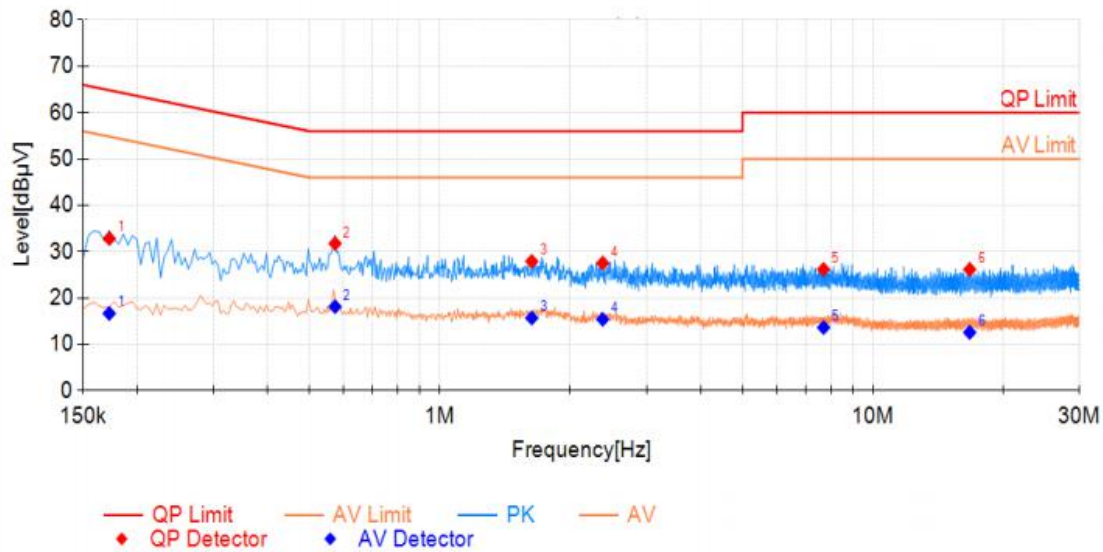

Final Data List

NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1725	32.85	64.84	31.99	16.68	54.84	38.16	PASS
2	0.573	31.76	56.00	24.24	18.14	46.00	27.86	PASS
3	1.6305	27.91	56.00	28.09	15.69	46.00	30.31	PASS
4	2.3775	27.55	56.00	28.45	15.41	46.00	30.59	PASS
5	7.692	26.19	60.00	33.81	13.65	50.00	36.35	PASS
6	16.7325	26.17	60.00	33.83	12.59	50.00	37.41	PASS

6 Radiated Emission and Band Edge

6.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

6.2 Test Setup

Figure 1. Below 30MHz

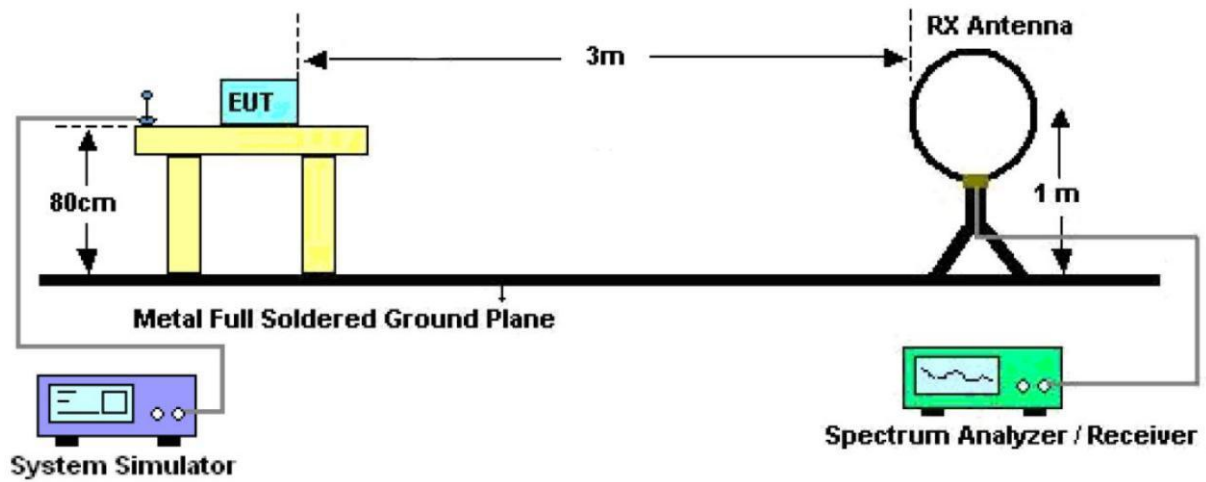


Figure 2. 30MHz to 1GHz


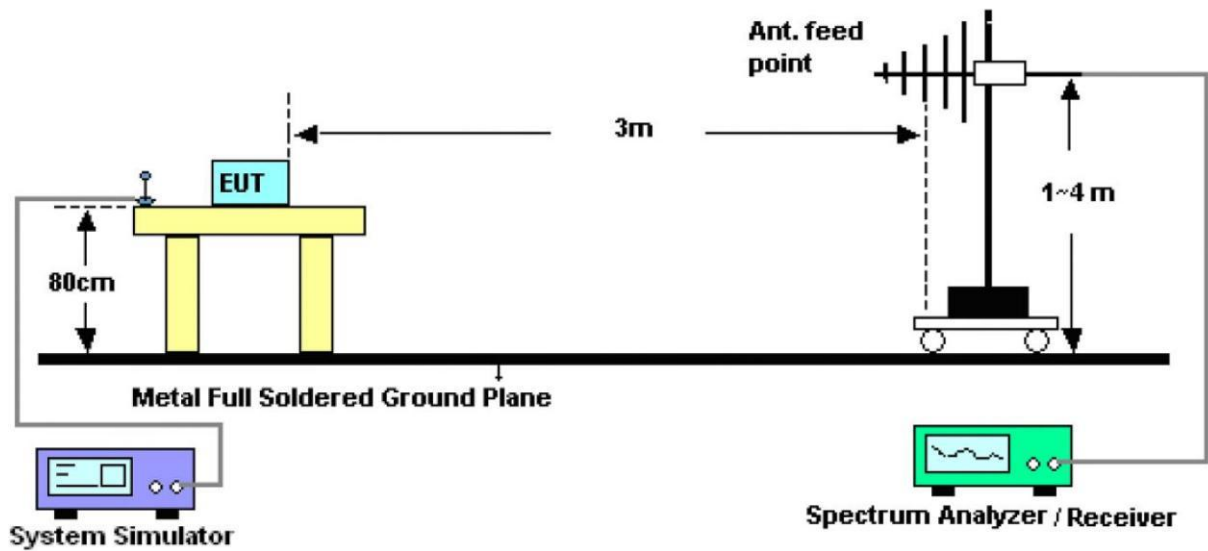


Figure 3. Above 1 GHz

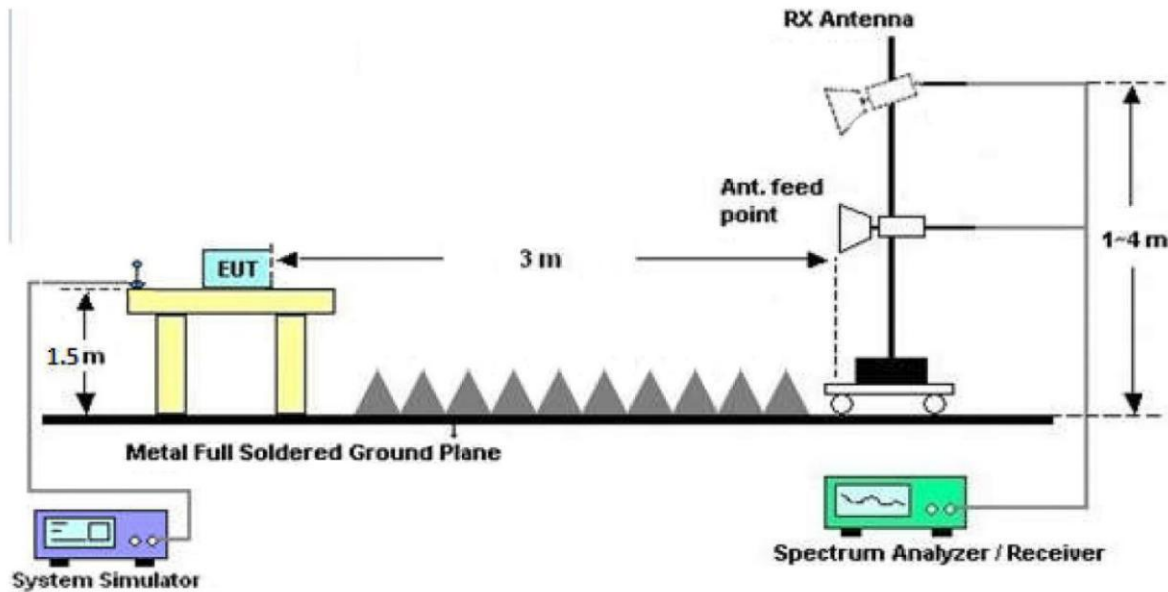

6.3 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.



For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

6.4 Test Data

PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the Middle channel which is the worst case, only the worst case is recorded in the report

Test plot for Horizontal

Antenna Polarization: Horizontal GFSK(CH00: 2402MHz)

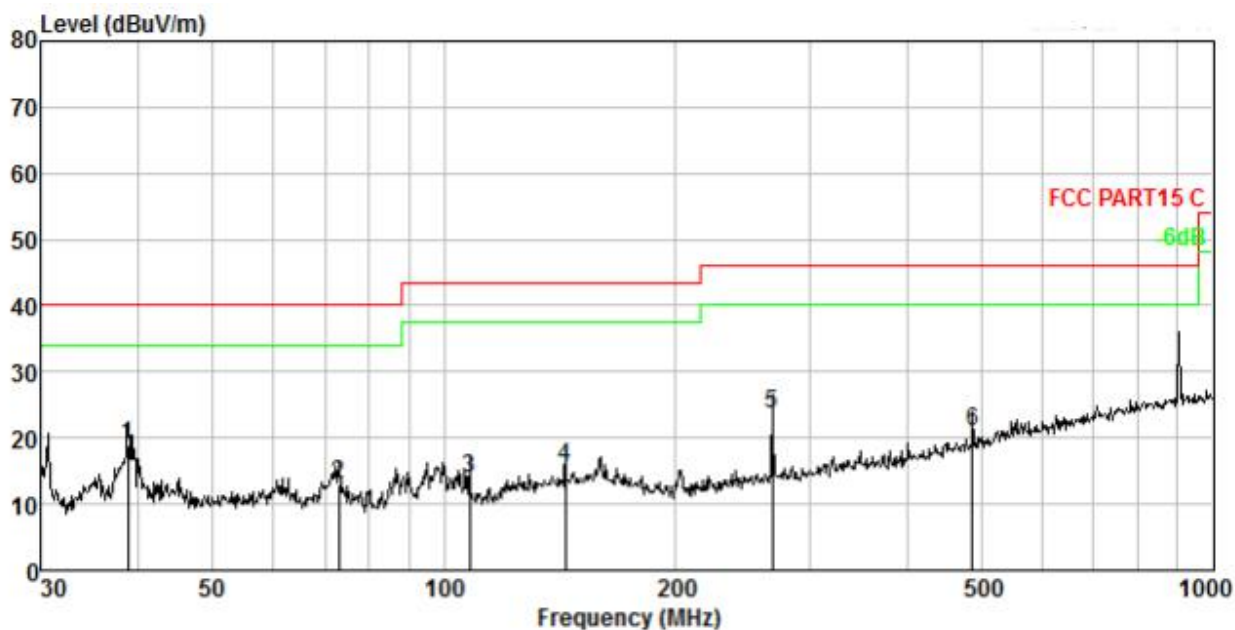


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.888	1.65	12.12	35.16	29.91	19.02	40.00	-20.98	QP
2.	73.103	2.73	9.66	30.69	29.96	13.12	40.00	-26.88	QP
3.	107.888	3.40	10.56	30.04	30.00	14.00	43.50	-29.50	QP
4.	143.830	3.90	13.46	28.18	30.02	15.52	43.50	-27.98	QP
5.	267.546	4.96	12.76	36.07	30.24	23.55	46.00	-22.45	QP
6.	487.315	6.00	16.81	29.04	30.88	20.97	46.00	-25.03	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor

Test plot for Vertical

Antenna Polarization: Vertical GFSK(CH00: 2402MHz)

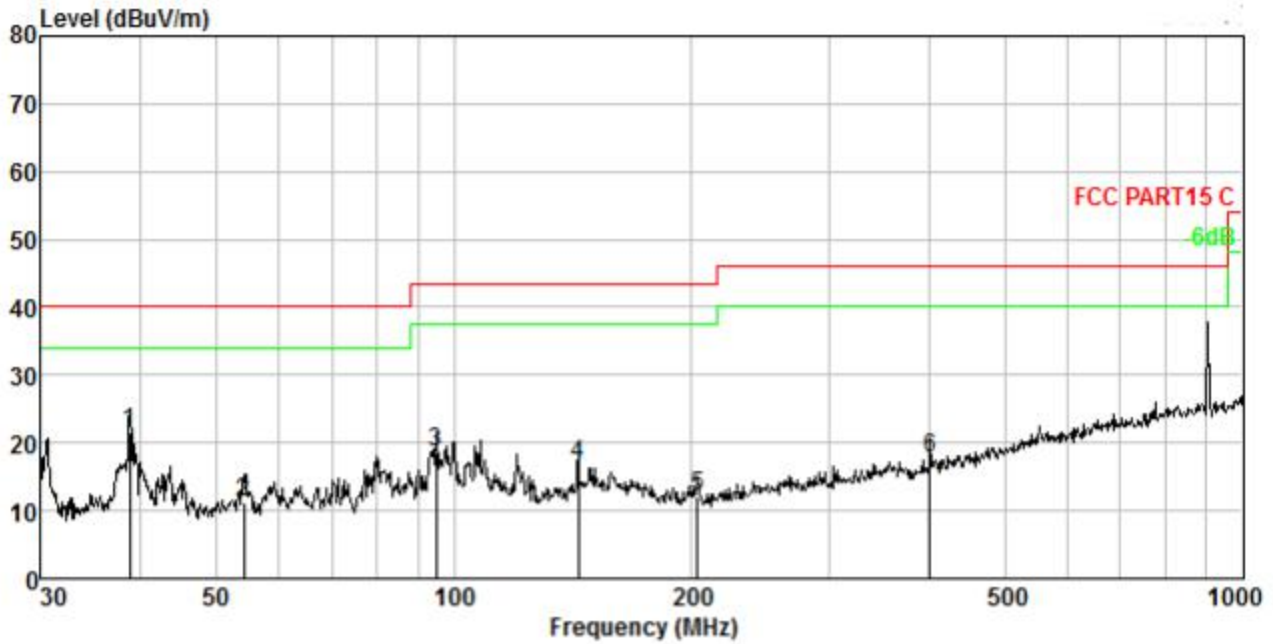

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.888	1.65	12.12	37.65	29.91	21.51	40.00	-18.49	QP
2.	54.261	2.22	12.10	26.90	29.93	11.29	40.00	-28.71	QP
3.	95.093	3.18	9.11	36.38	29.98	18.69	43.50	-24.81	QP
4.	143.830	3.90	13.46	29.63	30.02	16.97	43.50	-26.53	QP
5.	203.523	4.49	11.12	26.49	30.05	12.05	43.50	-31.45	QP
6.	401.839	5.67	14.84	27.77	30.70	17.58	46.00	-28.42	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Test Frequency 1GHz-25GHz

GFSK Low Channel (2402MHz)

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector (PK/AV)
2402(F)	84.22	32.01	5.43	33.85	87.81	114	-26.19	V	PK
4804	41.22	34.04	6.58	34.09	47.75	74.00	-26.25	V	PK
7206	35.20	37.11	7.73	34.50	45.54	74.00	-28.46	V	PK
9608	34.55	39.31	9.23	34.79	48.30	74.00	-25.70	V	PK
2402(F)	82.75	32.01	5.43	33.85	86.34	114	-27.66	H	PK
4804	41.27	34.04	6.58	34.09	47.80	74.00	-26.20	H	PK
7206	34.61	37.11	7.73	34.50	44.95	74.00	-29.05	H	PK
9608	32.74	39.31	9.23	34.79	46.49	74.00	-27.51	H	PK
2402(F)	73.96	32.01	5.43	33.85	77.55	94	-16.45	V	AV
4804	37.41	34.04	6.58	34.09	43.94	54.00	-10.06	V	AV
7206	31.75	37.11	7.73	34.50	42.09	54.00	-11.91	V	AV
9608	31.77	39.31	9.23	34.79	45.52	54.00	-8.48	V	AV
2402(F)	72.76	32.01	5.43	33.85	76.35	94	-17.65	H	AV
4804	35.20	34.04	6.58	34.09	41.73	54.00	-12.27	H	AV
7206	29.74	37.11	7.73	34.50	40.08	54.00	-13.92	H	AV
9608	27.33	39.31	9.23	34.79	41.08	54.00	-12.92	H	AV

GFSK Middle Channel (2440MHz)

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector (PK/AV)
2440(F)	85.69	32.24	5.46	33.85	89.54	114	-24.46	V	PK
4880	42.52	34.38	6.69	34.09	49.50	74.00	-24.50	V	PK
7320	41.22	37.22	7.78	34.53	51.69	74.00	-22.31	V	PK
9760	35.20	39.46	9.35	34.80	49.21	74.00	-24.79	V	PK
2440(F)	84.52	32.24	5.46	33.85	88.37	114	-25.63	H	PK
4880	41.50	34.38	6.69	34.09	48.48	74.00	-25.52	H	PK
7320	35.70	37.22	7.78	34.53	46.17	74.00	-27.83	H	PK
9760	34.21	39.46	9.35	34.80	48.22	74.00	-25.78	H	PK
2440(F)	75.69	32.24	5.46	33.85	79.54	94	-14.46	V	AV
4880	38.96	34.38	6.69	34.09	45.94	54.00	-8.06	V	AV
7320	35.55	37.22	7.78	34.53	46.02	54.00	-7.98	V	AV
9760	30.22	39.46	9.35	34.80	44.23	54.00	-9.77	V	AV



Report No.: PTC22022501701E-FC01

2440(F)	74.97	32.24	5.46	33.85	78.82	94	-15.18	H	AV
4880	36.22	34.38	6.69	34.09	43.20	54.00	-10.80	H	AV
7320	31.47	37.22	7.78	34.53	41.94	54.00	-12.06	H	AV
9760	29.46	39.46	9.35	34.80	43.47	54.00	-10.53	H	AV

GFSK High Channel (2480MHz)

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector (PK/AV)
2480(F)	84.76	32.32	5.48	33.92	88.64	114	-25.36	V	PK
4960	40.22	34.72	6.79	34.09	47.64	74.00	-26.36	V	PK
7440	35.27	37.34	7.82	34.57	45.86	74.00	-28.14	V	PK
9920	36.83	39.62	9.46	34.81	51.10	74.00	-22.90	V	PK
2480(F)	83.73	32.24	5.46	33.92	87.61	114	-26.39	H	PK
4960	39.32	34.72	6.79	34.09	46.74	74.00	-27.26	H	PK
7440	34.00	37.34	7.82	34.57	44.59	74.00	-29.41	H	PK
9920	35.22	39.62	9.46	34.81	49.49	74.00	-24.51	H	PK
2480(F)	76.44	32.24	5.46	33.92	80.32	94	-13.68	V	AV
4960	36.10	34.04	6.58	34.09	42.63	54.00	-11.37	V	AV
7440	30.72	37.11	7.73	34.50	41.06	54.00	-12.94	V	AV
9920	32.22	39.31	9.23	34.79	45.97	54.00	-8.03	V	AV
2480(F)	75.49	32.24	5.46	33.92	79.37	94	-14.63	H	AV
4960	34.38	34.04	6.58	34.09	40.91	54.00	-13.09	H	AV
7440	28.66	37.11	7.73	34.50	39.00	54.00	-15.00	H	AV
9920	30.15	39.31	9.23	34.79	43.90	54.00	-10.10	H	AV

Note:

1. The testing has been conformed to $10 \times 2480\text{MHz} = 24800\text{MHz}$.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
 Emission Level = Read Level + Factor
 Over Limit = Emission Level - Limit



Report No.: PTC22022501701E-FC01

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test Mode: Low Channel 2402MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	44.42	29.15	3.41	34.01	42.97	74.00	-31.03	H	Peak
2400	57.22	29.16	3.43	34.01	55.80	74.00	-18.20	H	Peak
2390	42.43	29.15	3.41	34.01	40.98	74.00	-33.02	V	Peak
2400	56.32	29.16	3.43	34.01	54.90	74.00	-19.10	V	Peak
2390	36.22	29.15	3.41	34.01	34.77	54.00	-19.23	H	AV
2400	48.83	29.16	3.43	34.01	47.41	54.00	-6.59	H	AV
2390	36.45	29.15	3.41	34.01	35.00	54.00	-19.00	V	AV
2400	45.36	29.16	3.43	34.01	43.94	54.00	-10.06	V	AV

Test Mode: High Channel 2480MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	48.33	29.28	3.53	34.03	47.11	74.00	-26.89	H	Peak
2500	43.00	29.30	3.56	34.03	41.83	74.00	-32.17	H	Peak
2483.5	46.90	29.28	3.53	34.03	45.68	74.00	-28.32	V	Peak
2500	43.43	29.30	3.56	34.03	42.26	74.00	-31.74	V	Peak
2483.5	40.85	29.28	3.53	34.03	39.63	54.00	-14.37	H	AV
2500	47.20	29.30	3.56	34.03	46.03	54.00	-7.97	H	AV
2483.5	42.40	29.28	3.53	34.03	41.18	54.00	-12.82	V	AV
2500	35.10	29.30	3.56	34.03	33.93	54.00	-20.07	V	AV




7 20dB Bandwidth Test

7.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

7.2 Test Setup



7.3 Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW =100kHz,
Detector= Average
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and –20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



7.4 Test Data

Test Item	: 20dB Bandwidth	Test Mode	: TX
Test Voltage	: DC 3.7V	Temperature	: 23.4°C
Test Result	: PASS	Humidity	: 52.7%RH


Frequency (MHz)	Bandwidth (MHz)	Result
2402MHZ	1.211	PASS
2440MHZ	1.212	PASS
2480MHZ	1.210	PASS



Test Mode: Low



Report No.: PTC22022501701E-FC01

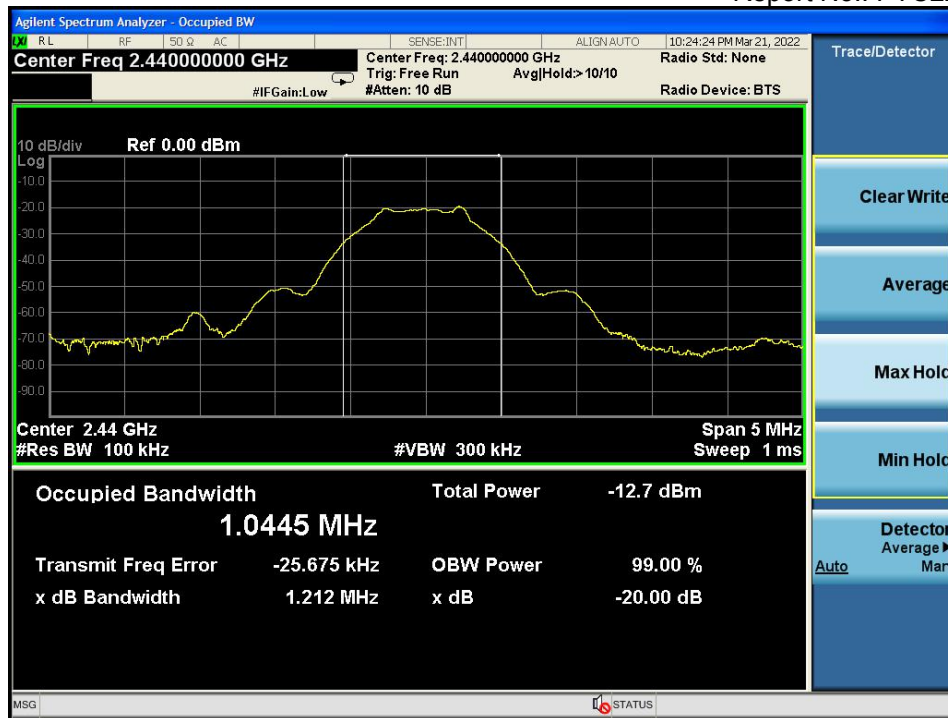

Test Mode: Middle



Test Mode: High


8 Antenna Requirement

8.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.2 Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 0DBI. It complies with the standard requirement.

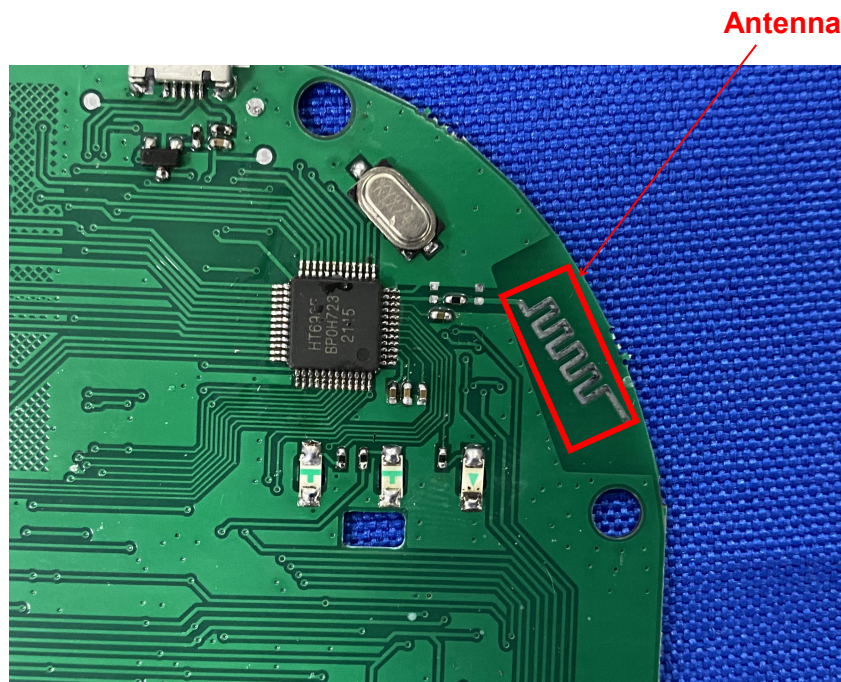


9 APPENDIX I -- TEST SETUP PHOTOGRAPH


Conducted Emission



Radiated Spurious Emissions
From 30MHz-1000MHz

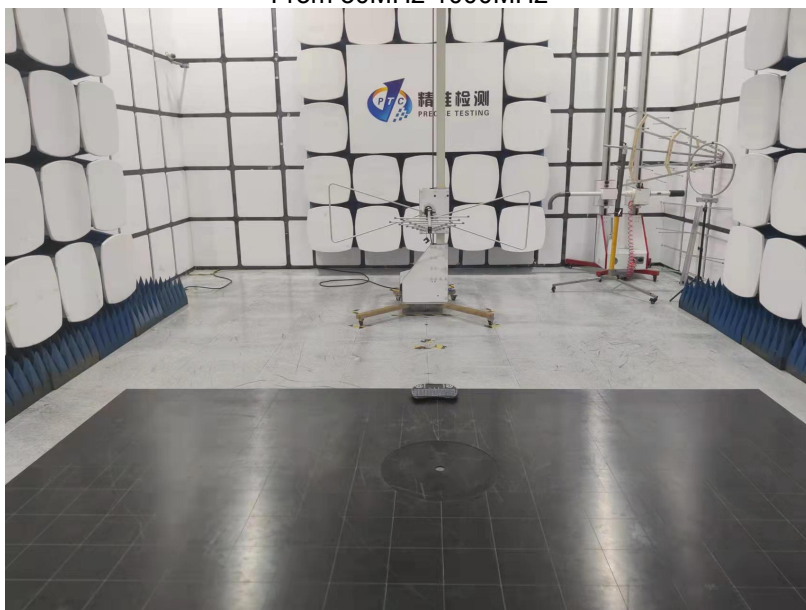

Above 1GHz

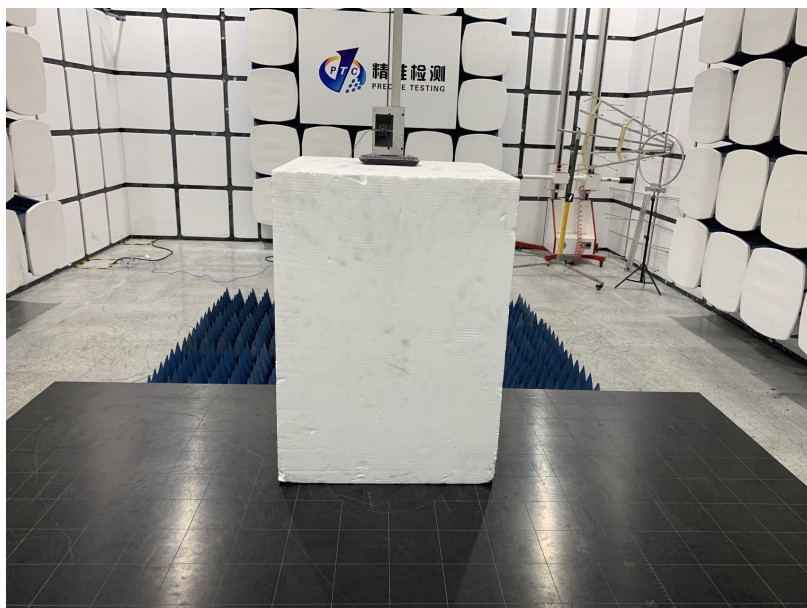

10 APPENDIX II -- EXTERNAL PHOTOGRAPH













11 APPENDIX III -- INTERNAL PHOTOGRAPH

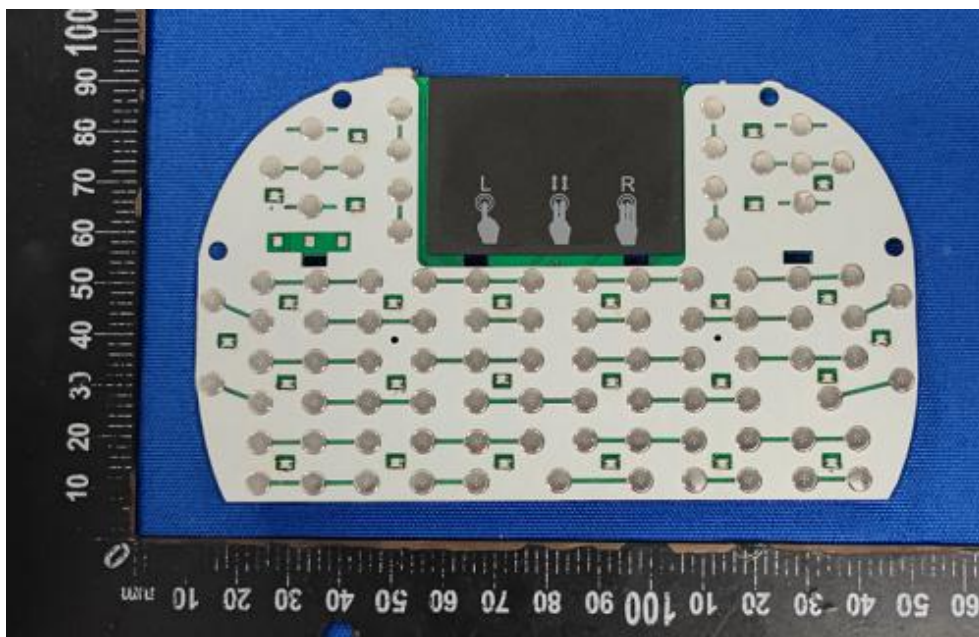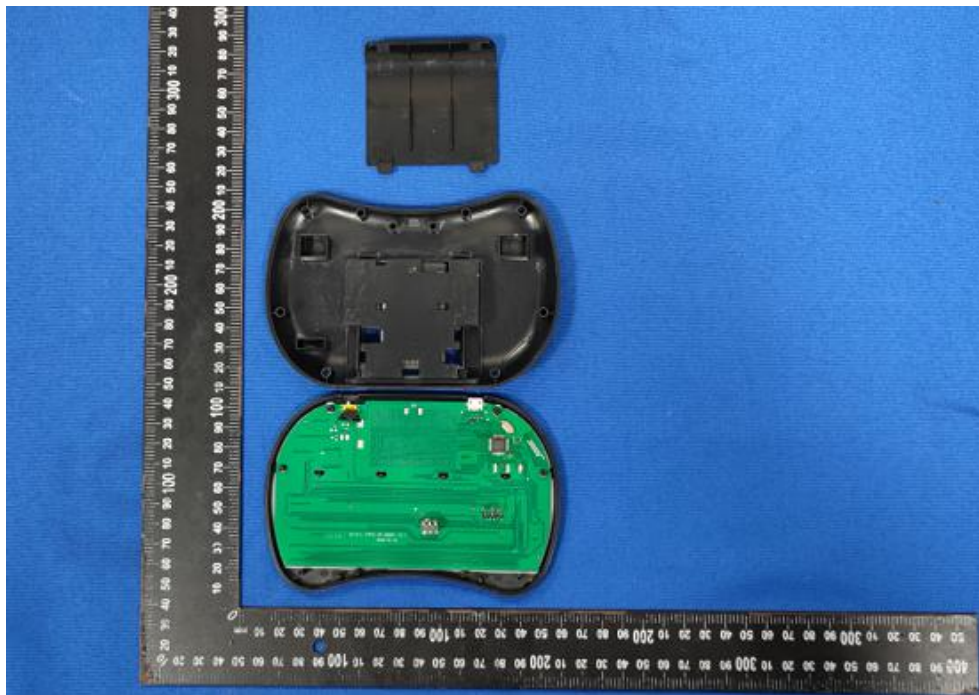

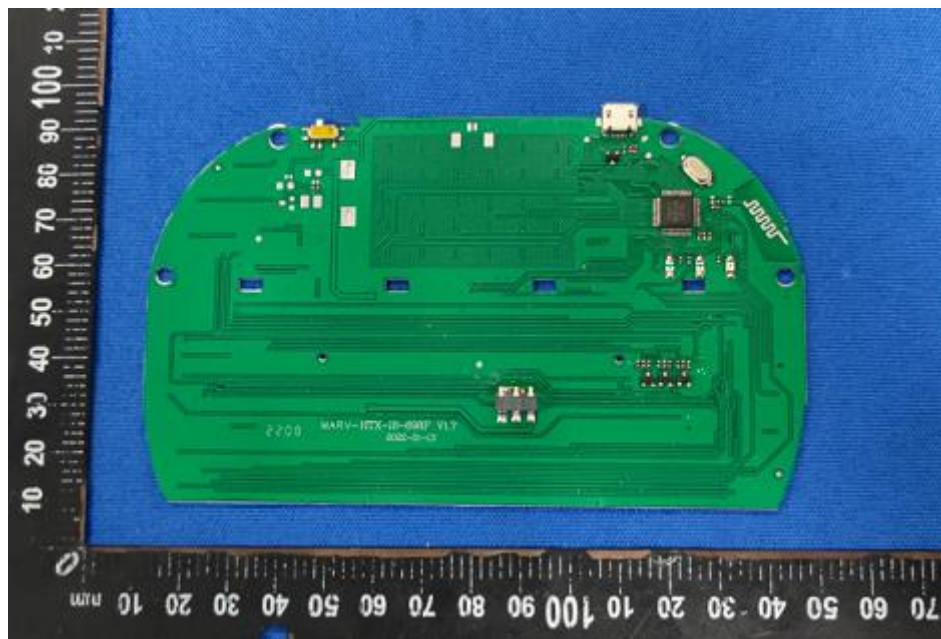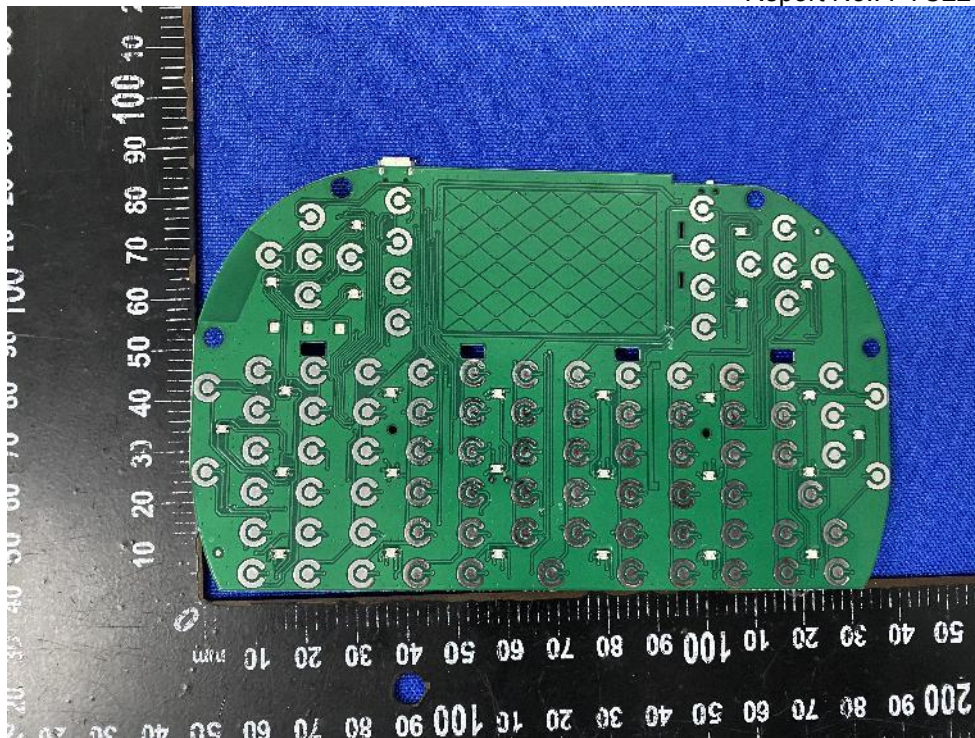

*****THE END REPORT*****