



Dongguan Henghui Electronic Technology Co., Ltd.

Hengxin Technology Inc.

Acknowledgment

client:

Product name:

2.4G Antenna

Part No:

HX-A11

Customer part number:


Sample delivery date:

The customer confirms that the supplier's engineering department, quality				
assurance department,	purchasing department	approves the sample	sender	
			Zhao Shougang	

Address: No. 75, Yanghe Road, Yanggongzhou,
Shatian Town, Dongguan City TEL: 0769-81663533 FAX:
0769-89361945 E-mail:
nogps@qq.com Http://
www.nogps.cn http://hxnogps.1688.com

Table of contents

1. Cover -----	1
2. Directory -----	2
3. Finished product drawing -----	3
4. Test report -----	4

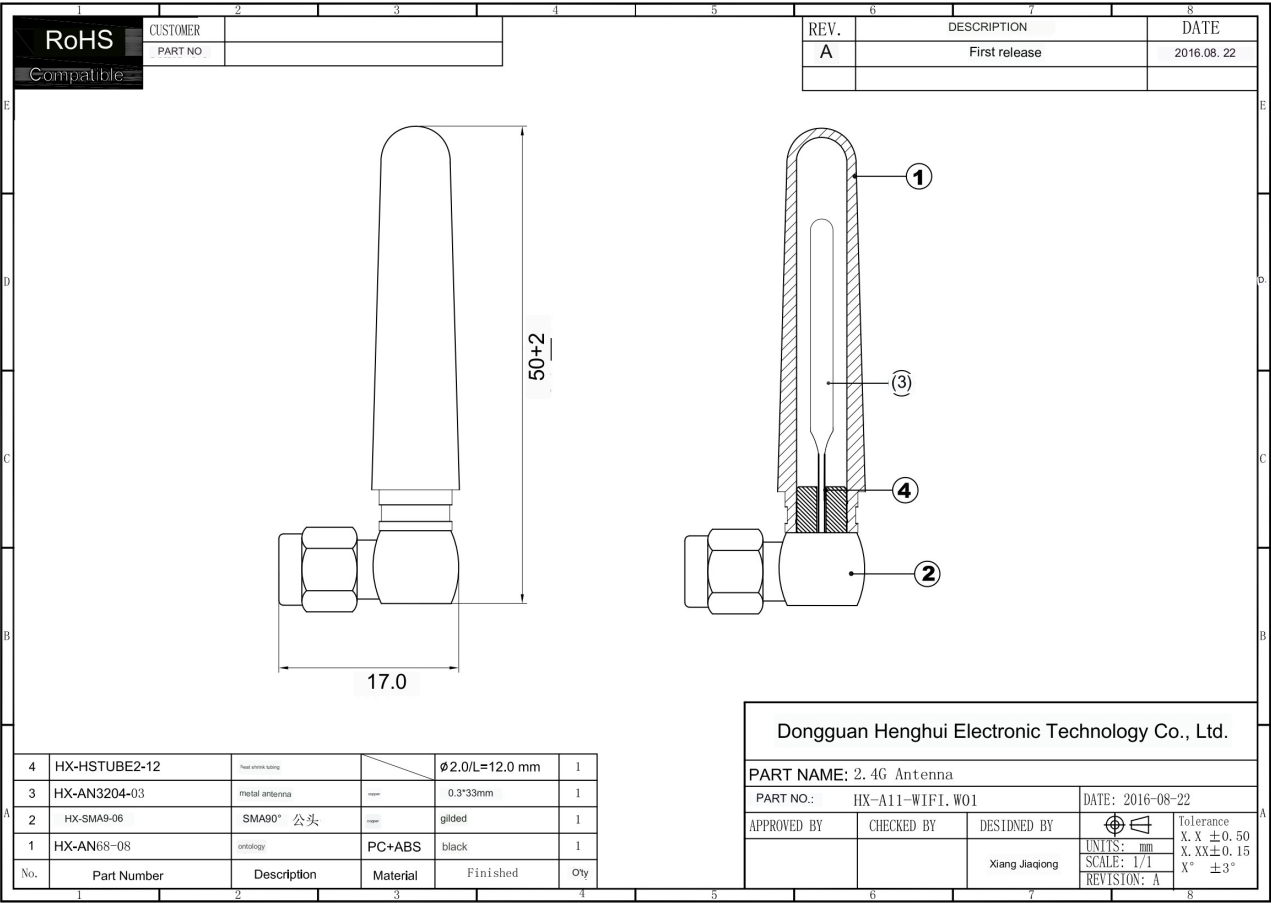

Index:

1. Reliability Testing 2.
Specification 3. S
Parameter Test Data 4. Antenna
Radiation Pattern

=====


1. Reliability Testing

Test Item	Procedure	Requirement
1. Visual inspection and Dimension check	Applicable methods using x5 magnification	follow specification
2. Rapid Changing of Temperature	-40°C (30minutes) to 80°C (30minutes); 24 cycles	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance <±5%
3. Damp Heat	24 hours at 60°C; 90 ~ 95%RH	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance <±5%
4. Endurance	24 hours at 80°C	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance <±5%
5. Connector Pull Strength Test	>= 1.0 Kg	Hold 2~3S: 1. no visible damage 2. bandwidth tolerance <±5%

2.Specification

A. Electrical Characteristics	
SWR(Tested in PC)	≤ 2.0 @ 2400~2500 MHz
Typical Antenna Gain	2.0dBi
Impedance	50 Ohms
B.Material	
Material of Radiator	CU
Connector Type	SMA
C. Environmental	
Operation Temperature	- 30°C ~ + 85°C
Storage Temperature	- 30°C ~ + 85°C

3. SWR Testing Result

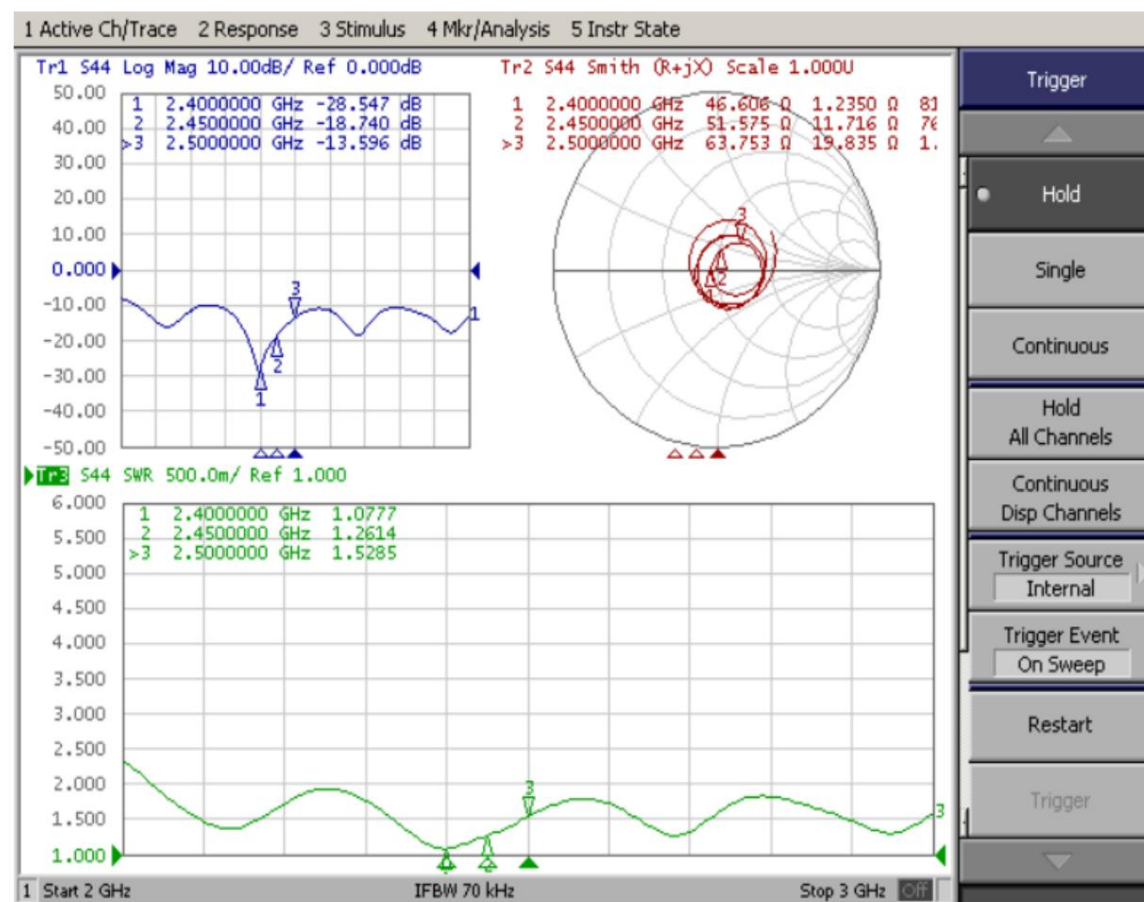

4. Antenna Radiation Pattern

yyyyyyyyy

Antenna Anechoic Chamber Dimension: 8 x 4 x 4 m

Quiet Zone: 600mm @1 GHz

Isolation: >100dB @ 1 MHz ~ 10 GHz

Testing Equipment: Agilent 5071B

Received Antenna: 0.7 ~ 6.0 GHz for Gain Calibration

Double Ridged Horn Antenna

