



FCC RF Test Report

APPLICANT : GT-tronics HK Limited
EQUIPMENT : GT-tronics QCC Bluetooth Module
BRAND NAME : GT-tronics
MODEL NAME : QC386FNA, QC386FNB, QC581FNA,
QC581FNB
FCC ID : B4O-QC38XFNX
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : May 27, 2024 ~ Nov. 05, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	20
3.4 20dB and 99% Bandwidth Measurement	22
3.5 Output Power Measurement.....	33
3.6 Conducted Band Edges Measurement.....	34
3.7 Conducted Spurious Emission Measurement	41
3.8 Radiated Band Edges and Spurious Emission Measurement	51
3.9 AC Conducted Emission Measurement.....	55
3.10 Antenna Requirements.....	57
4 LIST OF MEASURING EQUIPMENT.....	58
5 MEASUREMENT UNCERTAINTY	59
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR440902A	Rev. 01	Initial issue of report	Dec. 11, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.57 dB at 2483.600 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.74 dB at 0.150 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

GT-tronics HK Limited

B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

1.2 Manufacturer

GT-tronics HK Limited

B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GT-tronics QCC Bluetooth Module
Brand Name	GT-tronics
Model Name	QC386FNA, QC386FNB, QC581FNA, QC581FNB
FCC ID	B4O-QC38XFNX
SN Code	Conducted: F4044C1FE599 for sample 1 Radiated: F4044C1FE600 for sample 1 F4044C1FE601 for sample 2 F4044C1FE602 for sample 3 Conduction: F4044C1FE597 for sample 1
HW Version	v2.2
SW Version	1.0
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The four models name QC386FNA, QC386FNB, QC581FNA, QC581FNB are the same product except model name different for market segment.
3. There are three kinds of Antenna for EUT, as below,

Antenna number	Antenna Type	Antenna Gain
1	Chip	1.80dBi
2	Metal Wire	2.71dBi
3	Dipole	5.00dBi

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 11.88 dBm (0.0154 W) Bluetooth EDR (2Mbps) : 11.08 dBm (0.0128 W) Bluetooth EDR (3Mbps) : 11.64 dBm (0.0146 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.883MHz Bluetooth EDR (2Mbps) : 1.187MHz Bluetooth EDR (3Mbps) : 1.195MHz
Antenna Type / Gain	<sample 1>Chip Antenna type with gain 1.80 dBi <sample 2>Metal Wire Antenna Type with gain 2.71 dBi <sample 3>Dipole Antenna type with gain 5.00 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272



Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : Bluetooth Link + Powered By NB for sample 1		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with test jig and notebook.			

2.3 Connection Diagram of Test System

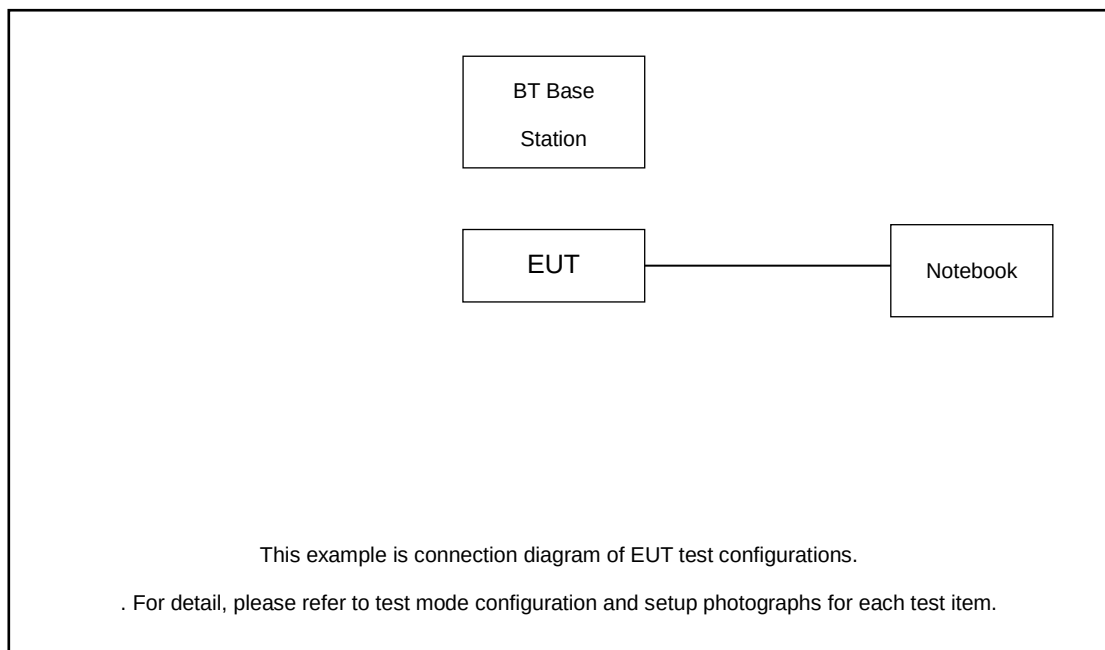

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Wireless Connectivity tester	R&S	CMW 270	N/A	N/A	Unshielded,1.8m
2.	Test Jig	N/A	N/A	N/A	N/A	N/A
3.	Antenna	N/A	N/A	N/A	N/A	N/A
4.	Notebook	DELL	3400	N/A	N/A	AC I/P : Unshielded, 1.2m DC O/P: Shielded, 1.8m
5.	WLAN AP	Dlink	DIR-820L	N/A	N/A	Unshielded,1.8m
6.	iPod	apple	MC69029/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program " BlueTest3" was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with Wireless Connectivity tester.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.0 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.0 + 10 = 11.0(\text{dB})\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

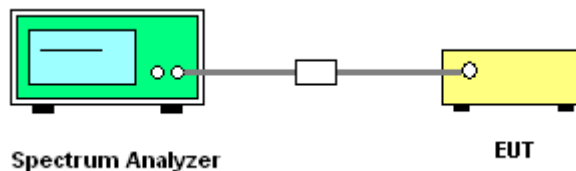


3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.



Number of Hopping Channel Plot on Channel 00

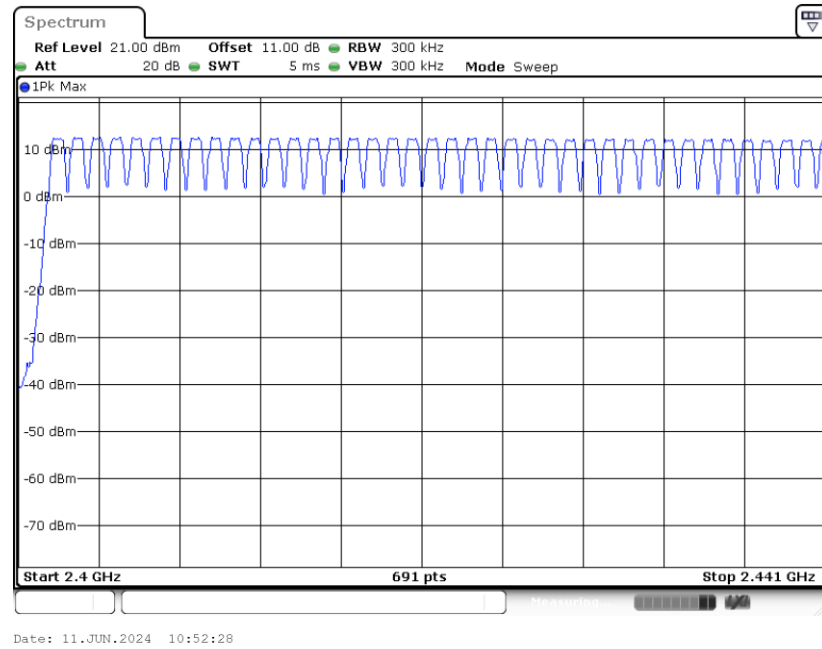

Number of Hopping Channel Plot on Channel 78

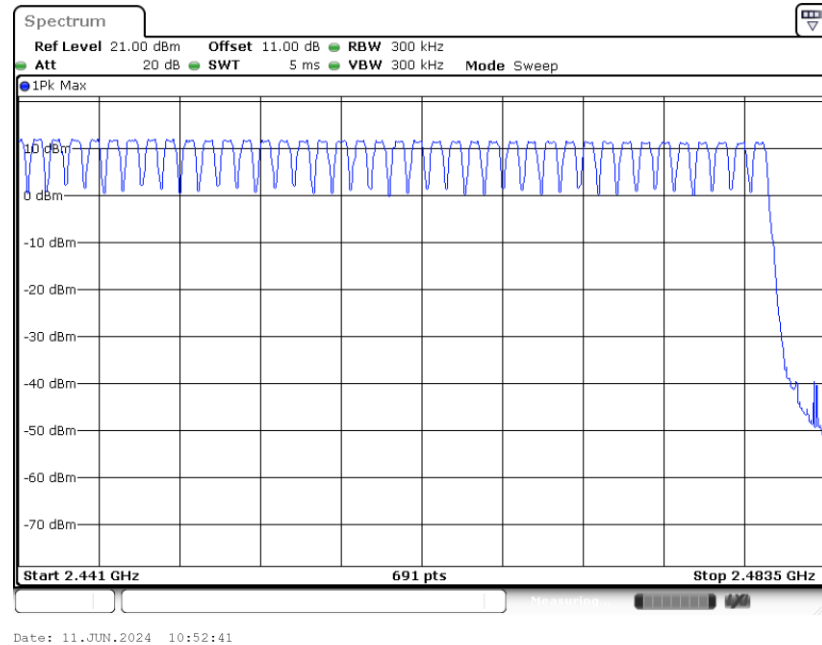

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

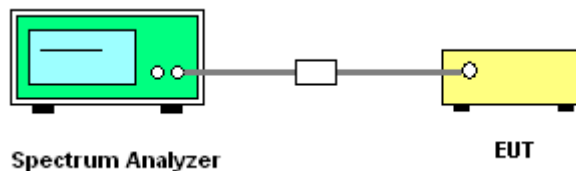


3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<1Mbps>

Channel Separation Plot on Channel 00 - 01

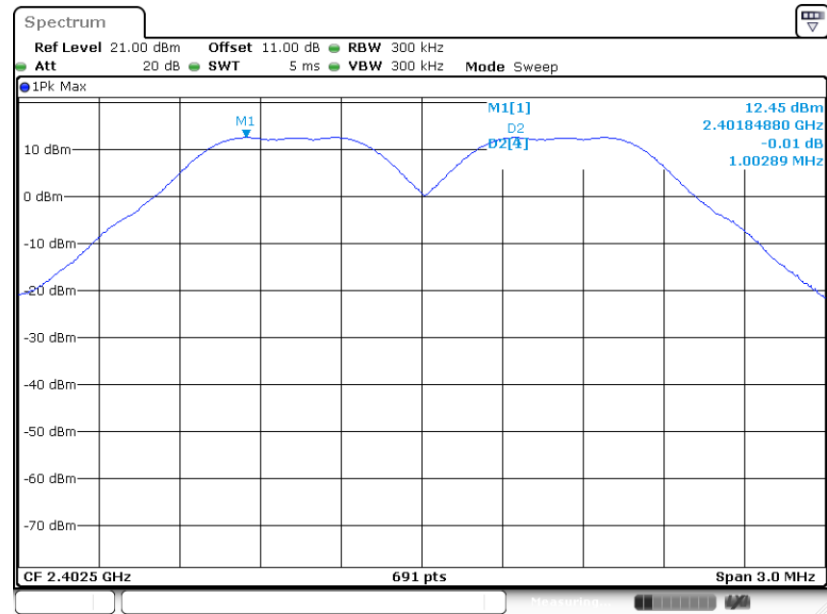

Date: 11.JUN.2024 10:46:14


Channel Separation Plot on Channel 39 - 40

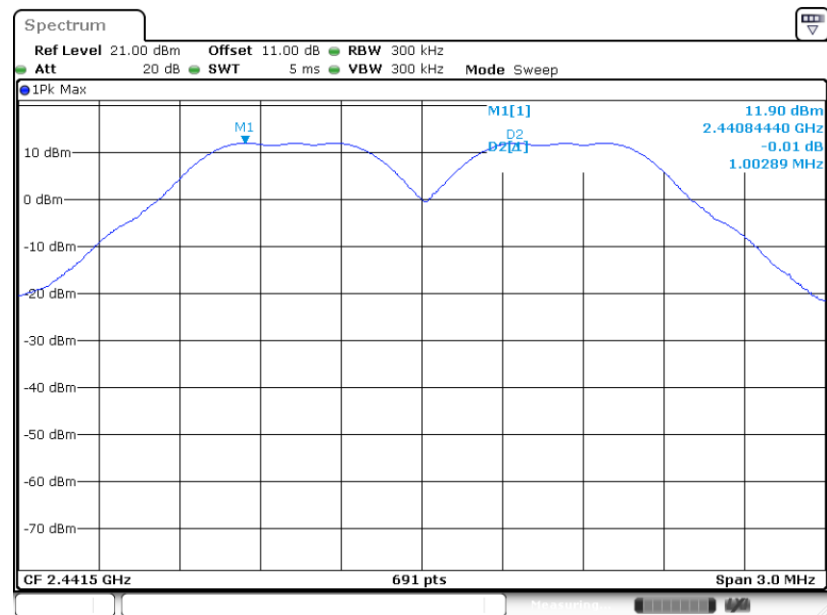

Date: 11.JUN.2024 10:42:30




Channel Separation Plot on Channel 77 - 78

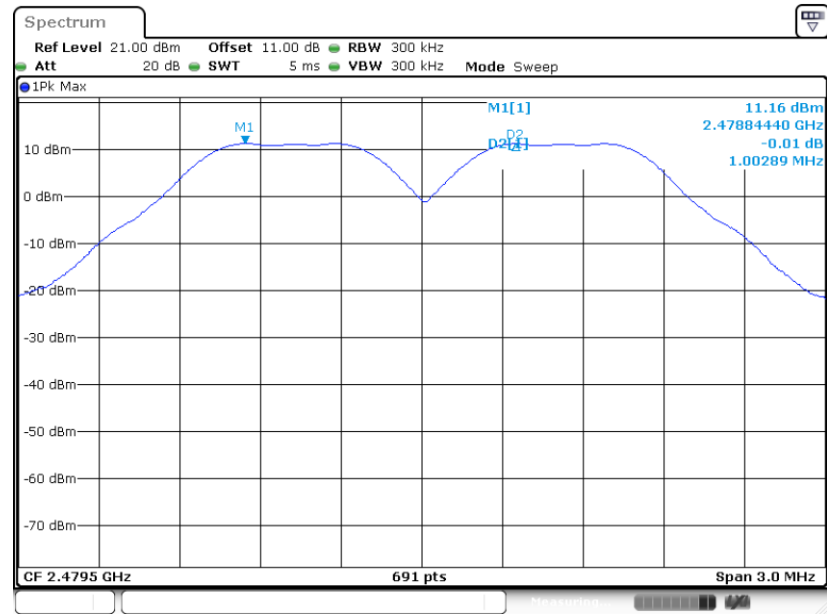

Date: 11.JUN.2024 10:40:40

<2Mbps>


Channel Separation Plot on Channel 00 - 01

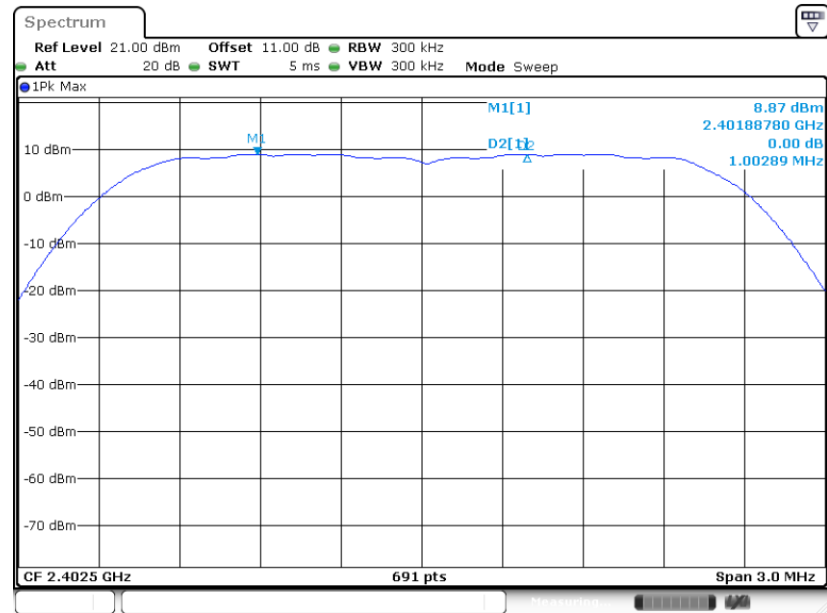

Date: 11.JUN.2024 11:35:39




Channel Separation Plot on Channel 39 - 40

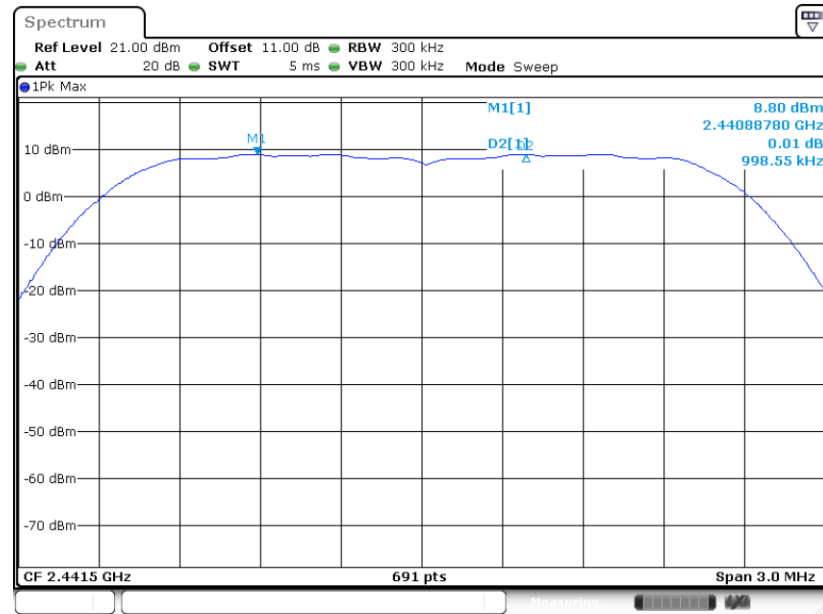

Date: 11.JUN.2024 11:09:33

Channel Separation Plot on Channel 77 - 78

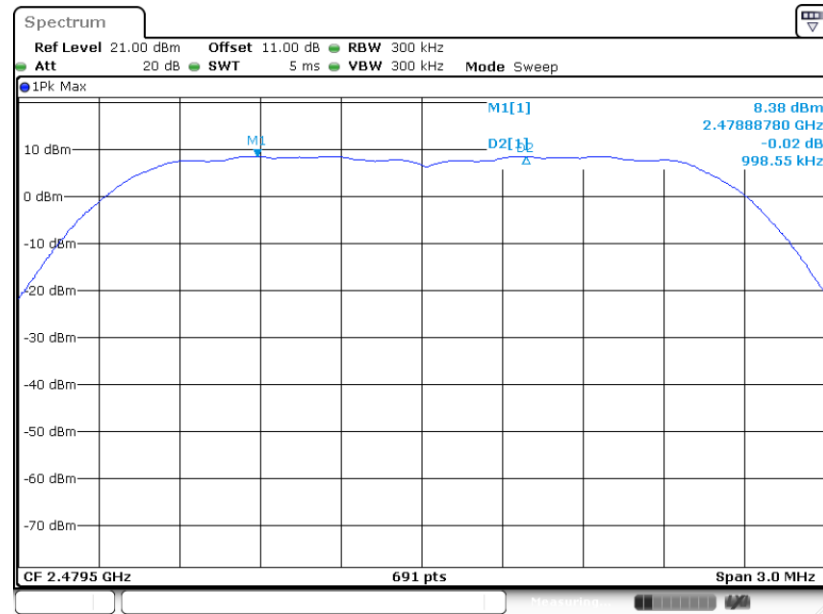


Date: 11.JUN.2024 11:03:32




<3Mbps>

Channel Separation Plot on Channel 00 - 01

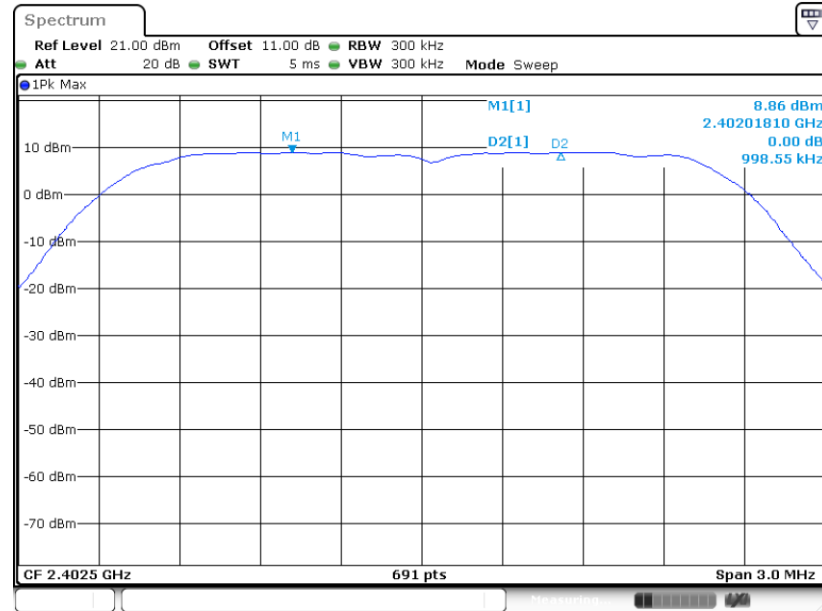

Date: 11.JUN.2024 11:53:46


Channel Separation Plot on Channel 39 - 40

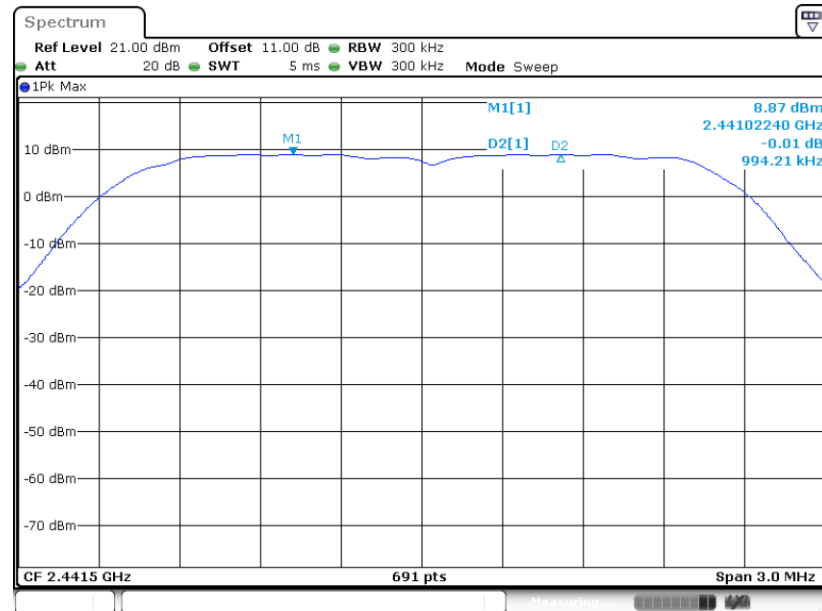

Date: 11.JUN.2024 11:55:33



Channel Separation Plot on Channel 77 - 78

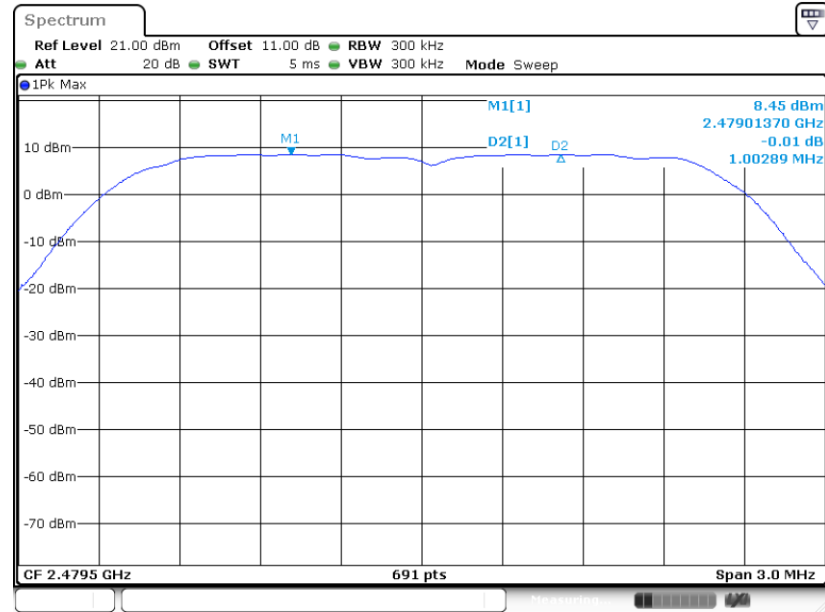

Date: 11.JUN.2024 11:57:55

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


3.3.4 Test Setup

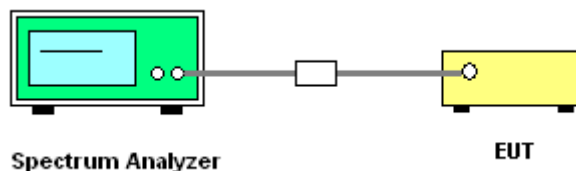

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

Package Transfer Time Plot

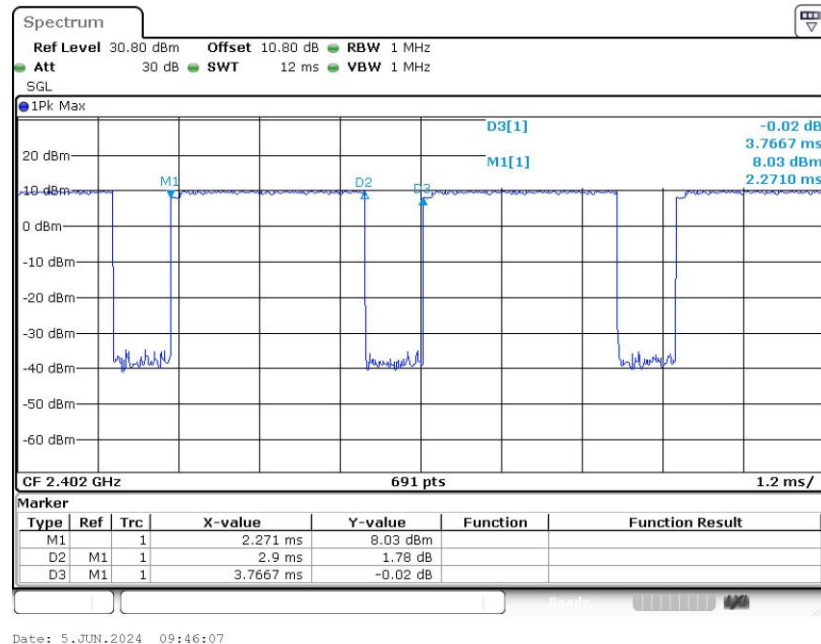

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

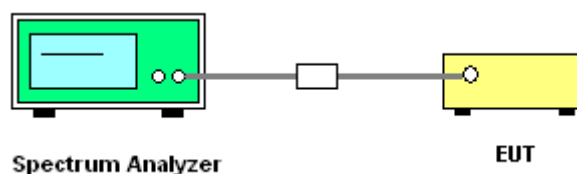


3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00

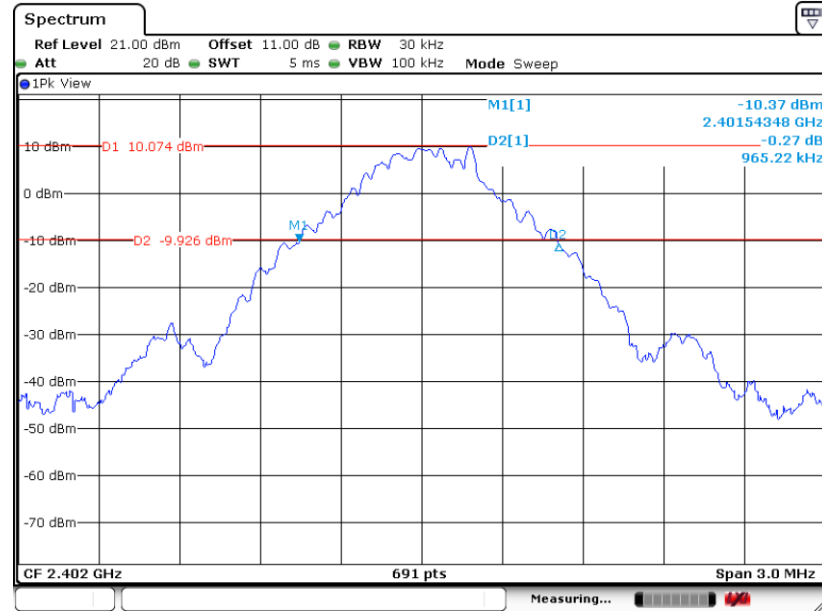

Date: 11.JUN.2024 10:18:48


20 dB Bandwidth Plot on Channel 39

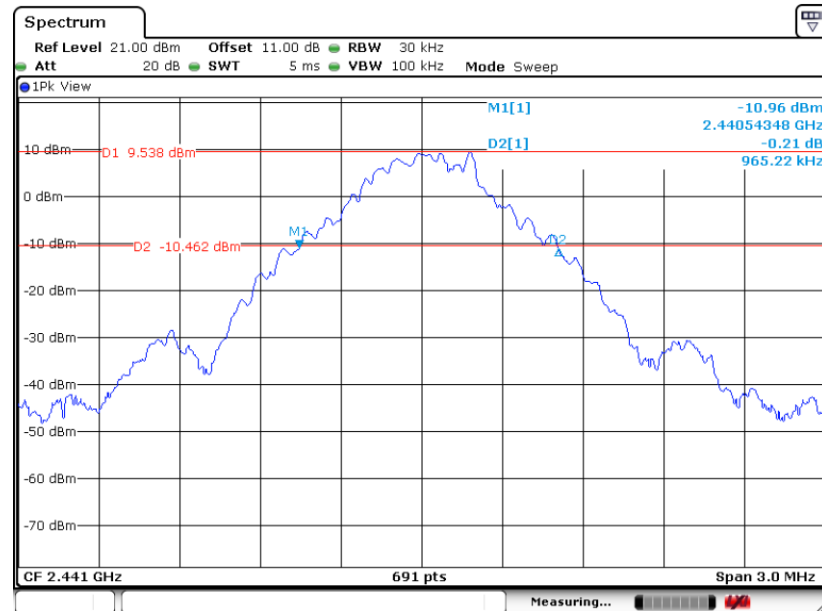

Date: 11.JUN.2024 10:25:28




20 dB Bandwidth Plot on Channel 78

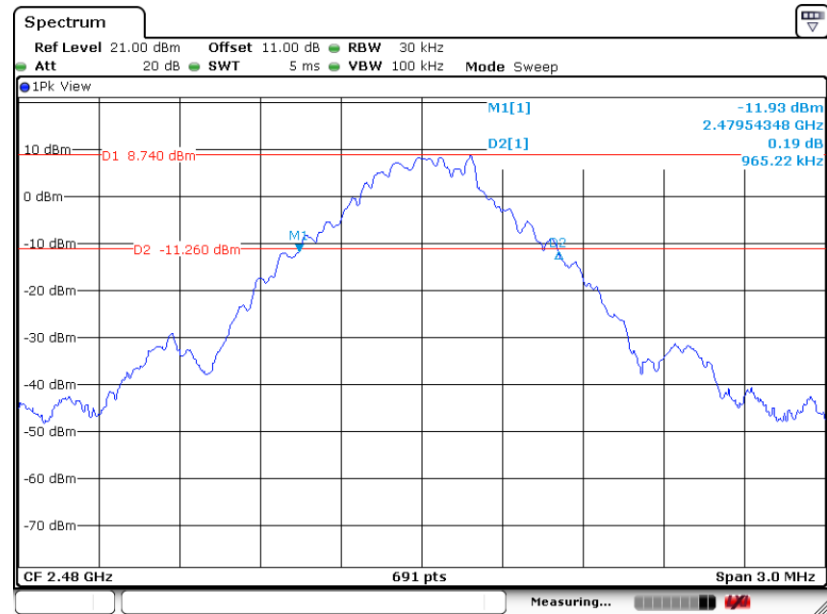

Date: 11.JUN.2024 10:33:40

<2Mbps>


20 dB Bandwidth Plot on Channel 00

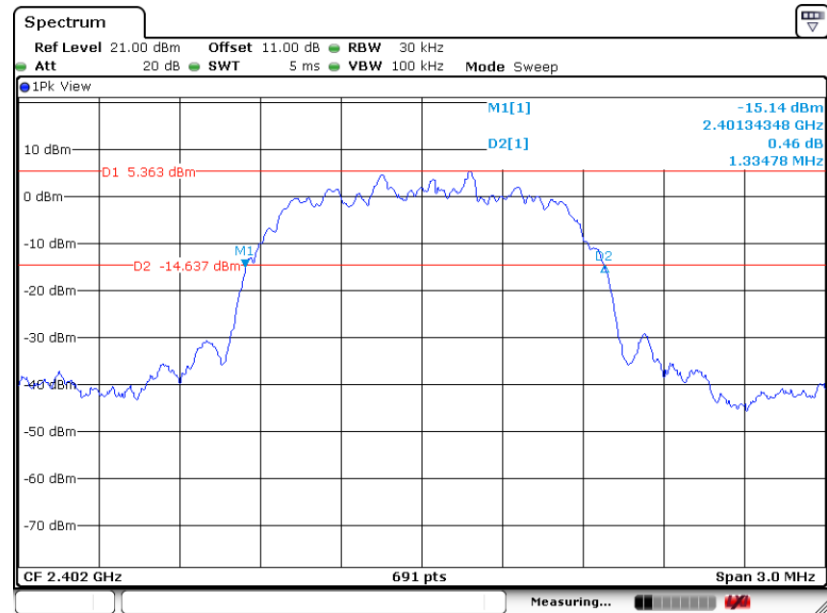

Date: 11.JUN.2024 10:54:22




20 dB Bandwidth Plot on Channel 39

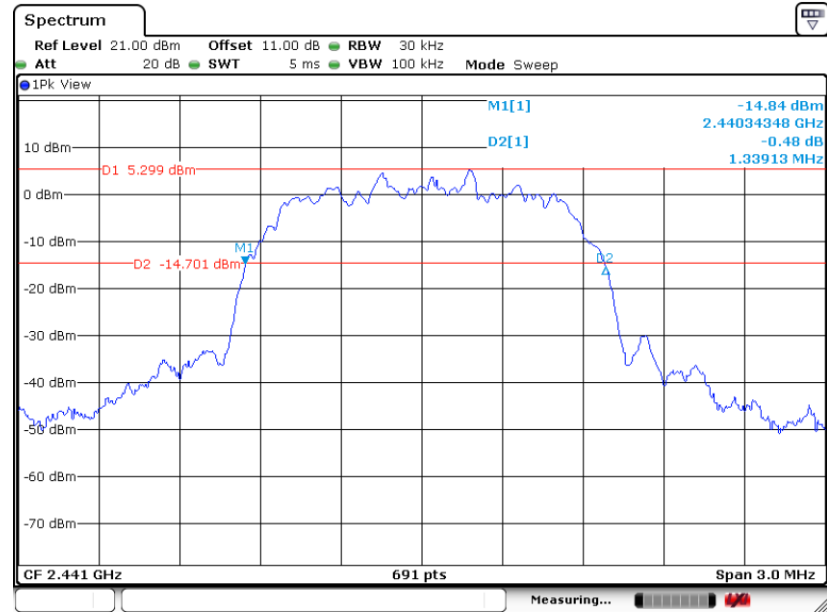

Date: 11.JUN.2024 10:58:22

20 dB Bandwidth Plot on Channel 78

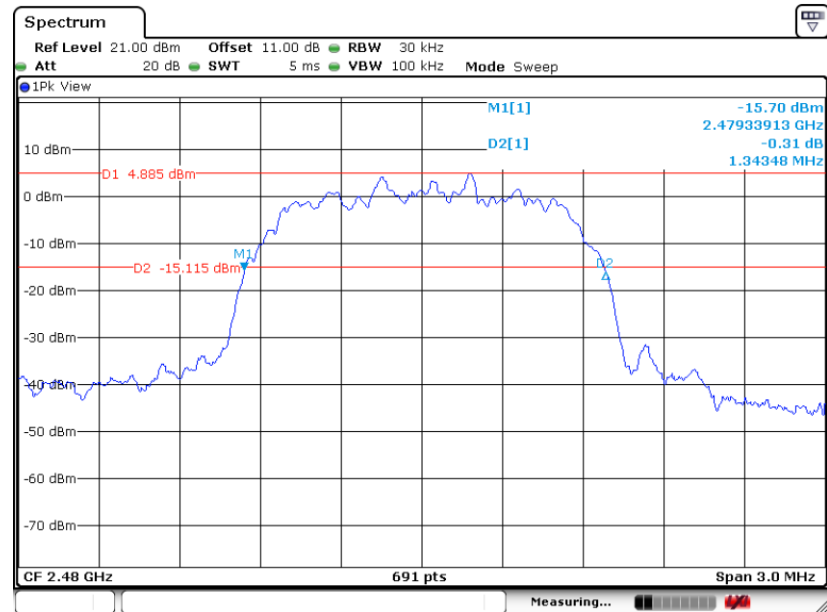


Date: 11.JUN.2024 11:01:04




<3Mbps>

20 dB Bandwidth Plot on Channel 00

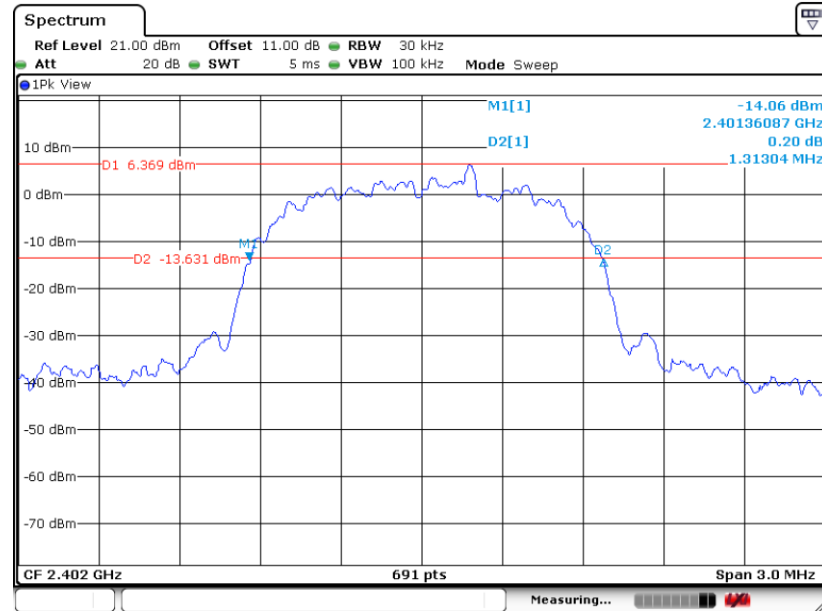

Date: 11.JUN.2024 11:43:24


20 dB Bandwidth Plot on Channel 39

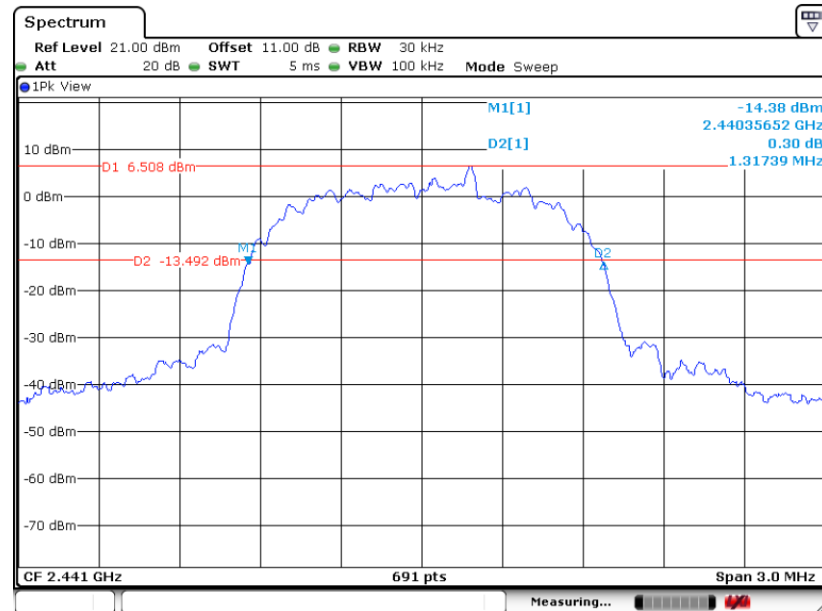

Date: 11.JUN.2024 11:46:27



20 dB Bandwidth Plot on Channel 78

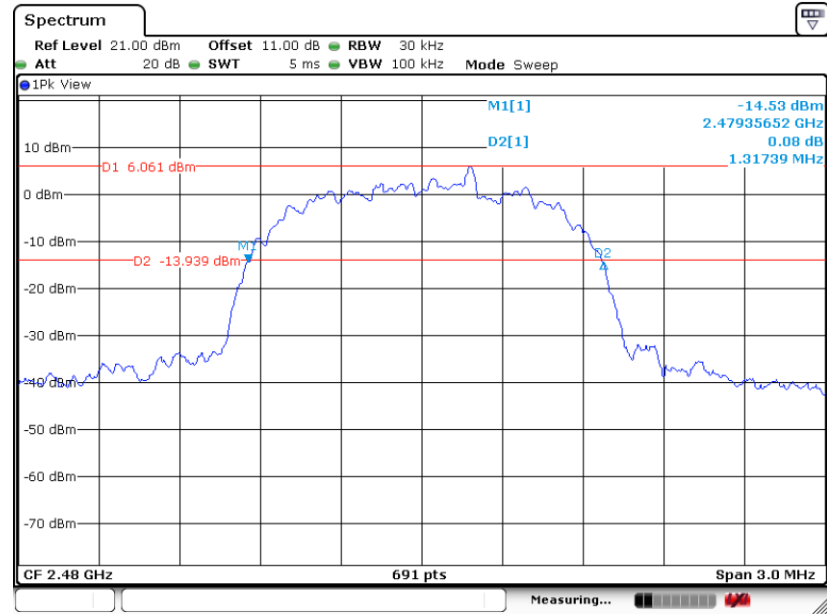

Date: 11.JUN.2024 11:50:38




3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

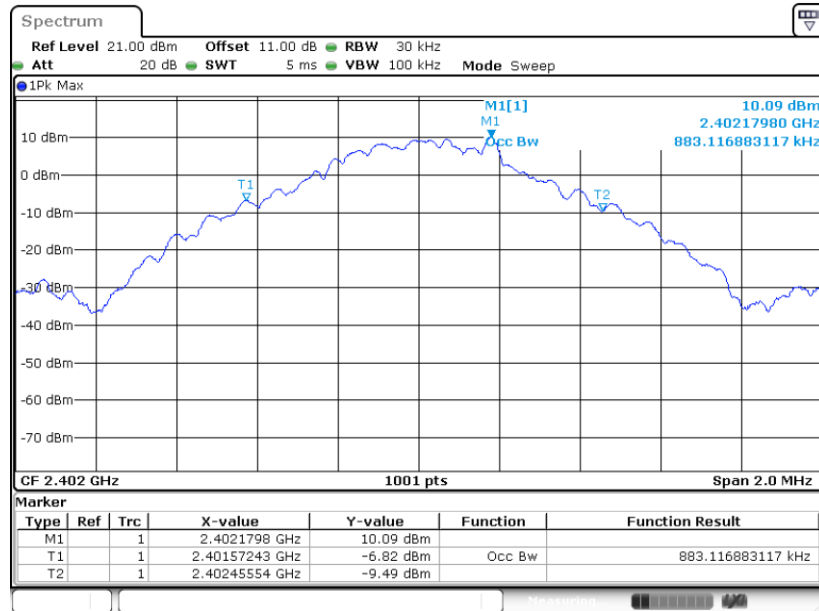


Date: 11.JUN.2024 10:17:56



99% Occupied Bandwidth Plot on Channel 39

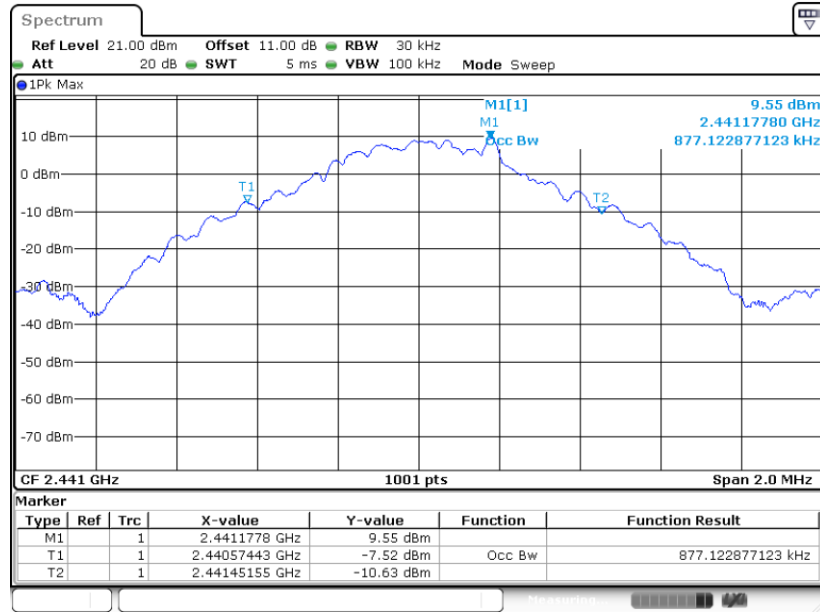


99% Occupied Bandwidth Plot on Channel 78

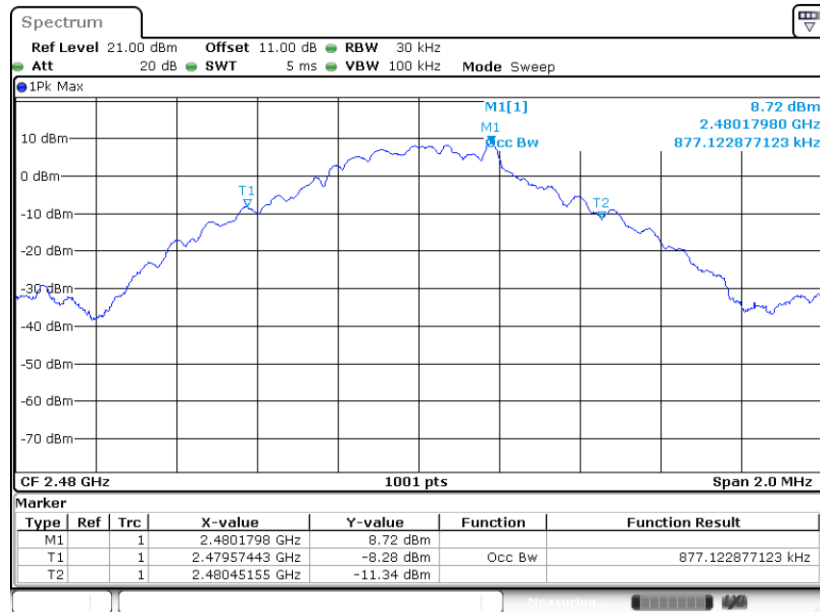




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

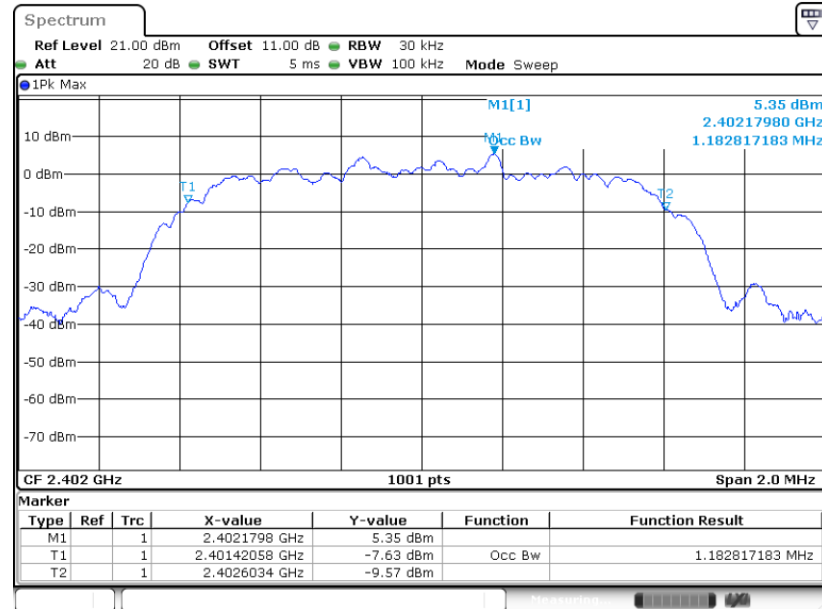

Date: 11.JUN.2024 10:53:39


99% Occupied Bandwidth Plot on Channel 39

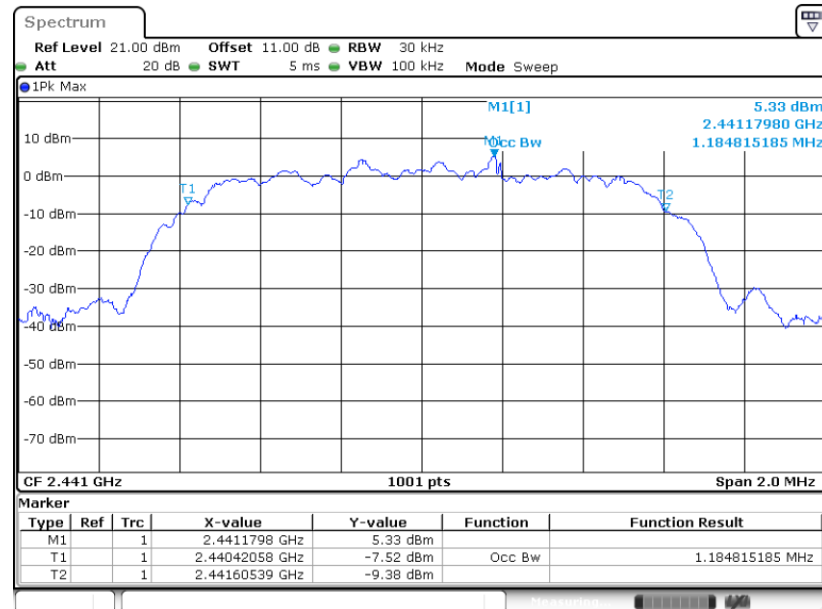

Date: 11.JUN.2024 10:57:57




99% Occupied Bandwidth Plot on Channel 78

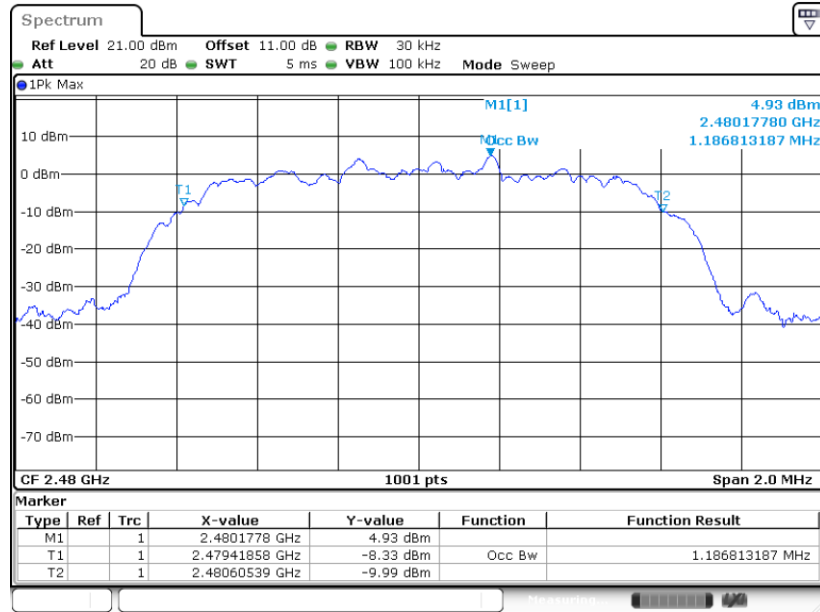

Date: 11.JUN.2024 11:00:15

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

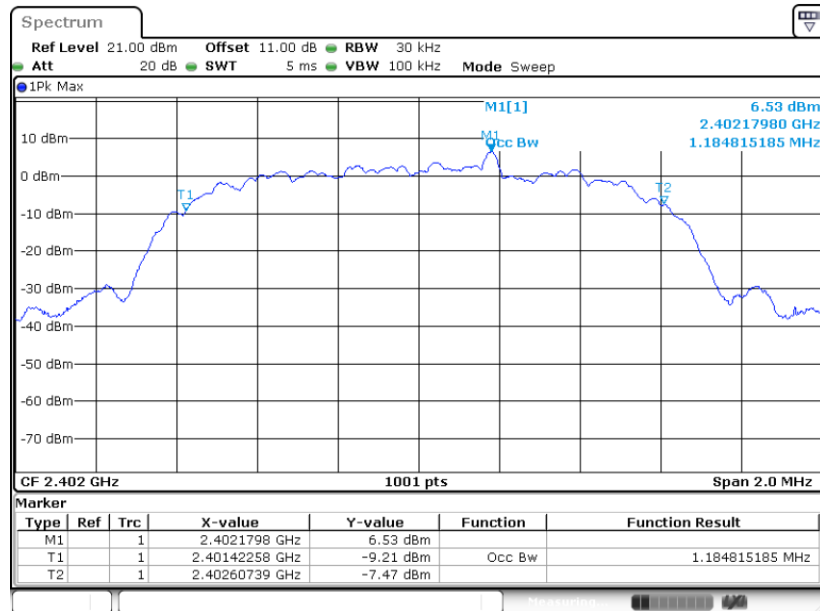


Date: 11.JUN.2024 11:41:59



99% Occupied Bandwidth Plot on Channel 39

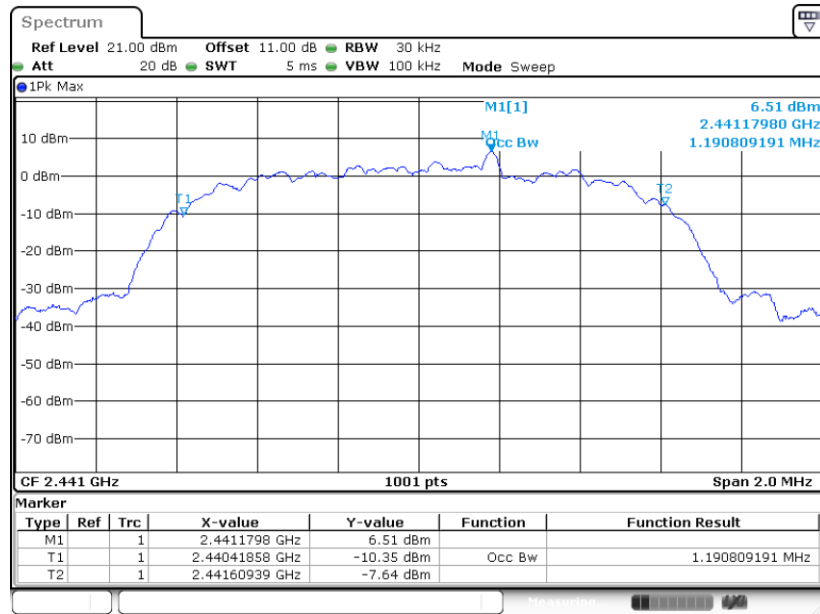

99% Occupied Bandwidth Plot on Channel 78

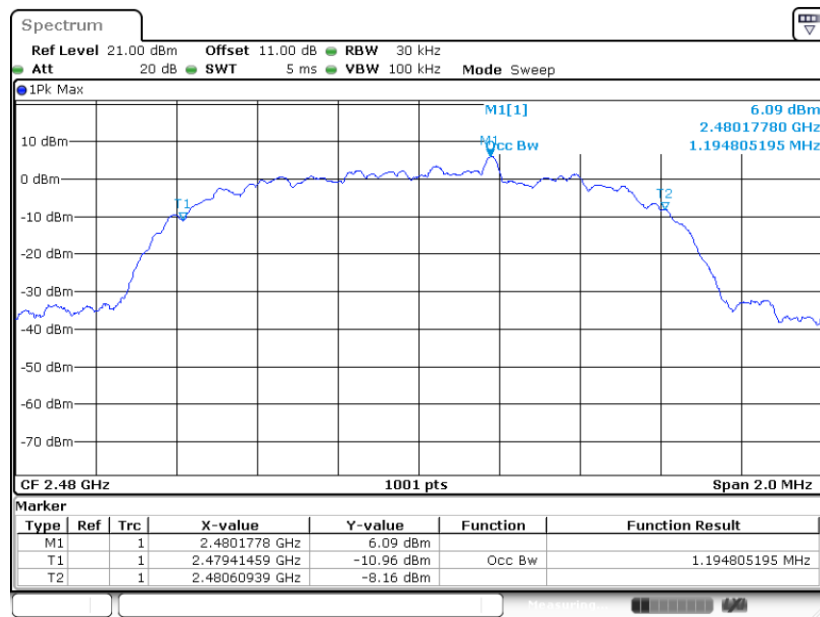

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

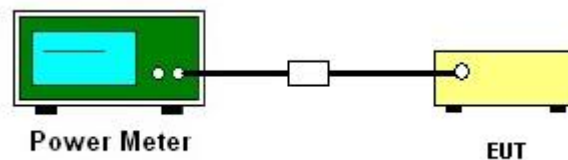

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

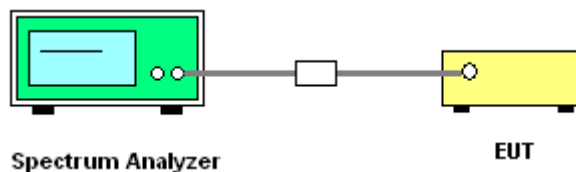





3.6.5 Test Result of Conducted Band Edges

<1Mbps>

Low Band Edge Plot on Channel 00

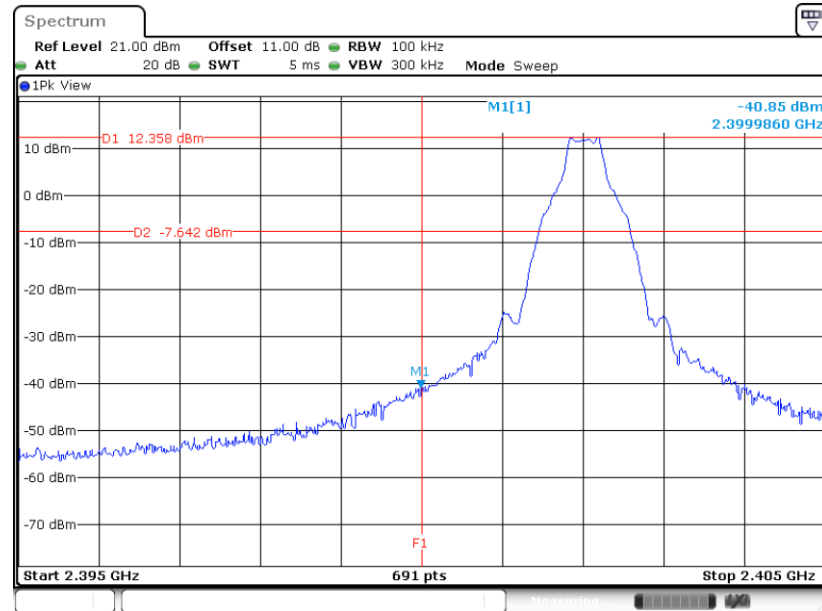


High Band Edge Plot on Channel 78

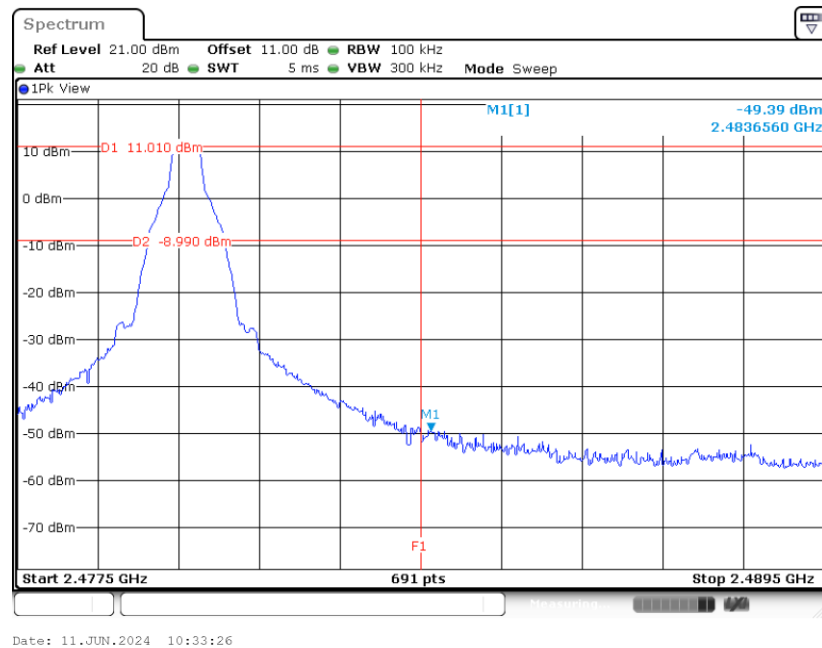




<2Mbps>

Low Band Edge Plot on Channel 00

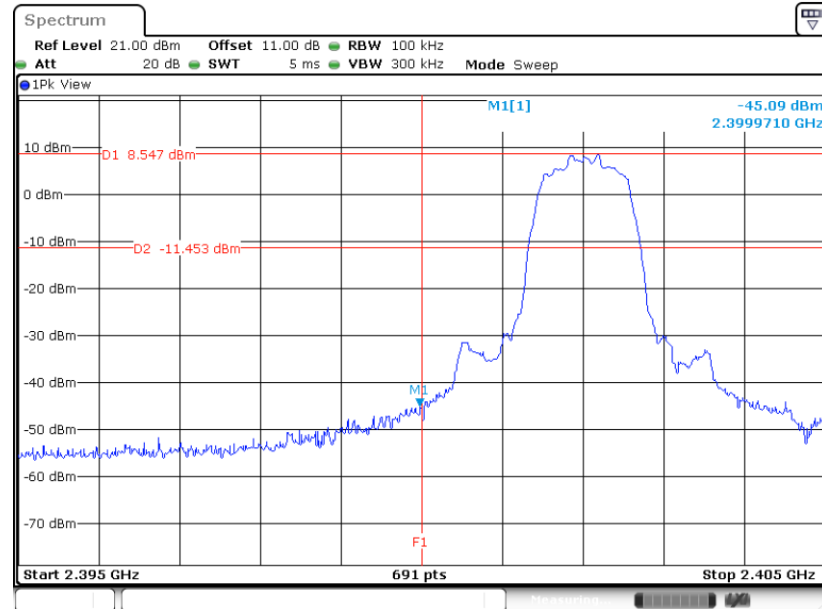

Date: 11.JUN.2024 10:54:05

High Band Edge Plot on Channel 78

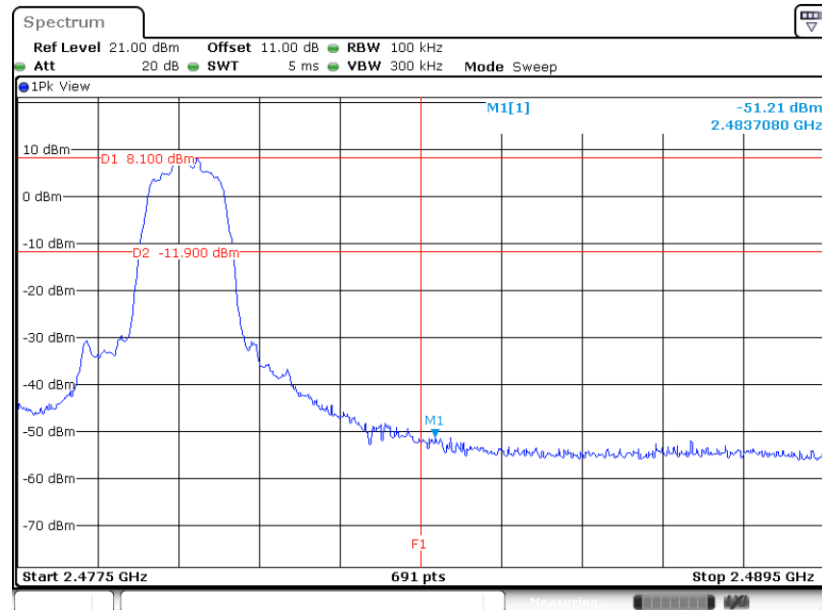


Date: 11.JUN.2024 11:00:49




<3Mbps>

Low Band Edge Plot on Channel 00

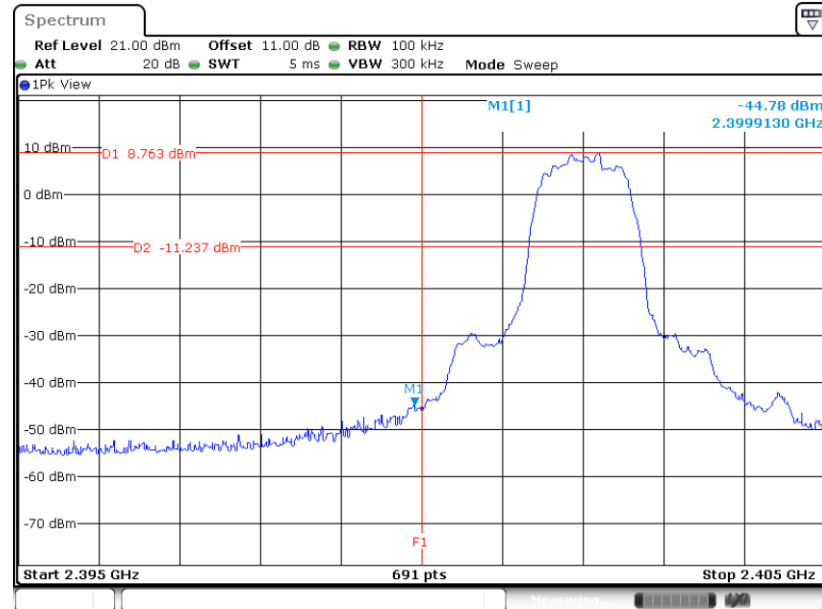

Date: 11.JUN.2024 11:42:55

High Band Edge Plot on Channel 78

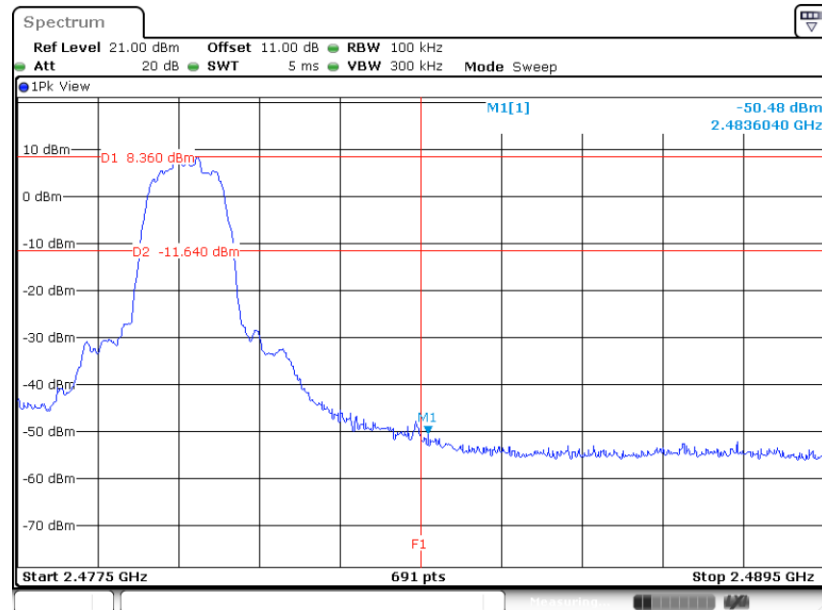


Date: 11.JUN.2024 11:50:08

3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

Hopping Mode Low Band Edge Plot

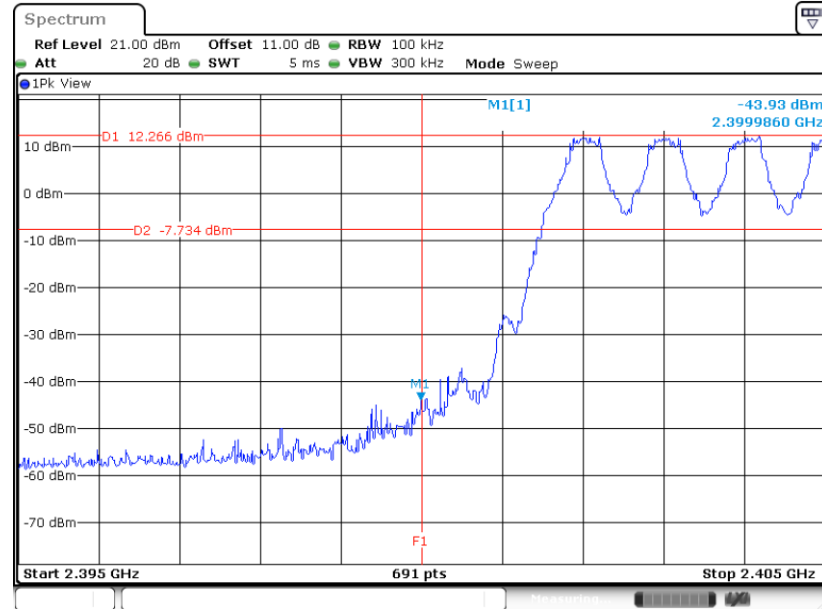

Date: 11.JUN.2024 10:49:24

Hopping Mode High Band Edge Plot

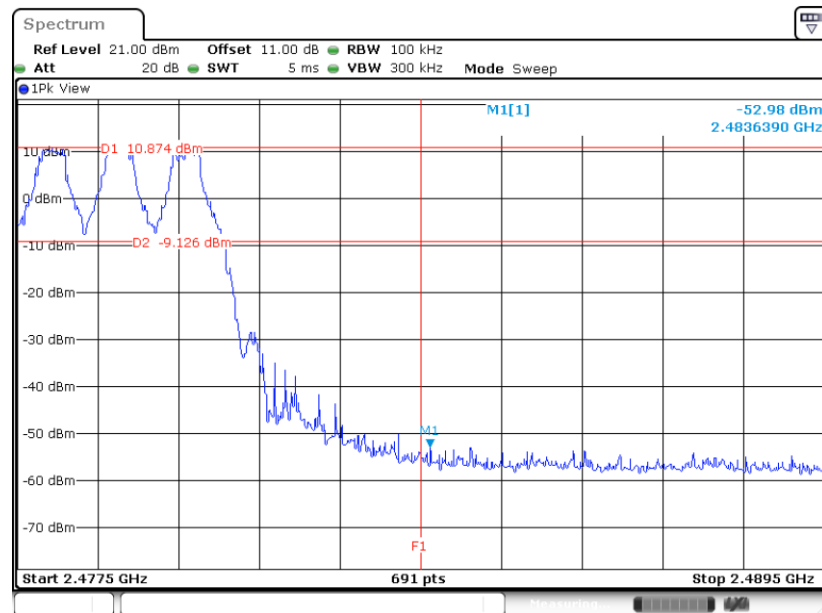


Date: 11.JUN.2024 10:50:03




<2Mbps>

Hopping Mode Low Band Edge Plot

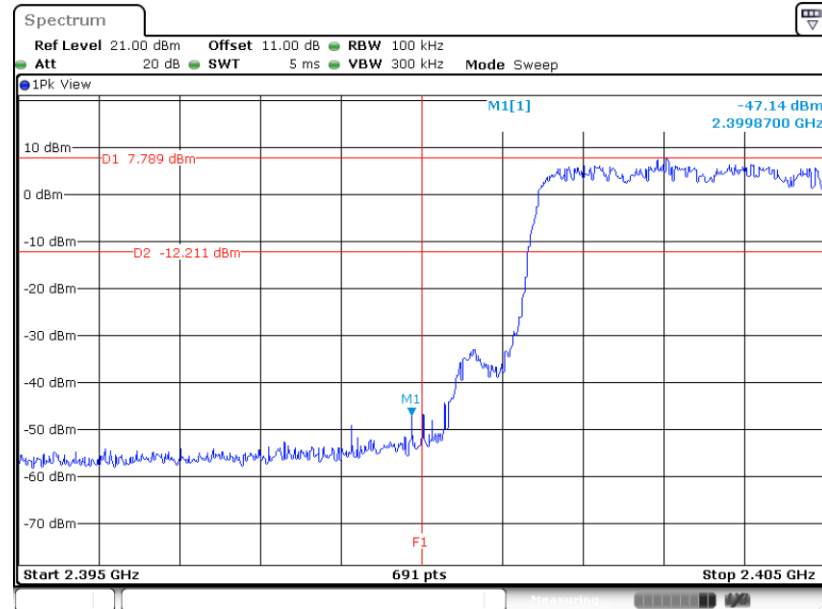

Date: 11.JUN.2024 11:37:29

Hopping Mode High Band Edge Plot

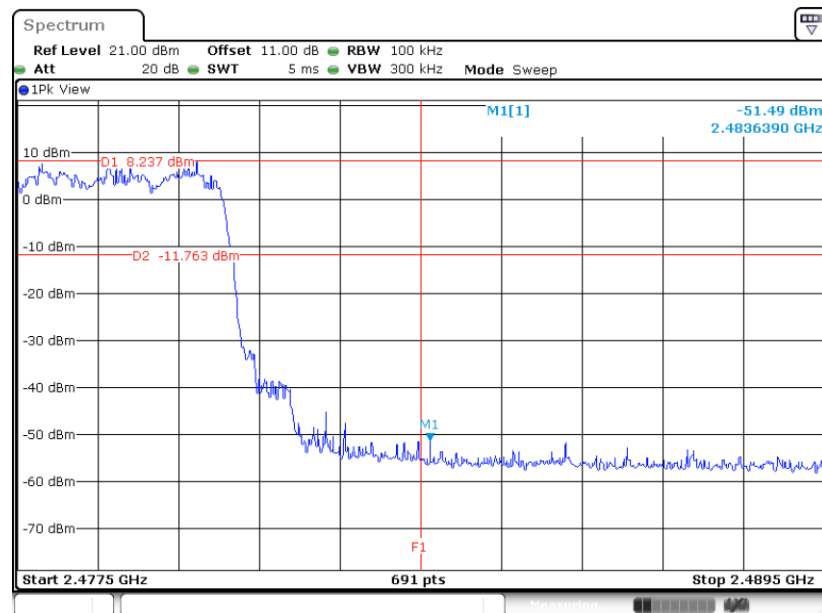


Date: 11.JUN.2024 11:39:09




<3Mbps>

Hopping Mode Low Band Edge Plot

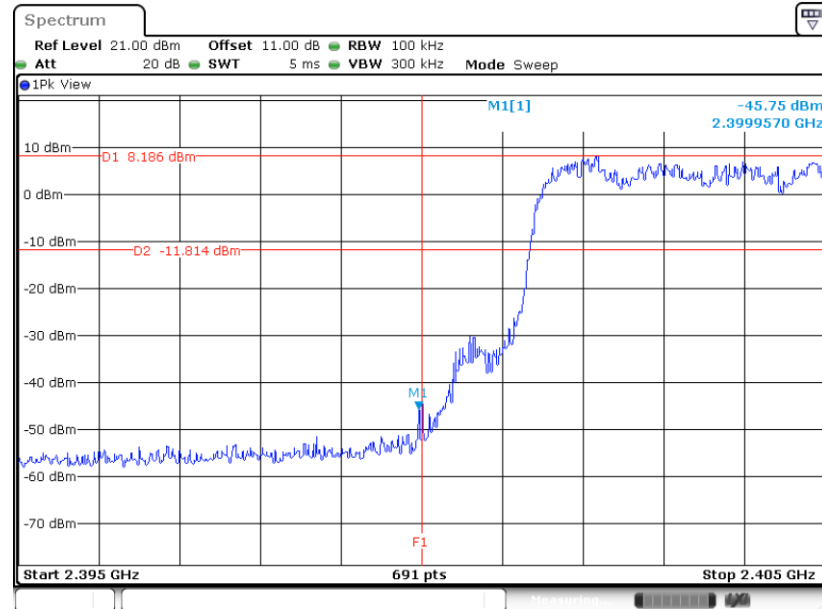

Date: 11.JUN.2024 11:58:48

Hopping Mode High Band Edge Plot

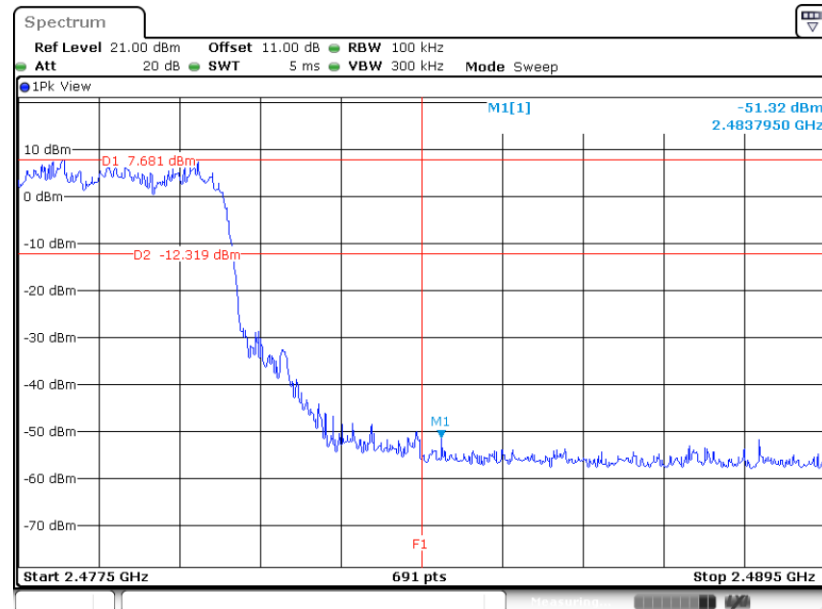

Date: 11.JUN.2024 11:59:25

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

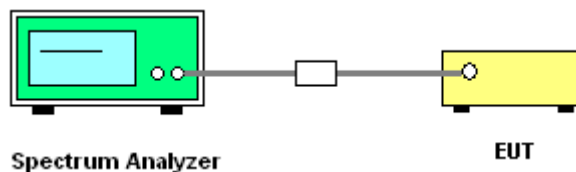




3.7.5 Test Result of Conducted Spurious Emission


<1Mbps>

CSE Plot on Ch 00

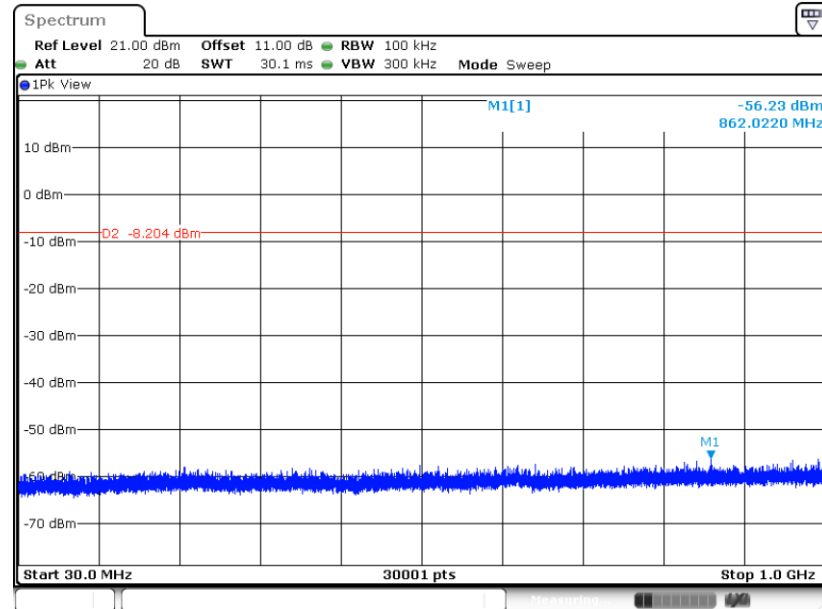

Date: 11.JUN.2024 10:19:51


CSE Plot on Ch 00

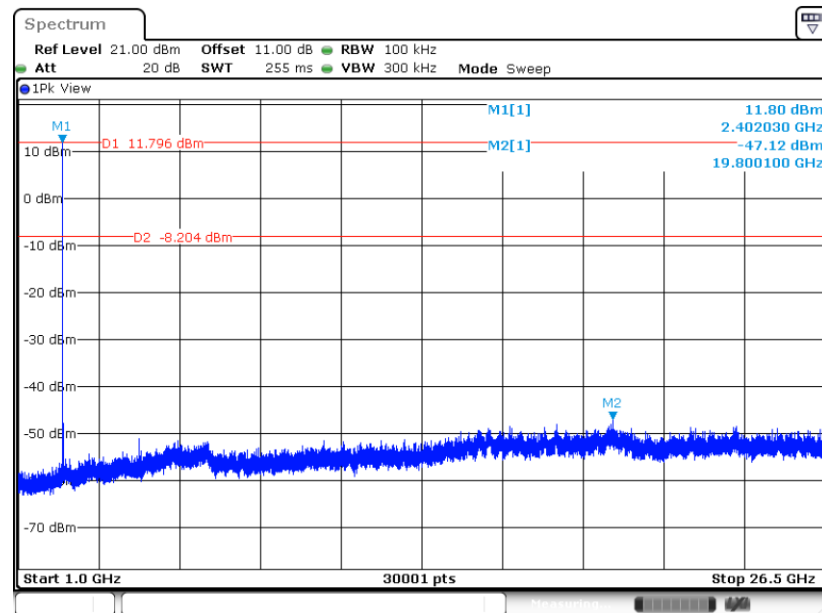

Date: 11.JUN.2024 10:19:19




CSE Plot on Ch 39

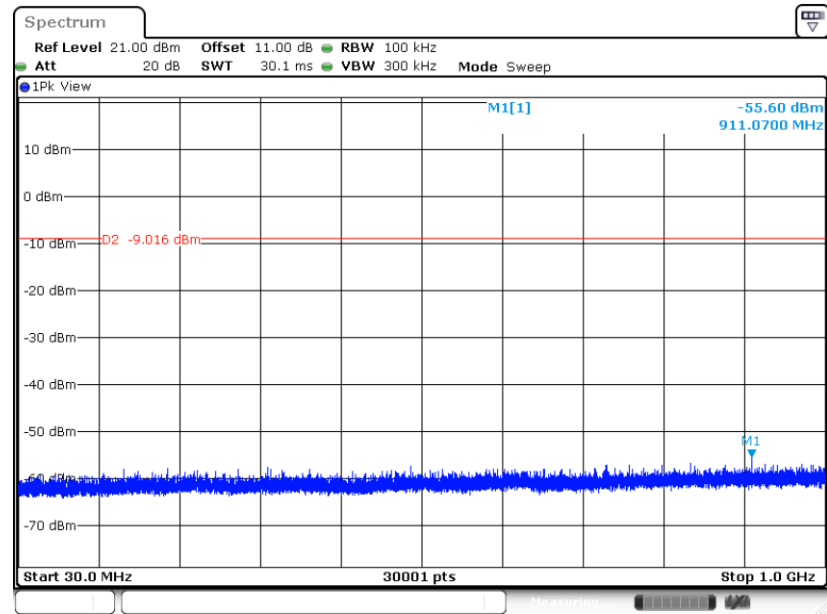

Date: 11.JUN.2024 10:32:15


CSE Plot on Ch 39

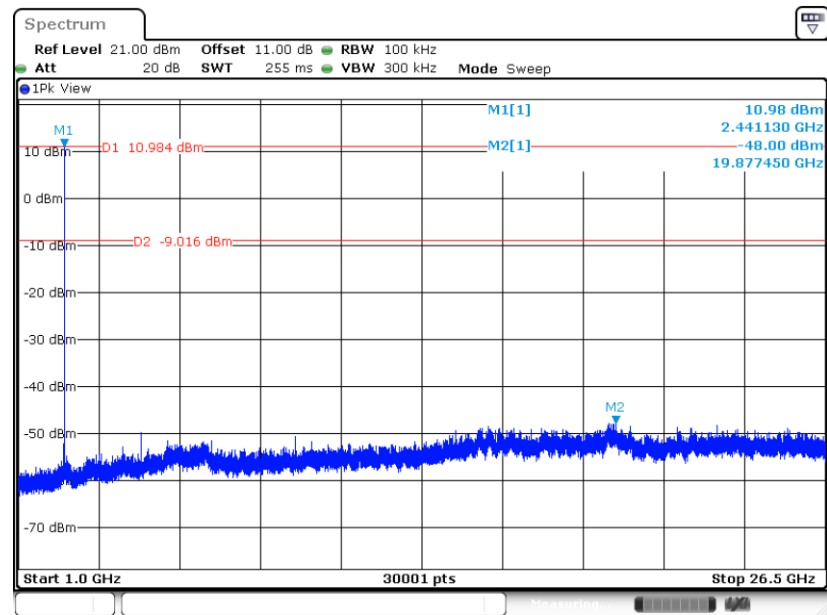

Date: 11.JUN.2024 10:31:49




CSE Plot on Ch 78

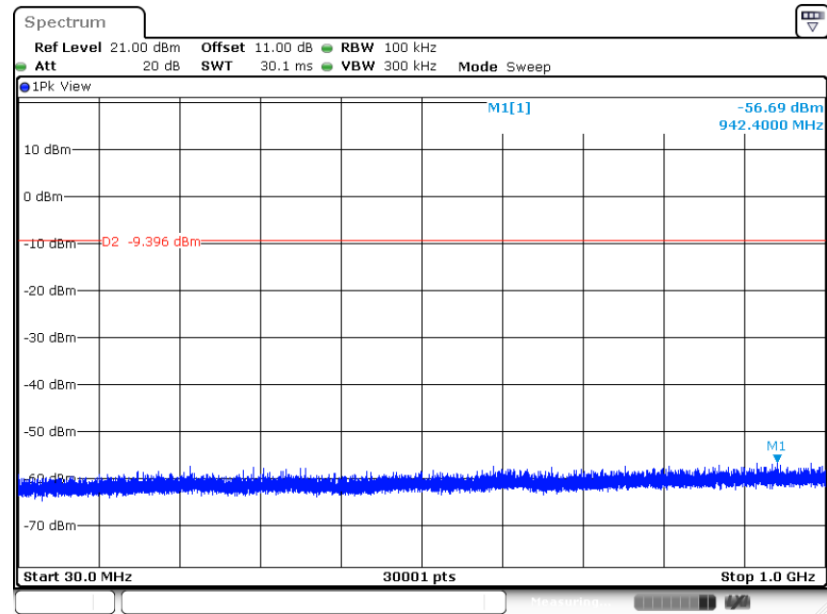

Date: 11.JUN.2024 10:36:31

CSE Plot on Ch 78

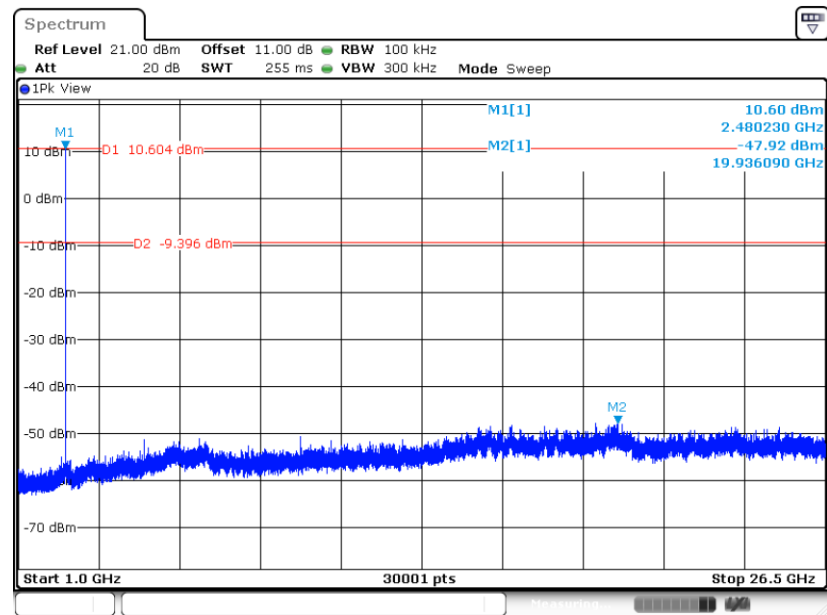


Date: 11.JUN.2024 10:36:04




<2Mbps>

CSE Plot on Ch 00

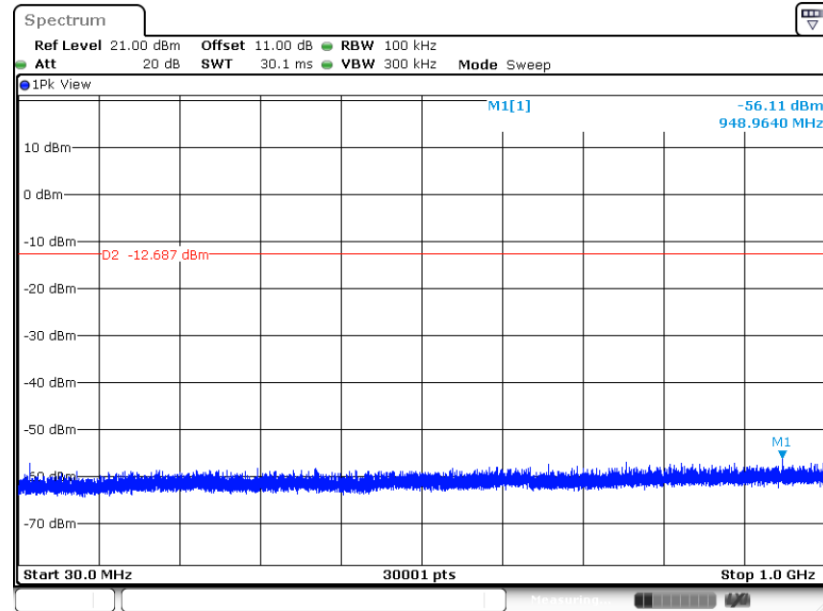

Date: 11.JUN.2024 10:55:22


CSE Plot on Ch 00

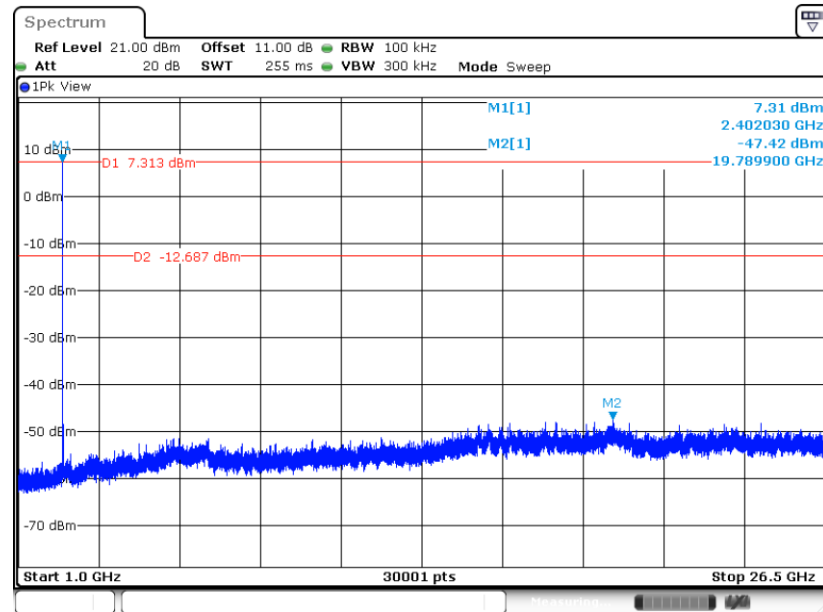

Date: 11.JUN.2024 10:54:51




CSE Plot on Ch 39

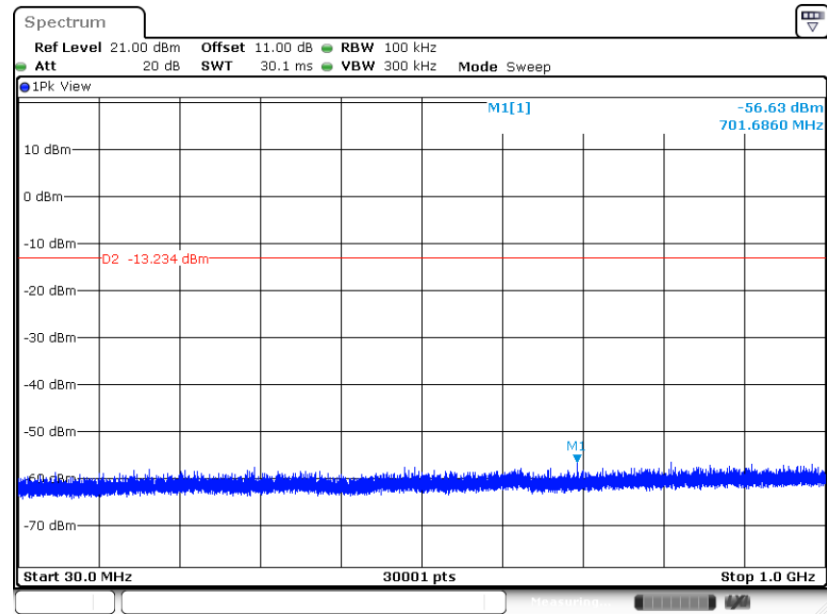

Date: 11.JUN.2024 10:59:17


CSE Plot on Ch 39

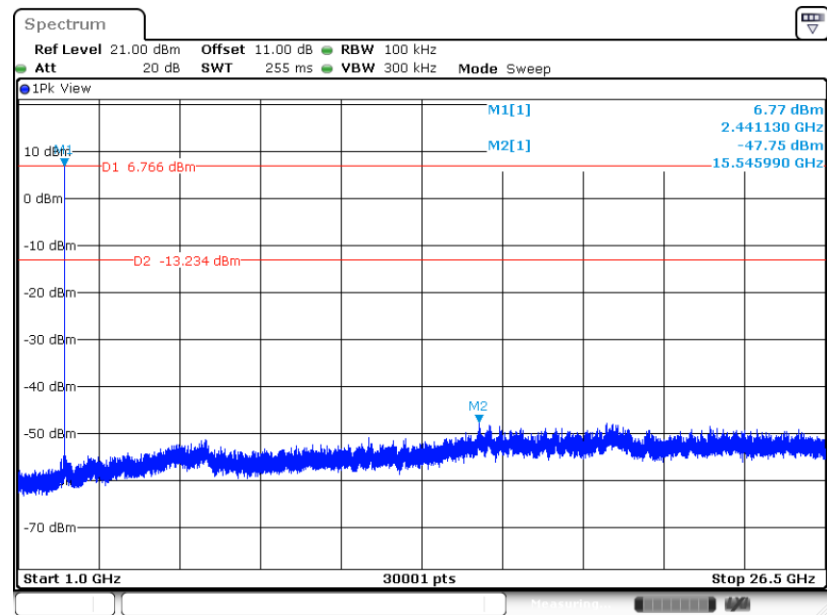

Date: 11.JUN.2024 10:58:52




CSE Plot on Ch 78

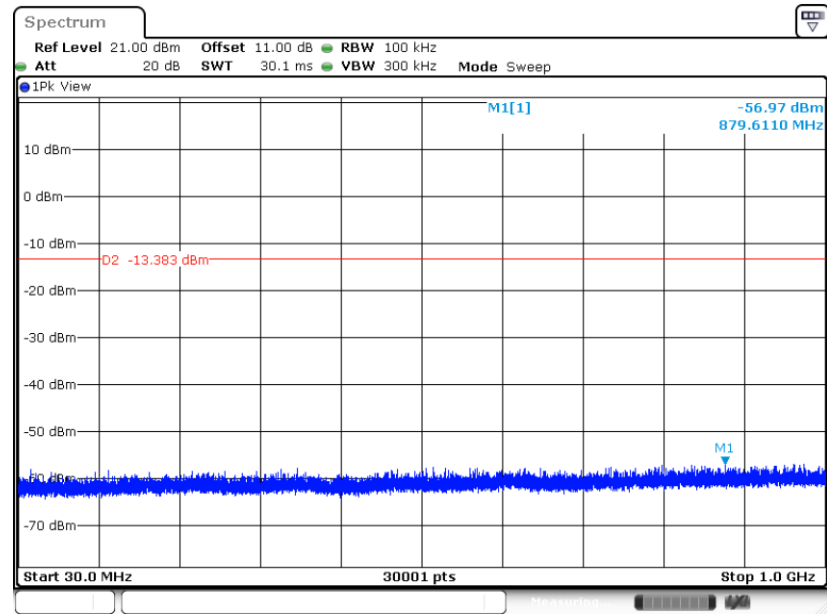

Date: 11.JUN.2024 11:02:01

CSE Plot on Ch 78

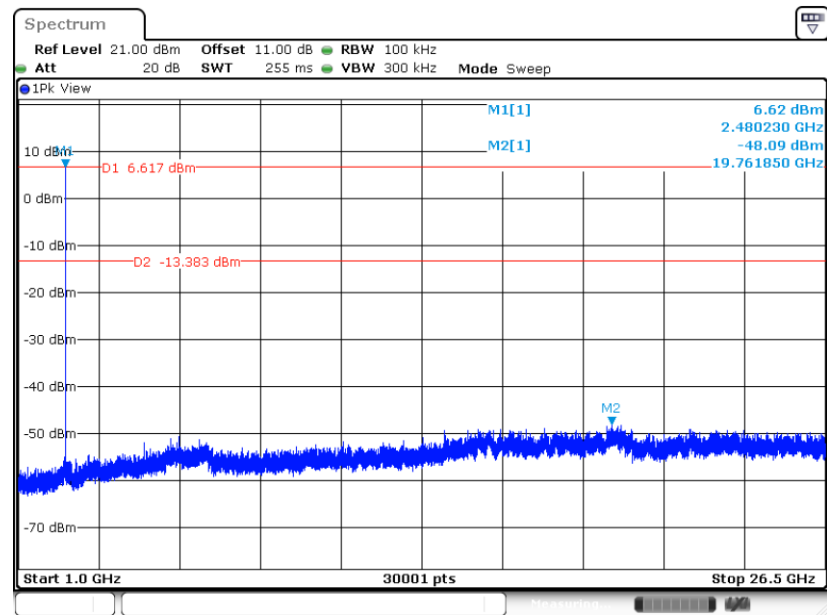


Date: 11.JUN.2024 11:01:36




<3Mbps>

CSE Plot on Ch 00

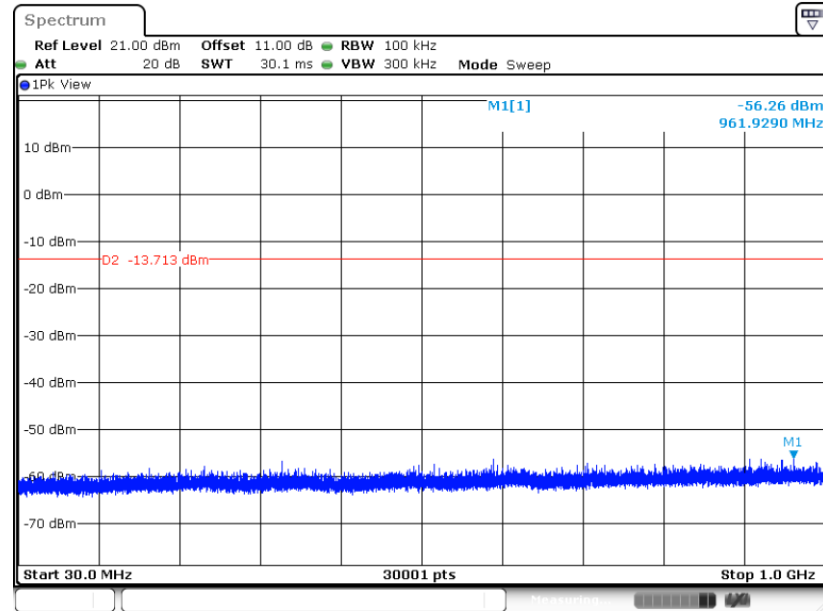

Date: 11.JUN.2024 11:44:40


CSE Plot on Ch 00

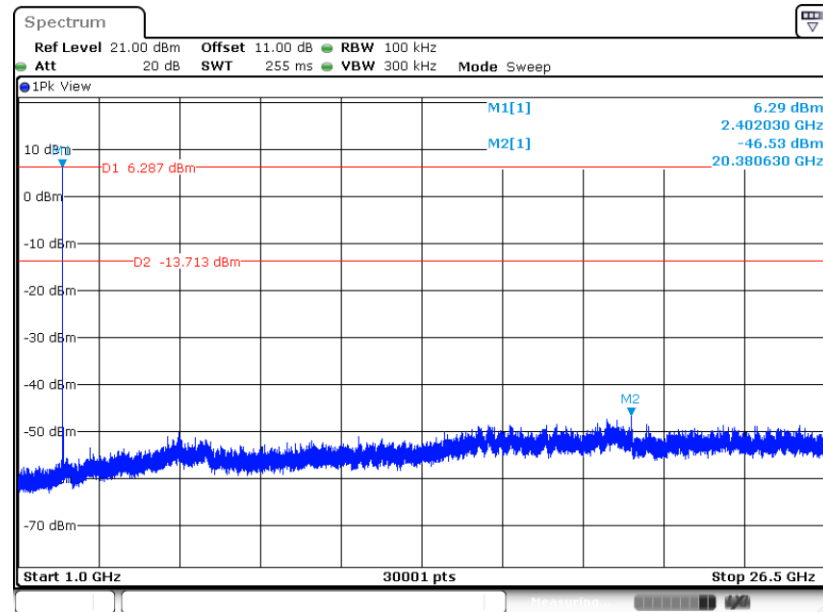

Date: 11.JUN.2024 11:44:13




CSE Plot on Ch 39

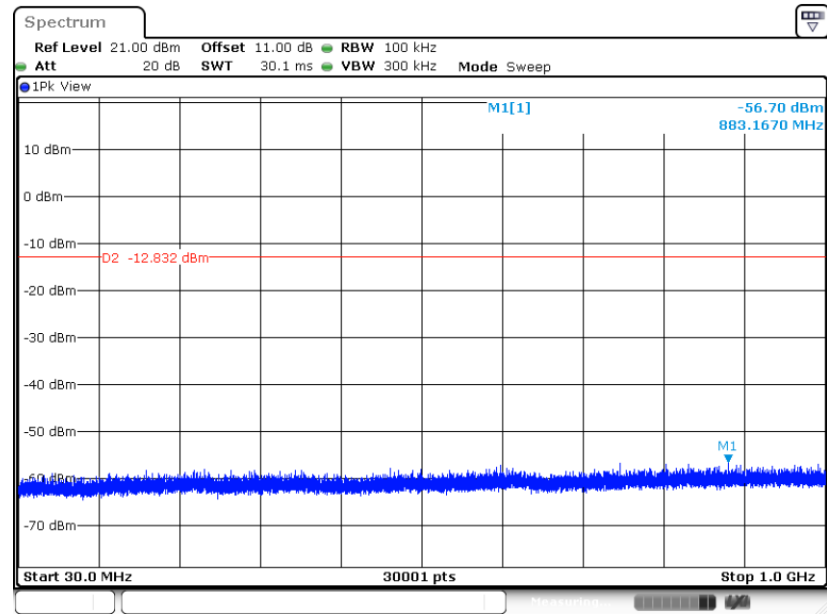

Date: 11.JUN.2024 11:47:40


CSE Plot on Ch 39

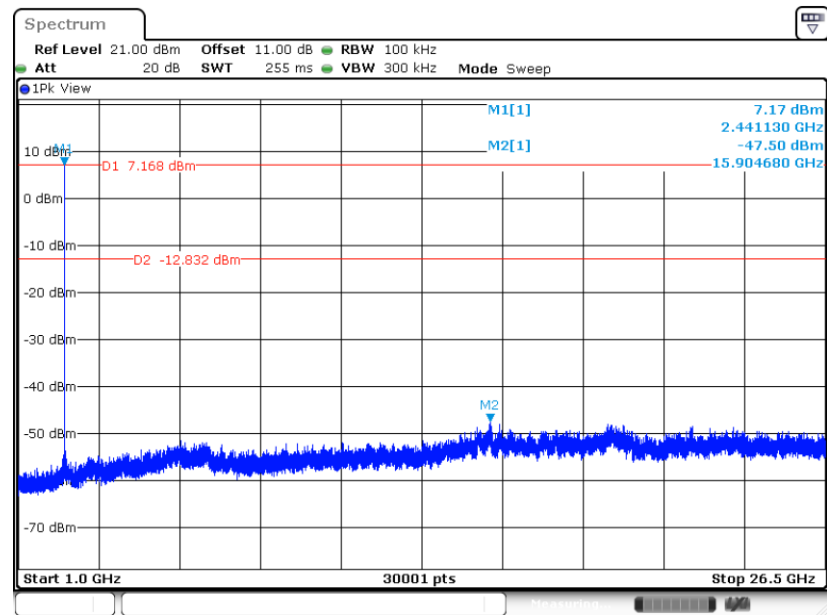

Date: 11.JUN.2024 11:47:14




CSE Plot on Ch 78

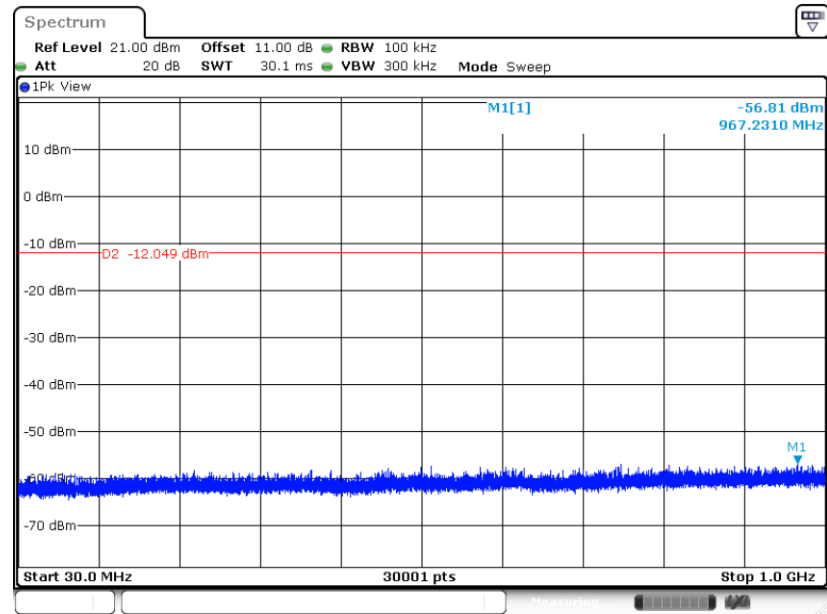

Date: 11.JUN.2024 11:52:02

CSE Plot on Ch 78

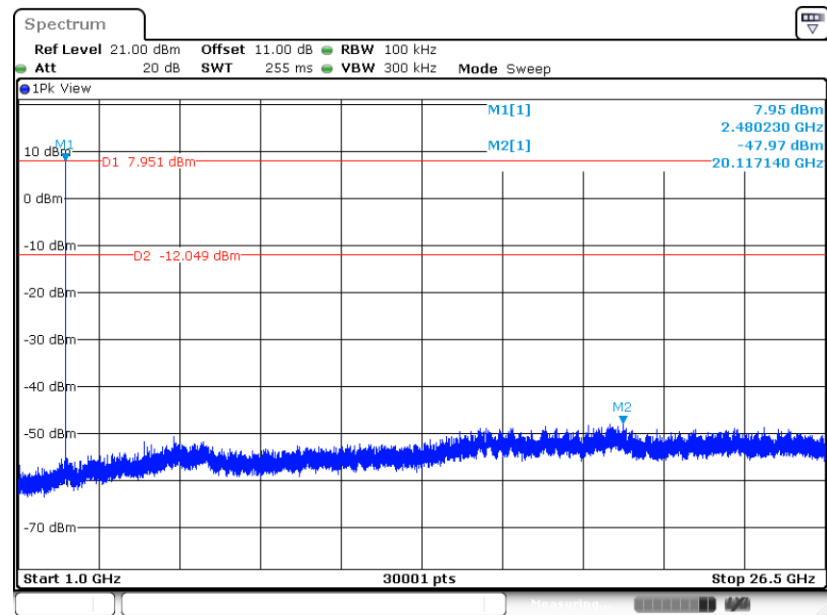

Date: 11.JUN.2024 11:51:32



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

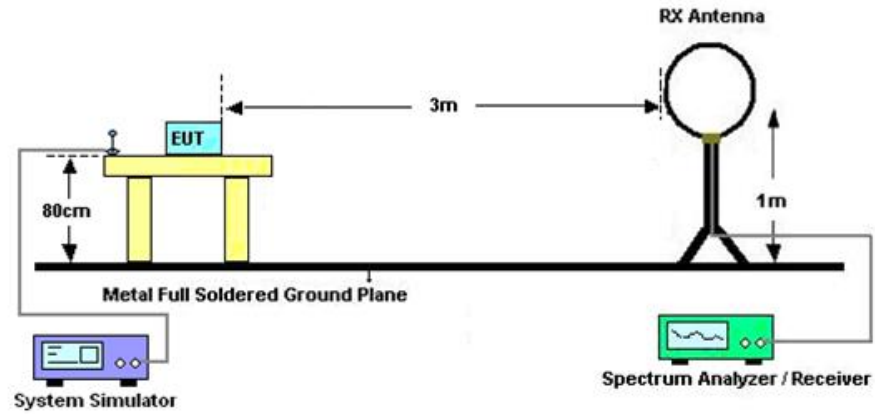

For radiated emissions from 30MHz to 1GHz

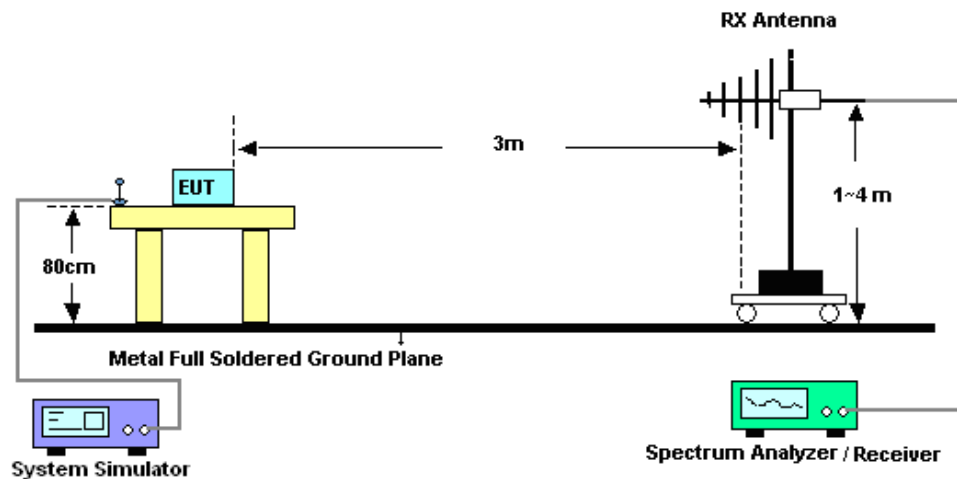

For radiated emissions above 1GHz

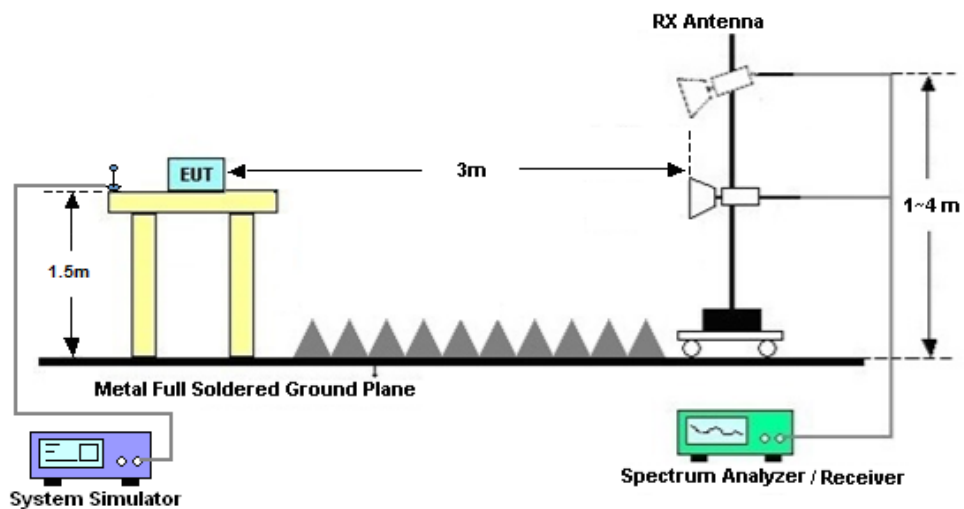

**3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

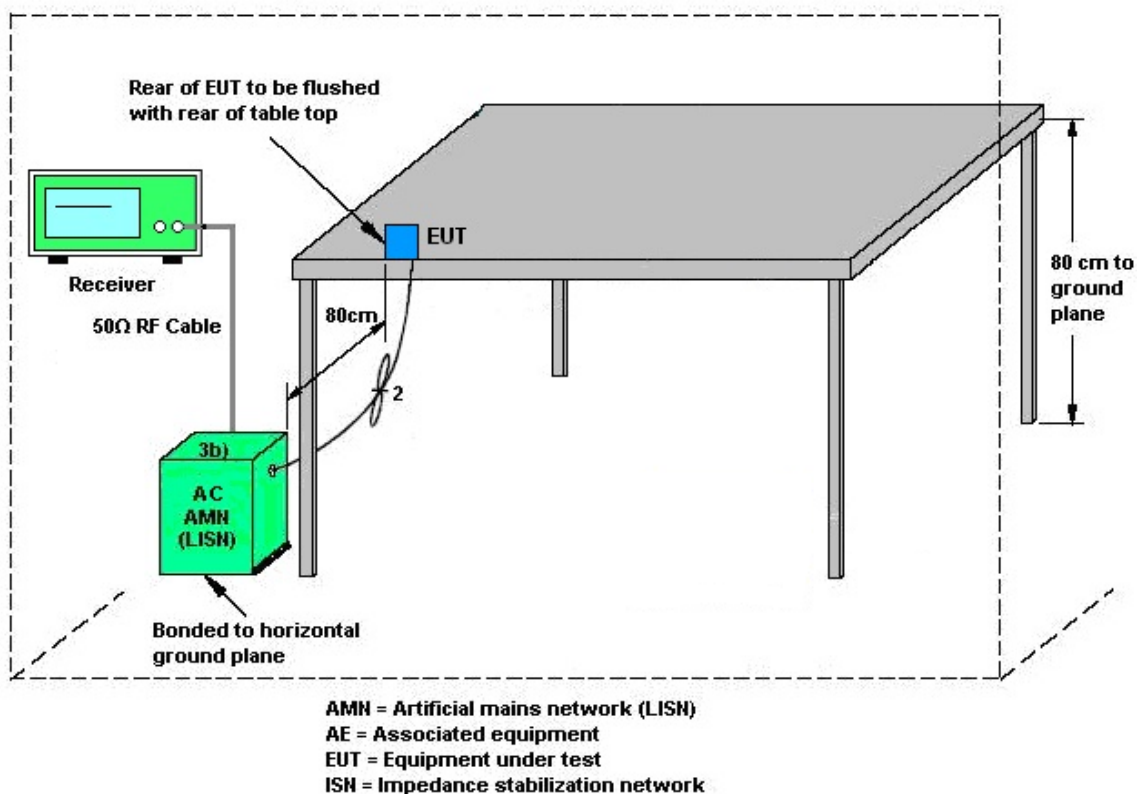

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 04, 2024 ~Jun. 12, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jun. 04, 2024 ~Jun. 12, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Dec. 27, 2023	Jun. 04, 2024 ~Jun. 12, 2024	Dec. 26, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Oct. 25, 2024 ~Nov. 05, 2024	Dec. 28, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 09, 2024	Oct. 25, 2024 ~Nov. 05, 2024	May. 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-147 4	1GHz~18GHz	Jul. 07, 2023	Oct. 25, 2024 ~Nov. 05, 2024	Jul. 06, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Oct. 17, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY572801 36	500MHz~26.5G Hz	Jul. 03, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F11905001 9	N/A	Oct. 14, 2024	Oct. 25, 2024 ~Nov. 05, 2024	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 25, 2024 ~Nov. 05, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 25, 2024 ~Nov. 05, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	May 27, 2024	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	May 27, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	May 27, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 07, 2023	May 27, 2024	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.50dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.10dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.80dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.10dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	He Qingsheng	Temperature:	21~25	°C
Test Date:	2024/6/4~2024/6/12	Relative Humidity:	51~54	%

TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20dB BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.965	0.883	1.003	0.6435	Pass
DH	1Mbps	1	39	2441	0.965	0.877	1.003	0.6435	Pass
DH	1Mbps	1	78	2480	0.965	0.877	1.003	0.6435	Pass
2DH	2Mbps	1	0	2402	1.335	1.183	1.003	0.8898	Pass
2DH	2Mbps	1	39	2441	1.339	1.185	0.999	0.8927	Pass
2DH	2Mbps	1	78	2480	1.343	1.187	0.999	0.8956	Pass
3DH	3Mbps	1	0	2402	1.313	1.185	0.999	0.8753	Pass
3DH	3Mbps	1	39	2441	1.317	1.191	0.994	0.8782	Pass
3DH	3Mbps	1	78	2480	1.317	1.195	1.003	0.8782	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass


TEST RESULTS DATA						
Peak Power Table						
DH	CH.	NTX	Peak Power (dBm)	Power Level	Power Limit (dBm)	Test Result
DH5	0	1	11.88	7	20.97	Pass
	39	1	10.87	7	20.97	Pass
	78	1	10.51	7	20.97	Pass
2DH5	0	1	11.08	7	20.97	Pass
	39	1	10.20	7	20.97	Pass
	78	1	9.99	7	20.97	Pass
3DH5	0	1	11.64	7	20.97	Pass
	39	1	10.66	7	20.97	Pass
	78	1	10.37	7	20.97	Pass

TEST RESULTS DATA				
Average Power Table				
(Reporting Only)				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH5	0	1	11.81	1.13
	39	1	10.79	1.13
	78	1	10.46	1.13
2DH5	0	1	8.24	1.14
	39	1	7.76	1.14
	78	1	7.63	1.14
3DH5	0	1	8.08	1.17
	39	1	7.54	1.17
	78	1	7.44	1.17

TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

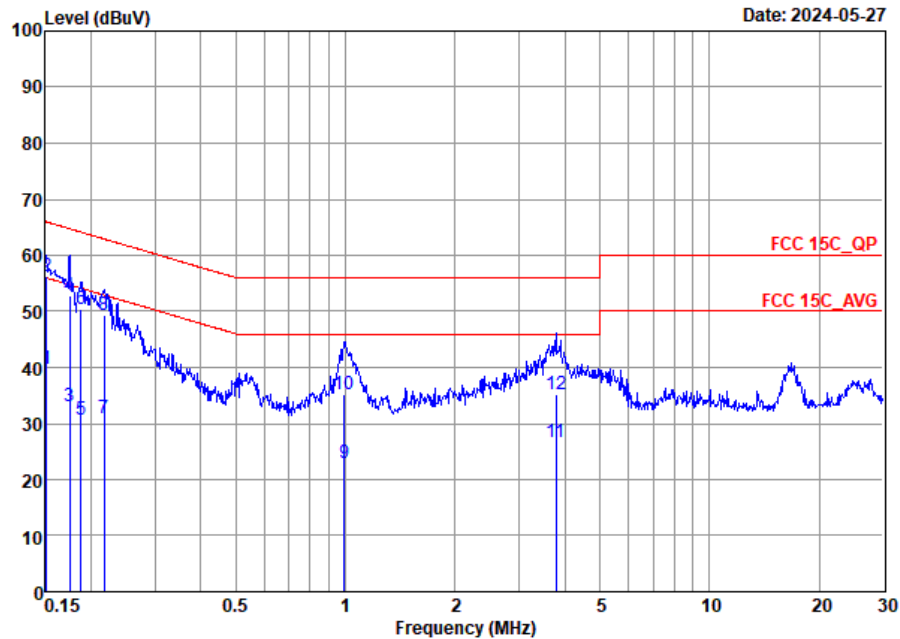


Site : CO01-SZ
Condition: FCC 15C_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	39.72	-16.24	55.96	19.21	10.38	10.13	Average
2 *	0.15	56.22	-9.74	65.96	35.71	10.38	10.13	QP
3	0.17	33.02	-21.70	54.72	12.61	10.27	10.14	Average
4	0.17	52.92	-11.80	64.72	32.51	10.27	10.14	QP
5	0.19	30.73	-23.42	54.15	10.19	10.39	10.15	Average
6	0.19	50.43	-13.72	64.15	29.89	10.39	10.15	QP
7	0.22	30.90	-22.02	52.92	10.40	10.35	10.15	Average
8	0.22	49.30	-13.62	62.92	28.80	10.35	10.15	QP
9	0.99	22.92	-23.08	46.00	2.50	10.26	10.16	Average
10	0.99	35.12	-20.88	56.00	14.70	10.26	10.16	QP
11	3.78	26.80	-19.20	46.00	6.31	10.18	10.31	Average
12	3.78	35.20	-20.80	56.00	14.71	10.18	10.31	QP



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

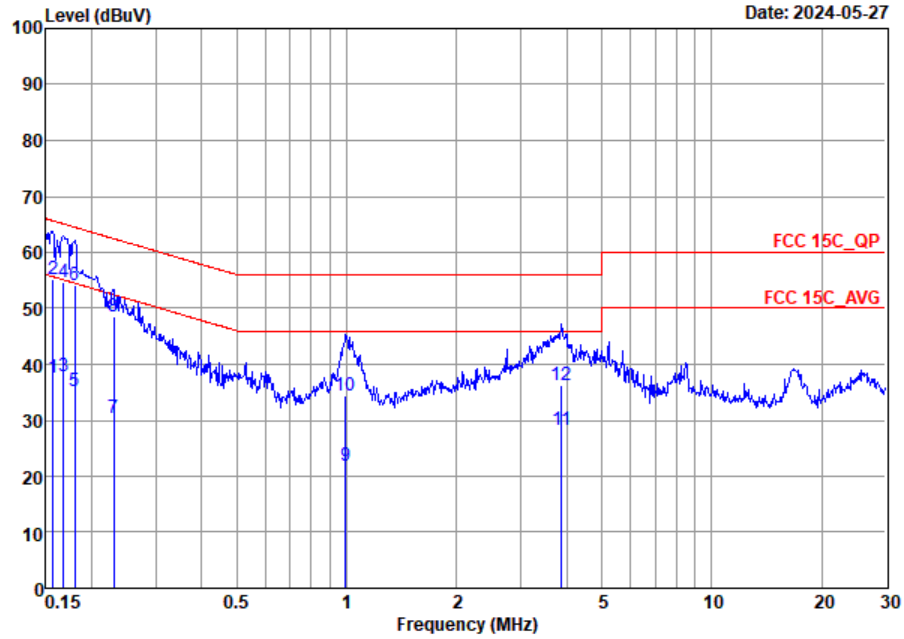

Site : CO01-SZ
Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	37.59	-18.06	55.65	17.19	10.26	10.14	Average
2	0.16	55.09	-10.56	65.65	34.69	10.26	10.14	QP
3	0.17	37.90	-17.18	55.08	17.30	10.46	10.14	Average
4 *	0.17	54.70	-10.38	65.08	34.10	10.46	10.14	QP
5	0.18	35.17	-19.33	54.50	14.60	10.43	10.14	Average
6	0.18	54.07	-10.43	64.50	33.50	10.43	10.14	QP
7	0.23	30.44	-22.00	52.44	10.10	10.19	10.15	Average
8	0.23	48.64	-13.80	62.44	28.30	10.19	10.15	QP
9	0.99	21.89	-24.11	46.00	1.50	10.23	10.16	Average
10	0.99	34.39	-21.61	56.00	14.00	10.23	10.16	QP
11	3.88	28.30	-17.70	46.00	7.50	10.48	10.32	Average
12	3.88	36.40	-19.60	56.00	15.60	10.48	10.32	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20°C~22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Sample
Mode 1	2400-2483.5	SISO	Bluetooth BR_GFSK	00	2402	1DH5	-	1
Mode 2	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	1DH5	-	1
Mode 3	2400-2483.5	SISO	Bluetooth BR_GFSK	78	2480	1DH5	-	1
Mode 10	2400-2483.5	SISO	Bluetooth BR_GFSK	00	2402	1DH5	-	2
Mode 11	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	1DH5	-	2
Mode 12	2400-2483.5	SISO	Bluetooth BR_GFSK	78	2480	1DH5	-	2
Mode 19	2400-2483.5	SISO	Bluetooth BR_GFSK	00	2402	1DH5	-	3
Mode 20	2400-2483.5	SISO	Bluetooth BR_GFSK	39	2441	1DH5	-	3
Mode 21	2400-2483.5	SISO	Bluetooth BR_GFSK	78	2480	1DH5	-	3





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2370.17	45.85	74.00	-28.15	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	47.05	74.00	-26.95	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	48.86	74.00	-25.14	-	V	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.60	61.19	74.00	-12.81	V	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	51.79	74.00	-22.21	V	Peak	Pass	Harmonic
10	Bluetooth BR_GFSK	00	2377.73	45.26	74.00	-28.74	H	PEAK	Pass	Band Edge
10	Bluetooth BR_GFSK	00	4804.00	46.29	74.00	-27.71	H	Peak	Pass	Harmonic
11	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
11	Bluetooth BR_GFSK	39	7323.00	52.07	74.00	-21.93	V	Peak	Pass	Harmonic
12	Bluetooth BR_GFSK	78	2483.54	61.91	74.00	-12.09	H	PEAK	Pass	Band Edge
12	Bluetooth BR_GFSK	78	7440.00	50.70	74.00	-23.30	V	Peak	Pass	Harmonic
19	Bluetooth BR_GFSK	00	2388.02	47.42	74.00	-26.58	V	PEAK	Pass	Band Edge
19	Bluetooth BR_GFSK	00	4804.00	44.95	74.00	-29.05	H	Peak	Pass	Harmonic
20	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
20	Bluetooth BR_GFSK	39	7323.00	51.58	74.00	-22.42	V	Peak	Pass	Harmonic
21	Bluetooth BR_GFSK	78	2483.60	64.43	74.00	-9.57	V	PEAK	Pass	Band Edge
21	Bluetooth BR_GFSK	78	7440.00	49.80	74.00	-24.20	V	Peak	Pass	Harmonic



Mode	1																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	Level (dBuV/m) Date: 2024-10-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.17</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>43.30</td><td>30.73</td><td>5.34</td><td>33.52</td><td>200</td><td>279 PEAK</td></tr><tr><td>2</td><td>2370.17</td><td>21.06</td><td>54.00</td><td>-32.94</td><td>18.51</td><td>30.73</td><td>5.34</td><td>33.52</td><td>200</td><td>279 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2370.17	45.85	74.00	-28.15	43.30	30.73	5.34	33.52	200	279 PEAK	2	2370.17	21.06	54.00	-32.94	18.51	30.73	5.34	33.52	200	279 AVERAGE	Level (dBuV/m) Date: 2024-10-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>105.22</td><td>-----</td><td>-----</td><td>102.67</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>279 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>80.43</td><td>-----</td><td>-----</td><td>77.88</td><td>30.72</td><td>5.37</td><td>33.54</td><td>200</td><td>279 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	105.22	-----	-----	102.67	30.72	5.37	33.54	200	279 PEAK	2	2402.00	80.43	-----	-----	77.88	30.72	5.37	33.54	200	279 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2370.17	45.85	74.00	-28.15	43.30	30.73	5.34	33.52	200	279 PEAK																																																																																																
2	2370.17	21.06	54.00	-32.94	18.51	30.73	5.34	33.52	200	279 AVERAGE																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2402.00	105.22	-----	-----	102.67	30.72	5.37	33.54	200	279 PEAK																																																																																																
2	2402.00	80.43	-----	-----	77.88	30.72	5.37	33.54	200	279 AVERAGE																																																																																																

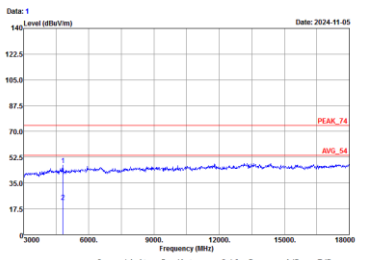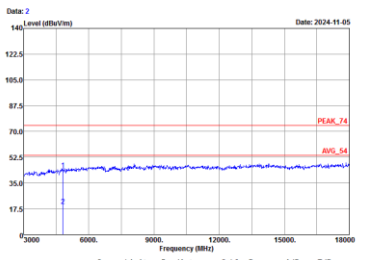

Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak	 Graph showing Peak Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line representing the spectrum, with a red line indicating the limit. A peak is labeled 'PEAK_74' at approximately 2402 MHz. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.	 Graph showing Peak Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue line representing the spectrum, with a red line indicating the limit. A peak is labeled 'PEAK_74' at approximately 2402 MHz. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.
Avg	 Graph showing Average Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line representing the average spectrum, with a red line indicating the limit. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.	 Graph showing Average Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue line representing the average spectrum, with a red line indicating the limit. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.





Mode	2																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5 Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																					
ANT	SISO																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	Data: 1 Level (dBuV/m) Date: 2024-11-05 Frequency (MHz) <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>4882.00</td><td>46.84</td><td>-27.16</td><td>74.00</td><td>53.23</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>22.05</td><td>-31.95</td><td>54.00</td><td>28.44</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>45.94</td><td>-28.06</td><td>74.00</td><td>50.04</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>21.15</td><td>-32.85</td><td>54.00</td><td>25.25</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Average</td></tr></table>	Peak	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 *	4882.00	46.84	-27.16	74.00	53.23	36.51	8.65	51.55	---	Peak	2	4882.00	22.05	-31.95	54.00	28.44	36.51	8.65	51.55	---	Average	3	7320.00	45.94	-28.06	74.00	50.04	36.88	10.18	51.16	---	Peak	4	7320.00	21.15	-32.85	54.00	25.25	36.88	10.18	51.16	---	Average	Data: 2 Level (dBuV/m) Date: 2024-11-05 Frequency (MHz) <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>43.30</td><td>-30.70</td><td>74.00</td><td>49.69</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.51</td><td>-35.49</td><td>54.00</td><td>24.90</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7320.00</td><td>48.86</td><td>-25.14</td><td>74.00</td><td>52.96</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>24.07</td><td>-29.93</td><td>54.00</td><td>28.17</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Average</td></tr></table>	Peak	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4882.00	43.30	-30.70	74.00	49.69	36.51	8.65	51.55	---	Peak	2	4882.00	18.51	-35.49	54.00	24.90	36.51	8.65	51.55	---	Average	3 *	7320.00	48.86	-25.14	74.00	52.96	36.88	10.18	51.16	---	Peak	4	7320.00	24.07	-29.93	54.00	28.17	36.88	10.18	51.16	---	Average
	Peak	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1 *	4882.00	46.84	-27.16	74.00	53.23	36.51	8.65	51.55	---	Peak																																																																																																																												
2	4882.00	22.05	-31.95	54.00	28.44	36.51	8.65	51.55	---	Average																																																																																																																												
3	7320.00	45.94	-28.06	74.00	50.04	36.88	10.18	51.16	---	Peak																																																																																																																												
4	7320.00	21.15	-32.85	54.00	25.25	36.88	10.18	51.16	---	Average																																																																																																																												
Peak	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4882.00	43.30	-30.70	74.00	49.69	36.51	8.65	51.55	---	Peak																																																																																																																												
2	4882.00	18.51	-35.49	54.00	24.90	36.51	8.65	51.55	---	Average																																																																																																																												
3 *	7320.00	48.86	-25.14	74.00	52.96	36.88	10.18	51.16	---	Peak																																																																																																																												
4	7320.00	24.07	-29.93	54.00	28.17	36.88	10.18	51.16	---	Average																																																																																																																												



Mode	3																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	SISO																																																																																																													
Pol.	Horizontal					Fundamental																																																																																																								
Peak	Level (dBuV/m) Date: 2024-10-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2441 2452.8 2464.6 2476.4 2488.2 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.54</td><td>60.16</td><td>74.00</td><td>-13.84</td><td>57.59</td><td>30.70</td><td>5.46</td><td>33.59</td><td>124</td><td>191 PEAK</td></tr><tr><td>2 2483.54</td><td>35.37</td><td>54.00</td><td>-18.63</td><td>32.80</td><td>30.70</td><td>5.46</td><td>33.59</td><td>124</td><td>191 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.54	60.16	74.00	-13.84	57.59	30.70	5.46	33.59	124	191 PEAK	2 2483.54	35.37	54.00	-18.63	32.80	30.70	5.46	33.59	124	191 AVERAGE	Level (dBuV/m) Date: 2024-10-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>106.10</td><td>-----</td><td>-----</td><td>103.53</td><td>30.70</td><td>5.46</td><td>33.59</td><td>124</td><td>191 PEAK</td></tr><tr><td>2 2480.00</td><td>81.31</td><td>-----</td><td>-----</td><td>78.74</td><td>30.70</td><td>5.46</td><td>33.59</td><td>124</td><td>191 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	106.10	-----	-----	103.53	30.70	5.46	33.59	124	191 PEAK	2 2480.00	81.31	-----	-----	78.74	30.70	5.46	33.59	124	191 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																				
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 2483.54	60.16	74.00	-13.84	57.59	30.70	5.46	33.59	124	191 PEAK																																																																																																					
2 2483.54	35.37	54.00	-18.63	32.80	30.70	5.46	33.59	124	191 AVERAGE																																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 2480.00	106.10	-----	-----	103.53	30.70	5.46	33.59	124	191 PEAK																																																																																																					
2 2480.00	81.31	-----	-----	78.74	30.70	5.46	33.59	124	191 AVERAGE																																																																																																					

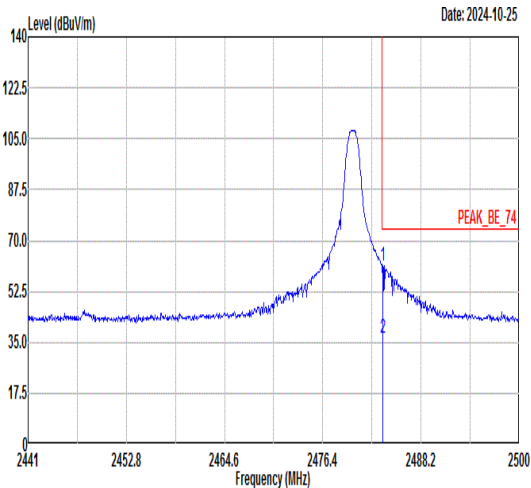
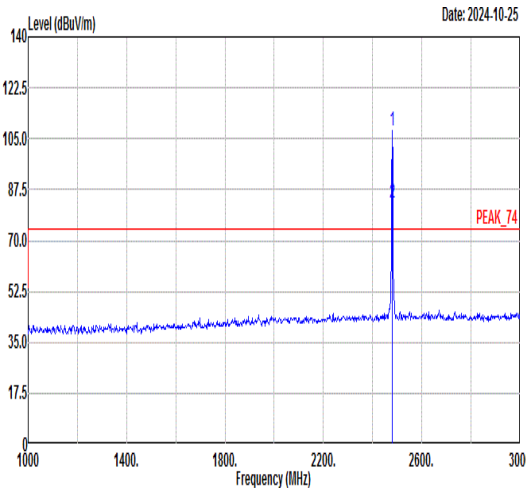


Mode	3																																																																																																																																																							
	Band Edge																																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																							
ANT	SISO																																																																																																																																																							
Pol.	Vertical							Fundamental																																																																																																																																																
Peak																																																																																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Margin</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.60</td><td>61.19</td><td>74.00</td><td>-12.81</td><td>58.62</td><td>30.70</td><td>5.46</td><td>33.59</td><td></td><td></td><td>242</td><td>286</td><td>PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>36.40</td><td>54.00</td><td>-17.60</td><td>33.83</td><td>30.70</td><td>5.46</td><td>33.59</td><td></td><td></td><td>242</td><td>286</td><td>AVERAGE</td></tr></table>									Limit		Margin		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				cm	deg		1	2483.60	61.19	74.00	-12.81	58.62	30.70	5.46	33.59			242	286	PEAK	2	2483.60	36.40	54.00	-17.60	33.83	30.70	5.46	33.59			242	286	AVERAGE	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Margin</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>107.96</td><td>-----</td><td>-----</td><td>105.39</td><td>30.70</td><td>5.46</td><td>33.59</td><td></td><td></td><td>242</td><td>286</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>83.17</td><td>-----</td><td>-----</td><td>80.60</td><td>30.70</td><td>5.46</td><td>33.59</td><td></td><td></td><td>242</td><td>286</td><td>AVERAGE</td></tr></table>									Limit		Margin		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				cm	deg		1	2480.00	107.96	-----	-----	105.39	30.70	5.46	33.59			242	286	PEAK	2	2480.00	83.17	-----	-----	80.60	30.70	5.46	33.59			242	286	AVERAGE
			Limit		Margin		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				cm	deg																																																																																																																																												
1	2483.60	61.19	74.00	-12.81	58.62	30.70	5.46	33.59			242	286	PEAK																																																																																																																																											
2	2483.60	36.40	54.00	-17.60	33.83	30.70	5.46	33.59			242	286	AVERAGE																																																																																																																																											
		Limit		Margin		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB				cm	deg																																																																																																																																												
1	2480.00	107.96	-----	-----	105.39	30.70	5.46	33.59			242	286	PEAK																																																																																																																																											
2	2480.00	83.17	-----	-----	80.60	30.70	5.46	33.59			242	286	AVERAGE																																																																																																																																											



	3																																																																																																																																																	
Mode	Harmonic																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																	
ANT	SISO																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	Data: 1 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak labeled 'PEAK_74' at 74.00 dBuV/m and an average labeled 'AVG_54' at 54.00 dBuV/m. <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.33</td><td>-30.67</td><td>74.00</td><td>49.80</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>18.54</td><td>-35.46</td><td>54.00</td><td>25.81</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>44.98</td><td>-29.02</td><td>74.00</td><td>49.24</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>20.19</td><td>-33.81</td><td>54.00</td><td>24.45</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.33	-30.67	74.00	49.80	36.64	8.41	51.52	---	Peak	2	4960.00	18.54	-35.46	54.00	25.81	36.64	8.41	51.52	---	Average	3 *	7440.00	44.98	-29.02	74.00	49.24	36.76	10.17	51.19	---	Peak	4	7440.00	20.19	-33.81	54.00	24.45	36.76	10.17	51.19	---	Average	Data: 2 Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak labeled 'PEAK_74' at 74.00 dBuV/m and an average labeled 'AVG_54' at 54.00 dBuV/m. <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>44.36</td><td>-29.64</td><td>74.00</td><td>50.83</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>19.57</td><td>-34.43</td><td>54.00</td><td>26.04</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>51.79</td><td>-22.21</td><td>74.00</td><td>56.95</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>27.00</td><td>-27.00</td><td>54.00</td><td>31.26</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.36	-29.64	74.00	50.83	36.64	8.41	51.52	---	Peak	2	4960.00	19.57	-34.43	54.00	26.04	36.64	8.41	51.52	---	Average	3 *	7440.00	51.79	-22.21	74.00	56.95	36.76	10.17	51.19	---	Peak	4	7440.00	27.00	-27.00	54.00	31.26	36.76	10.17	51.19	---	Average
		Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																									
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																									
1	4960.00	43.33	-30.67	74.00	49.80	36.64	8.41	51.52	---	Peak																																																																																																																																								
2	4960.00	18.54	-35.46	54.00	25.81	36.64	8.41	51.52	---	Average																																																																																																																																								
3 *	7440.00	44.98	-29.02	74.00	49.24	36.76	10.17	51.19	---	Peak																																																																																																																																								
4	7440.00	20.19	-33.81	54.00	24.45	36.76	10.17	51.19	---	Average																																																																																																																																								
	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																										
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																									
1	4960.00	44.36	-29.64	74.00	50.83	36.64	8.41	51.52	---	Peak																																																																																																																																								
2	4960.00	19.57	-34.43	54.00	26.04	36.64	8.41	51.52	---	Average																																																																																																																																								
3 *	7440.00	51.79	-22.21	74.00	56.95	36.76	10.17	51.19	---	Peak																																																																																																																																								
4	7440.00	27.00	-27.00	54.00	31.26	36.76	10.17	51.19	---	Average																																																																																																																																								

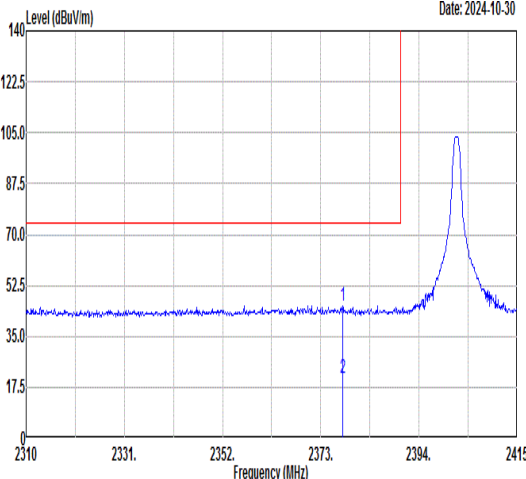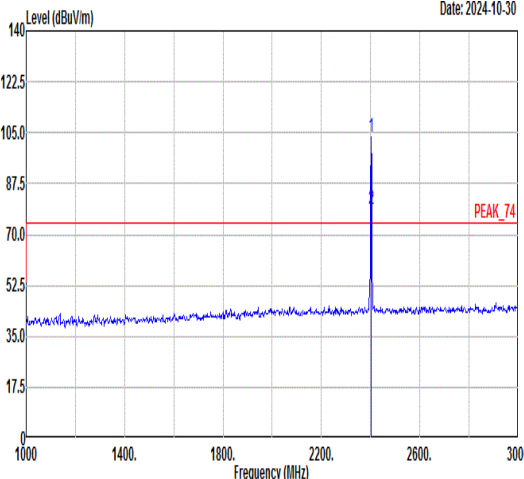

Mode	10																																																																																																								
	Band Edge																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																								
ANT	SISO																																																																																																								
Pol.	Horizontal	Fundamental																																																																																																							
Peak	Level (dBuV/m) Date: 2024-10-30  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.73</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>42.72</td><td>30.72</td><td>5.35</td><td>33.53</td><td>146</td><td>317 PEAK</td></tr><tr><td>2</td><td>2377.73</td><td>20.47</td><td>54.00</td><td>-33.53</td><td>17.93</td><td>30.72</td><td>5.35</td><td>33.53</td><td>146</td><td>317 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2024-10-30  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.69</td><td>-----</td><td>-----</td><td>101.14</td><td>30.72</td><td>5.37</td><td>33.54</td><td>146</td><td>317 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>78.90</td><td>-----</td><td>-----</td><td>76.35</td><td>30.72</td><td>5.37</td><td>33.54</td><td>146</td><td>317 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2377.73	45.26	74.00	-28.74	42.72	30.72	5.35	33.53	146	317 PEAK	2	2377.73	20.47	54.00	-33.53	17.93	30.72	5.35	33.53	146	317 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.69	-----	-----	101.14	30.72	5.37	33.54	146	317 PEAK	2	2402.00	78.90	-----	-----	76.35	30.72	5.37	33.54	146	317 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2377.73	45.26	74.00	-28.74	42.72	30.72	5.35	33.53	146	317 PEAK																																																																																															
2	2377.73	20.47	54.00	-33.53	17.93	30.72	5.35	33.53	146	317 AVERAGE																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2402.00	103.69	-----	-----	101.14	30.72	5.37	33.54	146	317 PEAK																																																																																															
2	2402.00	78.90	-----	-----	76.35	30.72	5.37	33.54	146	317 AVERAGE																																																																																															



Mode	10																																																																			
	Harmonic																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																			
ANT	SISO																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak	Data: 1 Graph showing Peak Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal with a peak at 4884.00 MHz. A table below the graph provides detailed data for the peak and average levels. <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 *</td><td>4884.00</td><td>46.29</td><td>-27.71</td><td>74.00</td><td>52.60</td><td>36.39</td><td>8.88</td><td>51.58</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4884.00</td><td>25.50</td><td>-28.50</td><td>54.00</td><td>31.81</td><td>36.39</td><td>8.88</td><td>51.58</td><td>---</td><td>Average</td></tr></table>		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg	Remark	1 *	4884.00	46.29	-27.71	74.00	52.60	36.39	8.88	51.58	---	Peak	2	4884.00	25.50	-28.50	54.00	31.81	36.39	8.88	51.58	---	Average	Data: 2 Graph showing Peak Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal with a peak at 4884.00 MHz. A table below the graph provides detailed data for the peak and average levels. <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 *</td><td>4884.00</td><td>45.02</td><td>-28.98</td><td>74.00</td><td>51.33</td><td>36.39</td><td>8.88</td><td>51.58</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4884.00</td><td>20.23</td><td>-33.77</td><td>54.00</td><td>26.54</td><td>36.39</td><td>8.88</td><td>51.58</td><td>---</td><td>Average</td></tr></table>		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg	Remark	1 *	4884.00	45.02	-28.98	74.00	51.33	36.39	8.88	51.58	---	Peak	2	4884.00	20.23	-33.77	54.00	26.54	36.39	8.88	51.58	---	Average
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg	Remark																																																										
1 *	4884.00	46.29	-27.71	74.00	52.60	36.39	8.88	51.58	---	Peak																																																										
2	4884.00	25.50	-28.50	54.00	31.81	36.39	8.88	51.58	---	Average																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg	Remark																																																										
1 *	4884.00	45.02	-28.98	74.00	51.33	36.39	8.88	51.58	---	Peak																																																										
2	4884.00	20.23	-33.77	54.00	26.54	36.39	8.88	51.58	---	Average																																																										
Avg																																																																				





Mode	11																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																															
ANT	SISO																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																														
Peak	Data: 1 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m. The x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal. A peak is labeled 'PEAK_74' at 74.00 dBuV/m. A blue line shows the measured signal. A peak is labeled 'AVG_54' at 54.00 dBuV/m. <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>45.29</td><td>-28.71</td><td>74.00</td><td>51.68</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>28.50</td><td>-33.50</td><td>54.00</td><td>26.89</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7323.00</td><td>49.17</td><td>-24.83</td><td>74.00</td><td>53.27</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>24.38</td><td>-29.62</td><td>54.00</td><td>28.48</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		Freq	Level	Limit	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	4882.00	45.29	-28.71	74.00	51.68	36.51	8.65	51.55	---	Peak	2	4882.00	28.50	-33.50	54.00	26.89	36.51	8.65	51.55	---	Average	3 *	7323.00	49.17	-24.83	74.00	53.27	36.88	10.18	51.16	---	Peak	4	7323.00	24.38	-29.62	54.00	28.48	36.88	10.18	51.16	---	Average	Data: 2 Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 17.5 to 140 dBuV/m. The x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal. A peak is labeled 'PEAK_74' at 74.00 dBuV/m. A blue line shows the measured signal. A peak is labeled 'AVG_54' at 54.00 dBuV/m. <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>44.80</td><td>-29.20</td><td>74.00</td><td>51.19</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>28.01</td><td>-33.99</td><td>54.00</td><td>26.40</td><td>36.51</td><td>8.65</td><td>51.55</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7323.00</td><td>52.87</td><td>-21.93</td><td>74.00</td><td>56.17</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>27.28</td><td>-26.72</td><td>54.00</td><td>31.38</td><td>36.88</td><td>10.18</td><td>51.16</td><td>---</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		Freq	Level	Limit	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	4882.00	44.80	-29.20	74.00	51.19	36.51	8.65	51.55	---	Peak	2	4882.00	28.01	-33.99	54.00	26.40	36.51	8.65	51.55	---	Average	3 *	7323.00	52.87	-21.93	74.00	56.17	36.88	10.18	51.16	---	Peak	4	7323.00	27.28	-26.72	54.00	31.38	36.88	10.18	51.16	---	Average
	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																								
	Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																																								
1	4882.00	45.29	-28.71	74.00	51.68	36.51	8.65	51.55	---	Peak																																																																																																																																						
2	4882.00	28.50	-33.50	54.00	26.89	36.51	8.65	51.55	---	Average																																																																																																																																						
3 *	7323.00	49.17	-24.83	74.00	53.27	36.88	10.18	51.16	---	Peak																																																																																																																																						
4	7323.00	24.38	-29.62	54.00	28.48	36.88	10.18	51.16	---	Average																																																																																																																																						
	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																								
	Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																																								
1	4882.00	44.80	-29.20	74.00	51.19	36.51	8.65	51.55	---	Peak																																																																																																																																						
2	4882.00	28.01	-33.99	54.00	26.40	36.51	8.65	51.55	---	Average																																																																																																																																						
3 *	7323.00	52.87	-21.93	74.00	56.17	36.88	10.18	51.16	---	Peak																																																																																																																																						
4	7323.00	27.28	-26.72	54.00	31.38	36.88	10.18	51.16	---	Average																																																																																																																																						
Avg																																																																																																																																																



Mode	12																																																																																																																	
	Band Edge																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																	
ANT	SISO																																																																																																																	
Pol.	Horizontal					Fundamental																																																																																																												
Peak	Level (dBuV/m) Date: 2024-10-26 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>61.91</td><td>74.00</td><td>-12.09</td><td>59.34</td><td>30.70</td><td>5.46</td><td>33.59</td><td>305</td><td>5 PEAK</td></tr><tr><td>2</td><td>2483.54</td><td>37.12</td><td>54.00</td><td>-16.88</td><td>34.55</td><td>30.70</td><td>5.46</td><td>33.59</td><td>305</td><td>5 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	61.91	74.00	-12.09	59.34	30.70	5.46	33.59	305	5 PEAK	2	2483.54	37.12	54.00	-16.88	34.55	30.70	5.46	33.59	305	5 AVERAGE	Level (dBuV/m) Date: 2024-10-26 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>106.59</td><td>-----</td><td>-----</td><td>104.02</td><td>30.70</td><td>5.46</td><td>33.59</td><td>305</td><td>5 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>81.80</td><td>-----</td><td>-----</td><td>79.23</td><td>30.70</td><td>5.46</td><td>33.59</td><td>305</td><td>5 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	106.59	-----	-----	104.02	30.70	5.46	33.59	305	5 PEAK	2	2480.00	81.80	-----	-----	79.23	30.70	5.46	33.59	305	5 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2483.54	61.91	74.00	-12.09	59.34	30.70	5.46	33.59	305	5 PEAK																																																																																																								
2	2483.54	37.12	54.00	-16.88	34.55	30.70	5.46	33.59	305	5 AVERAGE																																																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2480.00	106.59	-----	-----	104.02	30.70	5.46	33.59	305	5 PEAK																																																																																																								
2	2480.00	81.80	-----	-----	79.23	30.70	5.46	33.59	305	5 AVERAGE																																																																																																								

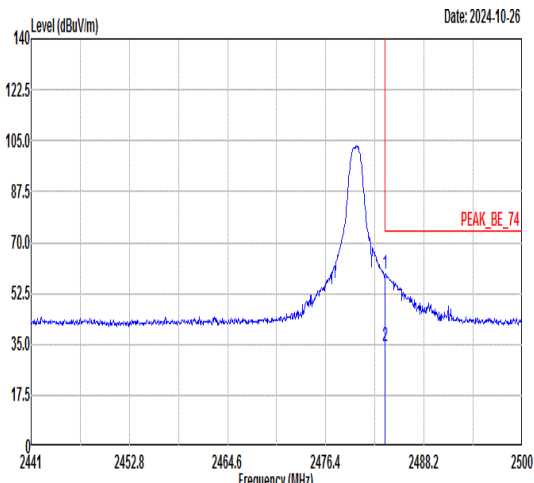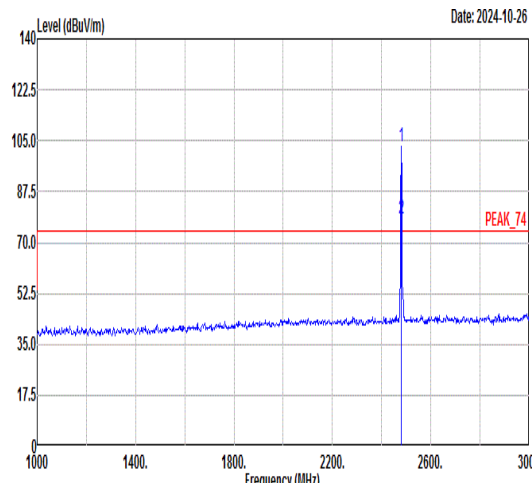

Mode	12																																																																																																																							
	Band Edge																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Vertical						Fundamental																																																																																																																	
Peak																																																																																																																								
	Date: 2024-10-26						Date: 2024-10-26																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>59.37</td><td>74.00</td><td>-14.63</td><td>56.80</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>282</td><td>PEAK</td></tr><tr><td>2</td><td>2483.54</td><td>34.58</td><td>54.00</td><td>-19.42</td><td>32.01</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>282</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	59.37	74.00	-14.63	56.80	30.70	5.46	33.59	300	282	PEAK	2	2483.54	34.58	54.00	-19.42	32.01	30.70	5.46	33.59	300	282	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.09</td><td>-----</td><td>-----</td><td>100.52</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>282</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>78.30</td><td>-----</td><td>-----</td><td>75.73</td><td>30.70</td><td>5.46</td><td>33.59</td><td>300</td><td>282</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.09	-----	-----	100.52	30.70	5.46	33.59	300	282	PEAK	2	2480.00	78.30	-----	-----	75.73	30.70	5.46	33.59	300	282	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2483.54	59.37	74.00	-14.63	56.80	30.70	5.46	33.59	300	282	PEAK																																																																																																													
2	2483.54	34.58	54.00	-19.42	32.01	30.70	5.46	33.59	300	282	AVERAGE																																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2480.00	103.09	-----	-----	100.52	30.70	5.46	33.59	300	282	PEAK																																																																																																													
2	2480.00	78.30	-----	-----	75.73	30.70	5.46	33.59	300	282	AVERAGE																																																																																																													



Mode	12																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																
ANT	SISO																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg	Data: 1 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line representing the signal level, with a red line indicating the limit. The signal level is below the limit across the frequency range. The limit is labeled PEAK_74 and AVG_54. <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>45.36</td><td>-28.64</td><td>74.00</td><td>51.83</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>20.57</td><td>-33.43</td><td>54.00</td><td>27.04</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>49.13</td><td>-24.87</td><td>74.00</td><td>53.39</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>24.34</td><td>-29.66</td><td>54.00</td><td>28.68</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Average</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4960.00	45.36	-28.64	74.00	51.83	36.64	8.41	51.52	---	---	Peak	2	4960.00	20.57	-33.43	54.00	27.04	36.64	8.41	51.52	---	---	Average	3 *	7440.00	49.13	-24.87	74.00	53.39	36.76	10.17	51.19	---	---	Peak	4	7440.00	24.34	-29.66	54.00	28.68	36.76	10.17	51.19	---	---	Average	Data: 2 Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue line representing the signal level, with a red line indicating the limit. The signal level is below the limit across the frequency range. The limit is labeled PEAK_74 and AVG_54. <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>44.57</td><td>-29.43</td><td>74.00</td><td>51.84</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>19.78</td><td>-34.22</td><td>54.00</td><td>26.25</td><td>36.64</td><td>8.41</td><td>51.52</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>50.70</td><td>-23.30</td><td>74.00</td><td>54.96</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>25.91</td><td>-28.09</td><td>54.00</td><td>30.17</td><td>36.76</td><td>10.17</td><td>51.19</td><td>---</td><td>---</td><td>Average</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.57	-29.43	74.00	51.84	36.64	8.41	51.52	---	---	Peak	2	4960.00	19.78	-34.22	54.00	26.25	36.64	8.41	51.52	---	---	Average	3 *	7440.00	50.70	-23.30	74.00	54.96	36.76	10.17	51.19	---	---	Peak	4	7440.00	25.91	-28.09	54.00	30.17	36.76	10.17	51.19	---	---	Average
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																										
Freq	Level	Limit	Level Factor	Loss Factor																																																																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																									
1	4960.00	45.36	-28.64	74.00	51.83	36.64	8.41	51.52	---	---	Peak																																																																																																																																						
2	4960.00	20.57	-33.43	54.00	27.04	36.64	8.41	51.52	---	---	Average																																																																																																																																						
3 *	7440.00	49.13	-24.87	74.00	53.39	36.76	10.17	51.19	---	---	Peak																																																																																																																																						
4	7440.00	24.34	-29.66	54.00	28.68	36.76	10.17	51.19	---	---	Average																																																																																																																																						
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																											
Freq	Level	Limit	Level Factor	Loss Factor																																																																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																								
1	4960.00	44.57	-29.43	74.00	51.84	36.64	8.41	51.52	---	---	Peak																																																																																																																																						
2	4960.00	19.78	-34.22	54.00	26.25	36.64	8.41	51.52	---	---	Average																																																																																																																																						
3 *	7440.00	50.70	-23.30	74.00	54.96	36.76	10.17	51.19	---	---	Peak																																																																																																																																						
4	7440.00	25.91	-28.09	54.00	30.17	36.76	10.17	51.19	---	---	Average																																																																																																																																						



Mode	19																																																																																																									
	Band Edge																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																								
Peak	Date: 2024-10-29 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.91</td><td>44.85</td><td>74.00</td><td>-29.15</td><td>42.30</td><td>30.73</td><td>5.34</td><td>33.52</td><td>100</td><td>173 PEAK</td></tr><tr><td>2</td><td>2368.91</td><td>20.06</td><td>54.00</td><td>-33.94</td><td>17.51</td><td>30.73</td><td>5.34</td><td>33.52</td><td>100</td><td>173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2368.91	44.85	74.00	-29.15	42.30	30.73	5.34	33.52	100	173 PEAK	2	2368.91	20.06	54.00	-33.94	17.51	30.73	5.34	33.52	100	173 AVERAGE	Date: 2024-10-29 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.11</td><td>-----</td><td>-----</td><td>96.56</td><td>30.72</td><td>5.37</td><td>33.54</td><td>100</td><td>173 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>74.32</td><td>-----</td><td>-----</td><td>71.77</td><td>30.72</td><td>5.37</td><td>33.54</td><td>100</td><td>173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.11	-----	-----	96.56	30.72	5.37	33.54	100	173 PEAK	2	2402.00	74.32	-----	-----	71.77	30.72	5.37	33.54	100	173 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2368.91	44.85	74.00	-29.15	42.30	30.73	5.34	33.52	100	173 PEAK																																																																																																
2	2368.91	20.06	54.00	-33.94	17.51	30.73	5.34	33.52	100	173 AVERAGE																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2402.00	99.11	-----	-----	96.56	30.72	5.37	33.54	100	173 PEAK																																																																																																
2	2402.00	74.32	-----	-----	71.77	30.72	5.37	33.54	100	173 AVERAGE																																																																																																





Mode	19																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																						
ANT	SISO																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	Level (dBuV/m) Date: 2024-10-29 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2331. 2352. 2373. 2394. 2415 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.02</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>44.87</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>246 PEAK</td></tr><tr><td>2</td><td>2388.02</td><td>22.63</td><td>54.00</td><td>-31.37</td><td>20.08</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>246 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-10-29 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400. 1800. 2200. 2600. 3000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>108.62</td><td>-----</td><td>106.07</td><td>30.72</td><td>5.37</td><td>33.54</td><td>100</td><td>246 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>83.83</td><td>-----</td><td>81.28</td><td>30.72</td><td>5.37</td><td>33.54</td><td>100</td><td>246 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.02	47.42	74.00	-26.58	44.87	30.72	5.36	33.53	100	246 PEAK	2	2388.02	22.63	54.00	-31.37	20.08	30.72	5.36	33.53	100	246 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	108.62	-----	106.07	30.72	5.37	33.54	100	246 PEAK	2	2402.00	83.83	-----	81.28	30.72	5.37	33.54	100	246 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2388.02	47.42	74.00	-26.58	44.87	30.72	5.36	33.53	100	246 PEAK																																																																																													
2	2388.02	22.63	54.00	-31.37	20.08	30.72	5.36	33.53	100	246 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2402.00	108.62	-----	106.07	30.72	5.37	33.54	100	246 PEAK																																																																																														
2	2402.00	83.83	-----	81.28	30.72	5.37	33.54	100	246 AVERAGE																																																																																														





Mode	19																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																															
ANT	SISO																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak	Data: 1 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak labeled 'PEAK_74' at 4884.00 MHz. A table below the graph provides detailed data for the peak and average values. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th></th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>4884.00</td><td>44.95</td><td>-29.05</td><td>74.00</td><td>64.52</td><td>36.39</td><td>8.88</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4884.00</td><td>20.16</td><td>-33.84</td><td>54.00</td><td>39.73</td><td>36.39</td><td>8.88</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	4884.00	44.95	-29.05	74.00	64.52	36.39	8.88	64.84	---	---	Peak	2	4884.00	20.16	-33.84	54.00	39.73	36.39	8.88	64.84	---	---	Average	Data: 2 Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak labeled 'PEAK_74' at 4884.00 MHz. A table below the graph provides detailed data for the peak and average values. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th></th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>4884.00</td><td>44.66</td><td>-29.34</td><td>74.00</td><td>64.23</td><td>36.39</td><td>8.88</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4884.00</td><td>19.87</td><td>-34.13</td><td>54.00</td><td>39.44</td><td>36.39</td><td>8.88</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 *	4884.00	44.66	-29.34	74.00	64.23	36.39	8.88	64.84	---	---	Peak	2	4884.00	19.87	-34.13	54.00	39.44	36.39	8.88	64.84	---	---	Average
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1 *	4884.00	44.95	-29.05	74.00	64.52	36.39	8.88	64.84	---	---	Peak																																																																																					
2	4884.00	20.16	-33.84	54.00	39.73	36.39	8.88	64.84	---	---	Average																																																																																					
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																						
	MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1 *	4884.00	44.66	-29.34	74.00	64.23	36.39	8.88	64.84	---	---	Peak																																																																																					
2	4884.00	19.87	-34.13	54.00	39.44	36.39	8.88	64.84	---	---	Average																																																																																					
Avg																																																																																																

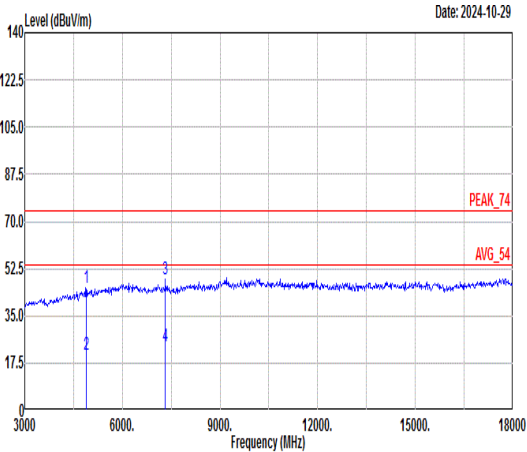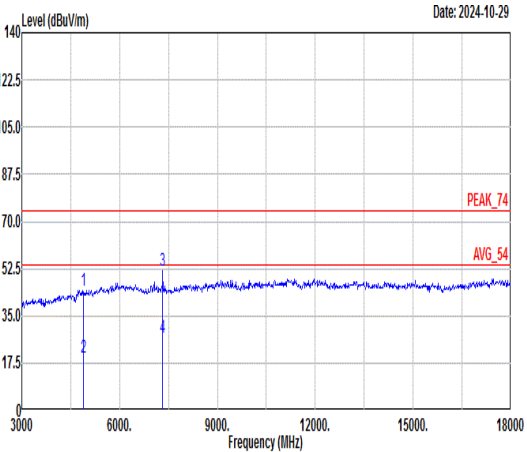

Mode	20																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																			
ANT	SISO																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg	 Level (dBuV/m) Date: 2024-10-29 Frequency (MHz) PEAK_74 AVG_54						 Level (dBuV/m) Date: 2024-10-29 Frequency (MHz) PEAK_74 AVG_54																																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>65.79</td><td>35.92</td><td>8.70</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>20.75</td><td>54.00</td><td>-33.25</td><td>41.00</td><td>35.92</td><td>8.70</td><td>64.87</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>66.24</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>23.64</td><td>54.00</td><td>-30.36</td><td>41.45</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	45.54	74.00	-28.46	65.79	35.92	8.70	64.87	---	---	Peak	2	4882.00	20.75	54.00	-33.25	41.00	35.92	8.70	64.87	---	---	Average	3	7323.00	48.43	74.00	-25.57	66.24	36.87	10.18	64.86	---	---	Peak	4	7323.00	23.64	54.00	-30.36	41.45	36.87	10.18	64.86	---	---	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>44.38</td><td>74.00</td><td>-29.62</td><td>64.63</td><td>35.92</td><td>8.70</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>19.59</td><td>54.00</td><td>-34.41</td><td>39.84</td><td>35.92</td><td>8.70</td><td>64.87</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>51.58</td><td>74.00</td><td>-22.42</td><td>69.39</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>26.79</td><td>54.00</td><td>-27.21</td><td>44.60</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	44.38	74.00	-29.62	64.63	35.92	8.70	64.87	---	---	Peak	2	4882.00	19.59	54.00	-34.41	39.84	35.92	8.70	64.87	---	---	Average	3	7323.00	51.58	74.00	-22.42	69.39	36.87	10.18	64.86	---	---	Peak	4	7323.00	26.79	54.00	-27.21	44.60	36.87	10.18	64.86	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	4882.00	45.54	74.00	-28.46	65.79	35.92	8.70	64.87	---	---	Peak																																																																																																																																																									
2	4882.00	20.75	54.00	-33.25	41.00	35.92	8.70	64.87	---	---	Average																																																																																																																																																									
3	7323.00	48.43	74.00	-25.57	66.24	36.87	10.18	64.86	---	---	Peak																																																																																																																																																									
4	7323.00	23.64	54.00	-30.36	41.45	36.87	10.18	64.86	---	---	Average																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4882.00	44.38	74.00	-29.62	64.63	35.92	8.70	64.87	---	---	Peak																																																																																																																																																									
2	4882.00	19.59	54.00	-34.41	39.84	35.92	8.70	64.87	---	---	Average																																																																																																																																																									
3	7323.00	51.58	74.00	-22.42	69.39	36.87	10.18	64.86	---	---	Peak																																																																																																																																																									
4	7323.00	26.79	54.00	-27.21	44.60	36.87	10.18	64.86	---	---	Average																																																																																																																																																									

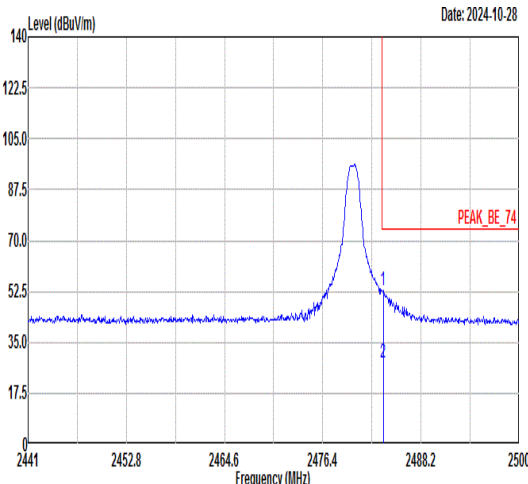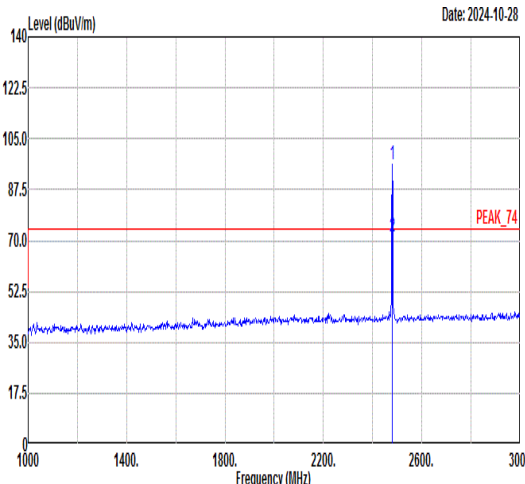

Mode	21																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>50.20</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>170 PEAK</td></tr><tr><td>2</td><td>2483.66</td><td>27.98</td><td>54.00</td><td>-26.02</td><td>25.41</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>170 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2483.66	52.77	74.00	-21.23	50.20	30.70	5.46	33.59	100	170 PEAK	2	2483.66	27.98	54.00	-26.02	25.41	30.70	5.46	33.59	100	170 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.15</td><td>-----</td><td>-----</td><td>93.58</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>170 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>71.36</td><td>-----</td><td>-----</td><td>68.79</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>170 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2480.00	96.15	-----	-----	93.58	30.70	5.46	33.59	100	170 PEAK	2	2480.00	71.36	-----	-----	68.79	30.70	5.46	33.59	100	170 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																																								
1	2483.66	52.77	74.00	-21.23	50.20	30.70	5.46	33.59	100	170 PEAK																																																																																									
2	2483.66	27.98	54.00	-26.02	25.41	30.70	5.46	33.59	100	170 AVERAGE																																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																																									
1	2480.00	96.15	-----	-----	93.58	30.70	5.46	33.59	100	170 PEAK																																																																																									
2	2480.00	71.36	-----	-----	68.79	30.70	5.46	33.59	100	170 AVERAGE																																																																																									



Mode	21																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	SISO																																																																																																													
Pol.	Vertical					Fundamental																																																																																																								
Peak	Level (dBuV/m) Date: 2024-10-28 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.60</td><td>64.43</td><td>74.00</td><td>-9.57</td><td>61.86</td><td>30.70</td><td>5.46</td><td>33.59</td><td>190</td><td>242 PEAK</td></tr><tr><td>2 2483.60</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>37.07</td><td>30.70</td><td>5.46</td><td>33.59</td><td>190</td><td>242 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.60	64.43	74.00	-9.57	61.86	30.70	5.46	33.59	190	242 PEAK	2 2483.60	39.64	54.00	-14.36	37.07	30.70	5.46	33.59	190	242 AVERAGE	Level (dBuV/m) Date: 2024-10-28 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>109.39</td><td>-----</td><td>-----</td><td>106.82</td><td>30.70</td><td>5.46</td><td>33.59</td><td>190</td><td>242 PEAK</td></tr><tr><td>2 2480.00</td><td>84.60</td><td>-----</td><td>-----</td><td>82.03</td><td>30.70</td><td>5.46</td><td>33.59</td><td>190</td><td>242 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	109.39	-----	-----	106.82	30.70	5.46	33.59	190	242 PEAK	2 2480.00	84.60	-----	-----	82.03	30.70	5.46	33.59	190	242 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 2483.60	64.43	74.00	-9.57	61.86	30.70	5.46	33.59	190	242 PEAK																																																																																																					
2 2483.60	39.64	54.00	-14.36	37.07	30.70	5.46	33.59	190	242 AVERAGE																																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 2480.00	109.39	-----	-----	106.82	30.70	5.46	33.59	190	242 PEAK																																																																																																					
2 2480.00	84.60	-----	-----	82.03	30.70	5.46	33.59	190	242 AVERAGE																																																																																																					




		21																																																																																																																																				
Mode	Harmonic																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																					
ANT	SISO																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	Data: 1 Level (dBuV/m) Date: 2024-11-05 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak at 4960.00 MHz. Below the graph is a table of results. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.25</td><td>-30.75</td><td>74.00</td><td>63.10</td><td>36.64</td><td>8.41</td><td>64.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>19.56</td><td>-35.44</td><td>54.00</td><td>38.32</td><td>36.64</td><td>8.41</td><td>64.81</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>45.77</td><td>-28.23</td><td>74.00</td><td>63.70</td><td>36.76</td><td>10.17</td><td>64.86</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>20.98</td><td>-33.02</td><td>54.00</td><td>38.91</td><td>36.76</td><td>10.17</td><td>64.86</td><td>---</td><td>Average</td></tr></table>		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4960.00	43.25	-30.75	74.00	63.10	36.64	8.41	64.90	---	Peak	2	4960.00	19.56	-35.44	54.00	38.32	36.64	8.41	64.81	---	Average	3 *	7440.00	45.77	-28.23	74.00	63.70	36.76	10.17	64.86	---	Peak	4	7440.00	20.98	-33.02	54.00	38.91	36.76	10.17	64.86	---	Average	Data: 2 Level (dBuV/m) Date: 2024-11-05 Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz. A red line indicates the limit at 74.00 dBuV/m. A blue line shows the measured signal, with a peak at 4960.00 MHz. Below the graph is a table of results. <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>44.70</td><td>-29.30</td><td>74.00</td><td>64.55</td><td>36.64</td><td>8.41</td><td>64.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>20.01</td><td>-33.99</td><td>54.00</td><td>39.77</td><td>36.64</td><td>8.41</td><td>64.81</td><td>---</td><td>Average</td></tr><tr><td>3 *</td><td>7440.00</td><td>49.80</td><td>-24.20</td><td>74.00</td><td>67.73</td><td>36.76</td><td>10.17</td><td>64.86</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>25.01</td><td>-28.99</td><td>54.00</td><td>42.94</td><td>36.76</td><td>10.17</td><td>64.86</td><td>---</td><td>Average</td></tr></table>		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4960.00	44.70	-29.30	74.00	64.55	36.64	8.41	64.90	---	Peak	2	4960.00	20.01	-33.99	54.00	39.77	36.64	8.41	64.81	---	Average	3 *	7440.00	49.80	-24.20	74.00	67.73	36.76	10.17	64.86	---	Peak	4	7440.00	25.01	-28.99	54.00	42.94	36.76	10.17	64.86	---	Average
		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																													
1	4960.00	43.25	-30.75	74.00	63.10	36.64	8.41	64.90	---	Peak																																																																																																																												
2	4960.00	19.56	-35.44	54.00	38.32	36.64	8.41	64.81	---	Average																																																																																																																												
3 *	7440.00	45.77	-28.23	74.00	63.70	36.76	10.17	64.86	---	Peak																																																																																																																												
4	7440.00	20.98	-33.02	54.00	38.91	36.76	10.17	64.86	---	Average																																																																																																																												
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																												
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																													
1	4960.00	44.70	-29.30	74.00	64.55	36.64	8.41	64.90	---	Peak																																																																																																																												
2	4960.00	20.01	-33.99	54.00	39.77	36.64	8.41	64.81	---	Average																																																																																																																												
3 *	7440.00	49.80	-24.20	74.00	67.73	36.76	10.17	64.86	---	Peak																																																																																																																												
4	7440.00	25.01	-28.99	54.00	42.94	36.76	10.17	64.86	---	Average																																																																																																																												


Appendix D. Duty Cycle Plots

For sample 1:

DH5 on time (One Pulse) Plot on Channel 39

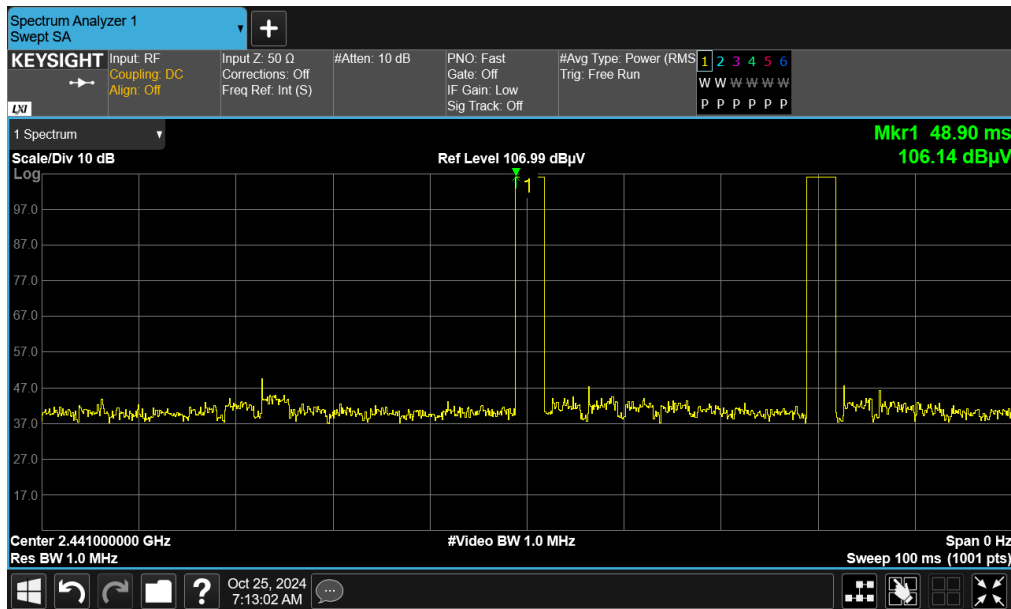

DH5 on time (Count Pulses) Plot on Channel 39

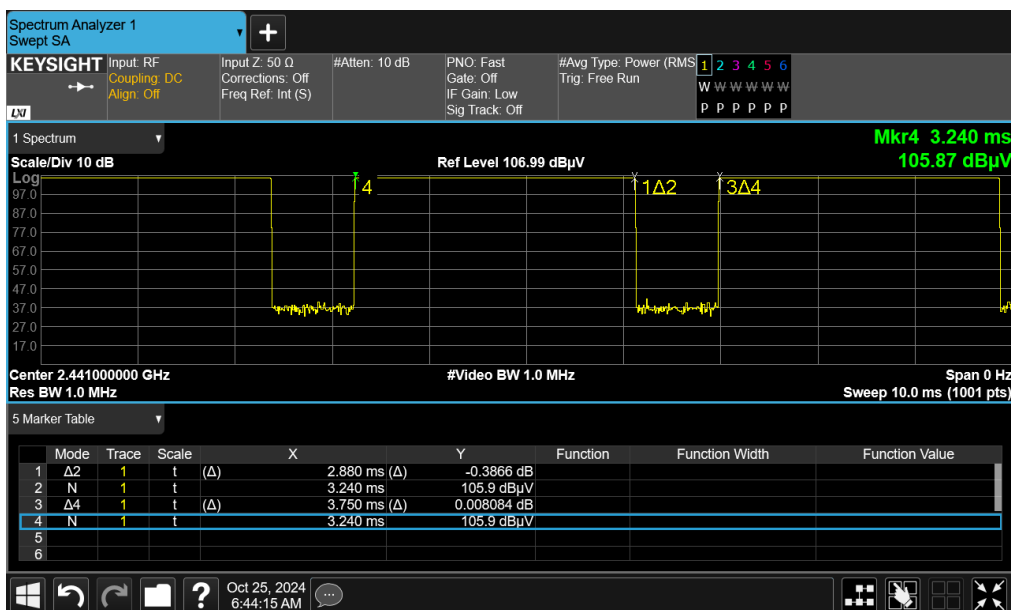

Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

For sample 2:

DH5 on time (One Pulse) Plot on Channel 39



DH5 on time (Count Pulses) Plot on Channel 39

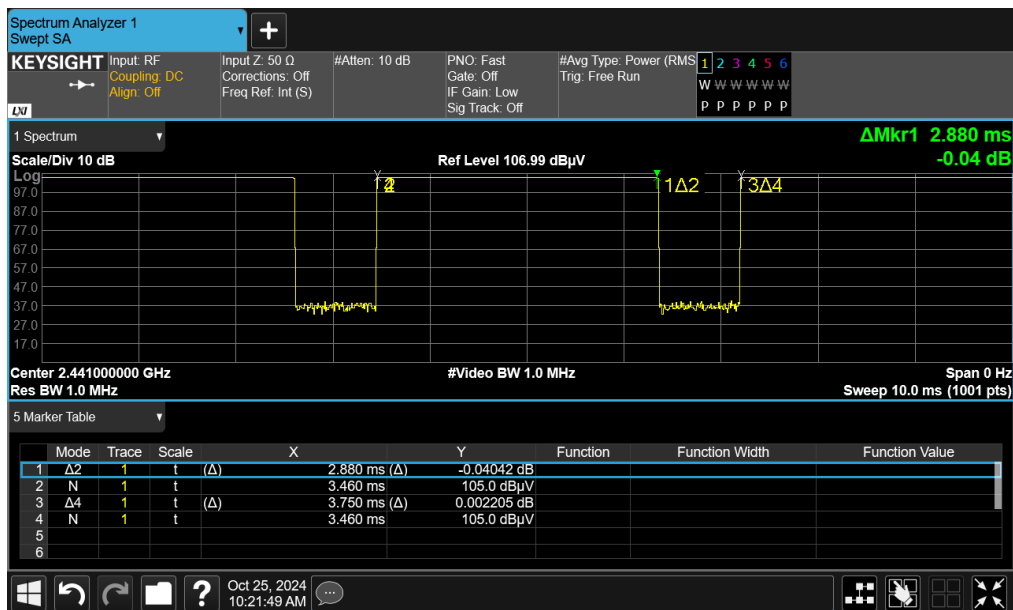

Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

For sample 3:

DH5 on time (One Pulse) Plot on Channel 39



DH5 on time (Count Pulses) Plot on Channel 39

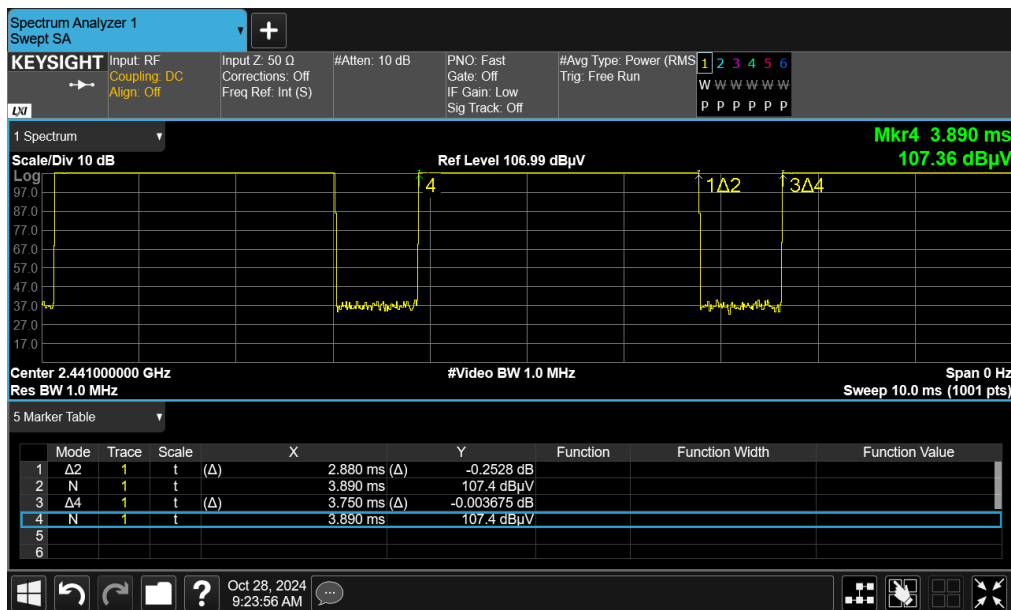

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.