



Shenzhen CTL Electromagnetic Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-89486187

FCC PART 15 SUBPART C TEST REPORT

FCC Part 15.247

Report Reference No......: **CTL120315192-WF**

Compiled by

(position+printed name+signature)...: File administrators Andy Zhang

Andy Zhang

Name of the organization performing the tests

Test Engineer Kendy Wang

Kendy Wang

(position+printed name+signature)...:

Approved by

(position+printed name+signature)...: Manager Tracy Qi

Tracy Qi

Date of issue.....: April 2, 2012

Representative Laboratory Name : **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address.....: Zone B, 4/F, Block 20, Guangqian Industrial Park, Longzhu Road, Nanshan, Shenzhen 518055 China.

Test Firm.....: **Bontek Compliance Testing Laboratory Ltd**

Address.....: 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

Applicant's name.....: **GT-tronics HK Ltd**

Address.....: B202, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

Test specification:

Standard: FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.

TRF Originator.....: Shenzhen CTL Electromagnetic Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd.. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : Bluetooth Module

Trade Mark: N/A

Model/Type reference.....: BC5MMRPA

Modulation: FHSS

Work Frequency Range.....: 2402~2480MHz

Antenna Type.....: PCB Antenna (-1.0 dBi)

FCC ID.....: B4OBC5MMRPA

Result.....: **Positive**

TEST REPORT

Test Report No. : CTL120315192-WF	April 2, 2012 Date of issue
--	--------------------------------

Equipment under Test : Bluetooth Module

Model /Type : BC5MMRPA

Listed Models : /

Applicant : GT-tronics HK Ltd

Address : B202, Tonic Industrial Center, 19 Lam Hing Street,
Kowloon Bay, Hong Kong

Manufacturer GT-tronics HK Ltd

Address B202, Tonic Industrial Center, 19 Lam Hing Street,
Kowloon Bay, Hong Kong

Test Result according to the
standards on page 4:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS.....</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
3.	<u>TEST ENVIRONMENT.....</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
3.7.	Summary of Test Result	9
4.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1.	Conducted Emissions Test	10
4.2.	Spurious Radiated Emissions Test	13
4.3.	20dB Bandwidth Measurement	21
4.4.	Peak Output Power Measurement	24
4.5.	100 KHz Bandwidth of Band Edges Measurement	27
4.6.	Frequency Separation	32
4.7.	Number of Hopping Frequency	33
4.8.	Dwell Time	35
4.9.	Antenna Requirement	41
4.10.	RF Exposure	42
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>43</u>
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>44</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 15.247](#): Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.

[ANSI C63.4-2003](#)

[FCC Public Notice DA 00-705](#): Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : March 14, 2012

Testing commenced on : March 14, 2012

Testing concluded on : March 31, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : ☐ 120V / 60 Hz ☐ 115V / 60Hz
☐ 12 V DC ☐ 24 V DC
☒ Other (specified in blank below)

DC 5V from USB Port

2.3. Short description of the Equipment under Test (EUT)

The device is a Bluetooth Module, work frequency at 2.4~2.4835GHz ISM Band.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz), mid (2442MHz) and high (2480MHz) with highest data rate are chosen for full testing.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☐ - supplied by the manufacturer

☒ - supplied by the lab

● USB Mouse	Manufacturer : DELL Model No. : M-UAE119
● LCD Display	Manufacturer : DELL Model No. : E178FPc
● Computer	Manufacturer : DELL Model No. : OPTIPLEX 330
● USB Keyboard	Manufacturer : DELL Model No. : L100
● Notebook PC	Manufacturer : DELL Model No. : PP26L
● USB Mouse	Manufacturer : DELL Model No. : MOC5UO
● USB Keyboard	Manufacturer : DELL Model No. : SK8185

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **B4OBC5MMRPA** filing to comply with of the FCC Part 15.247 Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

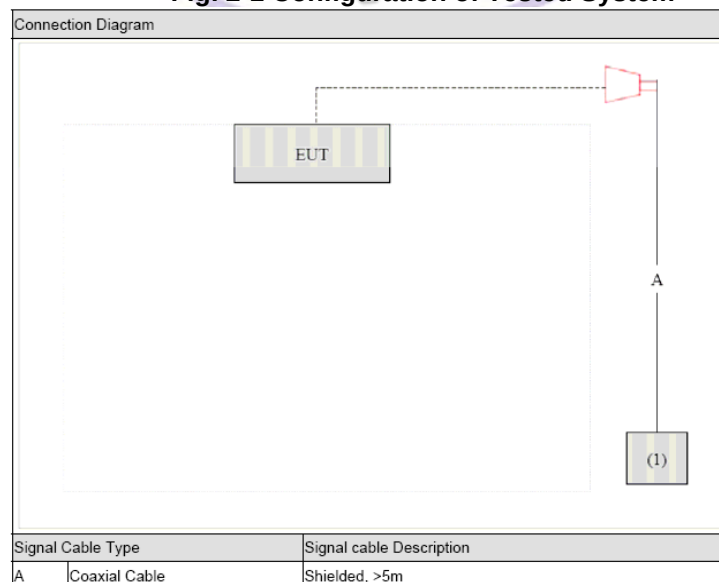

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2011/04/14	2012/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2011/04/14	2012/04/13
3	Dual Directional Coupler	Agilent	778D	2011/04/14	2012/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2011/04/14	2012/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2011/04/14	2012/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2011/04/14	2012/04/13
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2011/04/14	2012/04/13
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2011/04/14	2012/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2011/04/14	2012/04/13
10	AC Power Supply	IDRC	CF-500TP	2011/04/14	2012/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2011/04/14	2012/04/13
12	RF Current Probe	FCC	F-33-4	2011/04/14	2012/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2011/04/14	2012/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2011/04/14	2012/04/13
15	Amplifier	HP	8447D	2011/04/14	2012/04/13
16	SIGNAL GENERATOR	HP	8647A	2011/04/14	2012/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2011/04/14	2012/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2011/04/14	2012/04/13
19	EMI Test Receiver	R&S	ESPI	2011/04/14	2012/04/13

3.7. Summary of Test Result

No deviations from the test standards


FCC Rules	Description of Test	Result
FCC Part 15.207(a)	Conducted Emission	Compliant
FCC Part 15.247(b)(1)	Peak Output Power	Compliant
FCC Part 15.247(a)	20dB Bandwidth	Compliant
FCC Part 15.247(c)	100 KHz Bandwidth of Frequency Band Edges	Compliant
FCC Part 15.209(a)(f)	Spurious Emission	Compliant
FCC Part 15.247(a)(1)	Frequency Separation	Compliant
FCC Part 15.247(a)(1)(iii)	Number of Hopping Frequency	Compliant
FCC Part 15.247(a)(1)(iii)	Time of Occupancy	Compliant
FCC Part 15.203, FCC Part 15.247(b)(4)(i)	Antenna Requirement	Compliant
FCC Part 1.1310	RF Exposure	Compliant



4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

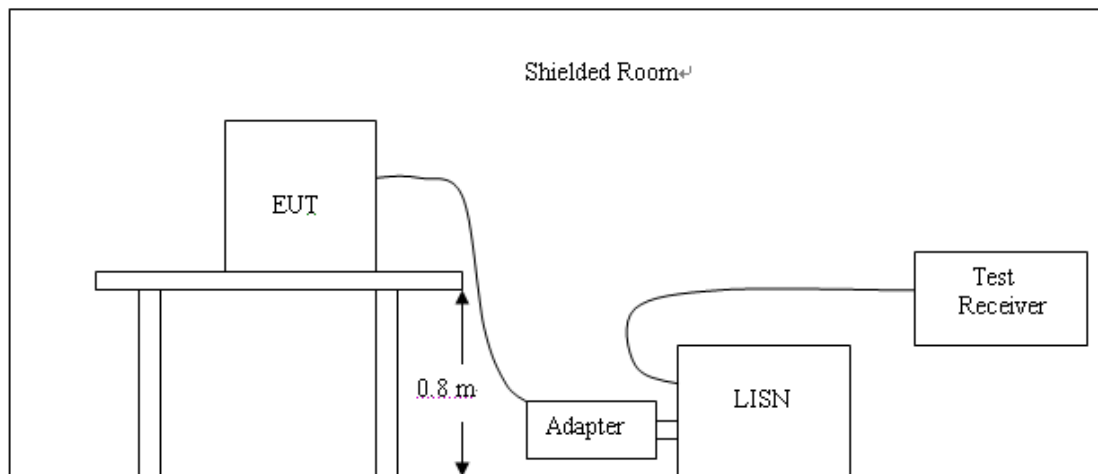

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz

TEST RESULTS**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

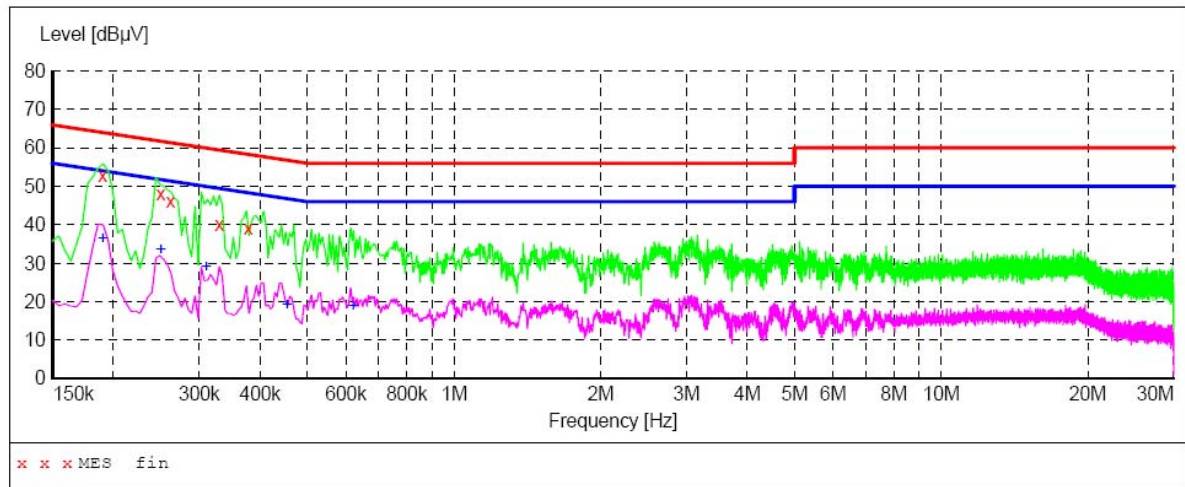
**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	52.90	10.2	64	11.1	QP	L1	GND
0.250000	48.10	10.2	62	13.7	QP	L1	GND
0.262000	46.10	10.2	61	15.3	QP	L1	GND
0.330000	40.20	10.2	60	19.3	QP	L1	GND
0.378000	39.10	10.2	58	19.2	QP	L1	GND

MEASUREMENT RESULT:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	36.70	10.2	54	17.3	AV	L1	GND
0.250000	33.60	10.2	52	18.2	AV	L1	GND
0.310000	29.20	10.2	50	20.8	AV	L1	GND
0.454000	19.40	10.2	47	27.4	AV	L1	GND
0.620000	19.10	10.2	46	26.9	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

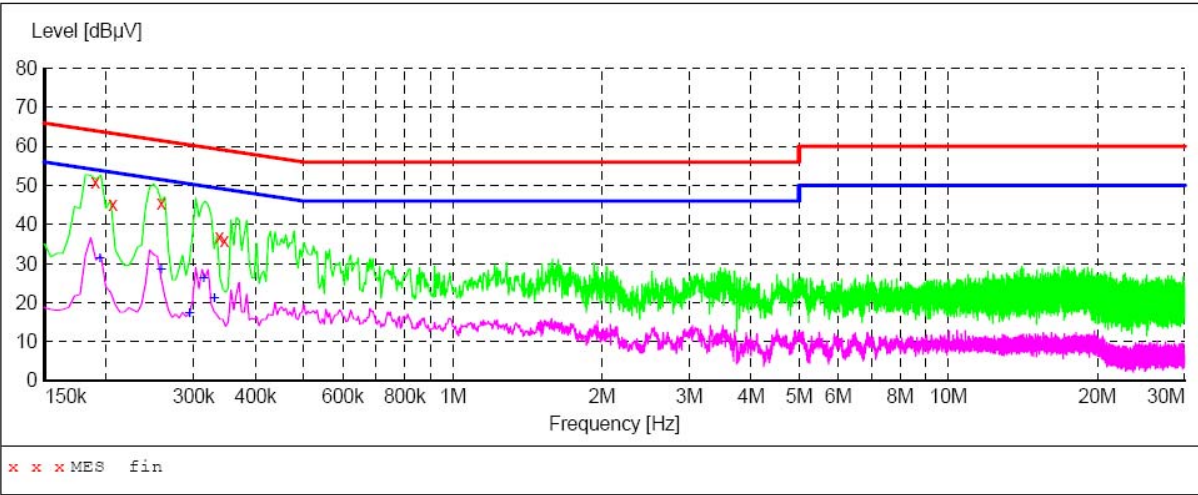

MEASUREMENT RESULT:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	50.80	10.2	64	13.2	QP	N	GND
0.206000	45.20	10.2	63	18.2	QP	N	GND
0.258000	45.40	10.2	62	16.1	QP	N	GND
0.338000	36.80	10.2	59	22.5	QP	N	GND
0.346000	35.90	10.2	59	23.2	QP	N	GND


MEASUREMENT RESULT:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.194000	31.30	10.2	54	22.6	AV	N	GND
0.258000	28.40	10.2	52	23.1	AV	N	GND
0.294000	17.30	10.2	50	33.1	AV	N	GND
0.314000	26.40	10.2	50	23.5	AV	N	GND
0.330000	21.30	10.2	50	28.2	AV	N	GND


4.2. Spurious Radiated Emissions Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

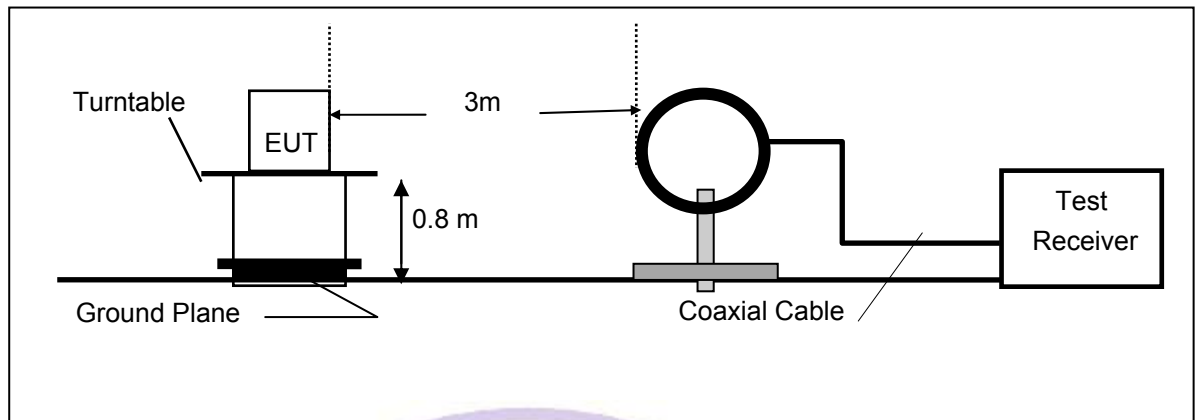

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

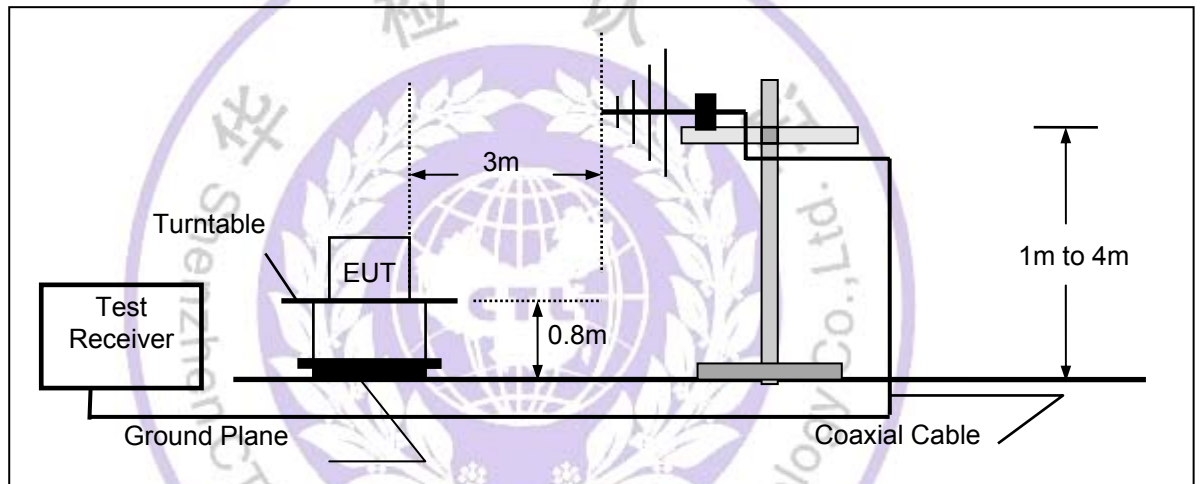

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

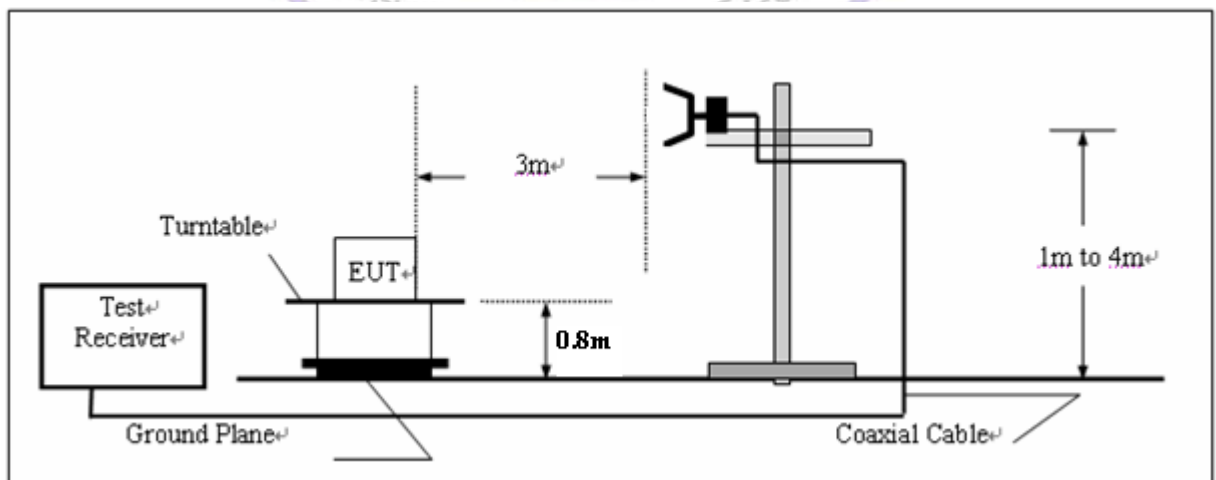

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST PROCEDURE

1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measurements have been completed.

Note:


Three axes are chosen for pretest, the Z axis is the worst mode for final test.

For battery operated equipment, the equipment tests shall be performed using a new battery.


TEST RESULTS

Refer to attach tabular data sheets.


Conducted Spurious Emission Measurement Results CH Low

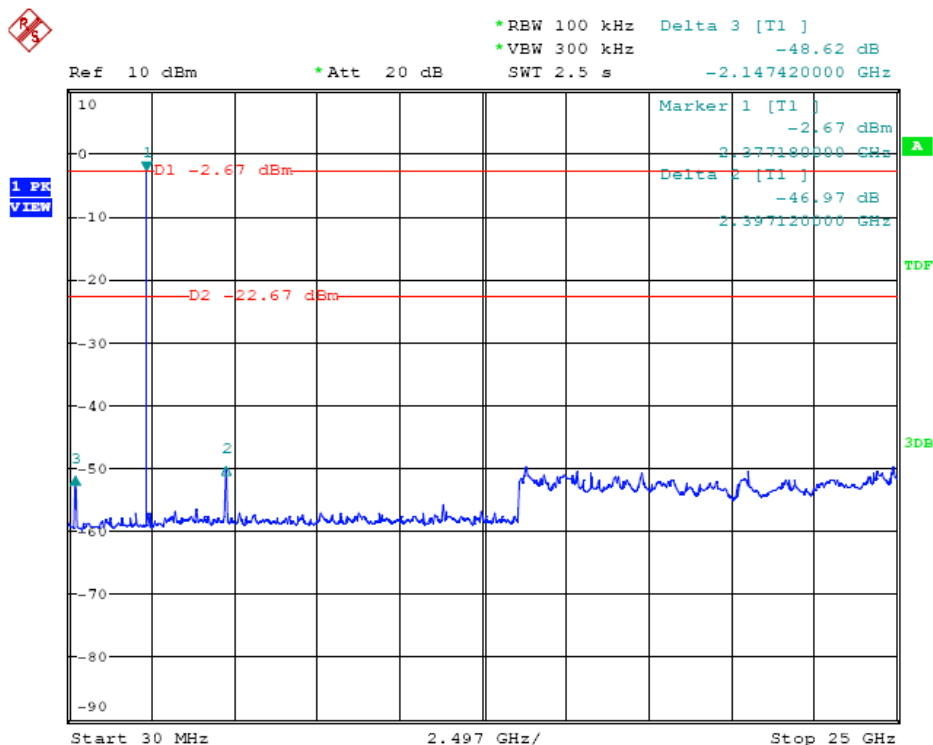

CH Mid

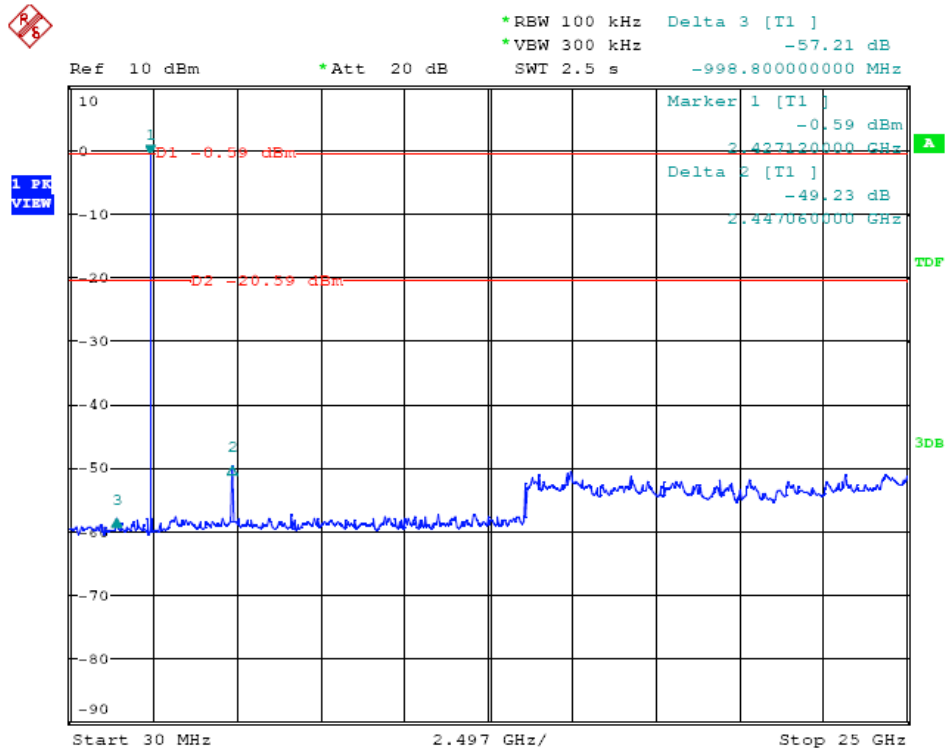

CH High

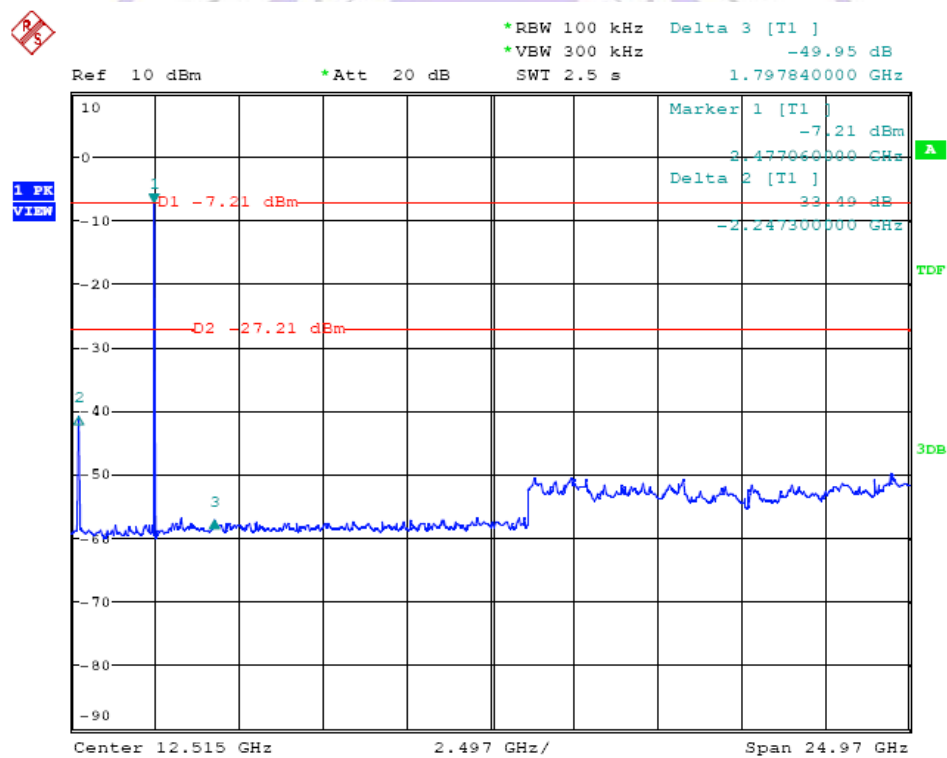


Radiated Spurious Emission Measurement Result (below 1GHz)

See the following plots:

SCAN TABLE: "test Field(30M-1G)QP"

Short Description:			Field Strength(30M-1G)				
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562 10	

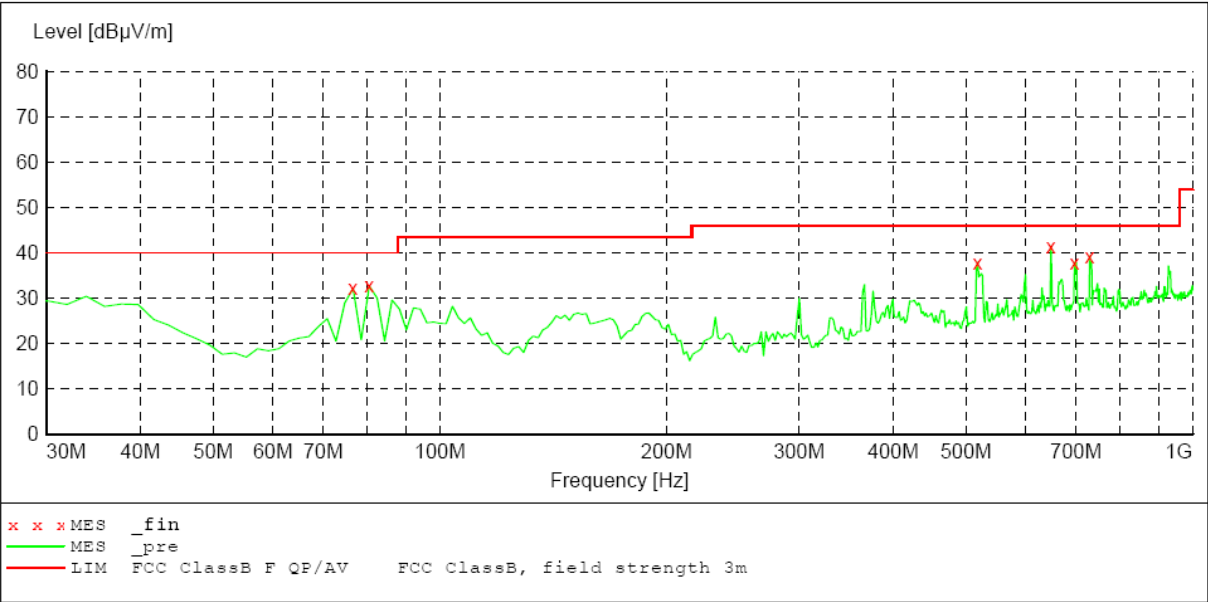


MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
76.650000	32.20	11.2	40.0	7.8	QP	300.0	189.00	HORIZONTAL
80.540000	32.70	11.4	40.0	7.3	QP	300.0	189.00	HORIZONTAL
517.910000	37.90	20.6	46.0	8.1	QP	100.0	143.00	HORIZONTAL
648.150000	41.50	23.4	46.0	4.5	QP	100.0	143.00	HORIZONTAL
696.750000	37.90	24.0	46.0	8.1	QP	100.0	211.00	HORIZONTAL
729.790000	39.30	23.9	46.0	6.7	QP	100.0	177.00	HORIZONTAL

SCAN TABLE: "test Field(30M-1G)QP"

Short Description: Field Strength(30M-1G)
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz QuasiPeak 1.0 s 120 kHz HL562 10

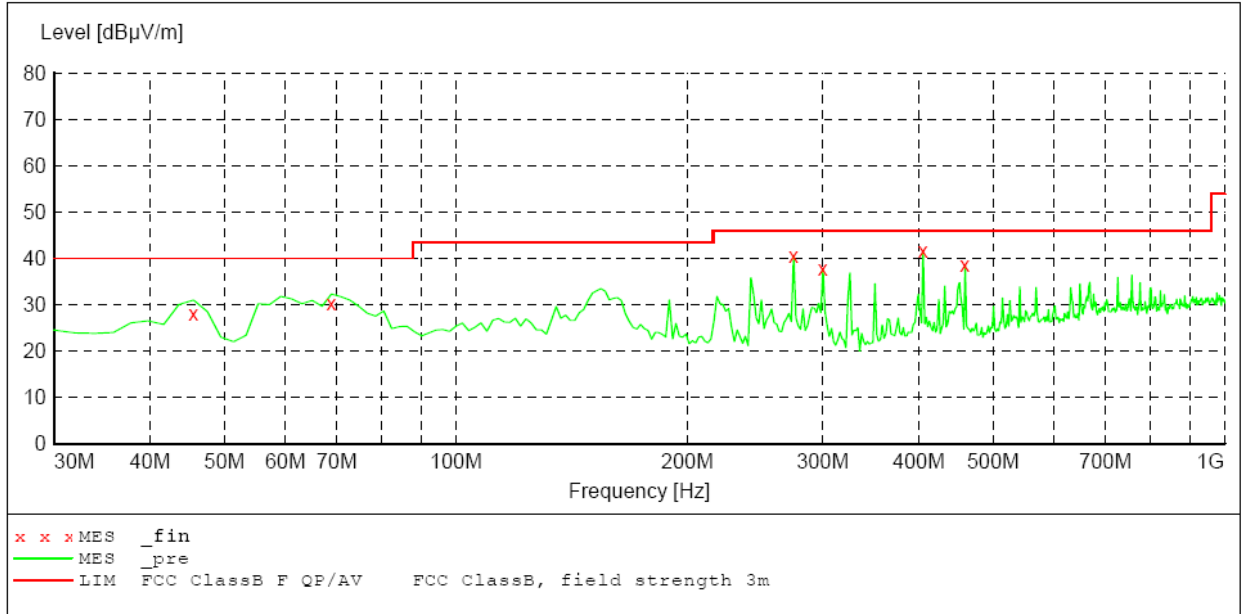**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.550000	28.00	12.6	40.0	12.0	QP	325.0	209.00	VERTICAL
68.870000	30.30	10.2	40.0	9.7	QP	278.0	209.00	VERTICAL
274.920000	40.70	13.0	46.0	5.3	QP	100.0	217.00	VERTICAL
300.200000	37.70	13.8	46.0	8.3	QP	100.0	190.00	VERTICAL
405.170000	41.70	20.2	46.0	4.3	QP	100.0	343.00	VERTICAL
459.590000	38.50	20.1	46.0	7.5	QP	100.0	190.00	VERTICAL

Remark:

- (1) Measuring frequencies from 9 KHz to the 1GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 100KHz. Below 30MHz was 10KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	49.81	PK	74.00	24.19	53.21	28.3	4.90	-36.6	-3.40
1	2390.00	40.81	AV	54.00	13.19	44.21	28.3	4.90	-36.6	-3.40
2	*2402.00	92.93	PK			96.33	28.3	4.90	-36.5	-3.40
2	*2402.00	81.83	AV			85.23	28.3	4.90	-36.5	-3.40
3	4804.00	54.62	PK	74.00	19.38	51.42	32.7	7.00	-35.3	3.20
3	4804.00	49.50	AV	54.00	4.50	46.30	32.7	7.00	-35.3	3.20
4	7206.00	62.80	PK	74.00	11.20	53.40	35.8	8.90	-34.8	9.40
4	7206.00	49.75	AV	54.00	4.25	40.35	35.8	8.90	-34.8	9.40
5	9608.00	56.90	PK	74.00	17.10	44.30	37.2	10.20	-36.6	12.60
5	9608.00	50.91	AV	54.00	3.09	38.31	37.2	10.20	-36.6	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	46.91	PK	74.00	27.09	50.31	28.3	4.90	-36.6	-3.40
1	2390.00	38.79	AV	54.00	15.21	42.19	28.3	4.90	-36.6	-3.40
2	*2402.00	90.63	PK			94.03	28.3	4.90	-36.5	-3.40
2	*2402.00	77.90	AV			81.30	28.3	4.90	-36.5	-3.40
3	4804.00	56.40	PK	74.00	17.60	53.20	32.7	7.00	-35.3	3.20
3	4804.00	48.30	AV	54.00	5.70	45.10	32.7	7.00	-35.3	3.20
4	7206.00	60.79	PK	74.00	13.21	51.39	35.8	8.90	-34.8	9.40
4	7206.00	49.63	AV	54.00	4.37	40.23	35.8	8.90	-34.8	9.40
5	9608.00	64.90	PK	74.00	9.10	52.30	37.2	10.20	-36.6	12.60
5	9608.00	47.70	AV	54.00	6.30	35.10	37.2	10.20	-36.6	12.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level.
5. The limit value is defined as per 15.247
6. "*" : Fundamental frequency
7. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
8. Spectrum Peak Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
Spectrum AV Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2442.00	108.19	PK			92.15	28.3	5.10	-36.6	-3.20
1	*2442.00	89.11	AV			83.23	28.3	5.10	-36.6	-3.20
2	4884.00	51.72	PK	74.00	19.24	51.36	32.3	7.60	-36.5	3.40
2	4884.00	40.53	AV	54.00	10.03	40.57	32.3	7.60	-36.5	3.40
3	7326.00	51.79	PK	74.00	12.50	52.10	36.1	8.60	-35.3	9.40
3	7326.00	49.29	AV	54.00	9.08	35.52	36.1	8.60	-35.3	9.40
4	9768.00	57.80	PK	74.00	12.17	49.23	37.2	10.20	-34.8	12.60
4	9768.00	48.89	AV	54.00	6.07	35.33	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2442.00	86.12	PK			89.32	28.3	5.10	-36.6	-3.20
1	*2442.00	76.93	AV			80.13	28.3	5.10	-36.6	-3.20
2	4884.00	56.63	PK	74.00	17.37	53.23	32.3	7.60	-36.5	3.40
2	4884.00	42.57	AV	54.00	11.43	39.17	32.3	7.60	-36.5	3.40
3	7326.00	59.42	PK	74.00	14.58	50.02	36.1	8.60	-35.3	9.40
3	7326.00	43.79	AV	54.00	10.21	34.39	36.1	8.60	-35.3	9.40
4	9768.00	60.90	PK	74.00	13.10	48.30	37.2	10.20	-34.8	12.60
4	9768.00	46.71	AV	54.00	7.29	34.11	37.2	10.20	-34.8	12.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level.
5. The limit value is defined as per 15.247
6. "*" : Fundamental frequency
7. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
8. Spectrum Peak Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
Spectrum AV Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
1	*2480.00	90.05	PK			93.15	28.8	4.70	-36.6	-3.10
1	*2480.00	81.03	AV			84.13	28.8	4.70	-36.6	-3.10
2	2483.50	47.15	PK	74.00	26.85	50.25	28.8	4.70	-36.6	-3.10
2	2483.50	38.29	AV	54.00	15.71	41.39	28.8	4.70	-36.6	-3.10
3	4025.02	53.89	PK	74.00	20.11	51.99	32.2	6.20	-36.5	1.90
3	4025.02	41.03	AV	54.00	12.97	39.13	32.2	6.20	-36.5	1.90
4	4960.00	52.13	PK	74.00	21.87	48.33	33.0	7.00	-36.2	3.80
4	4960.00	41.72	AV	54.00	12.28	37.92	33.0	7.00	-36.2	3.80
5	7440.00	57.12	PK	74.00	16.88	47.52	36.4	8.50	-35.3	9.60
5	7440.00	47.70	AV	54.00	6.30	38.10	36.4	8.50	-35.3	9.60
6	9920.00	59.01	PK	74.00	14.99	46.21	37.4	10.20	-34.8	12.80
6	9920.00	49.35	AV	54.00	4.65	36.55	37.4	10.20	-34.8	12.80


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
1	*2480.00	87.15	PK			90.25	28.8	4.70	-36.6	-3.10
1	*2480.00	78.35	AV			81.45	28.8	4.70	-36.6	-3.10
2	2483.50	46.24	PK	74.00	27.76	49.34	28.8	4.70	-36.6	-3.10
2	2483.50	37.78	AV	54.00	16.22	40.88	28.8	4.70	-36.6	-3.10
3	4025.02	52.19	PK	74.00	21.81	50.29	32.2	6.20	-36.5	1.90
3	4025.02	40.03	AV	54.00	13.97	38.13	32.2	6.20	-36.5	1.90
4	4960.00	51.30	PK	74.00	22.70	47.50	33.0	7.00	-36.2	3.80
4	4960.00	39.00	AV	54.00	15.00	35.20	33.0	7.00	-36.2	3.80
5	7440.00	56.82	PK	74.00	17.18	47.22	36.4	8.50	-35.3	9.60
5	7440.00	47.09	AV	54.00	6.91	37.49	36.4	8.50	-35.3	9.60
6	9920.00	58.10	PK	74.00	15.90	45.30	37.4	10.20	-34.8	12.80
6	9920.00	48.11	AV	54.00	5.89	35.31	37.4	10.20	-34.8	12.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level.
5. The limit value is defined as per 15.247
6. “* “: Fundamental frequency
7. Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
8. Spectrum Peak Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
Spectrum AV Setting: 1GHz- 25GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

4.3. 20dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as RBW=10 KHz VBW=30 KHz. Span=4MHz.
5. Mark the peak frequency and -20dB (upper and lower) frequency.
6. Repeat above procedures until all frequency measured were complete.

Note: For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.


TEST RESULTS

Channel	20 dB Bandwidth (MHz)	Pass / Fail
Lower	0.708	PASS
Mid	0.704	PASS
Higher	0.692	PASS


20dB Bandwidth Test Plots:

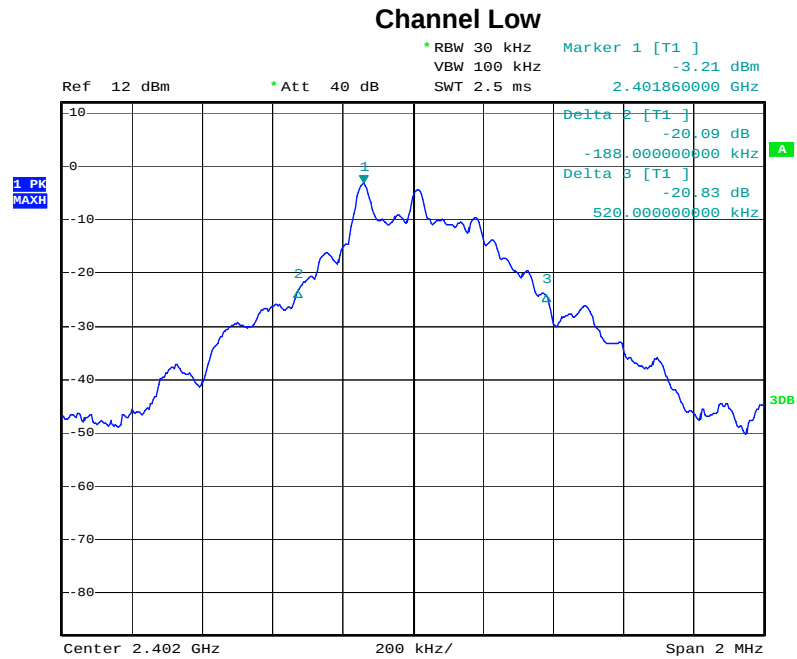

Date: 31.MAR.2012 19:43:16

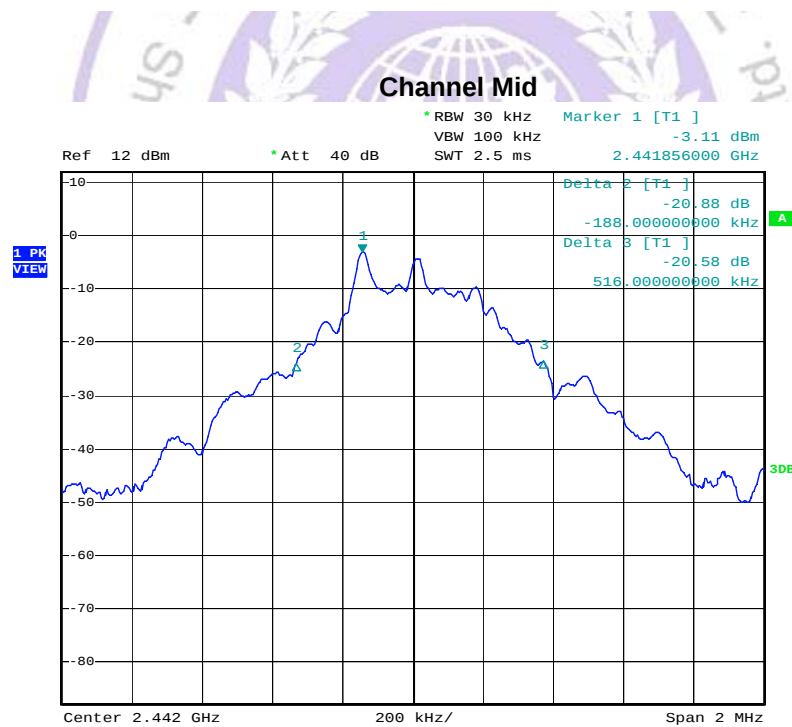

Date: 31.MAR.2012 19:44:36

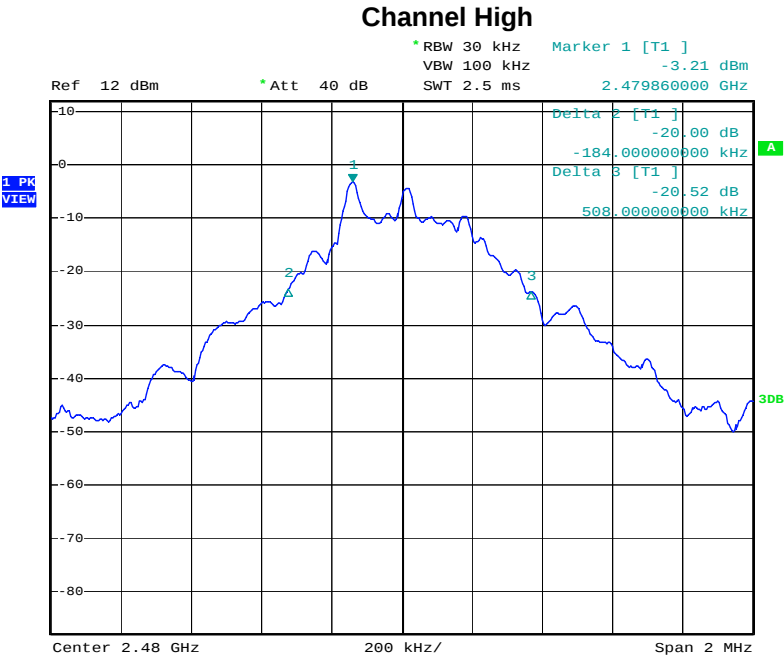


Date: 31.MAR.2012 19:46:28



4.4. Peak Output Power Measurement

TEST CONFIGURATION



TEST PROCEDURE

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as RBW=1 MHz, VBW = 3 MHz
5. Repeat above procedures until all frequency measured were complete


LIMIT

The Peak Output Power Measurement limits are 30dBm.


TEST RESULTS

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
LOW	2402.00	-2.49	30	PASS
MID	2442.00	-2.60	30	PASS
HIGH	2480.00	-2.40	30	PASS


Photo of Peak Output Power Measurement:

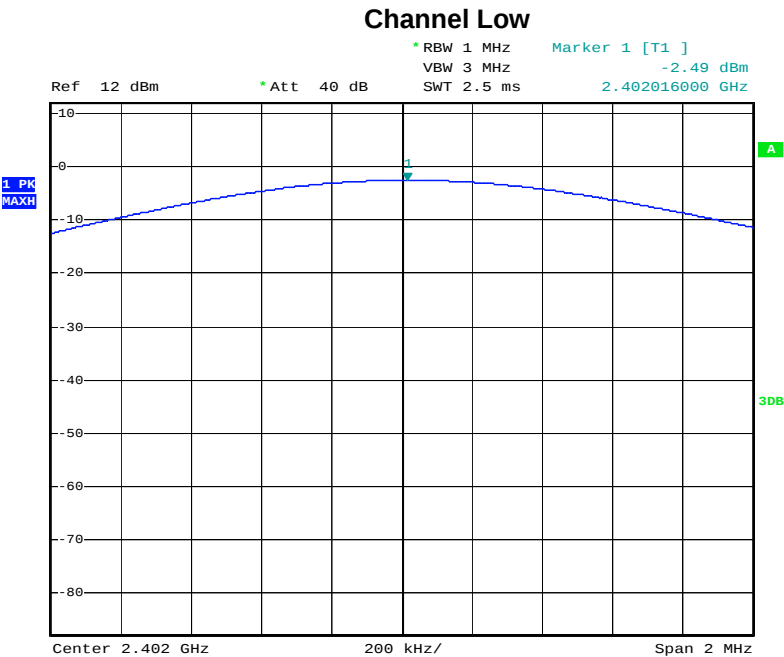

Date: 31.MAR.2012 20:11:09

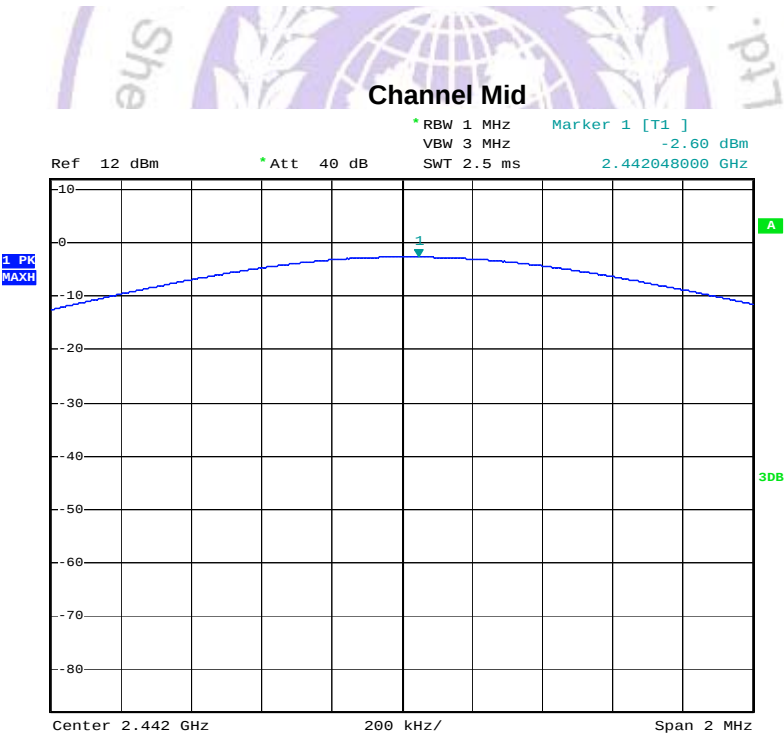

Date: 31.MAR.2012 20:10:31

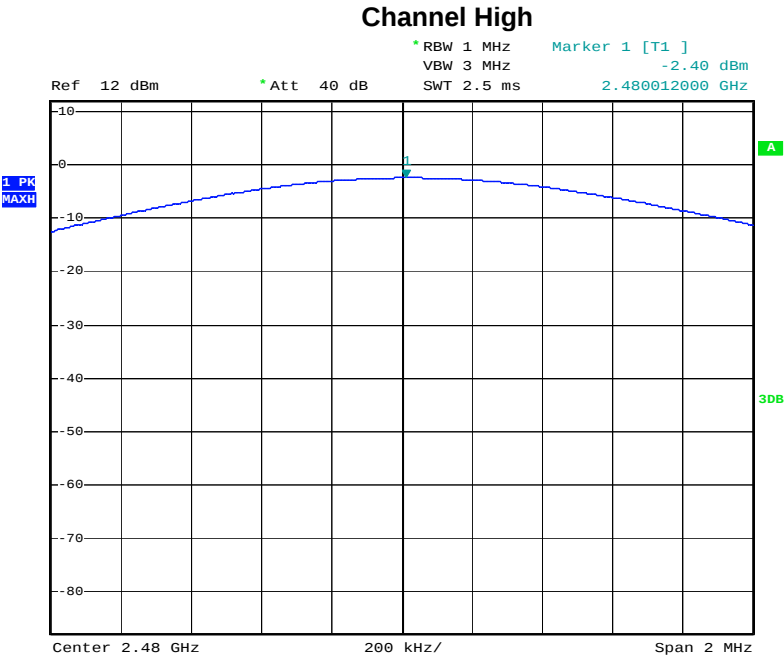


Date: 31.MAR.2012 20:09:17



4.5. 100 KHz Bandwidth of Band Edges Measurement

TEST CONFIGURATION




TEST PROCEDURE

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as RBW, VBW=100 KHz. Span=25MHz, Sweep=auto
5. Set center frequency of spectrum analyzer = operating frequency.
6. Repeat above procedures until all frequency measured was complete.

LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST RESULTS

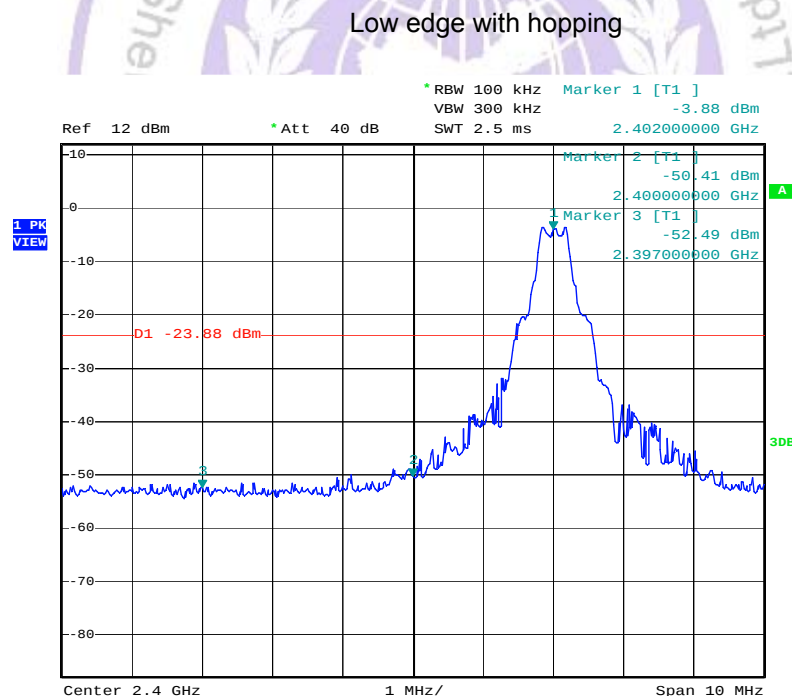


Date: 31.MAR.2012 20:17:10


Low edge without hopping

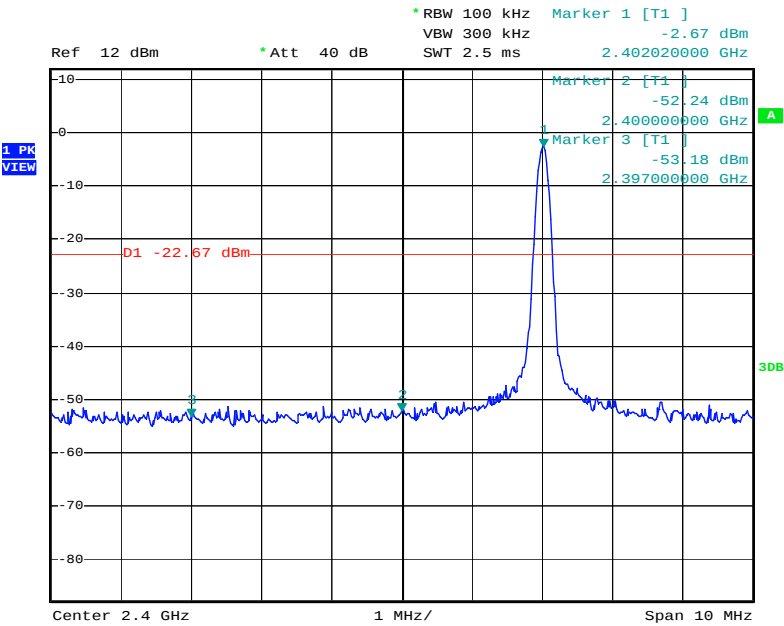

Date: 31.MAR.2012 20:14:19

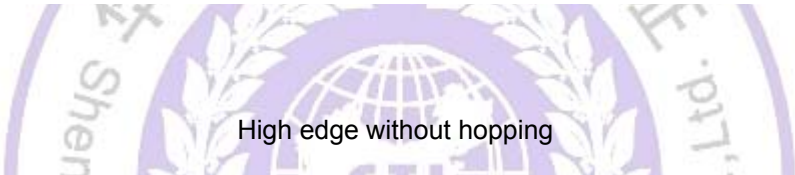


High edge without hopping

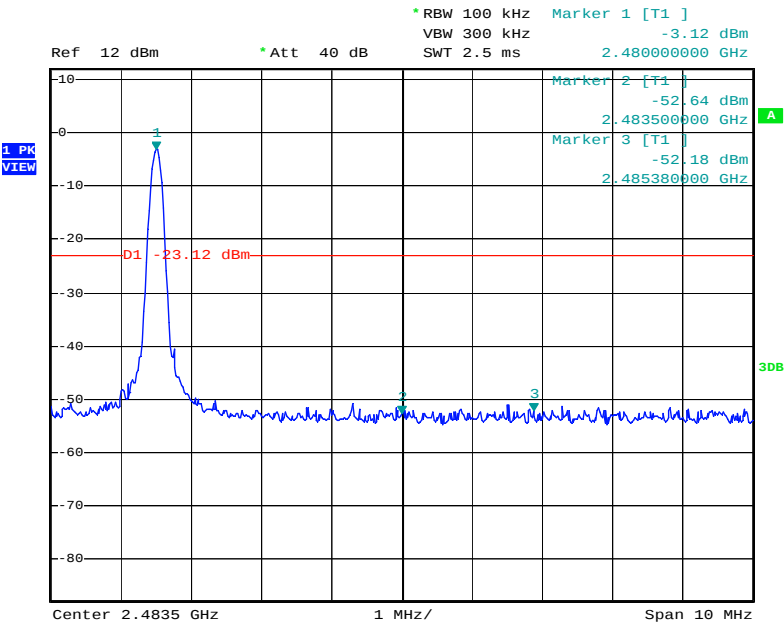

Date: 31.MAR.2012 20:20:11

High edge with hopping

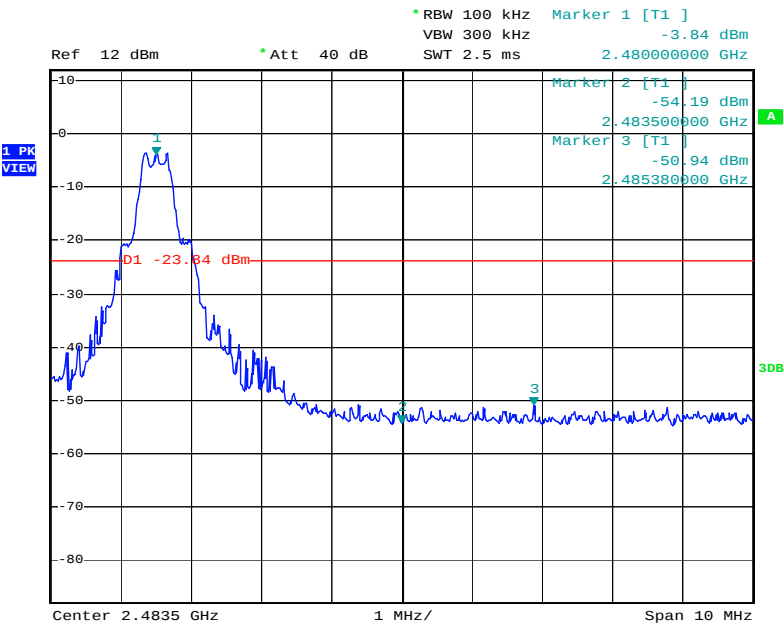

Date: 31.MAR.2012 20:19:09



Radiated Emission:

Operation Mode : TX CH Low

Fundamental Frequency: 2402 MHz

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2390.0	---					74.00	54.00		Peak
2386.0	---					74.00	54.00		Peak
2384.0	---					74.00	54.00		Peak

Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 25 °C
 Humidity 65 %

Pol Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2390.0	---					74.00	54.00		Peak
2386.0	---					74.00	54.00		Peak
2384.0	---					74.00	54.00		Peak

Remark :

- (1) Datas of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column .
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Operation Mode: TX CH High
Fundamental Frequency: 2480 MHz

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2483.6	---	---	---	---	---	74.00	54.00	---	Peak
2484.0	---	---	---	---	---	74.00	54.00	---	Peak
2484.8	---	---	---	---	---	74.00	54.00	---	Peak

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25 °C
Humidity 65 %

Pol - Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2483.6	---	---	---	---	---	74.00	54.00	---	Peak
2484.0	---	---	---	---	---	74.00	54.00	---	Peak
2484.8	---	---	---	---	---	74.00	54.00	---	Peak


Remark :

- (1) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column .
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



4.6. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as RBW=100 KHz, VBW=300 KHz. Span=10 MHz
5. Set center frequency of spectrum analyzer = middle of hopping channel.
6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

LIMIT

Limits and Measurement Result Of Channel Separation		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1) At least 25 KHz or 20 dB bandwidth of the hopping Channel, whichever is greater	1 MHz	PASS


TEST RESULTS

Frequency Separation Test Data

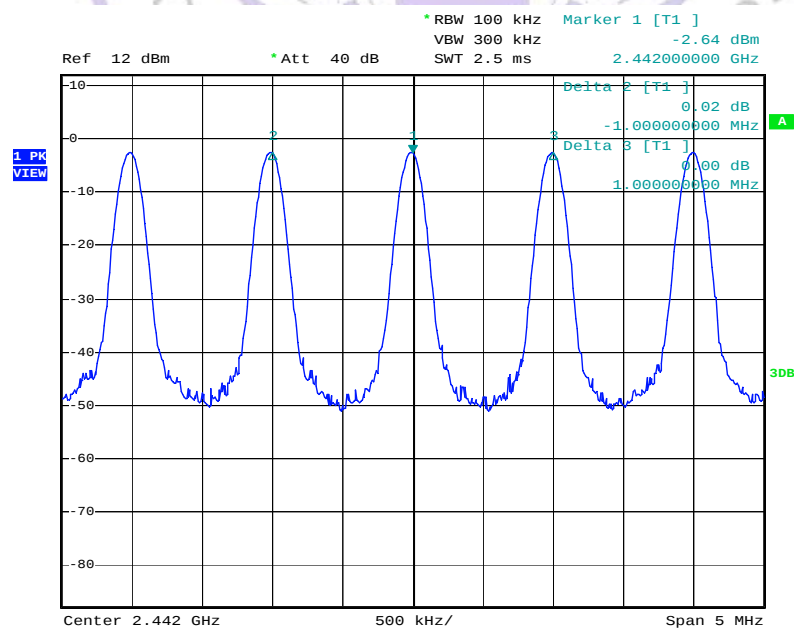

4.7. Number of Hopping Frequency

TEST CONFIGURATION



TEST PROCEDURE


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer Start=2400MHz, Stop=2483.5MHz, Sweep=auto.
5. Set the spectrum analyzer as RBW, VBW=100 KHz.
6. Max hold. view and count how many channel in the band.


LIMIT

Limits and Measurement Result Of Hopping Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)(iii) At least 15 hopping Frequencies	Total 79 Channels	PASS

TEST RESULTS

Channel Number on the following plots:

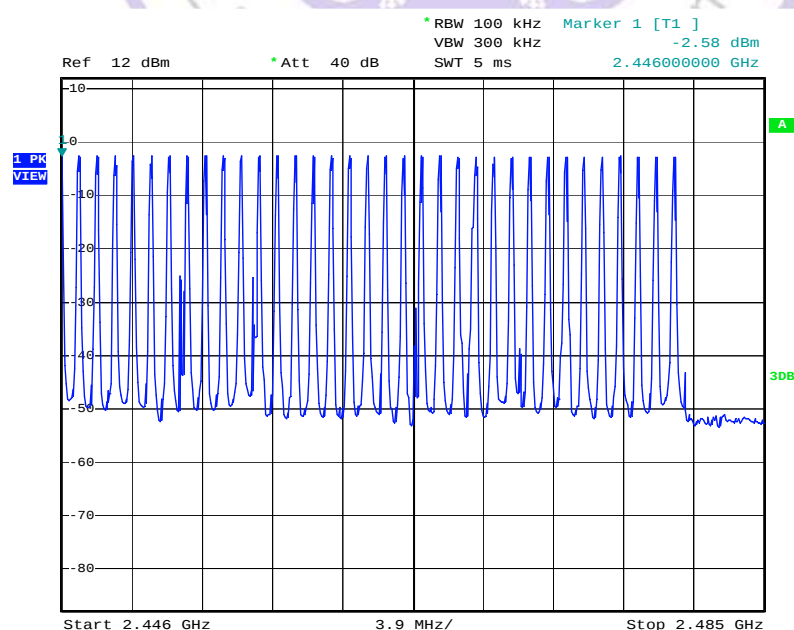

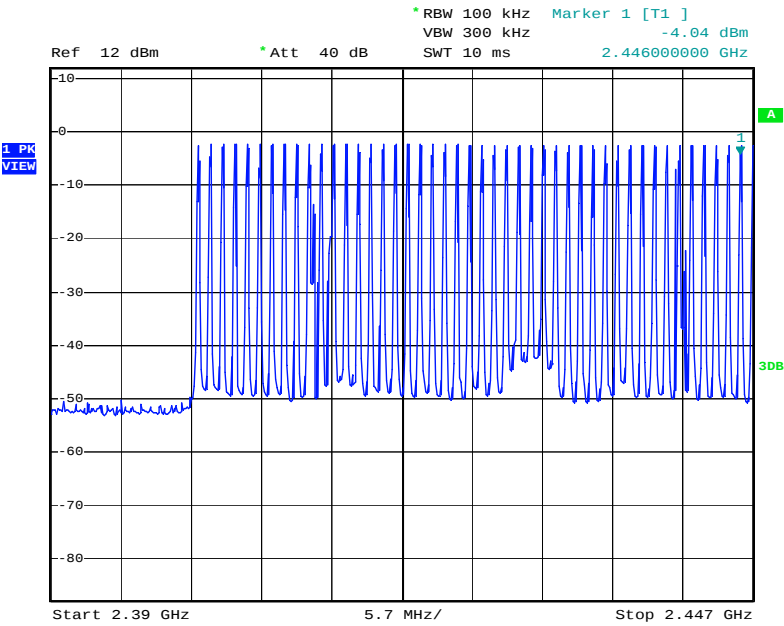


Date: 31.MAR.2012 19:57:33



4.8. Dwell Time

TEST CONFIGURATION



TEST PROCEDURE

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. Place the EUT on the table and set it in transmitting mode.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as RBW =1 MHz , VBW =3 MHz. Span=0Hz,
5. Set center frequency of spectrum analyzer = operating frequency.
6. Set center frequency of spectrum analyzer = operating frequency.

LIMIT

A period time = $0.4 \text{ (ms)} * 79 = 31.6 \text{ (s)}$ Limit: 400ms

DH1:

CH Low: Dwell time = $0.400 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 128.00 \text{ (ms)}$

CH Mid: Dwell time = $0.400 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 128.00 \text{ (ms)}$

CH High: Dwell time = $0.400 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 128.00 \text{ (ms)}$

DH3:

CH Low: Dwell time = $1.660 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 265.60 \text{ (ms)}$

CH Mid: Dwell time = $1.660 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 265.60 \text{ (ms)}$

CH High: Dwell time = $1.660 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 265.60 \text{ (ms)}$

DH5:


CH Low: Dwell time = $2.900 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 309.33 \text{ (ms)}$

CH Mid: Dwell time = $2.900 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 309.33 \text{ (ms)}$

CH High: Dwell time = $2.900 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 309.33 \text{ (ms)}$


TEST RESULTS

Dwell Time Test Data
CH-Low DH1

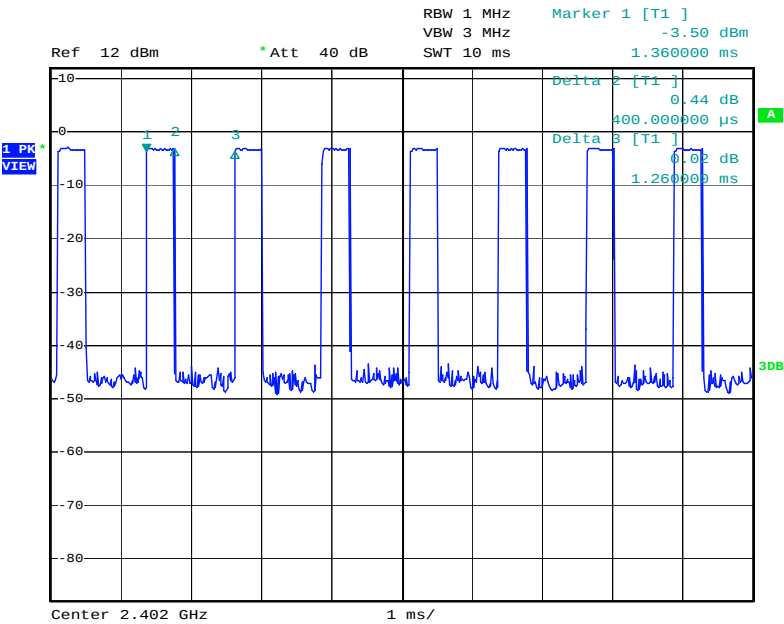


Date: 31.MAR.2012 19:59:57

CH-Low DH3

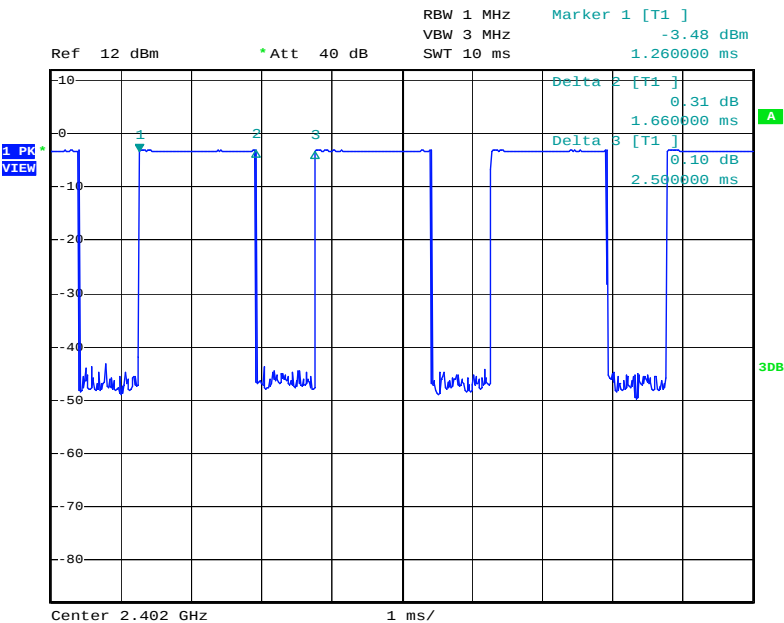


Date: 31.MAR.2012 20:00:58

CH-Low DH5

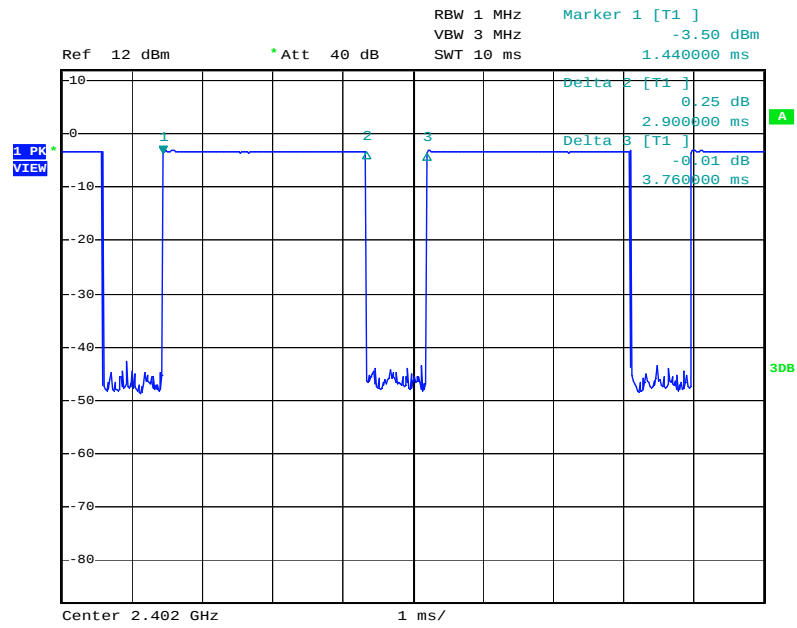


Date: 31.MAR.2012 20:01:47

CH-Mid DH1

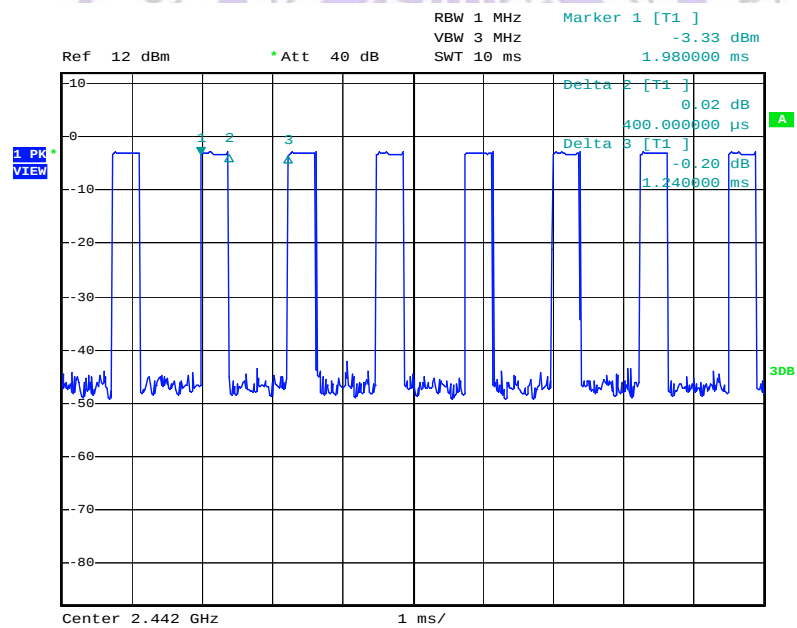


Date: 31.MAR.2012 20:05:02

CH-Mid DH3

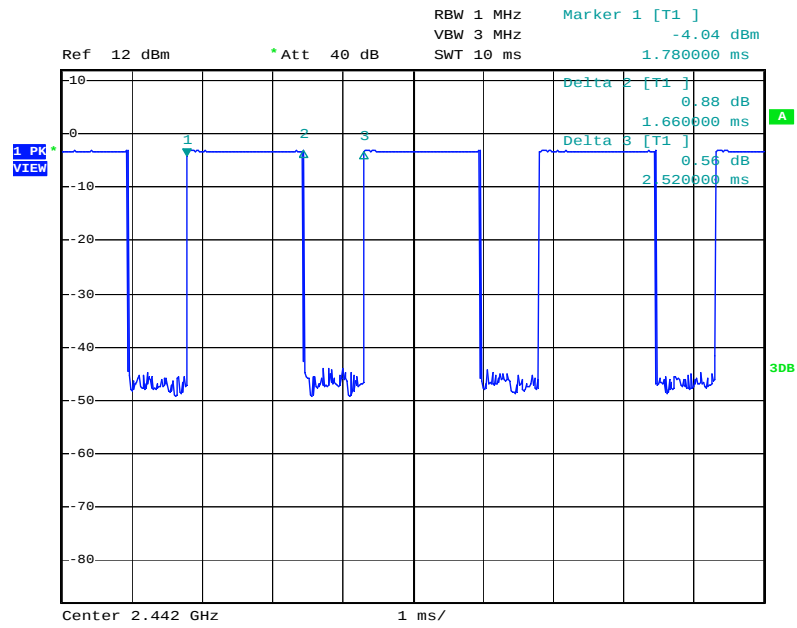


Date: 31.MAR.2012 20:03:32

CH-Mid DH5

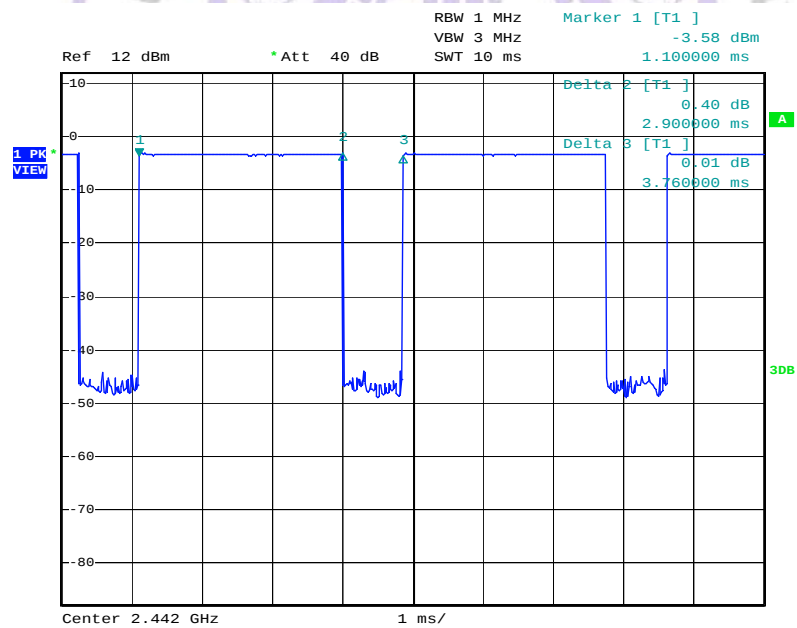


Date: 31.MAR.2012 20:02:27

CH-High DH1

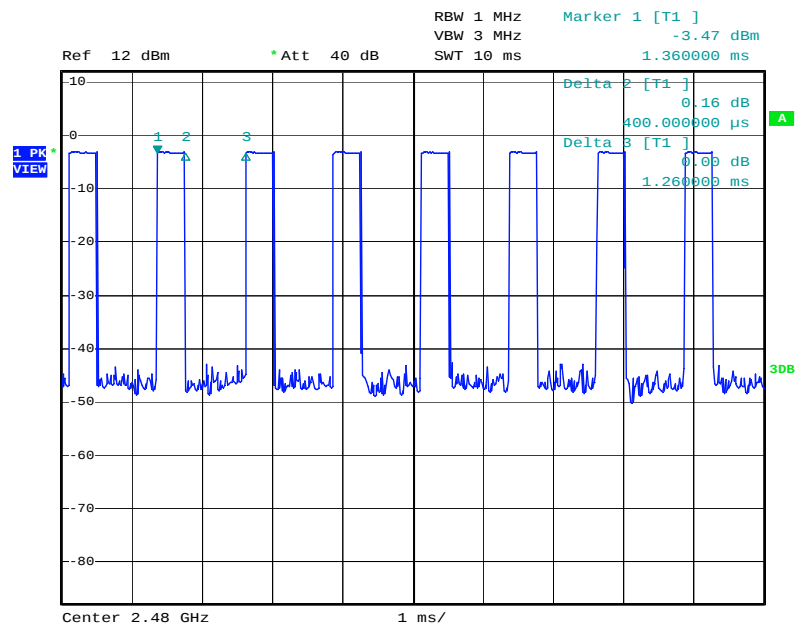

Date: 31.MAR.2012 20:06:07

CH-High DH3

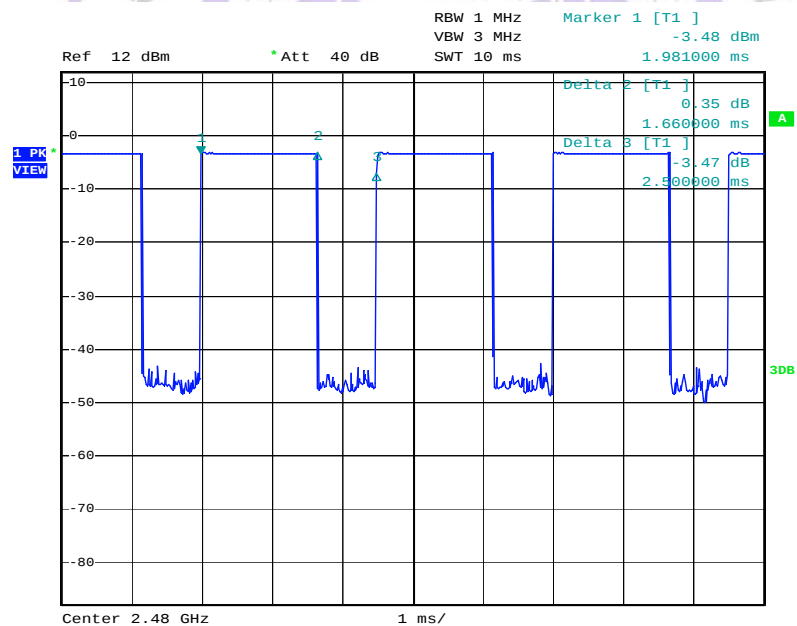

Date: 31.MAR.2012 20:07:00

Date: 31.MAR.2012 20:07:37



4.9. Antenna Requirement

STANDARD APPLICABLE

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to § 15.247 (4)(1), system operation in the 2400-2483.5 MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTED CONSTRUCTION

The directional gains of antenna used for transmitting is -1.0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.



4.10. RF Exposure

STANDARD APPLICABLE

According to §1.1307 (b)(1), system operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a bluetooth module.


MEASUREMENT RESULTS

This is a bluetooth module and the Max peak output power is -2.40dBm (0.58 mW) lower than low threshold 60/fGHz mW (24.48 mW), d<2.5cm in general population category.

The SAR measurement is not necessary.





5. Test Setup Photos of the EUT

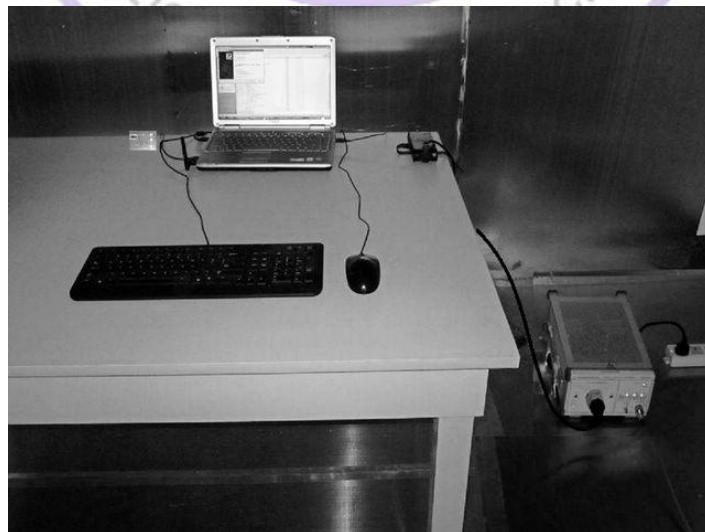

6. External and Internal Photos of the EUT




External Photos

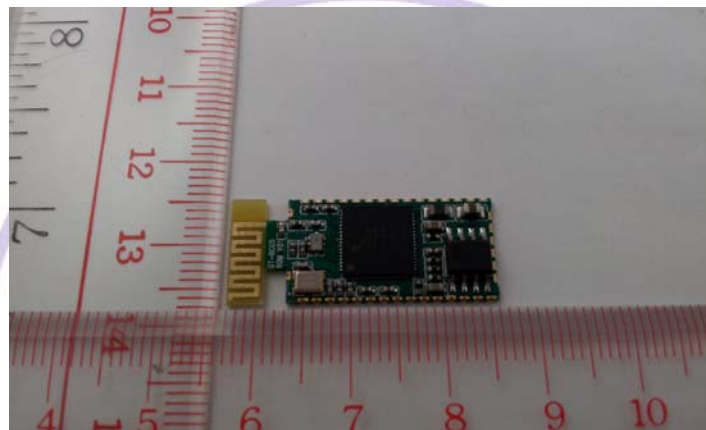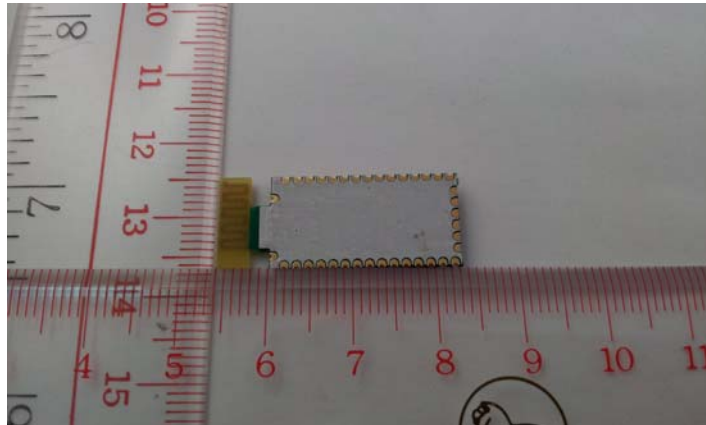

The EUT with Motherboard Photos



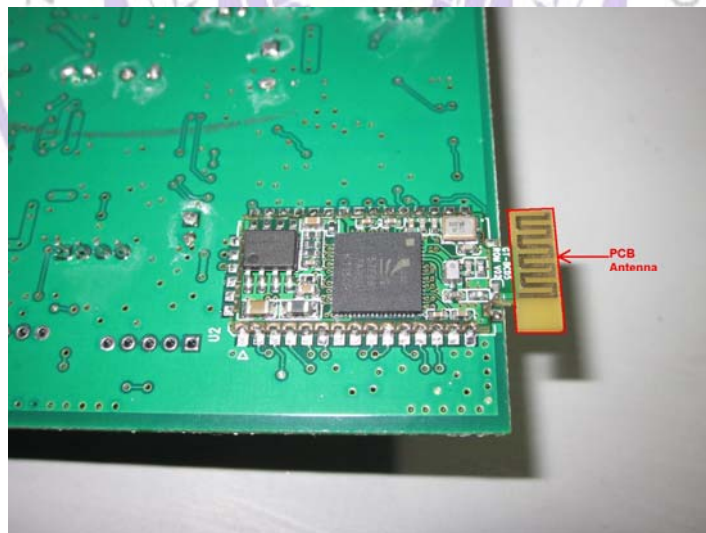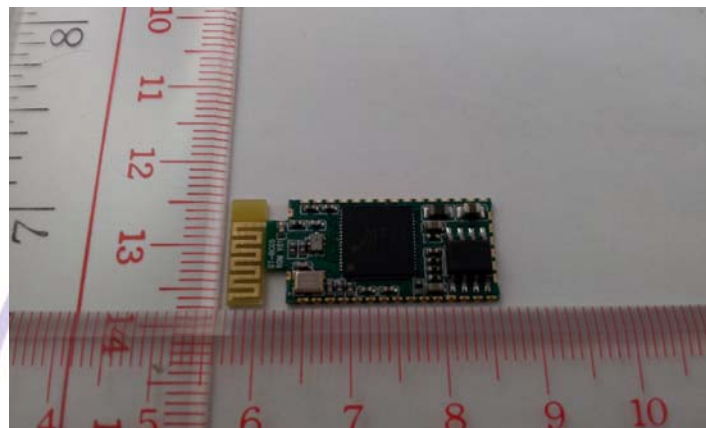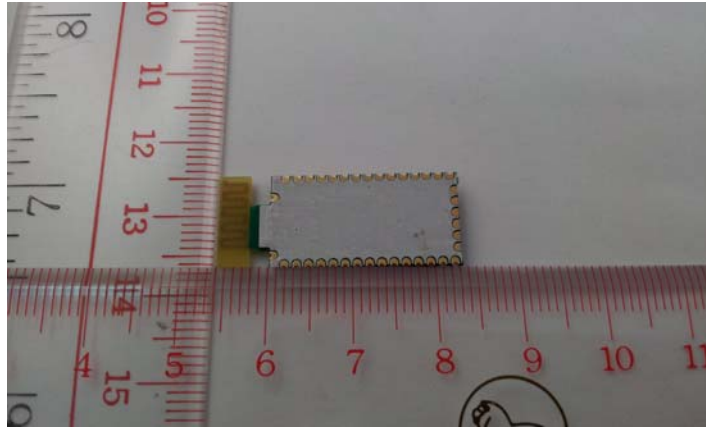

Internal Photos

.....End of Report.....