



FCC RADIO TEST REPORT

FCC ID: B4OEC86XFPX

Product : Wi-Fi + Bluetooth LE (WiBlue) module
Trade Name : GT-tronics
Serial Model : EC864FPA,EC865FPA,EC864FPB,EC865FPB,EC865FxA
Report No. : PTC801990160805E-FC01

Prepared for

GT-tronics HK Limited
B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay,
Hong Kong

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name..... GT-tronics HK Limited

Address..... B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

Manufacture's Name.... GT-tronics HK Limited

Address..... B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay, Hong Kong

Product description

Product name Wi-Fi + Bluetooth LE (WiBlue) module

Trade Name GT-tronics

Serial Model EC864FPA,EC865FPA,EC864FPB,EC865FPB,EC865FxA

Standards..... FCC CFR47 Part 15 Section 15.247

Test procedure ANSI C63.10:2013

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... Aug.29, 2016 ~ Sep.6, 2016

Date of Issue Sep.6, 2016

Test Result **Pass**

Testing Engineer

August Qiu

Authorized Signatory

Chris Du




Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (1 GHZ-25GHZ)	24
4 . POWER SPECTRAL DENSITY TEST	26
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
5 . BANDWIDTH TEST	29
5.1 APPLIED PROCEDURES / LIMIT	29
5.1.1 TEST PROCEDURE	29
5.1.2 DEVIATION FROM STANDARD	29

Table of Contents

	Page
5.1.3 TEST SETUP	29
5.1.4 EUT OPERATION CONDITIONS	29
5.1.5 TEST RESULTS	30
6 . PEAK OUTPUT POWER TEST	32
6.1 APPLIED PROCEDURES / LIMIT	32
6.1.1 TEST PROCEDURE	32
6.1.2 DEVIATION FROM STANDARD	32
6.1.3 TEST SETUP	32
6.1.4 EUT OPERATION CONDITIONS	32
6.1.5 TEST RESULTS	33
7. CONDUCTED SPURIOUS & BAND EDGE EMISSION	35
8. ANTENNA REQUIREMENT	38
8.1 STANDARD REQUIREMENT	38
8.2 EUT ANTENNA	38

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KDB558074 D01 DTS Meas Guidance v03r05		
Standard Section	Test Item	Judgment
15.207(a)	AC Conducted Emission	PASS
15.247 (a)(2)	6dB Bandwidth	PASS
15.247 (b)(3) 15.31(e)	Peak Output Power	PASS
15.247 (d) 15.205	Radiated Spurious Emission	PASS
15.247 (e)	Power Spectral Density	PASS
15.247(d), 15.205	Band Edge Emission	PASS
15.203	Antenna Requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Dongguan Precise Testing Service Co., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan,
Guangdong, China, Dongguan, 523129

China

FCC Registration Number: 371540

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated (<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Wi-Fi + Bluetooth LE (WiBlue) module	
Trade Name	GT-tronics	
Model Name	EC864FPA,EC865FPA,EC864FPB,EC865FPB,EC865FxA	
Model Difference	Only the model names and colors are different.	
Product Description	The EUT is a Wi-Fi + Bluetooth LE (WiBlue) module	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Bluetooth	BLE4.2
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Output Power(Peak):	3.42 dBm
	Antenna Gain (dBi)	-0.30dBi for BLE; 2dBi for WIFI
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Battery	DC 3.3V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	PCB antenna	N/A	-0.3	N/A

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480
Mode 4	Link Mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (4) The module control circuit board, is a auxiliary equipment, to test the module need to welding on the module control circuit board.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

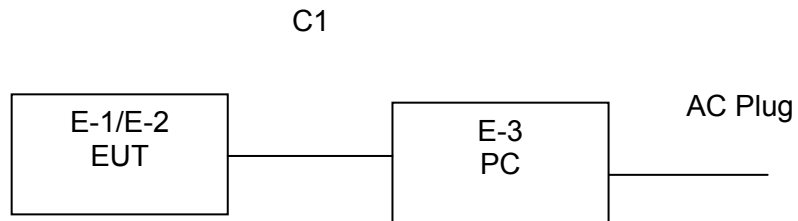

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
E-1	Show Box	N/A	EC864FPA	N/A
E-2	WIFI module control circuit board	N/A	LSD4WF	N/A
E-3	PC	4CV428DQXR	500-320cx	N/A

Item	Shielded Type	Ferrite Core	Length
C-1	NO	NO	1.0m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Conducted Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Agilent	N9010A	MY505202075 26B25MPBW7 X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
4	Humidity Chamber	GF	GTH-225-40 -1P	IAA061225	July 15, 2016	July 14, 2017	1 year

Radiated Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
4	Horn Antenna	SCHWARZBECK	BBHA9120D	120 D-12 46	July 15, 2016	July 14, 2017	1 year
5	Loop Antenna	SCHWARZBECK	FMZB1516	130 D-12 43	July 15, 2016	July 14, 2017	1 year
6	3m Anechoic Chamber	CHENGYU	966	PTC-002	June 6, 2016	June 6, 2017	1 year

Conducted Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year
4	Shielded room	CHENGYU	843	PTC-001	June 6, 2016	June 6, 2017	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

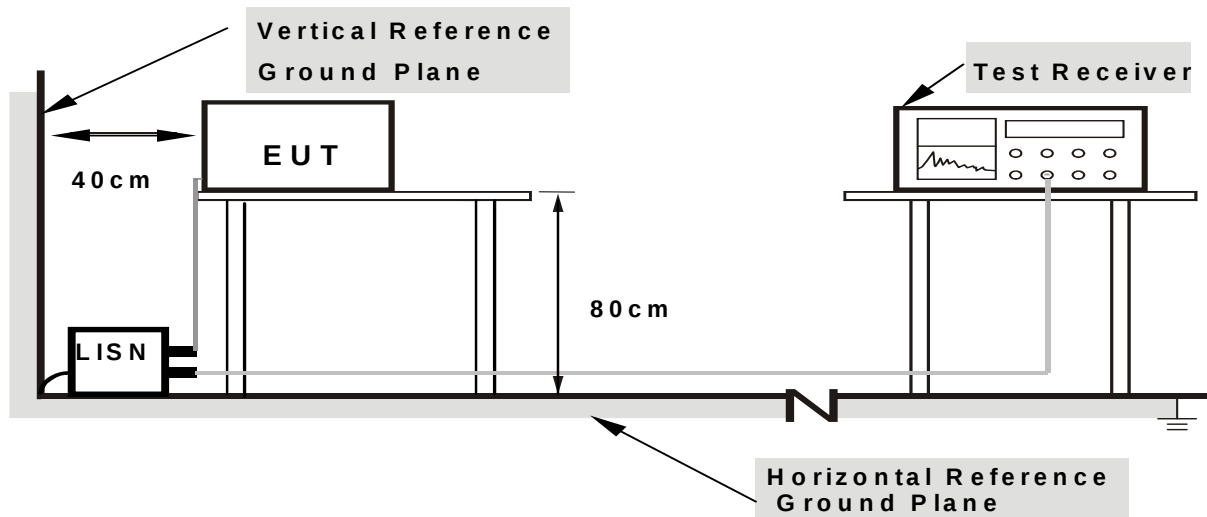

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V	Test Mode :	Mode 4

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1860	44.95	9.56	54.51	64.21	-9.70	QP
0.2779	37.34	9.88	47.22	60.88	-13.66	QP
0.3899	30.78	9.94	40.72	58.06	-17.34	QP
0.4860	27.83	10.02	37.85	56.24	-18.39	QP
0.1860	32.60	9.56	42.16	54.21	-12.05	AVG
0.2779	23.34	9.88	33.22	50.88	-17.66	AVG
0.3899	17.13	9.94	27.07	48.06	-20.99	AVG
0.4860	12.54	10.02	22.56	46.24	-23.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

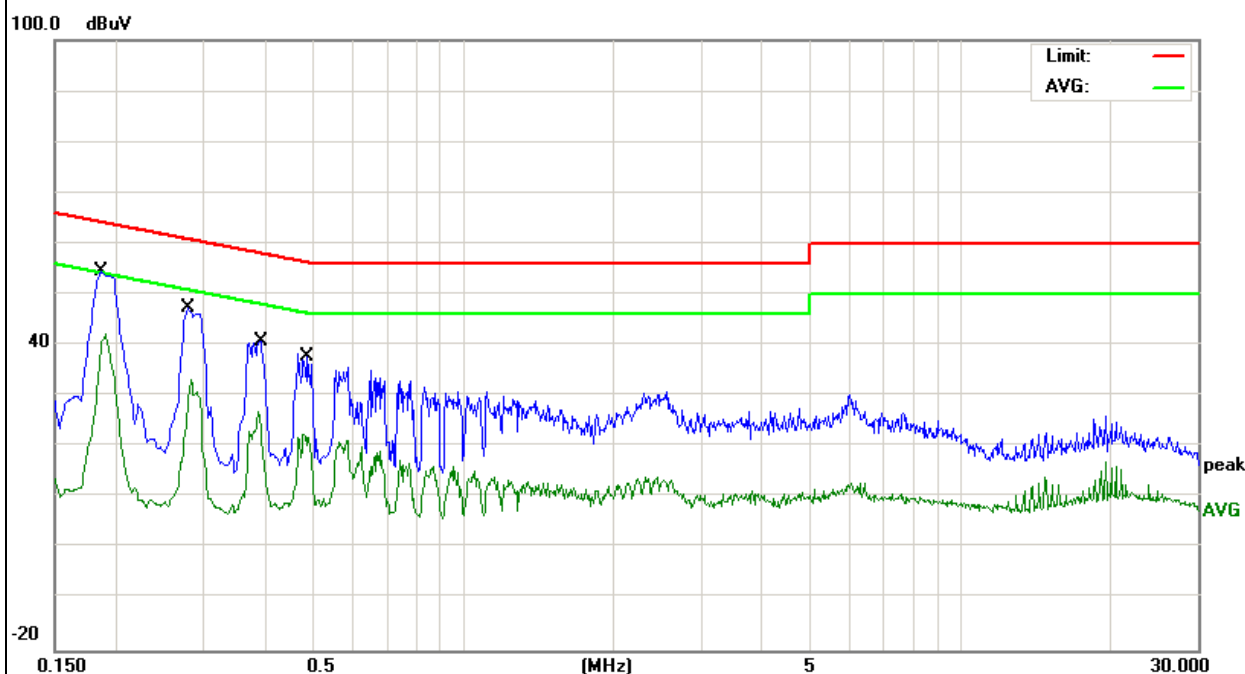


EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1860	45.60	9.56	55.16	64.21	-9.05	QP
0.2779	38.33	9.88	48.21	60.88	-12.67	QP
0.3780	32.46	9.92	42.38	58.32	-15.94	QP
0.4820	31.03	10.01	41.04	56.30	-15.26	QP
0.1860	31.27	9.56	40.83	54.21	-13.38	AVG
0.2779	20.93	9.88	30.81	50.88	-20.07	AVG
0.3780	14.74	9.92	24.66	48.32	-23.66	AVG
0.4820	12.63	10.01	22.64	46.30	-23.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

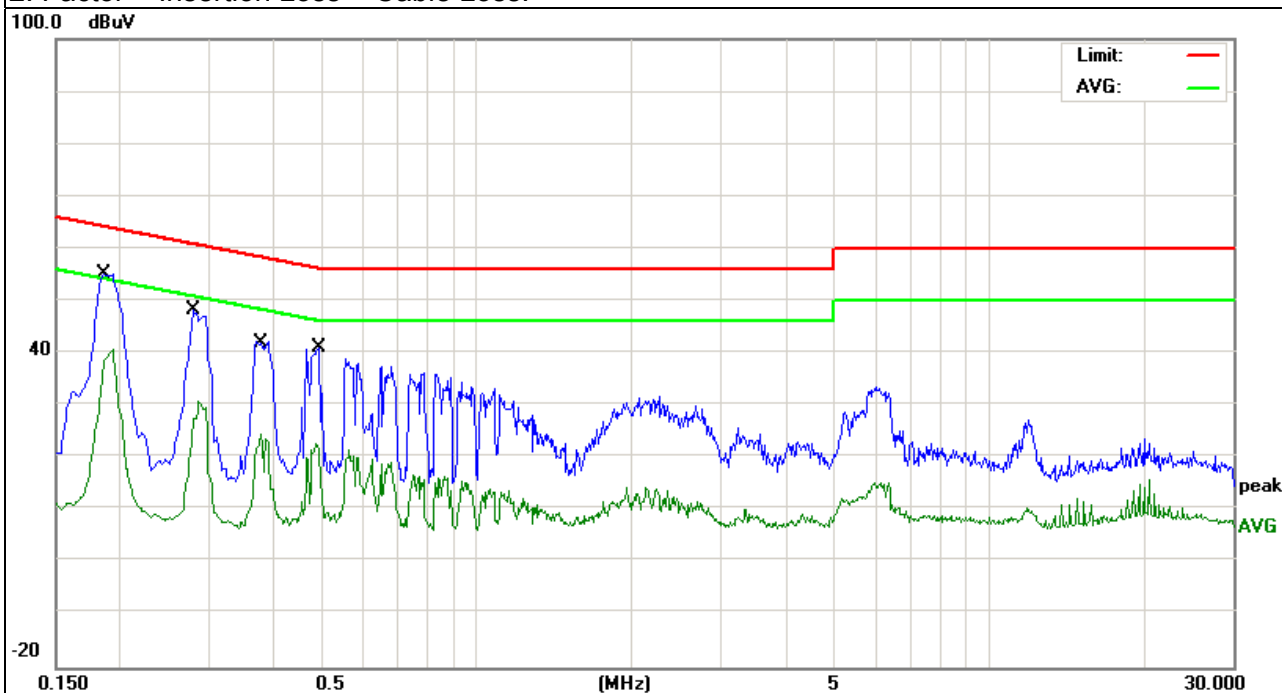

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Above 1GHz

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Below 1GHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz, the high was 1.5m) above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m (above 1GHz, the high was 1.5m); the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

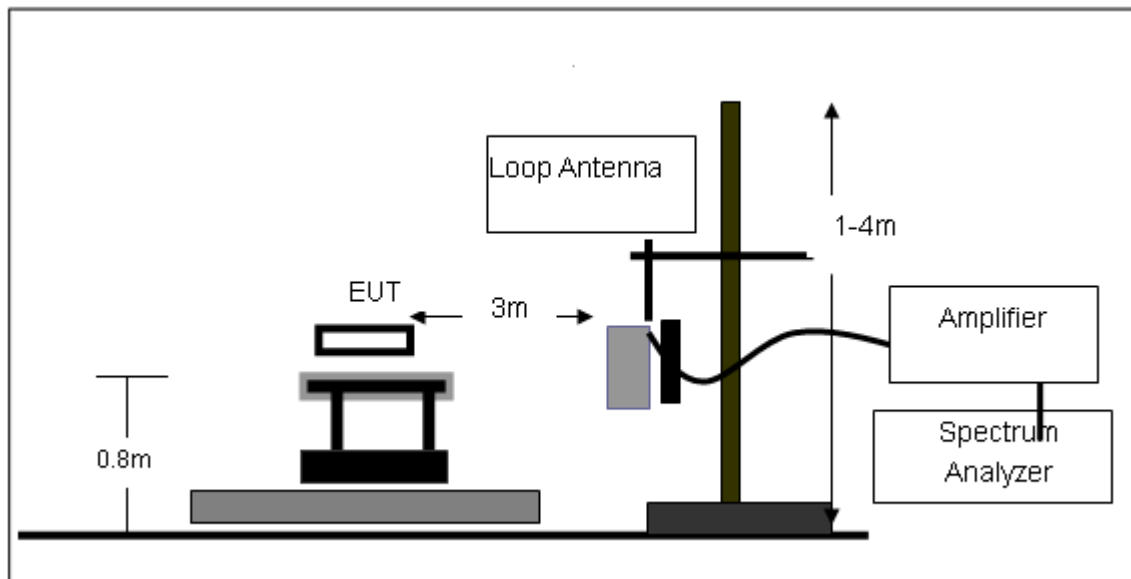

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

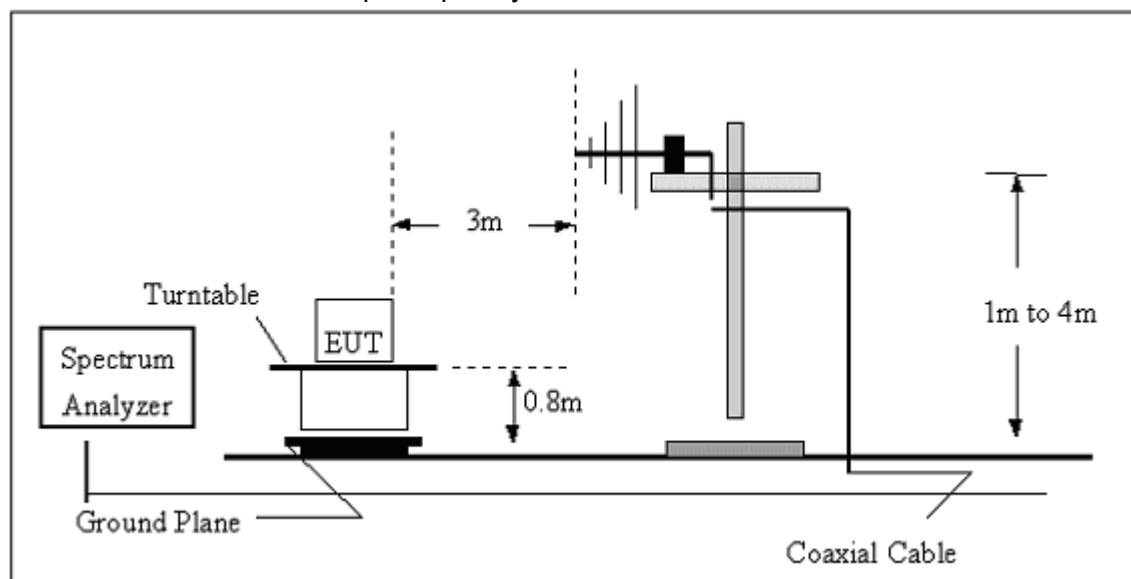

(C) Radiated Emission Test-Up Frequency Above 1GHz

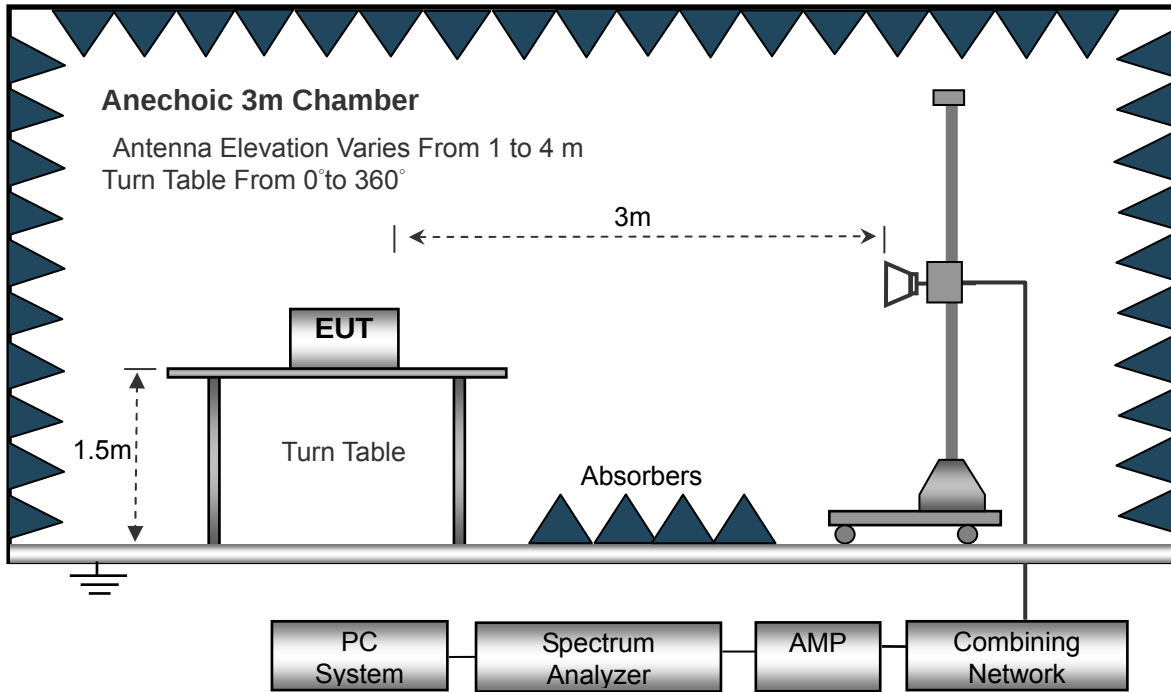

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC3.3V
Test Mode :	Mode 1 Low Ch	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.3V
Test Mode : Mode 1 Low Ch			

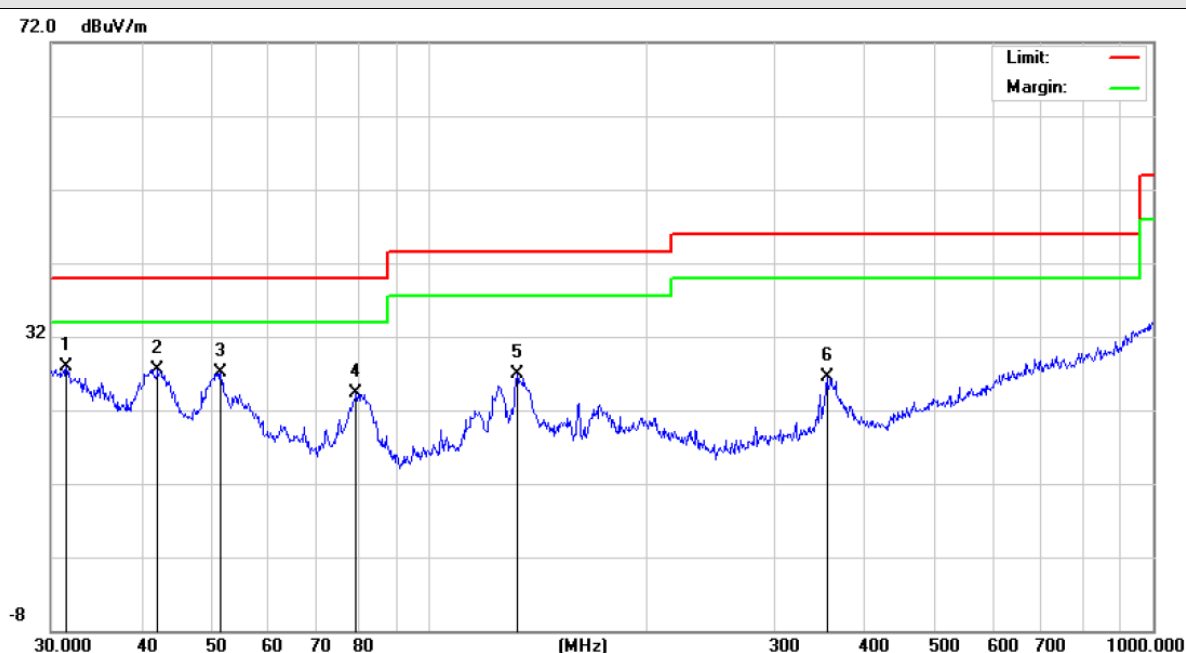


Site: Polarization: **Vertical** Temperature: 24
 Limit: FCC_PART15_B_03m_QP Power: AC 120V/60Hz Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	31.5094	8.93	19.03	27.96	40.00	-12.04	QP		
2		42.1542	14.16	13.41	27.57	40.00	-12.43	QP		
3		51.4806	18.05	9.07	27.12	40.00	-12.88	QP		
4		79.2426	15.12	9.14	24.26	40.00	-15.74	QP		
5		132.2206	15.93	10.92	26.85	43.50	-16.65	QP		
6		354.1831	12.20	14.21	26.41	46.00	-19.59	QP		



EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.3V
Test Mode : Mode 1 Low Ch			

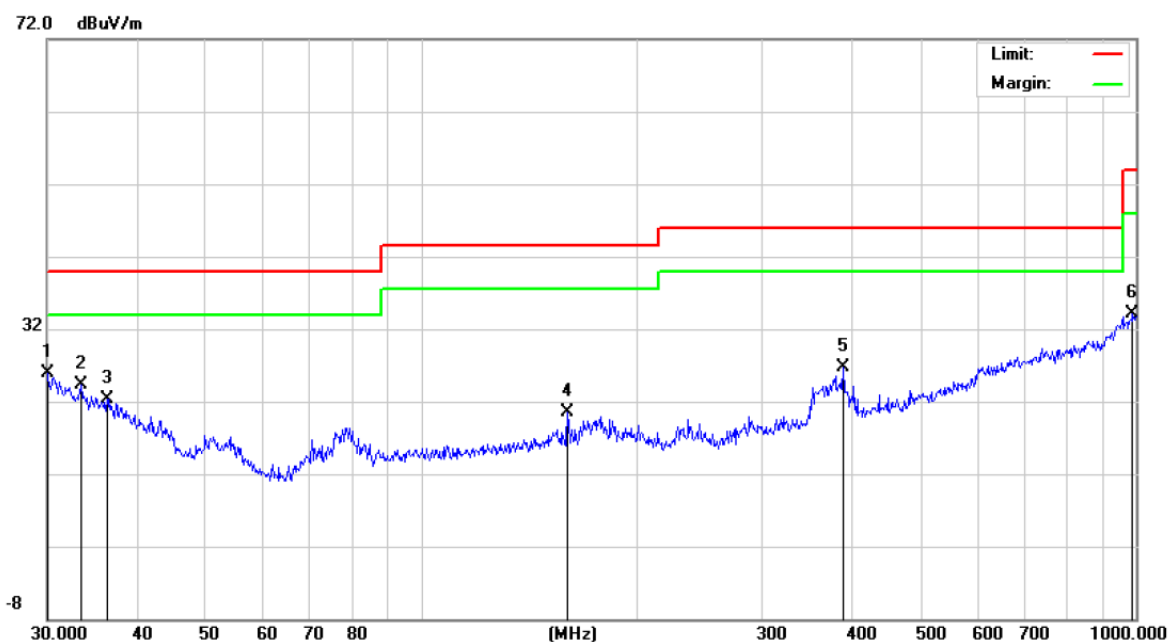

Site

Polarization: *Horizontal*

Temperature: 24

Limit: FCC_PART15_B_03m_QP

Power: AC 120V/60Hz

Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	6.34	19.57	25.91	40.00	-14.09	QP		
2		33.4448	6.36	17.90	24.26	40.00	-15.74	QP		
3		36.3813	5.67	16.72	22.39	40.00	-17.61	QP		
4		160.3456	8.99	11.45	20.44	43.50	-23.06	QP		
5		389.3549	12.03	14.77	26.80	46.00	-19.20	QP		
6		989.5354	6.91	27.21	34.12	54.00	-19.88	QP		

3.2.8 TEST RESULTS (1 GHZ-25GHZ)

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.3V

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
Low Channel (2402 MHz)-Above 1G							
4804.59	56.10	-3.64	52.46	74.00	-21.54	Pk	Vertical
4804.59	40.10	-3.64	36.46	54.00	-17.54	AV	Vertical
7206.54	60.99	-0.95	60.04	74.00	-13.96	Pk	Vertical
7206.54	42.10	-0.95	41.15	54.00	-12.85	AV	Vertical
4804.70	59.32	-3.64	55.68	74.00	-18.32	Pk	Horizontal
4804.70	42.43	-3.64	38.79	54.00	-15.21	AV	Horizontal
7206.62	57.89	-0.95	56.94	74.00	-17.06	Pk	Horizontal
7206.62	42.07	-0.95	41.12	54.00	-12.88	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G							
4880.64	60.99	-3.68	57.31	74.00	-16.69	Pk	Vertical
4880.64	39.32	-3.68	35.64	54.00	-18.36	AV	Vertical
7320.54	59.32	-0.82	58.50	74.00	-15.50	Pk	Vertical
7320.54	41.99	-0.82	41.17	54.00	-12.83	AV	Vertical
4880.62	59.07	-3.68	55.39	74.00	-18.61	Pk	Horizontal
4880.62	41.76	-3.68	38.08	54.00	-15.92	AV	Horizontal
7320.47	58.10	-0.82	57.28	74.00	-16.72	Pk	Horizontal
7320.47	41.99	-0.82	41.17	54.00	-12.83	AV	Horizontal
High Channel (2480 MHz)- Above 1G							
4960.95	57.89	-3.59	54.30	74.00	-19.70	Pk	Vertical
4960.95	40.76	-3.59	37.17	54.00	-16.83	AV	Vertical
7440.66	58.07	-0.68	57.39	74.00	-16.61	Pk	Vertical
7440.66	40.07	-0.68	39.39	54.00	-14.61	AV	Vertical
4960.54	58.32	-3.59	54.73	74.00	-19.27	Pk	Horizontal
4960.54	40.40	-3.59	36.81	54.00	-17.19	AV	Horizontal
7440.70	61.76	-0.68	61.08	74.00	-12.92	Pk	Horizontal
7440.70	41.21	-0.68	40.53	54.00	-13.47	AV	Horizontal

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)All other emissions more than 20dB below the limit.

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.3V

Bandedge for Low and High Ch

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
2326.72	61.39	-13.06	48.33	74	-25.67	Pk	Vertical
2326.72	55.53	-13.06	42.47	54	-11.53	AV	Vertical
2400	64.57	-13.06	51.51	74	-22.49	Pk	Vertical
2400	55.04	-13.06	41.98	54	-12.02	AV	Vertical
2378.23	61.27	-13.06	48.21	74	-25.79	Pk	Horizontal
2378.23	56.42	-13.06	43.36	54	-10.64	AV	Horizontal
2400	65.02	-13.06	51.96	74	-22.04	Pk	Horizontal
2400	55.85	-13.06	42.79	54	-11.21	AV	Horizontal
2483.5	62.1	-12.78	49.32	74	-24.68	Pk	Vertical
2483.5	61.62	-12.78	48.84	54	-5.16	AV	Vertical
2483.5	61.82	-12.78	49.04	74	-24.96	Pk	Horizontal
2483.5	61.48	-12.78	48.7	54	-5.30	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


4.1.5 TEST RESULTS

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC3.3V
Test Mode :	TX Mode /CH00, CH19, CH39		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-7.816	8	PASS
2440 MHz	-5.749	8	PASS
2480 MHz	-6.158	8	PASS

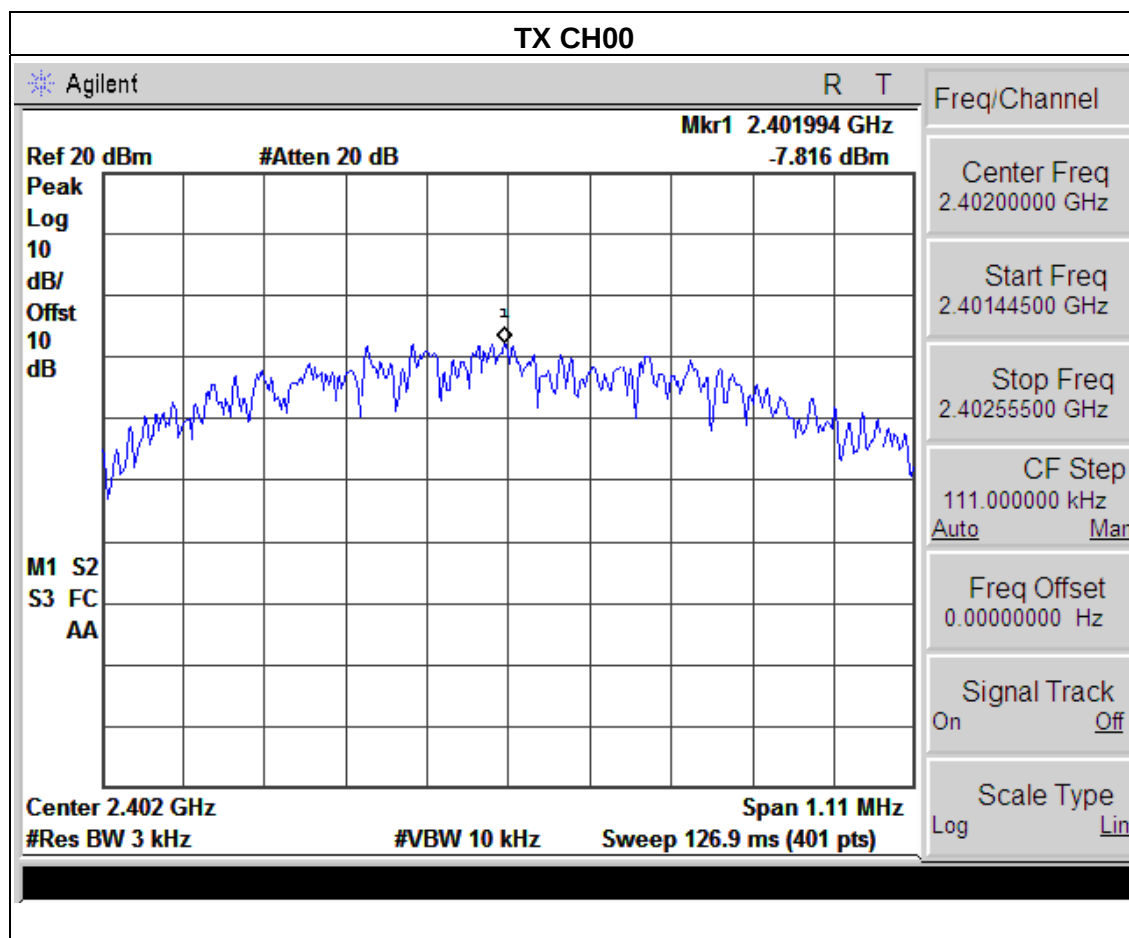

TX CH19

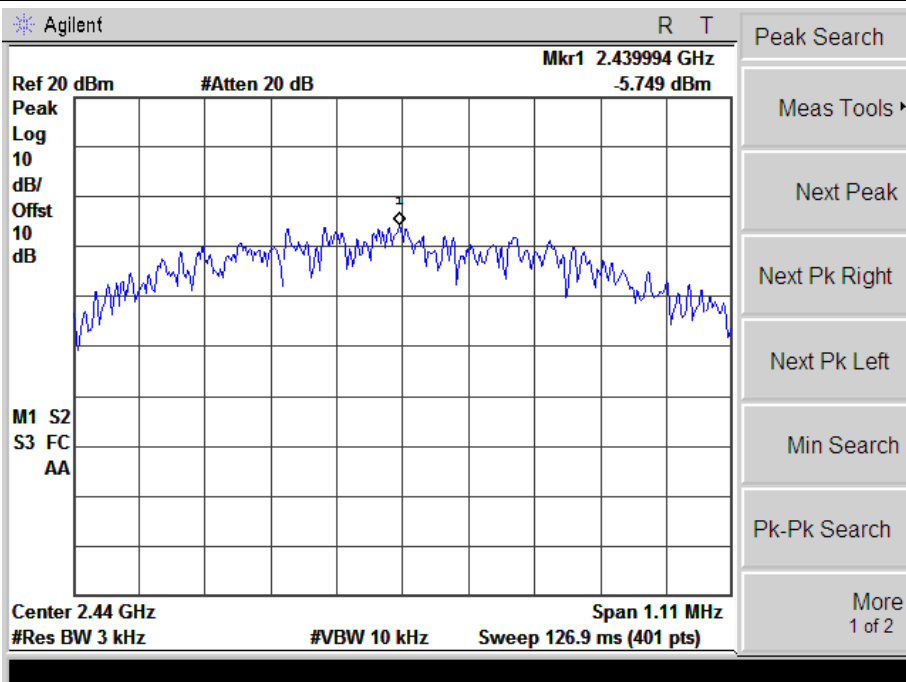

TX CH39

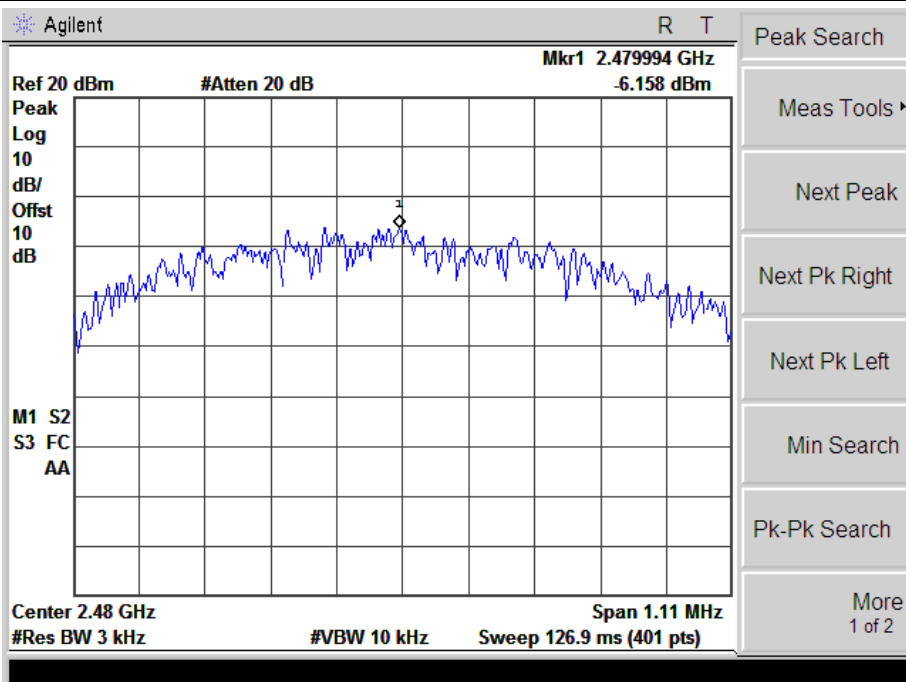

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

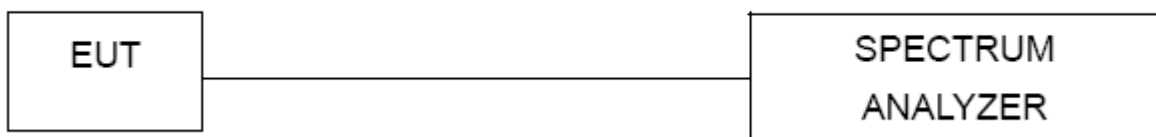


5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.5 TEST RESULTS

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC3.3V
Test Mode :	TX Mode/CH00, CH19, CH39		


Frequency	6dB Bandwidth (kHz)	Channel Separation (MHz)	Result
2402 MHz	760.379	>=500KHz	PASS
2440 MHz	758.199	>=500KHz	PASS
2480 MHz	754.162	>=500KHz	PASS

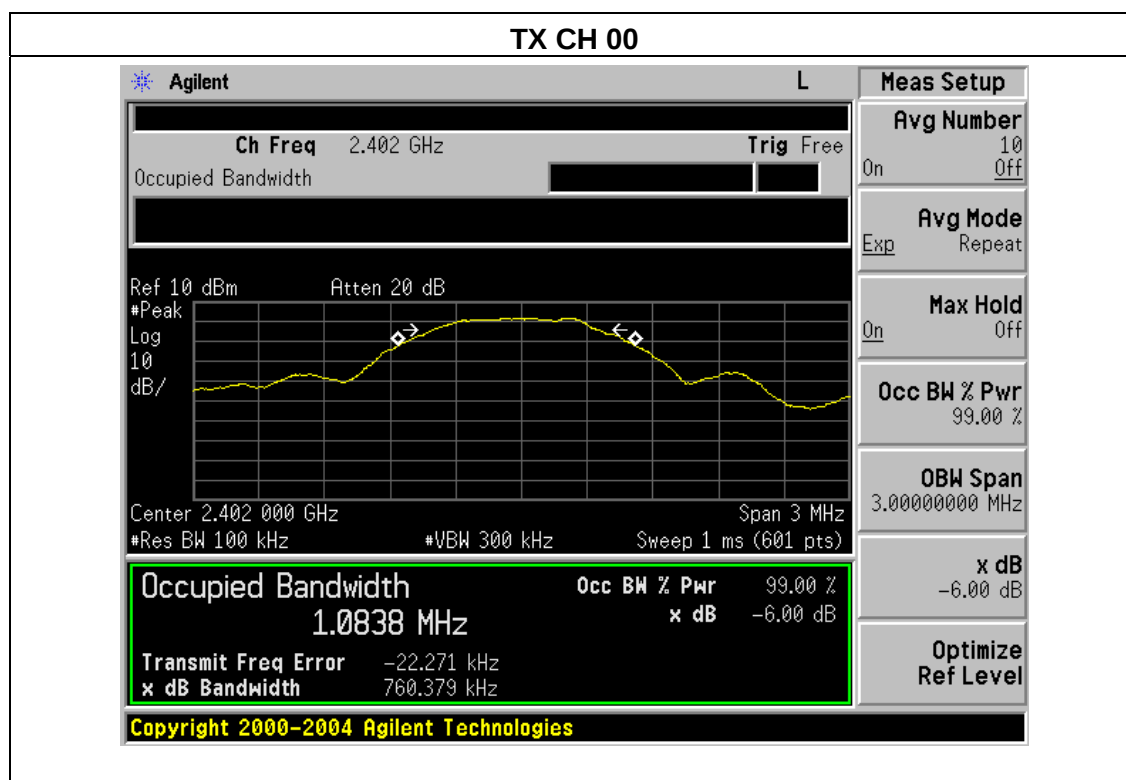

TX CH 19

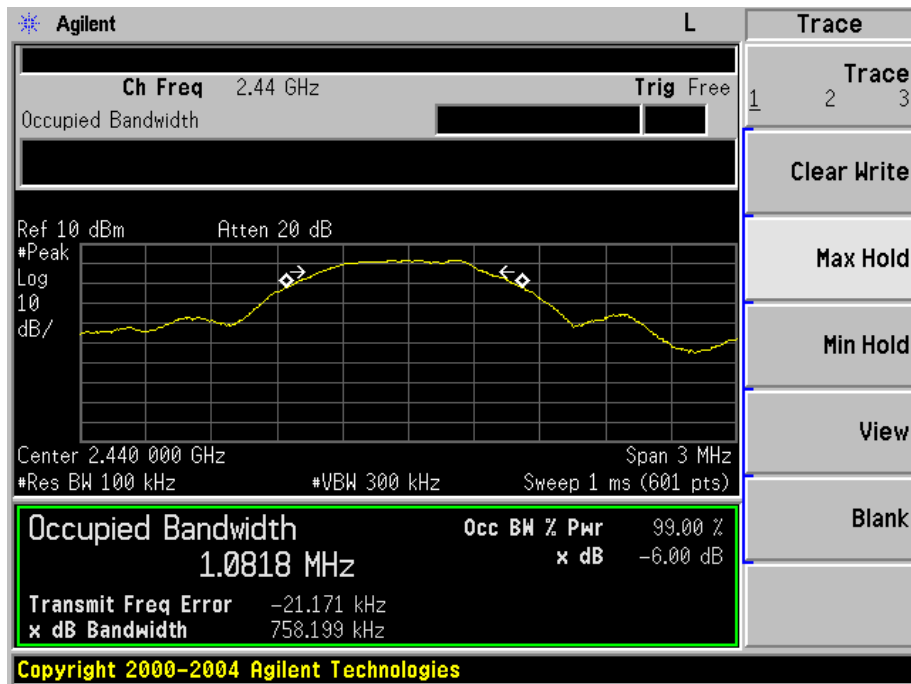

TX CH 39

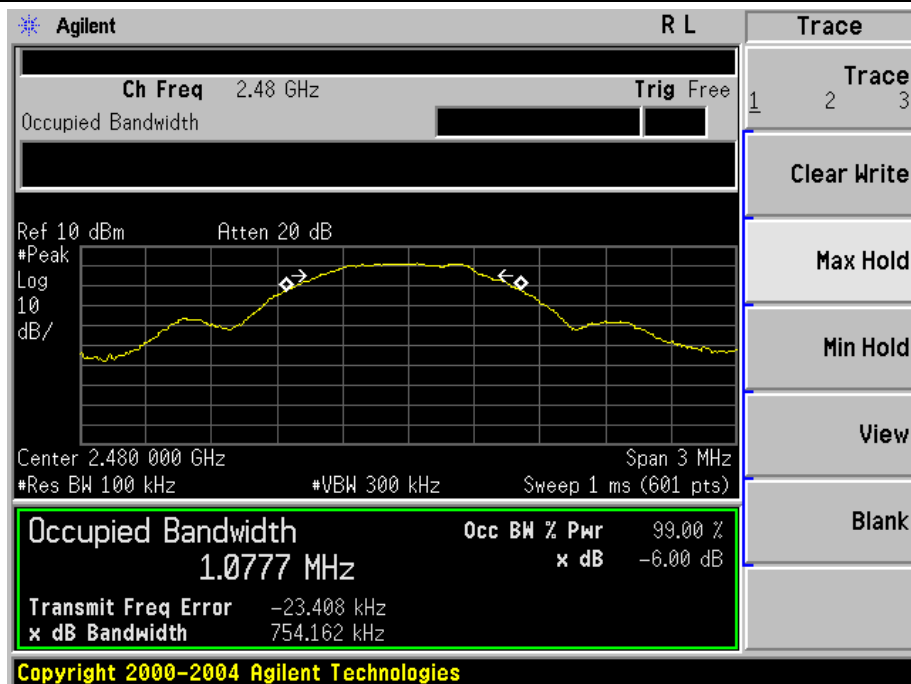

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to spectrum analyzer

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

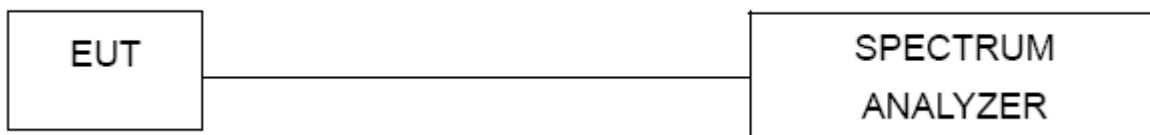


6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


6.1.5 TEST RESULTS

EUT :	Wi-Fi + Bluetooth LE (WiBlue) module	Model :	EC864FPA
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC3.3V
Test Mode :	TX Mode /CH00, CH19, CH39		


Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	3.42	30
CH19	2440	3.33	30
CH39	2480	2.96	30

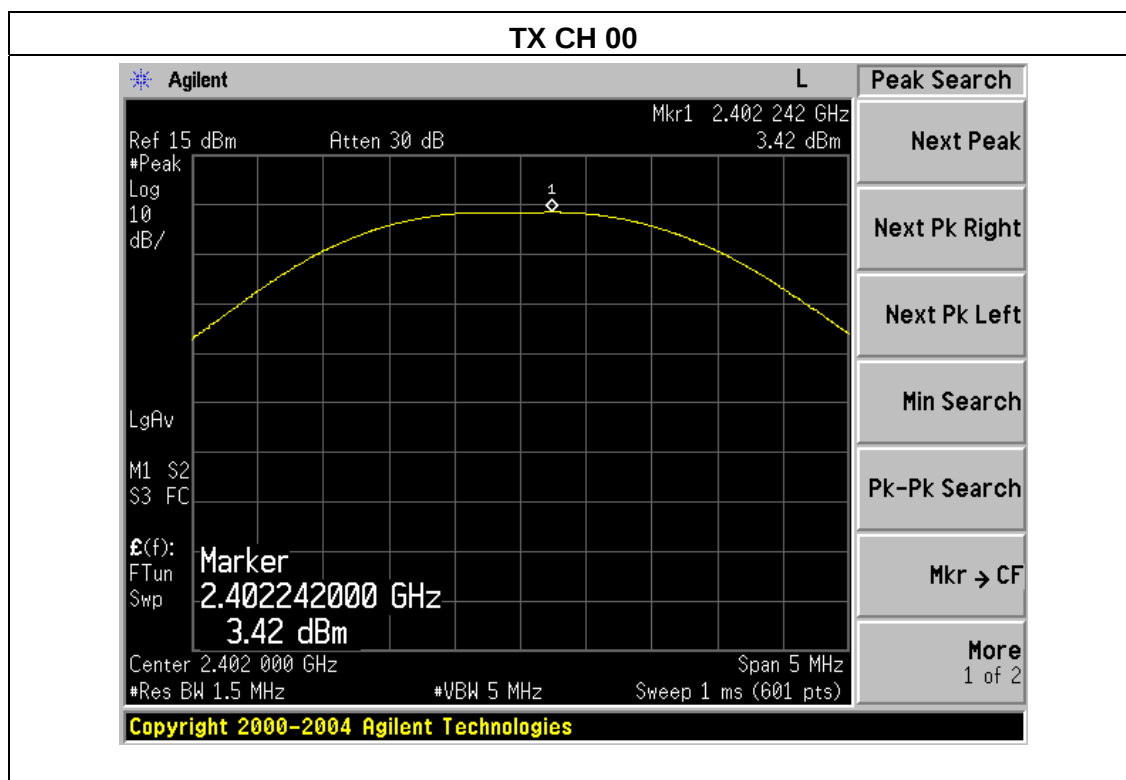

TX CH 19

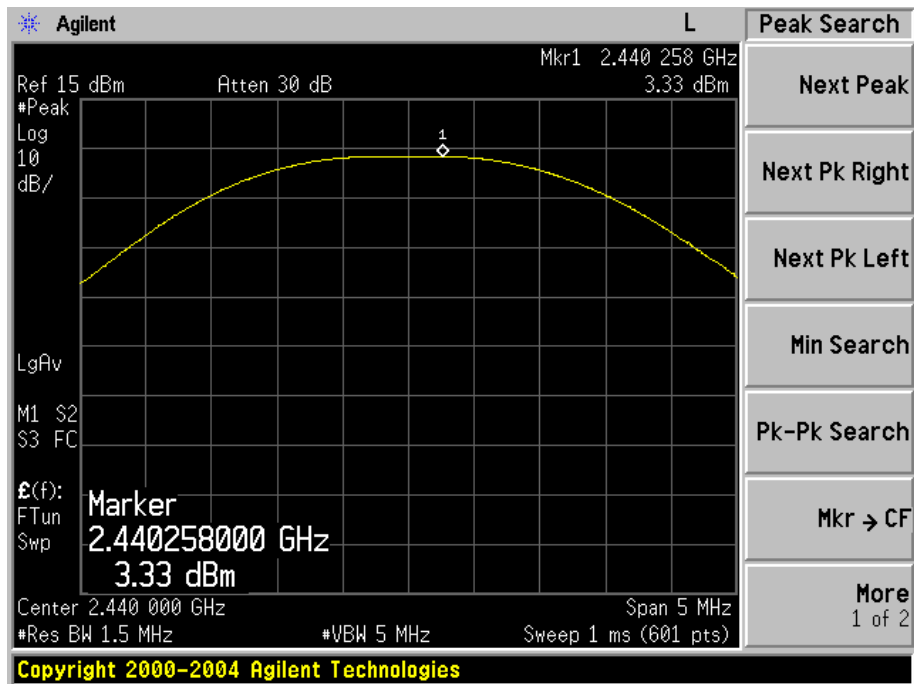

TX 39

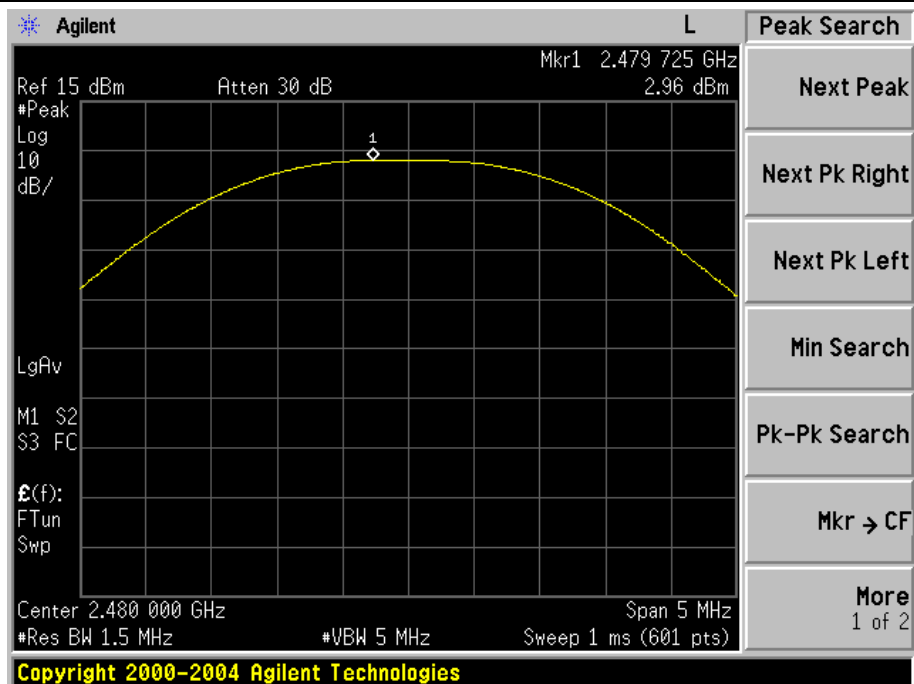


7. CONDUCTED SPURIOUS & BAND EDGE EMISSION

7.1 REQUIREMENT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 TEST SETUP

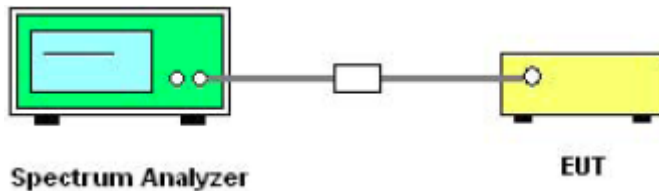


7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


CH00

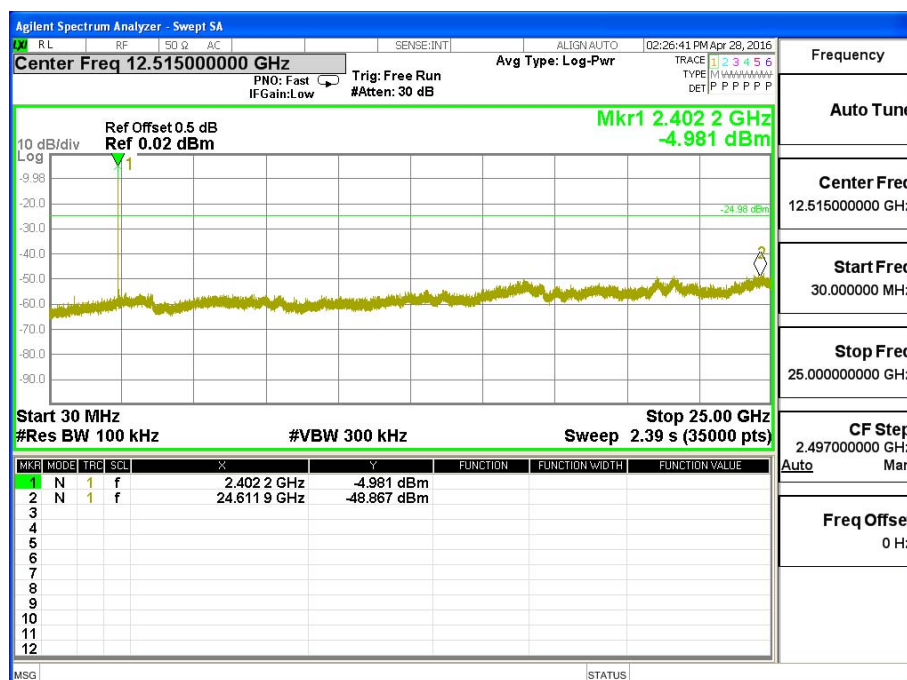

CH19

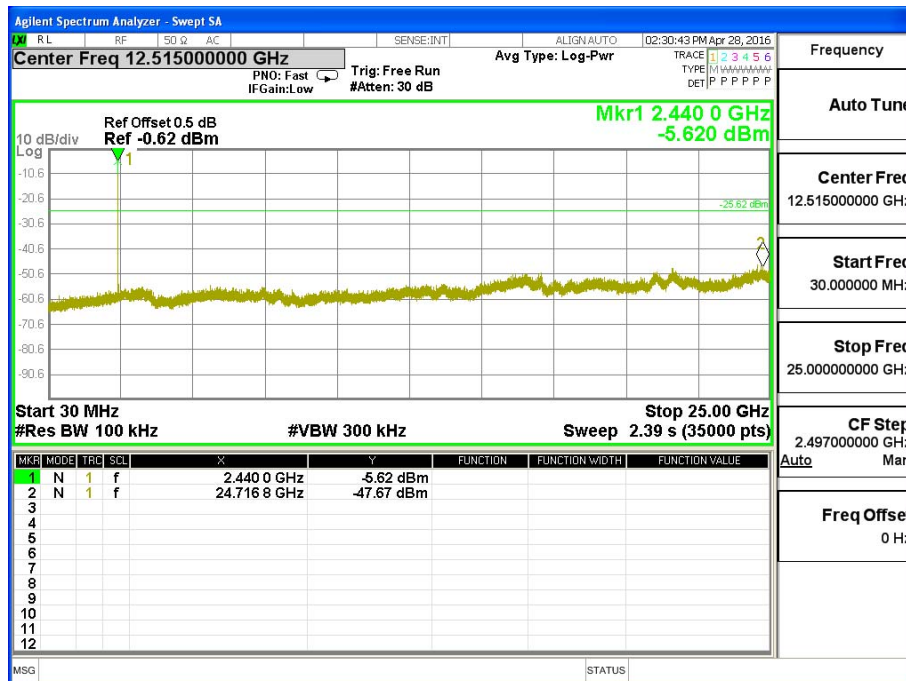


CH39

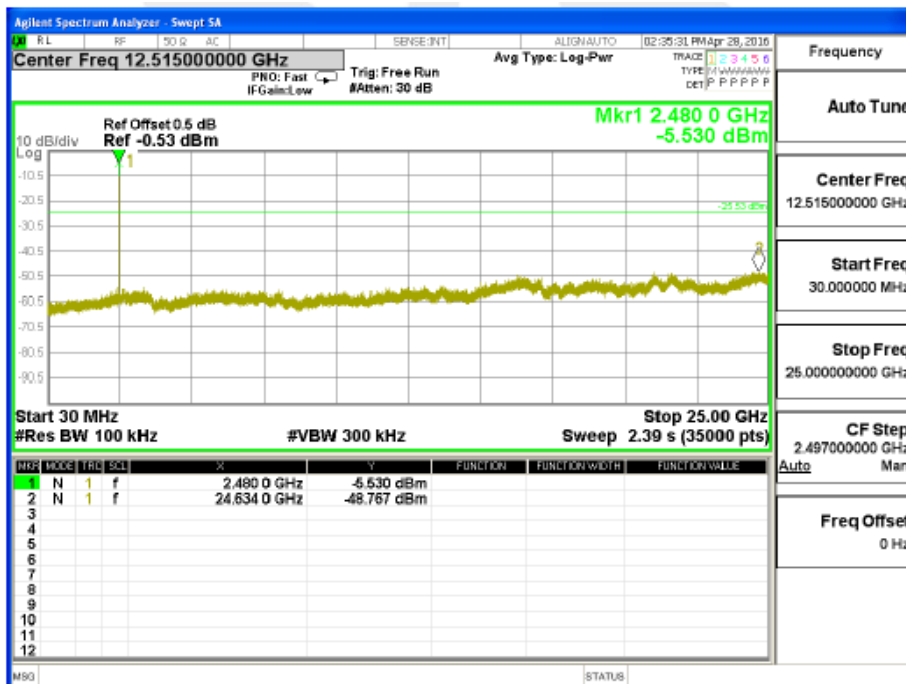


For Band edge

CH00

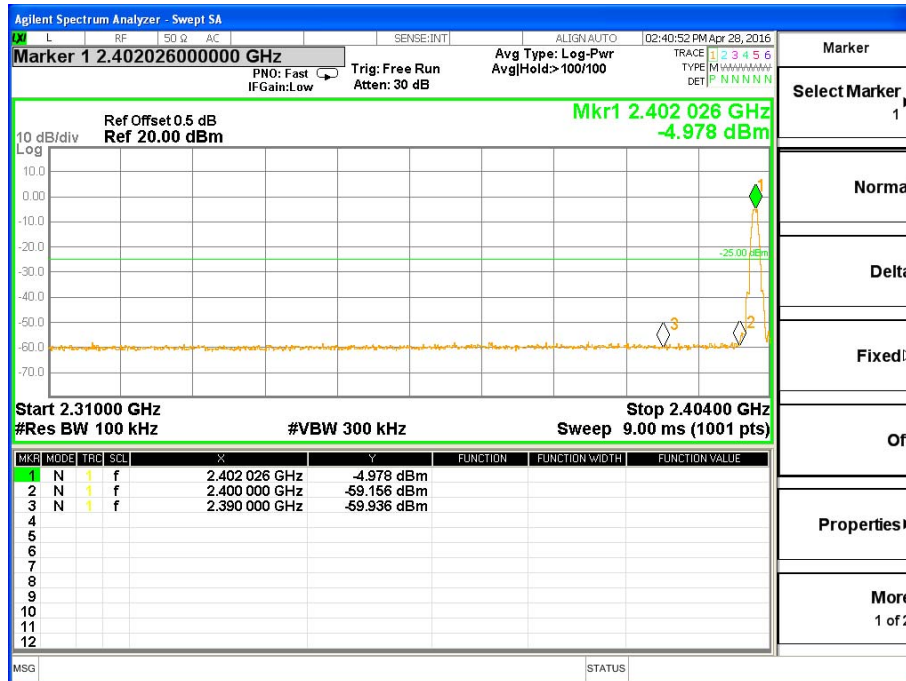

CH39

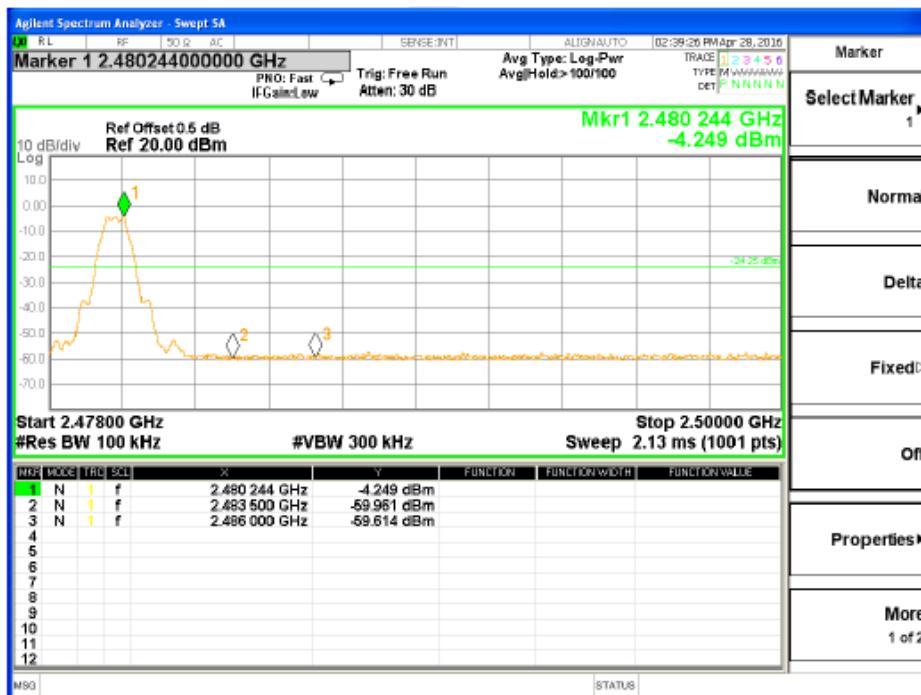

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement.