



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1805237041-WF

Compiled by:
(position+printed name+signature)

Allen Wang
(File administrators)

Allen Wang

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name.....: Bluetooth Module

Model/Type reference: BC870FNA

List Model(s).....: BC870FPA, BC870FPB, BC870FPC, BC870FNB, BC870FNC,
BC875FPA, BC875FPB, BC875FPC, BC875FNA, BC875FNB,
BC875FNC, QC521FNA, QC521FPA, QC525FPA, QC525FNA

Trade Mark.....: N/A

FCC ID.....: B4OHS-BC870FNA

Applicant's name: GT-tronics HK Ltd

Address of applicant: B210, Tonic Industrial Center, 19 Lam Hing Street, Kowloon Bay,
Hong Kong

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Jun. 07, 2018

Date of Test Date.....: Jun. 08, 2018–Jun. 29, 2018

Data of Issue.....: Jul. 02, 2018

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1805237041-WF	Jul. 02, 2018 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : Bluetooth Module

Model /Type : BC870FNA

Listed Models : BC870FPA, BC870FPB, BC870FPC, BC870FNB,
BC870FNC, BC875FPA, BC875FPB, BC875FPC,
BC875FNA, BC875FNB, BC875FNC, QC521FNA,
QC521FPA, QC525FPA, QC525FNA

Applicant : GT-tronics HK Ltd

Address : B210, Tonic Industrial Center, 19 Lam Hing Street,
Kowloon Bay, Hong Kong

Manufacturer : GT-tronics HK Ltd

Address : B210, Tonic Industrial Center, 19 Lam Hing Street,
Kowloon Bay, Hong Kong

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2018-07-02	CTL1805237041-WF	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.6. MODIFICATIONS.....	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSIONS TEST	9
3.2. RADIATED EMISSIONS AND BAND EDGE	12
3.3. MAXIMUM PEAK OUTPUT POWER	19
3.4. 20dB BANDWIDTH.....	23
3.5. FREQUENCY SEPARATION	27
3.6. NUMBER OF HOPPING FREQUENCY.....	29
3.7. TIME OF OCCUPANCY (DWEIL TIME).....	31
3.8. OUT-OF-BAND EMISSIONS	35
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	43
3.10. ANTENNA REQUIREMENT.....	44
4. TEST SETUP PHOTOS OF THE EUT	45
5. PHOTOS OF THE EUT.....	46

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Bluetooth Module
Model/Type reference:	BC870FNA
Power supply:	DC 3.3V from host device
Bluetooth :	
Supported type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz

Antenna type:

Type	Antenna type	Model	Gain
1	Rod antenna	HX-A05	3.00dBi
2	PCB antenna	N/A	1.90dBi
3	PCB antenna	N/A	1.90dBi

Note: All tests have been conducted with all three types antenna assembled respectively, only worse case with the highest antenna gain type 1 is reported in this report.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date last time	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2018/06/01	2019/05/31
LISN	R&S	ESH2-Z5	860014/010	2018/06/01	2019/05/31
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2018/06/01	2019/05/31
EMI Test Receiver	R&S	ESCI	103710	2018/06/01	2019/05/31
Spectrum Analyzer	Agilent	E4407B	MY41440676	2018/05/20	2019/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2018/01/16	2019/01/17
Power Meter	Anritsu	ML2487B	110553	2018/05/31	2018/05/30
Power Sensor	Anritsu	MA2411B	100345	2018/05/20	2019/05/19
Controller	EM Electronics	Controller EM 1000	N/A	2018/05/19	2019/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2018/05/17	2019/05/16
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2018/05/17	2019/05/16
Amplifier	Agilent	8349B	3008A02306	2018/05/17	2019/05/16
Amplifier	Agilent	8447D	2944A10176	2018/05/17	2019/05/16
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/05/18	2019/05/17
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2018/05/18	2019/05/17
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2018/05/18	2019/05/17
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2018/05/30	2018/05/31

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

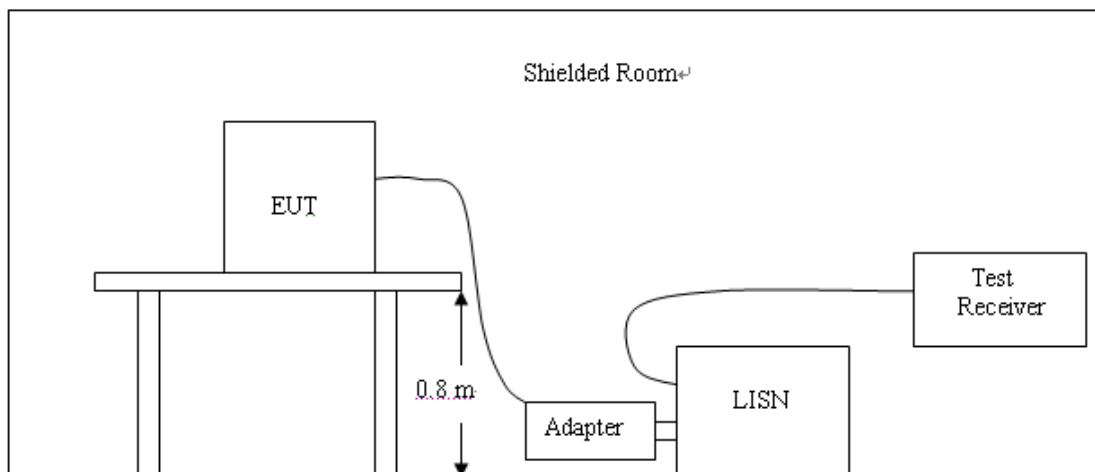

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


TEST RESULTS

Remark:

1. All antenna version of the EUT was measured, and the worst case of extend rod antenna type was reported.
2. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

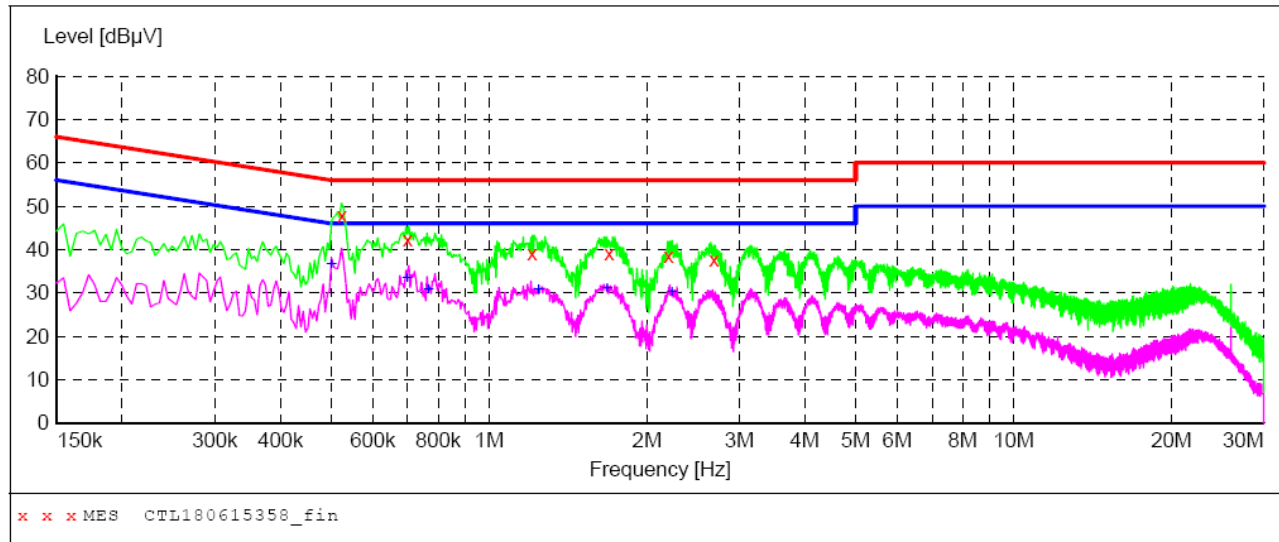**MEASUREMENT RESULT: "CTL180615358_fin"**

15/06/2018 15:42

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.523500	47.90	10.2	56	8.1	QP	L1	GND
0.699000	42.40	10.2	56	13.6	QP	L1	GND
1.207500	39.10	10.3	56	16.9	QP	L1	GND
1.693500	39.20	10.3	56	16.8	QP	L1	GND
2.197500	38.50	10.4	56	17.5	QP	L1	GND
2.683500	37.70	10.4	56	18.3	QP	L1	GND


MEASUREMENT RESULT: "CTL180615358_fin2"

15/06/2018 15:42

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.501000	36.40	10.2	46	9.6	AV	L1	GND
0.699000	33.20	10.2	46	12.8	AV	L1	GND
0.766500	30.50	10.2	46	15.5	AV	L1	GND
1.243500	30.70	10.3	46	15.3	AV	L1	GND
1.680000	31.00	10.3	46	15.0	AV	L1	GND
2.233500	30.00	10.4	46	16.0	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

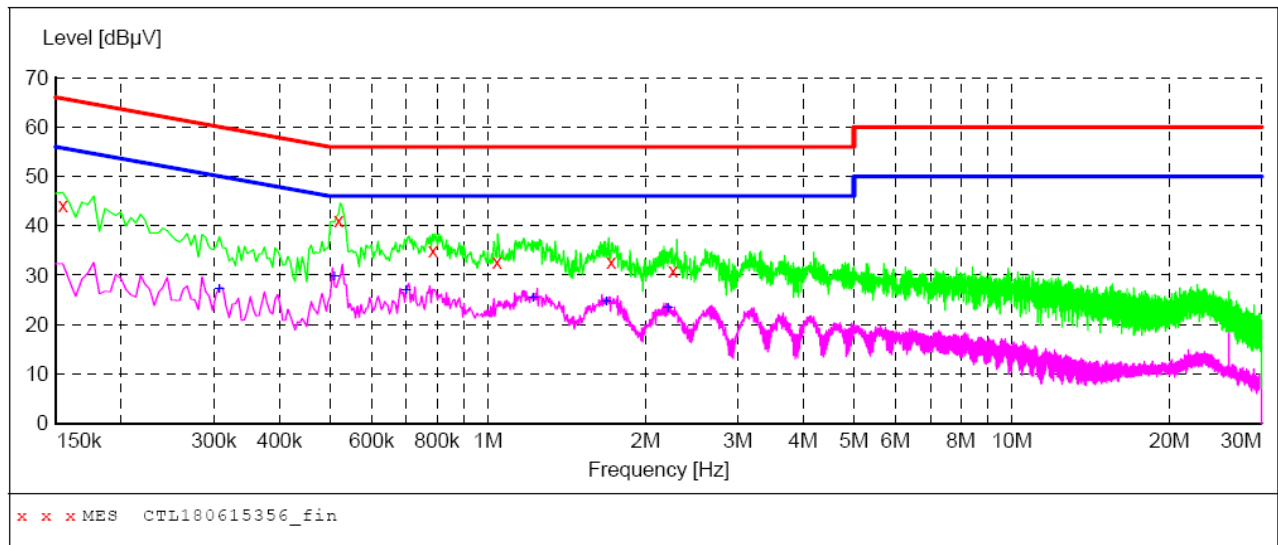**MEASUREMENT RESULT: "CTL180615356_fin"**

15/06/2018 15:39

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	44.20	10.2	66	21.6	QP	N	GND
0.519000	41.00	10.2	56	15.0	QP	N	GND
0.784500	34.90	10.2	56	21.1	QP	N	GND
1.041000	32.70	10.3	56	23.3	QP	N	GND
1.720500	32.60	10.3	56	23.4	QP	N	GND
2.256000	30.80	10.4	56	25.2	QP	N	GND

MEASUREMENT RESULT: "CTL180615356_fin2"

15/06/2018 15:39

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.307500	27.00	10.2	50	23.0	AV	N	GND
0.510000	29.70	10.2	46	16.3	AV	N	GND
0.699000	26.90	10.2	46	19.1	AV	N	GND
1.221000	25.30	10.3	46	20.7	AV	N	GND
1.684500	24.60	10.3	46	21.4	AV	N	GND
2.206500	23.20	10.4	46	22.8	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

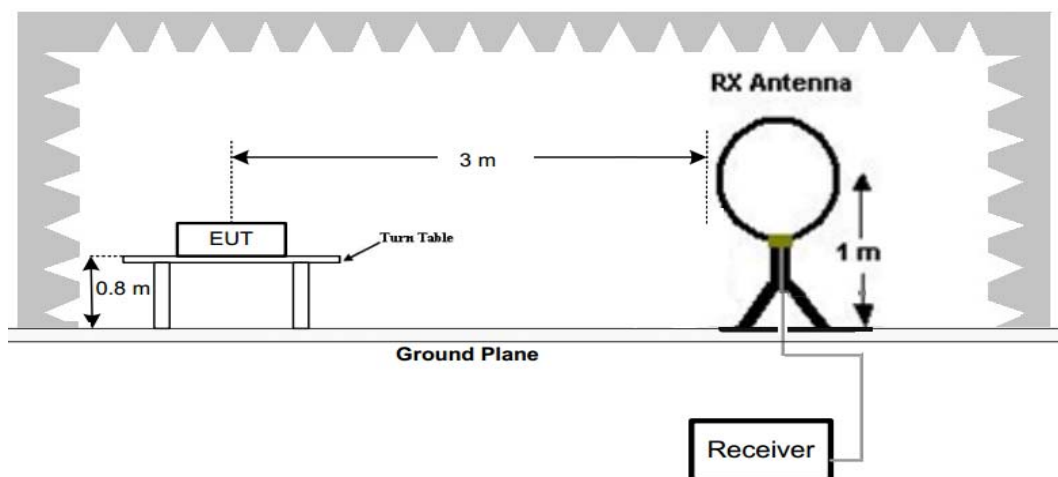

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

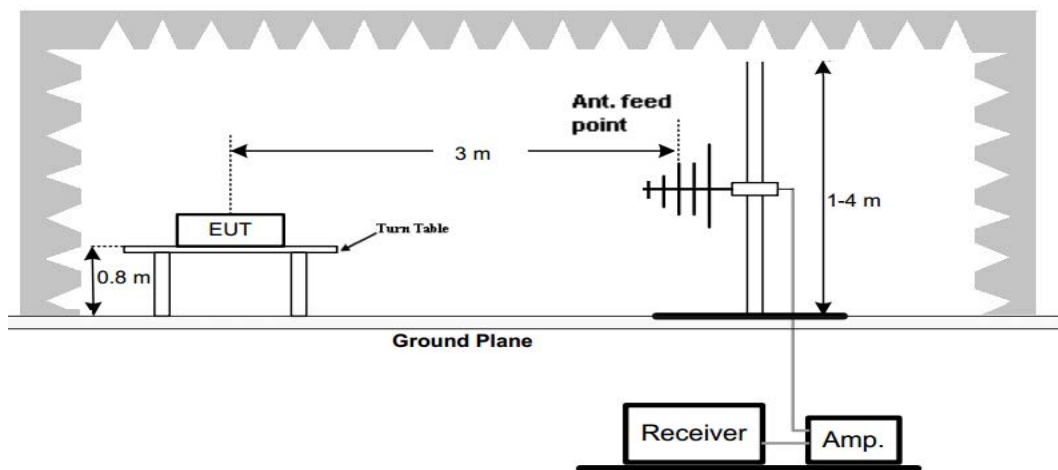

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

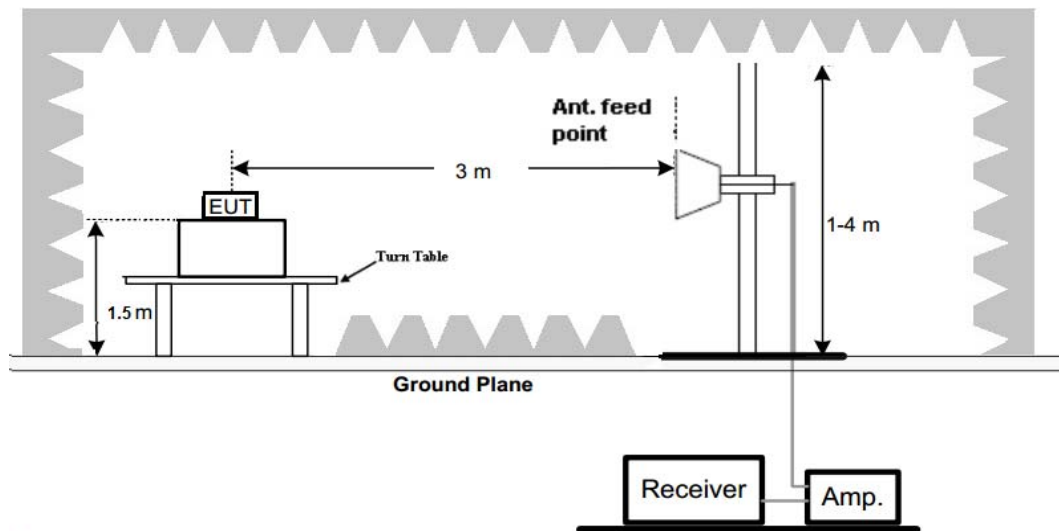

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. All antenna version of the EUT was measured, and the worst case of extend rod antenna type was reported.
2. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 200.0 ms 120 kHz VULB 9168

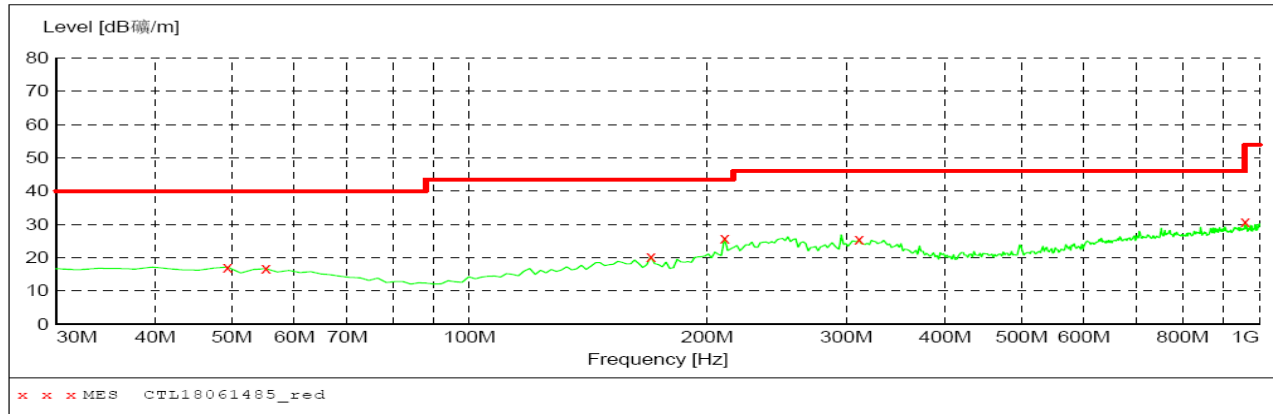**MEASUREMENT RESULT: "CTL18061485_red"**


2018-6-14 17:54

Frequency MHz	Level dB磁/m	Transd dB	Limit dB磁/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	17.20	13.8	40.0	22.8	---	0.0	0.00	HORIZONTAL
55.220000	16.70	13.4	40.0	23.3	---	0.0	0.00	HORIZONTAL
169.680000	20.40	14.3	43.5	23.1	---	0.0	0.00	HORIZONTAL
210.420000	25.90	11.4	43.5	17.6	---	0.0	0.00	HORIZONTAL
311.300000	25.40	14.8	46.0	20.6	---	0.0	0.00	HORIZONTAL
959.260000	30.80	25.9	46.0	15.2	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 200.0 ms 120 kHz VULB 9168

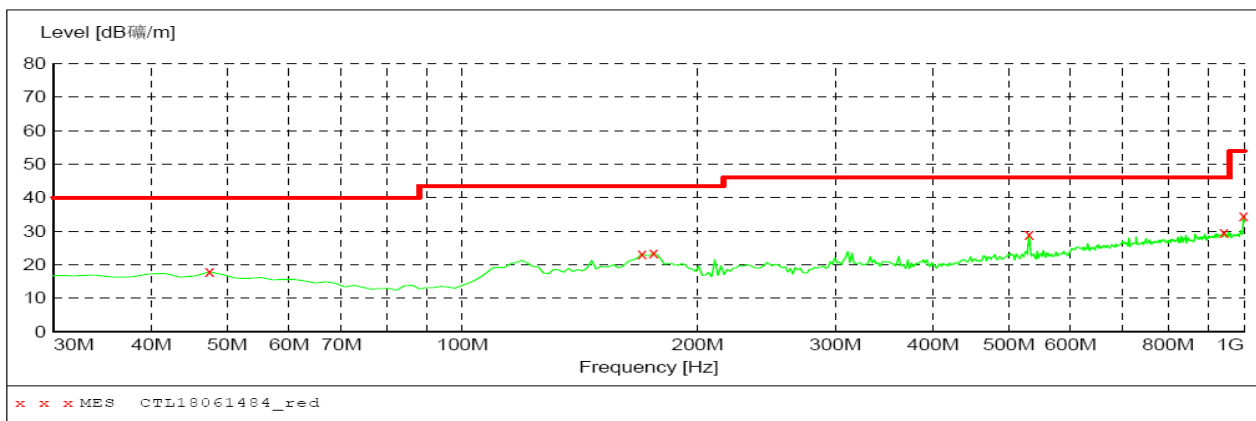**MEASUREMENT RESULT: "CTL18061484_red"**

2018-6-14 17:52

Frequency MHz	Level dB磁/m	Transd dB	Limit dB磁/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	17.90	13.8	40.0	22.1	---	0.0	0.00	VERTICAL
169.680000	23.20	14.3	43.5	20.3	---	0.0	0.00	VERTICAL
175.500000	23.50	13.5	43.5	20.0	---	0.0	0.00	VERTICAL
530.520000	28.90	19.6	46.0	17.1	---	0.0	0.00	VERTICAL
941.800000	29.70	25.8	46.0	16.3	---	0.0	0.00	VERTICAL
998.060000	34.50	26.0	53.9	19.4	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz**Note : GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.****GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	58.26	PK	74	15.74	53.75	33.49	6.91	35.89	4.51
4804.00	49.02	AV	54	4.98	44.51	33.49	6.91	35.89	4.51
5135.50	45.78	PK	74	28.22	38.55	34.4	7.11	34.28	7.23
5135.50	--	AV	54	--	--	--	--	--	--
7206.00	51.20	PK	74	22.8	40.10	36.95	9.18	35.03	11.10
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	58.68	PK	74	15.32	54.17	33.49	6.91	35.89	4.51
4804.00	49.12	AV	54	4.88	44.61	33.49	6.91	35.89	4.51
5135.50	45.89	PK	74	28.11	38.66	34.4	7.11	34.28	7.23
5135.50	--	AV	54	--	--	--	--	--	--
7206.00	51.45	PK	74	22.55	40.35	36.95	9.18	35.03	11.10
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	60.32	PK	74	13.68	55.67	33.6	6.95	35.90	4.65
4882.00	51.24	AV	54	2.76	46.59	33.6	6.95	35.90	4.65
5279.75	44.89	PK	74	29.11	37.41	34.62	7.19	34.33	7.48
5279.75	--	AV	54	--	--	--	--	--	--
7323.00	51.28	PK	74	22.72	39.59	37.46	9.23	35.00	11.69
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882.00	60.89	PK	74	13.11	56.24	33.6	6.95	35.9	4.65
4882.00	51.36	AV	54	2.64	46.71	33.6	6.95	35.9	4.65
5279.75	44.79	PK	74	29.21	37.31	34.62	7.19	34.33	7.48
5279.75	--	AV	54	--	--	--	--	--	--
7323.00	52.05	PK	74	21.95	40.36	37.46	9.23	35	11.69
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	56.89	PK	74	17.11	51.97	33.84	7	35.92	4.92
4960.00	47.65	AV	54	6.35	42.73	33.84	7	35.92	4.92
5298.25	44.52	PK	74	29.48	37.02	34.64	7.2	34.34	7.50
5298.25	--	AV	54	--	--	--	--	--	--
7440.00	49.62	PK	74	24.38	37.67	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.56	PK	74	16.44	52.64	33.84	7.0	35.92	4.92
4960.00	48.23	AV	54	5.77	43.31	33.84	7.0	35.92	4.92
5298.25	45.12	PK	74	28.88	37.62	34.64	7.2	34.34	7.50
5298.25	--	AV	54	--	--	--	--	--	--
7440.00	50.24	PK	74	23.76	38.29	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note : GFSK, Pi/4 QPSK and 8DPSK all have been tested, only worse case GFSK is reported.

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	97.15	PK	--	--	63.76	28.78	4.61	0.00	33.39
2402.00	88.56	AV	--	--	55.17	28.78	4.61	0.00	33.39
2386.75	47.58	PK	74	26.42	14.28	28.7	4.6	0.00	33.30
2386.75	--	AV	54	--	--	--	--	--	--
2390.00	49.56	PK	74	24.44	16.24	28.72	4.6	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.98	PK	74	23.02	17.59	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	97.98	PK	--	--	64.59	28.78	4.61	0.00	33.39
2402.00	89.05	AV	--	--	55.66	28.78	4.61	0.00	33.39
2386.75	48.22	PK	74	25.78	14.92	28.70	4.6	0.00	33.30
2386.75	--	AV	54	--	--	--	--	--	--
2390.00	50.21	PK	74	23.79	16.89	28.72	4.6	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	51.32	PK	74	22.68	17.93	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	95.44	PK	--	--	61.82	28.92	4.70	0.00	33.62
2480.00	86.28	AV	--	--	52.66	28.92	4.70	0.00	33.62
2483.50	50.63	PK	74	23.37	17.00	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2484.75	48.75	PK	74	25.25	15.12	28.93	4.70	0.00	33.63
2484.75	--	AV	54	--	--	--	--	--	--
2500.00	41.63	PK	74	32.37	7.95	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	95.89	PK	--	--	62.27	28.92	4.70	0.00	33.62
2480.00	86.44	AV	--	--	52.82	28.92	4.70	0.00	33.62
2483.50	50.65	PK	74	23.35	17.02	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2484.75	48.89	PK	74	25.11	15.26	28.93	4.70	0.00	33.63
2484.75	--	AV	54	--	--	--	--	--	--
2500.00	41.75	PK	74	32.25	8.07	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

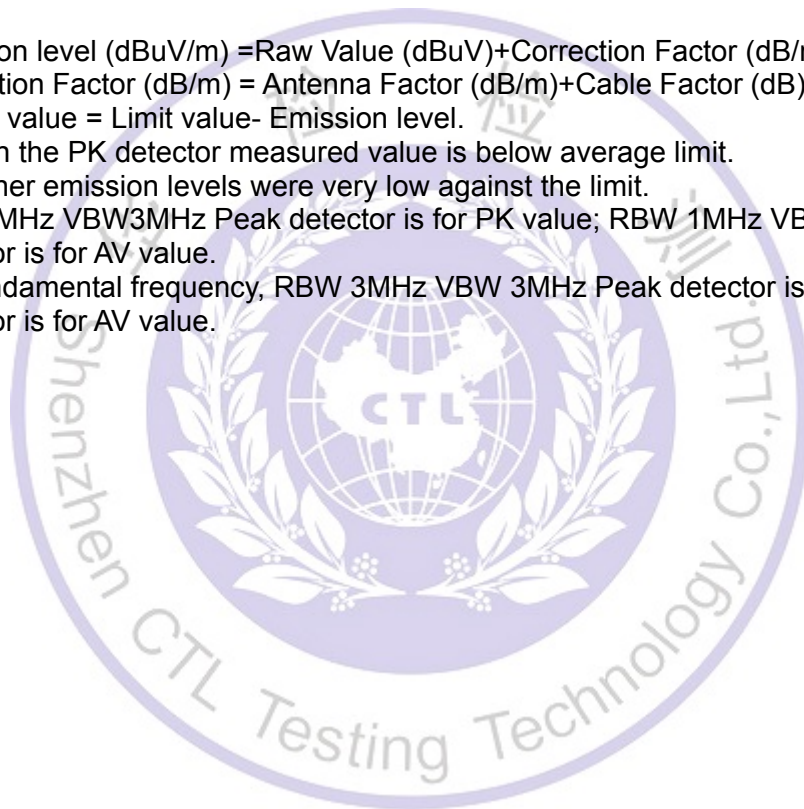

3.3. Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 125mW(20.97).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.


Test Configuration



Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	6.155	20.97	Pass
	39	7.046		
	78	4.662		
π/4DQPSK	00	3.823	20.97	Pass
	39	5.158		
	78	5.323		
8DPSK	00	4.116	20.97	Pass
	39	5.419		
	78	5.581		

Test plot as follows:

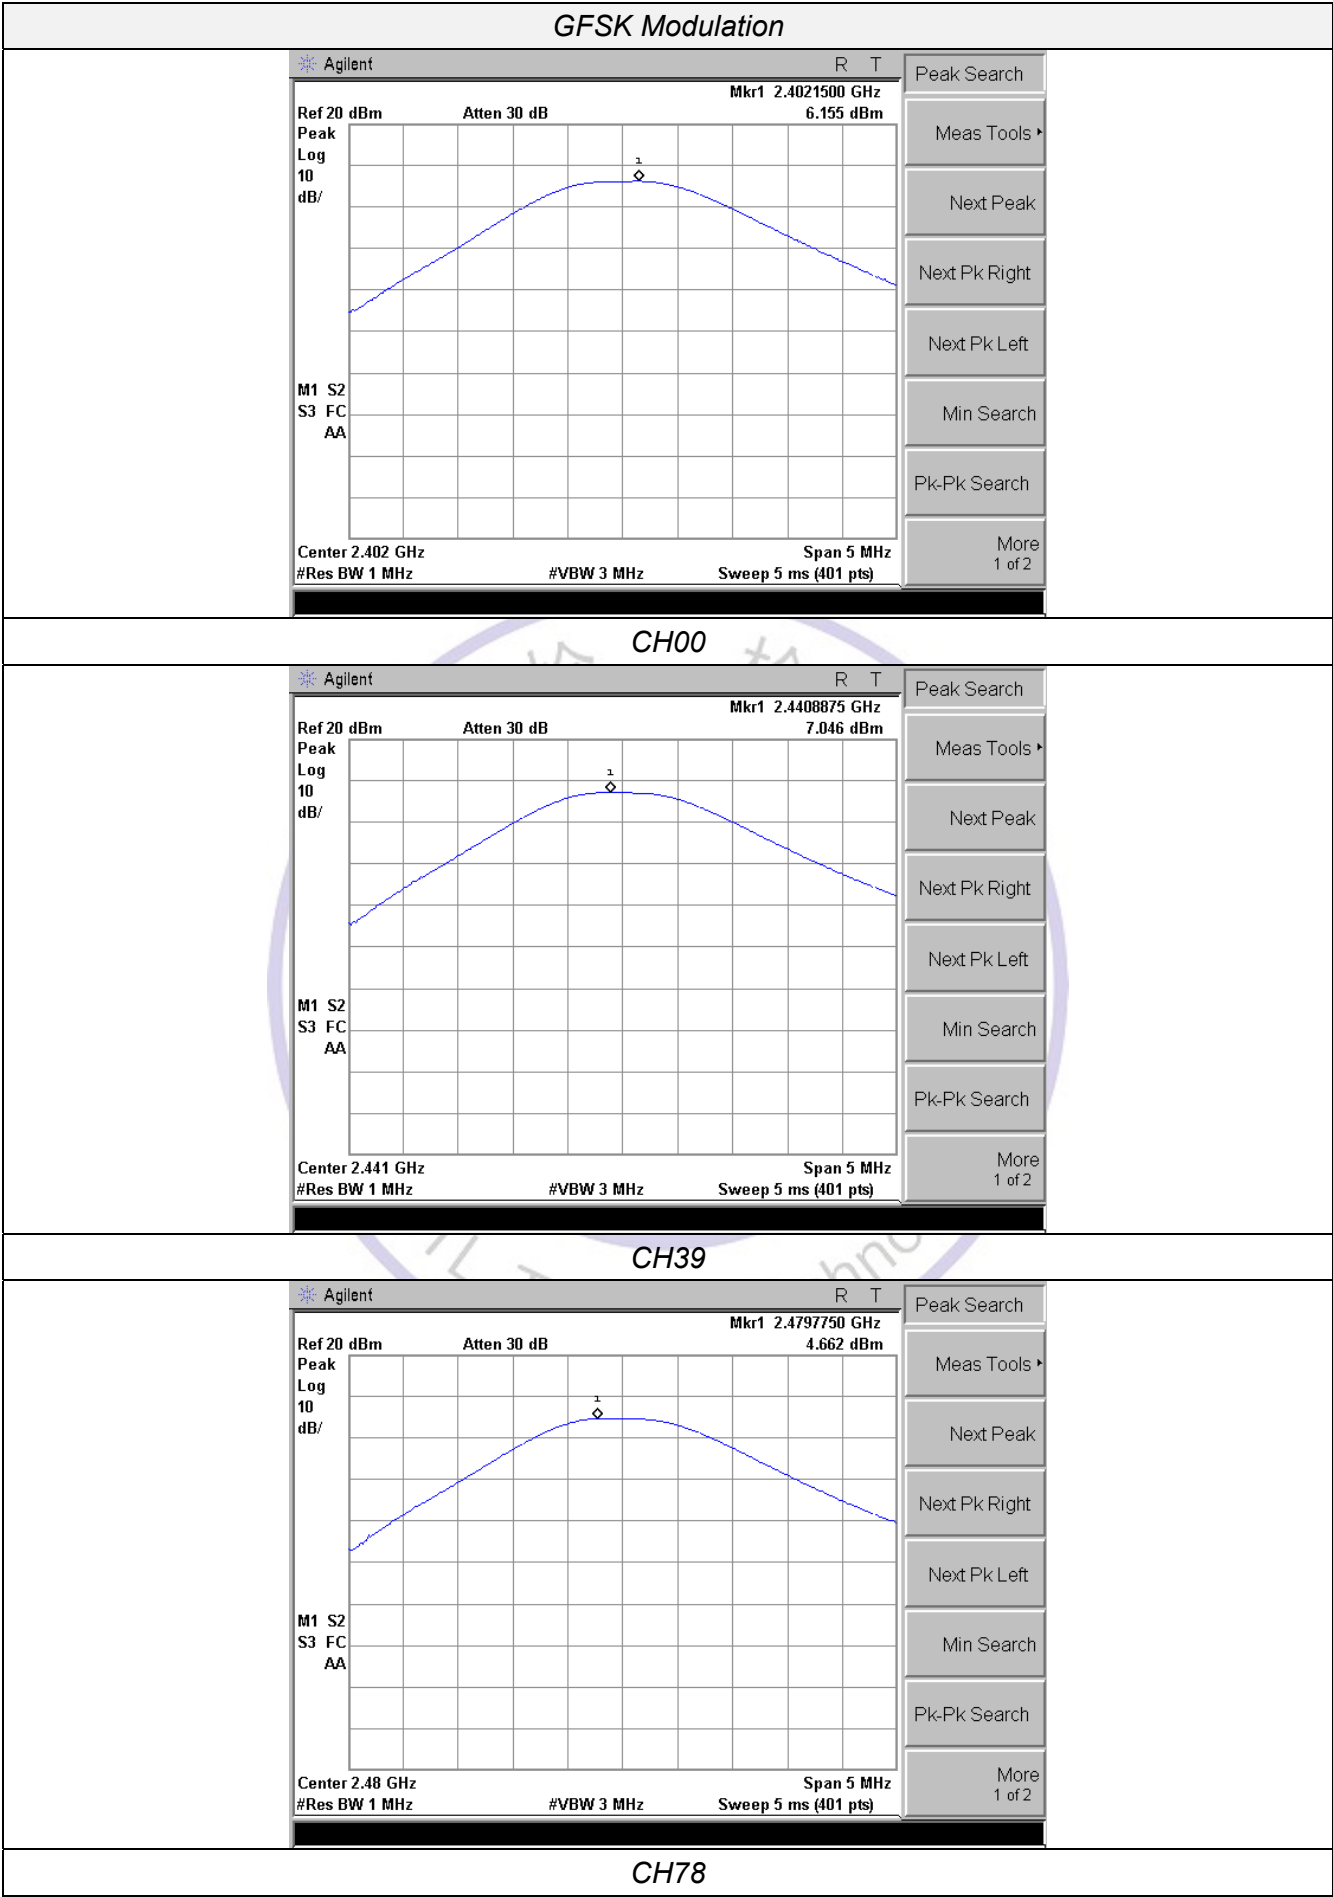

Agilent R T

Ref 20 dBm Atten 30 dB Mkr1 2.4018625 GHz 3.823 dBm

Peak Log 10 dB/

M1 S2
S3 FC
AA

Center 2.402 GHz Span 5 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)

Peak Search
Meas Tools
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
More
1 of 2

Agilent

Ref 20 dBm Atten 30 dB Mkr1 2.4408375 GHz R T

Peak 5.158 dBm

Log

10

dB/

M1 S2
S3 FC
AA

Center 2.441 GHz Span 5 MHz

#Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)

Peak Search

Meas Tools

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

More
1 of 2

Agilent

Ref 20 dBm Atten 30 dB

Mkr1 2.4798500 GHz 5.323 dBm

Peak Log 10 dB/

M1 S2
S3 FC
AA

Center 2.48 GHz Span 5 MHz

#Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)

Peak Search

Meas Tools

Next Peak

Next Pk Right




Next Pk Left

Min Search

Pk-Pk Search

More 1 of 2

CH78

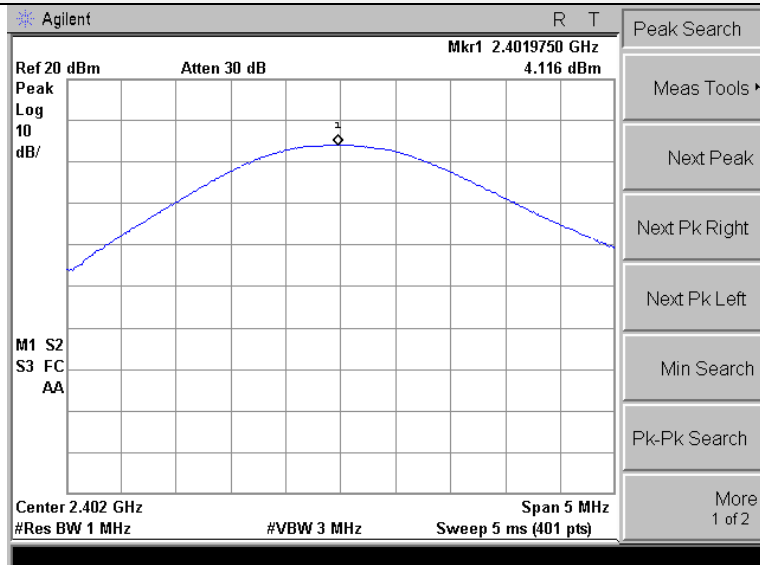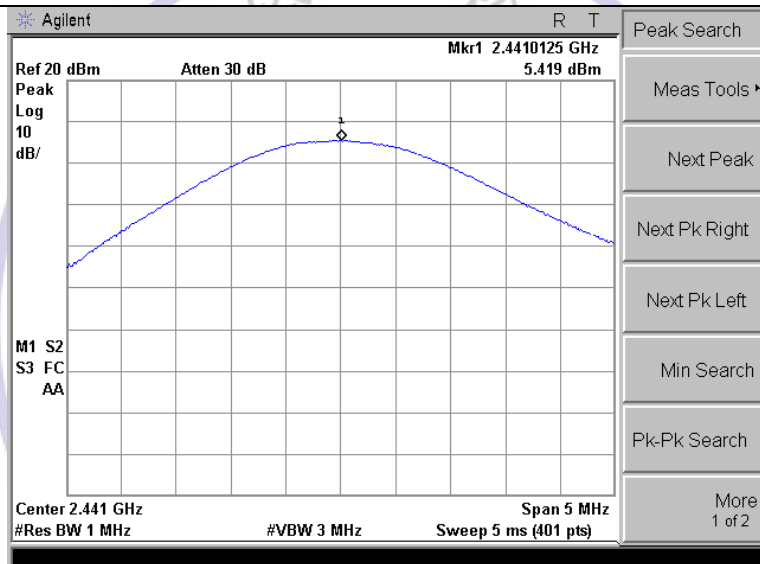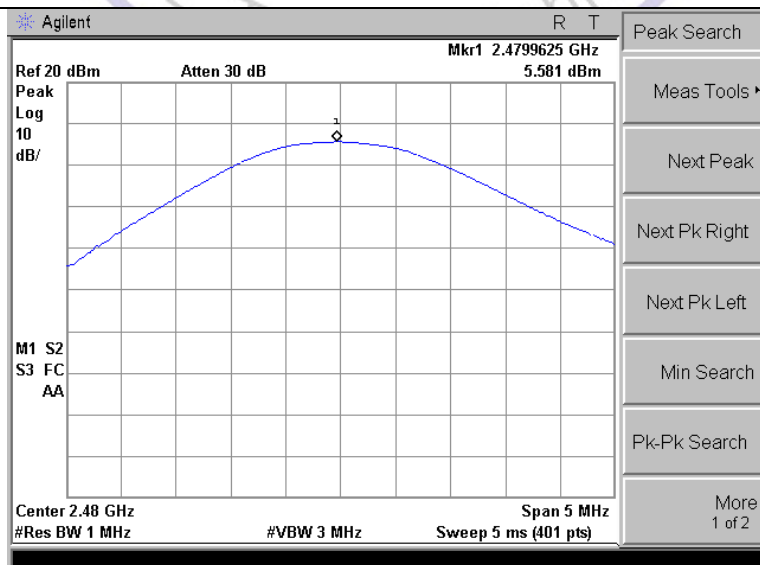8DPSK Modulation**CH00****CH39****CH78**

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	CH00	0.9392	0.8680	Pass
	CH39	0.9545	0.8653	
	CH78	0.9379	0.8561	
$\pi/4$ DQPSK	CH00	1.158	1.1064	
	CH39	1.175	1.0793	
	CH78	1.262	1.1740	
8DPSK	CH00	1.269	1.1577	
	CH39	1.266	1.1758	
	CH78	1.268	1.1608	

Test plot as follows:

The spectrum analyzer display shows a signal with a peak at 868.0296 kHz. The display includes a frequency plot with a blue trace, a grid, and various measurement parameters.

Parameters:

- Ch Freq: 2.402 GHz
- Occupied Bandwidth: []
- Ref 20 dBm
- Atten 30 dB
- Center 2.402 GHz
- Span 3 MHz
- #Res BW 30 kHz
- #VBW 100 kHz
- Sweep 5 ms (401 pts)

Measurements:

- Occupied Bandwidth: 868.0296 kHz
- Occ BW % Pwr: 99.00 %
- x dB: -20.00 dB
- Transmit Freq Error: -31.846 kHz
- x dB Bandwidth: 939.168 kHz

Agilent

Ch Freq 2.441 GHz

Trig Free

Occupied Bandwidth

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Center 2.441 GHz

#Res BW 30 kHz

Span 3 MHz

Sweep 5 ms (401 pts)

Occupied Bandwidth

865.2544 kHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -36.827 kHz

x dB Bandwidth 954.546 kHz

Trace/View

1 2

Trace

Clear Write

Max Hold

Min Hold

View

Blank

More 1 of 2

Agilent R T

Ch Freq 2.48 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.48 GHz Span 3 MHz

#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth 856.0746 kHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -40.560 kHz

x dB Bandwidth 937.942 kHz

Freq/Channel

Center Freq 2.4800000 GHz

Start Freq 2.4785000 GHz

Stop Freq 2.4815000 GHz

CF Step 300.000000 kHz

Auto Ma

Freq Offset 0.0000000 Hz

Signal Track On

CH78

The image shows a screenshot of an Agilent spectrum analyzer. The top bar displays the brand name 'Agilent' and the frequency '2.402 GHz'. Below this, the 'Occupied Bandwidth' is shown as '1.1064 MHz'. The main display area features a grid with a blue trace representing the signal. A peak is marked with a diamond and labeled 'Mkr1 2.4021200 GHz 4.28 dBm'. The y-axis is labeled 'Log' and 'dB/Offset'. The bottom status bar shows 'Center 2.402 GHz', 'Res BW 30 kHz', 'Span 3 MHz', 'VBW 100 kHz', and 'Sweep 5 ms (401 pts)'. A sidebar on the right contains buttons for 'Peak Search', 'Meas Tools', 'Next Peak', 'Next Pk Right', 'Next Pk Left', 'Min Search', 'Pk-Pk Search', and 'More'.

Measurement	Value
Center Freq	2.402 GHz
Occupied Bandwidth	1.1064 MHz
Ref 20 dBm	#Atten 30 dB
Mkr1	2.4021200 GHz 4.28 dBm
Center	2.402 GHz
Res BW	30 kHz
Span	3 MHz
VBW	100 kHz
Sweep	5 ms (401 pts)
Transmit Freq Error	-12.022 kHz
x dB Bandwidth	1.158 MHz
Occ BW % Pwr	99.00 %
x dB	-20.00 dB

Agilent R T

Freq/Channel

Center Freq 2.44100000 GHz

Start Freq 2.43950000 GHz

Stop Freq 2.44250000 GHz

CF Step 300.000000 kHz

Auto Ma

Freq Offset 0.00000000 Hz

Signal Track On Off

Ch Freq 2.441 GHz Trig Free

Occupied Bandwidth 1.0793 MHz

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.441 GHz Span 3 MHz

#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -43.267 kHz


x dB Bandwidth 1.175 MHz

The screen displays the 'Occupied Bandwidth' measurement results. At the top, the center frequency is 2.48 GHz. The spectral plot shows a signal with a peak level of 10 dBm. The occupied bandwidth is measured as 1.1740 MHz. The summary statistics at the bottom indicate an occupied bandwidth percentage of 99.00% and a power level of -20.00 dB.


Parameter	Value
Center Freq	2.48 GHz
Ref Level	20 dBm
Atten	30 dB
Peak Level	10 dBm
Occupied Bandwidth	1.1740 MHz
Occ BW % Pwr	99.00 %
x dB	-20.00 dB
Transmit Freq Error	-90.812 kHz
x dB Bandwidth	1.262 MHz

CH78


8DPSK Modulation

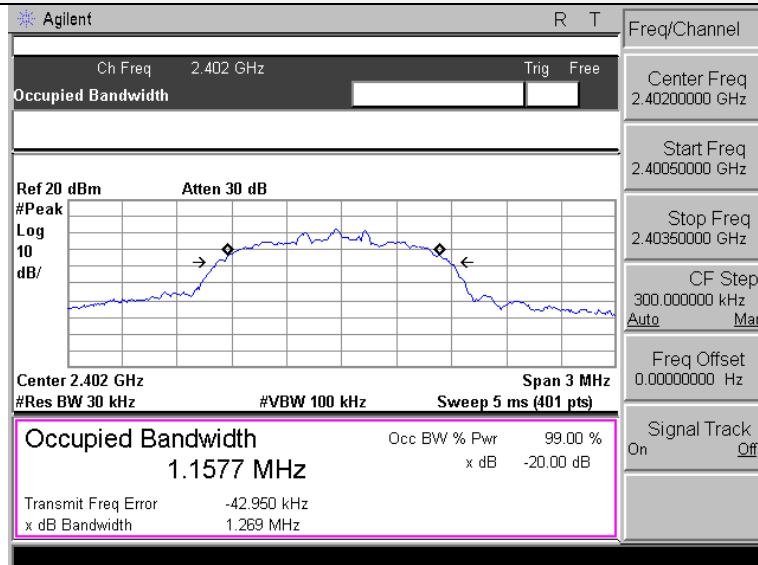

CH00

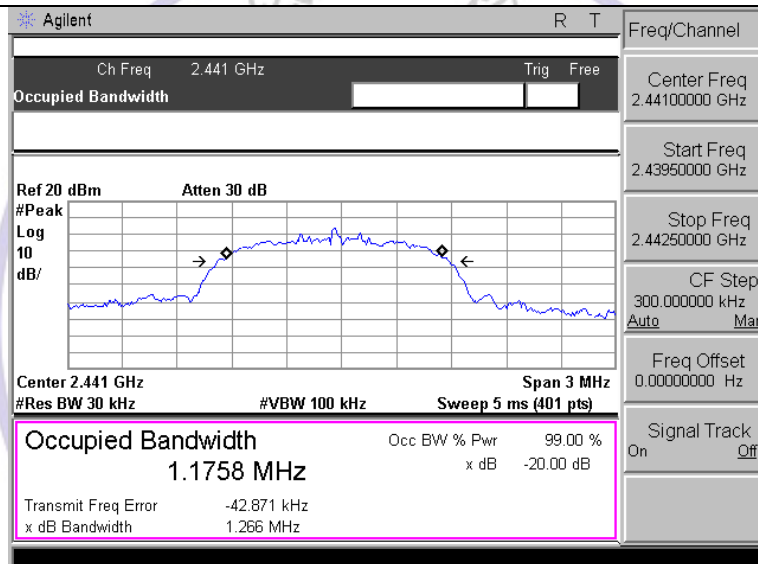

CH39

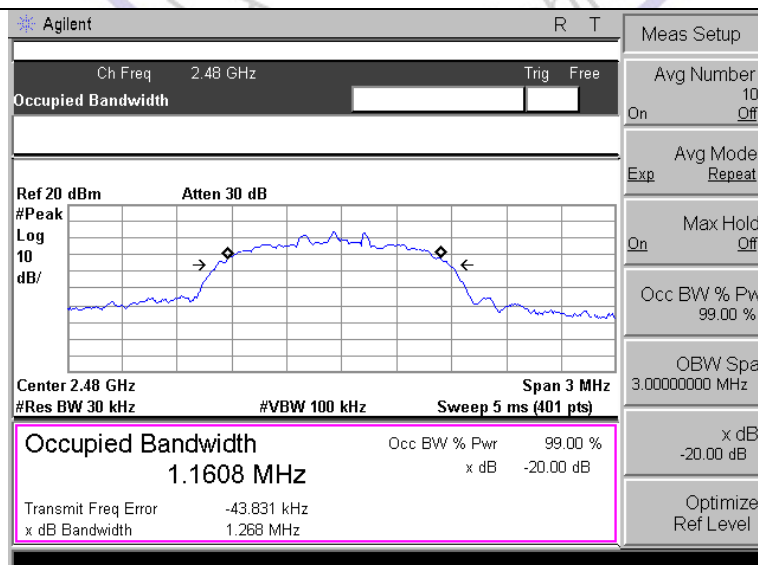

CH78

3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS



Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.000	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	0.930	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	0.990	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Note:


We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:

GFSK Modulation

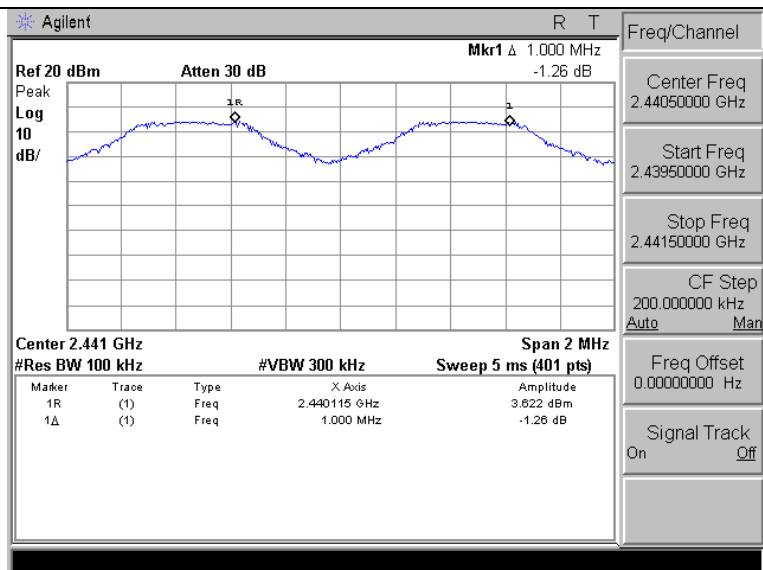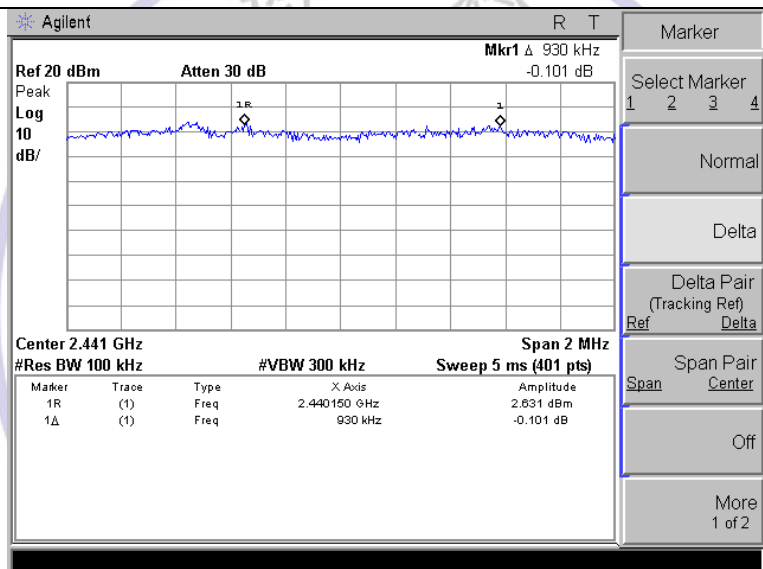 $\pi/4$ DQPSK Modulation

8DPSK Modulation

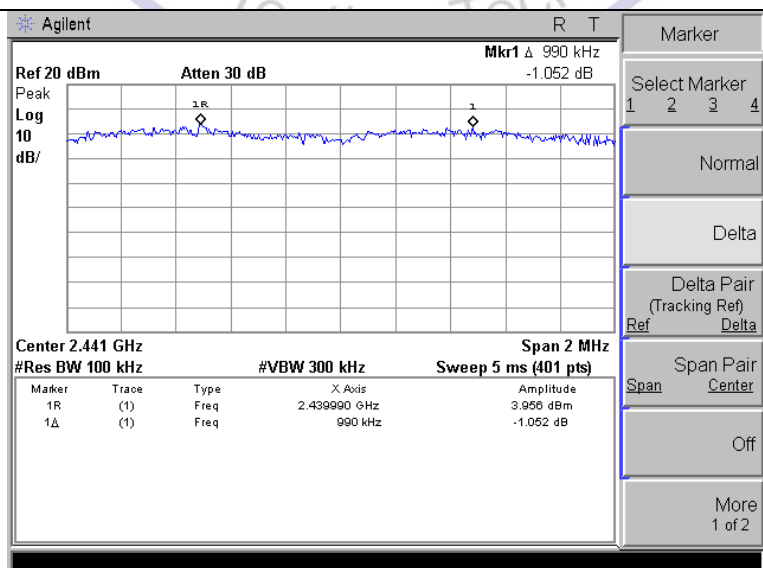

3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration




Test Results


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8DPSK	79		

Test plot as follows:


GFSK Modulation

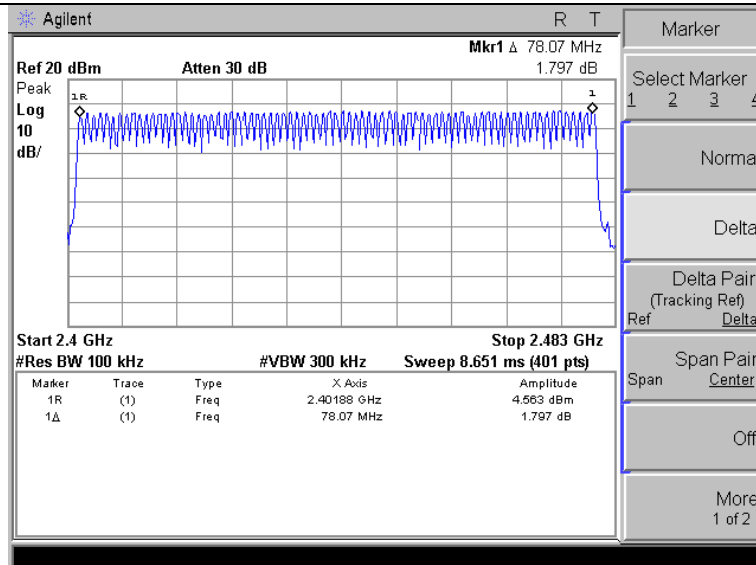

$\pi/4$ DQPSK Modulation

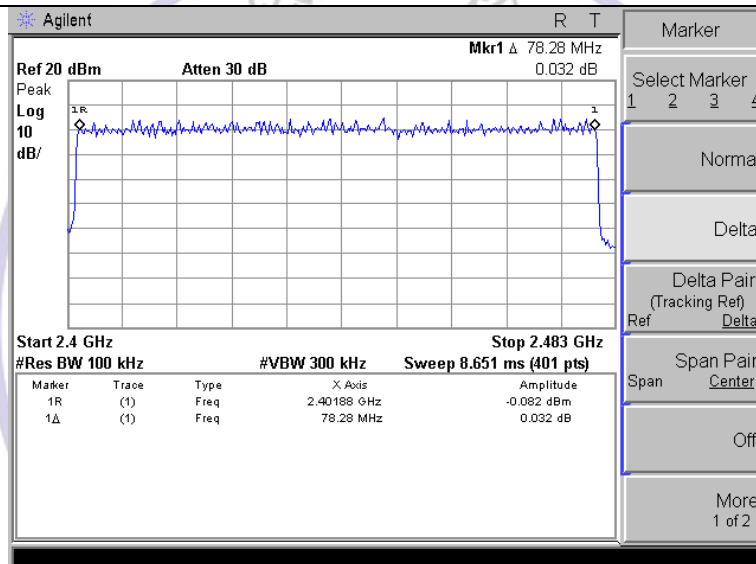

8DPSK Modulation

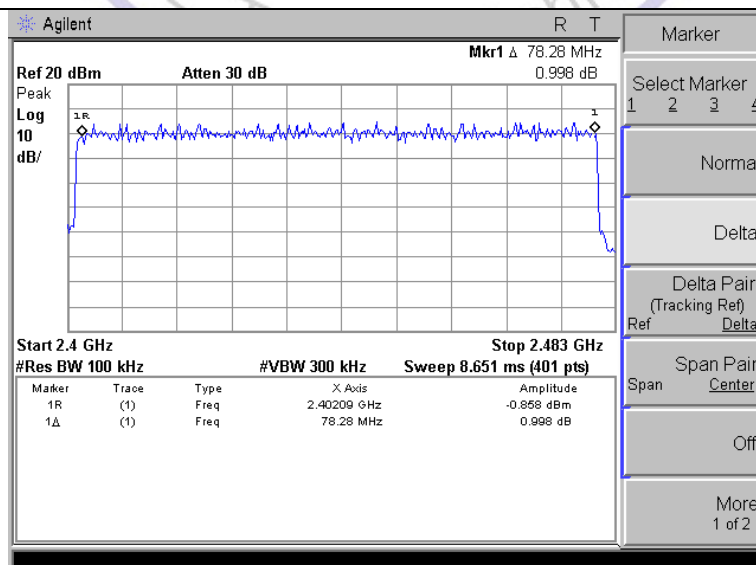

3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration




Test Results

Modulation	Packet	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.340	0.109	0.40	Pass
	DH3	1.631	0.261		
	DH5	2.850	0.304		
π/4DQPSK	2-DH1	0.390	0.125	0.40	Pass
	2-DH3	1.612	0.258		
	2-DH5	2.906	0.310		
8DPSK	3-DH1	0.390	0.125	0.40	Pass
	3-DH3	1.612	0.258		
	3-DH5	2.875	0.307		

Note:

- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6 \text{ Second}$ for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6 \text{ Second}$ for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6 \text{ Second}$ for DH5, 2-DH5, 3-DH5

Test plot as follows:

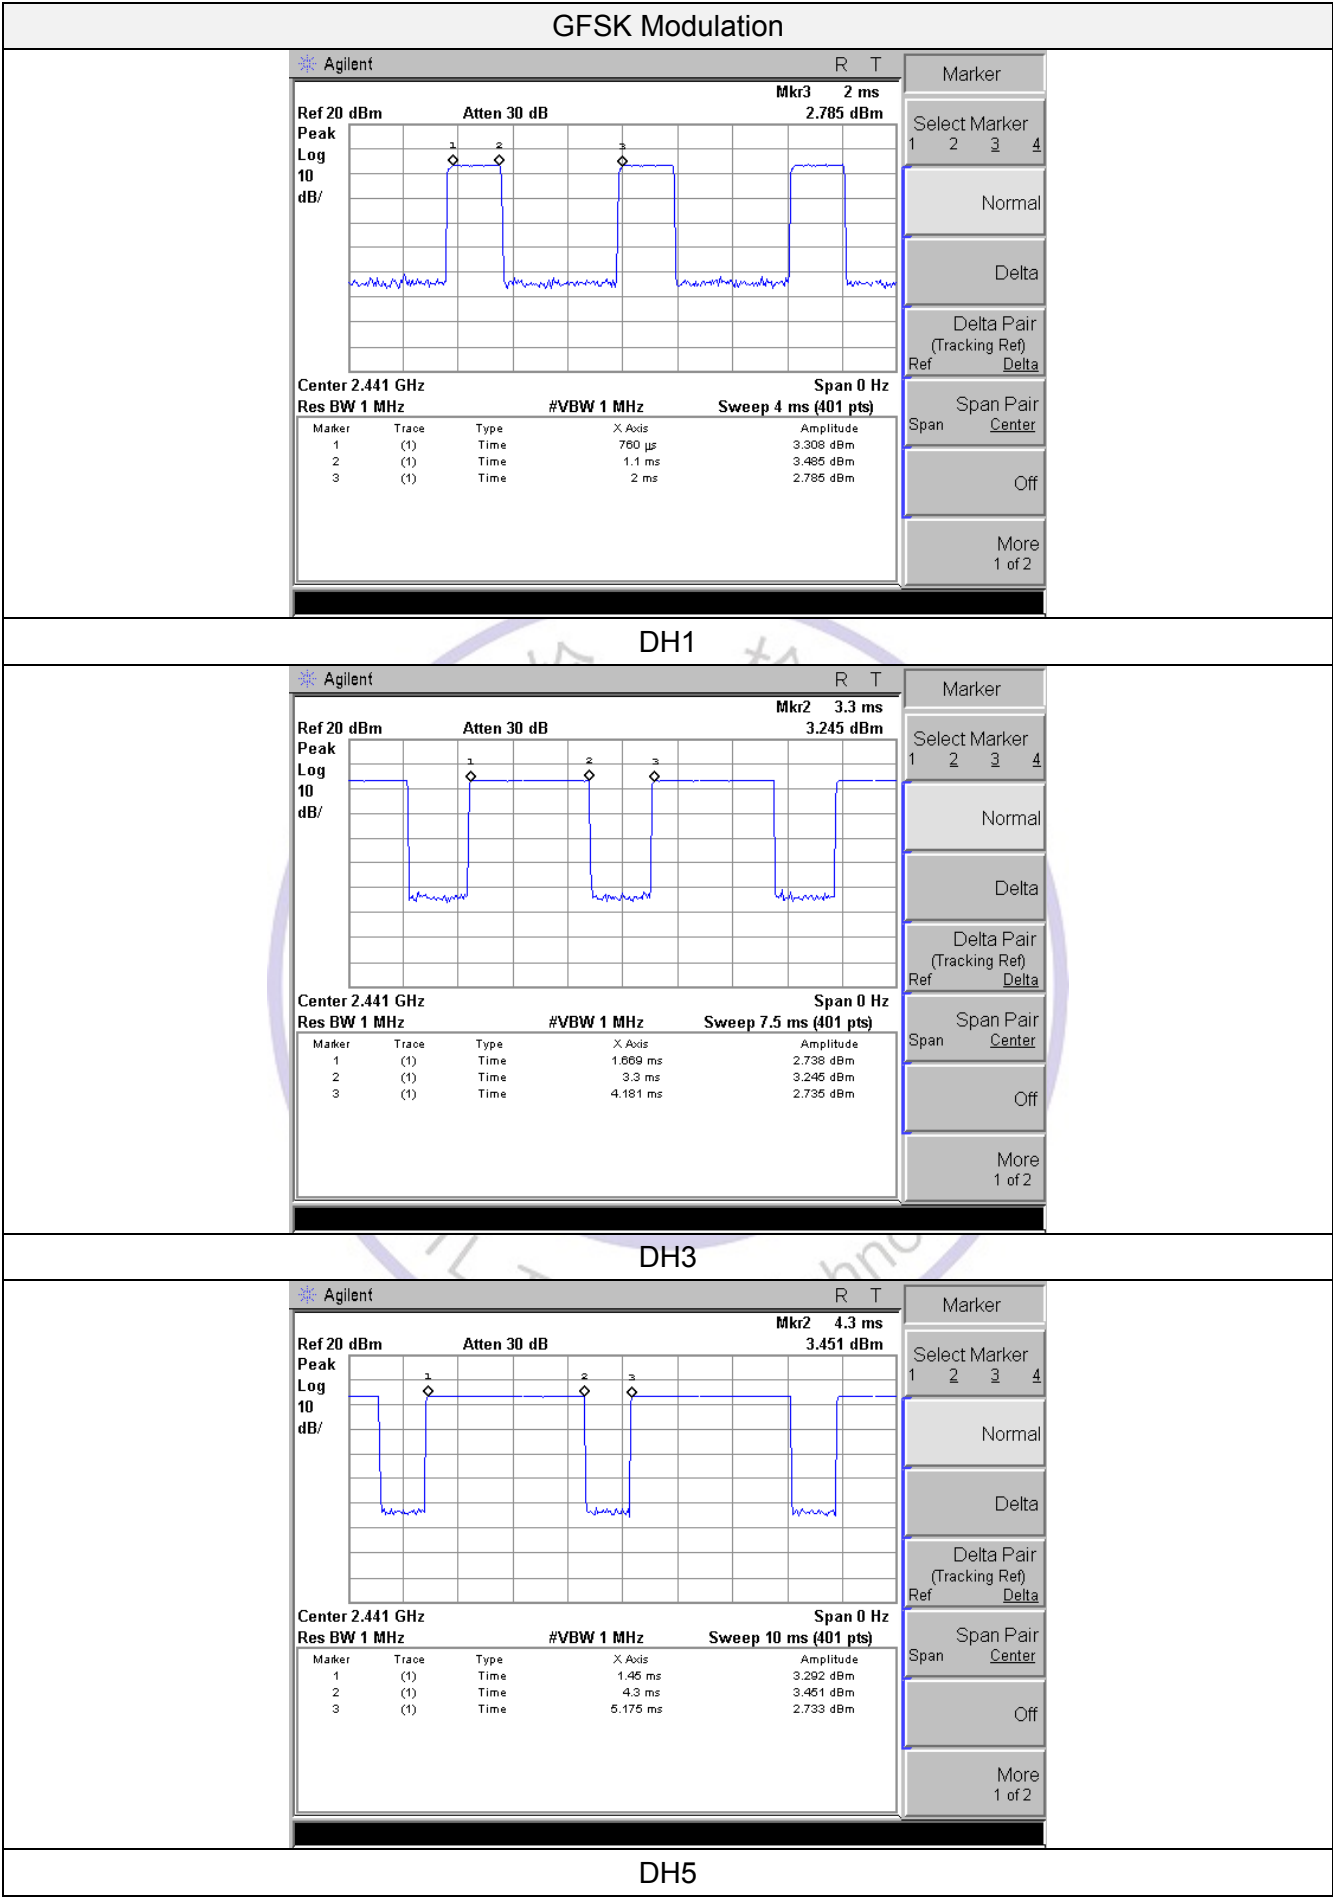

Agilent

Ref 20 dBm Atten 30 dB Mkr1 1.89 ms 1.56 dBm

Peak

Log

10

dB/

Center 2.441 GHz Span 0 Hz

Res BW 1 MHz #VBW 1 MHz Sweep 4 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	1.89 ms	1.56 dBm
2	(1)	Time	2.28 ms	3.49 dBm
3	(1)	Time	3.13 ms	1.574 dBm

Marker

Select Marker

1 2 3

Normal

Delta

Delta Pair (Tracking Ref)

Ref Delta

Span Pair

Span Center

Off

More

1 of 2

Agilent

Ref 20 dBm Atten 30 dB

Mkr3 5.156 ms 2.721 dBm

Peak Log 10 dB/

Center 2.441 GHz Span 0 Hz

Res BW 1 MHz #VBW 1 MHz Sweep 7.5 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	2.663 ms	3.265 dBm
2	(1)	Time	4.275 ms	3.867 dBm
3	(1)	Time	5.156 ms	2.721 dBm

Agilent

Ref 20 dBm

Peak Log 10 dB/

Atten 30 dB

Mkr3 5.712 ms

3.284 dBm

Center 2.441 GHz

Res BW 1 MHz

#VBW 1 MHz

Sweep 10 ms (401 pts)

Span 0 Hz

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	1.896 ms	2.758 dBm
2	(1)	Time	4.802 ms	3.955 dBm
3	(1)	Time	5.712 ms	3.284 dBm

Agilent

Sweep

Sweep Time 10.00 ms

Single


Auto Sweep

Coupling


SR

2-DH5


8DPSK Modulation

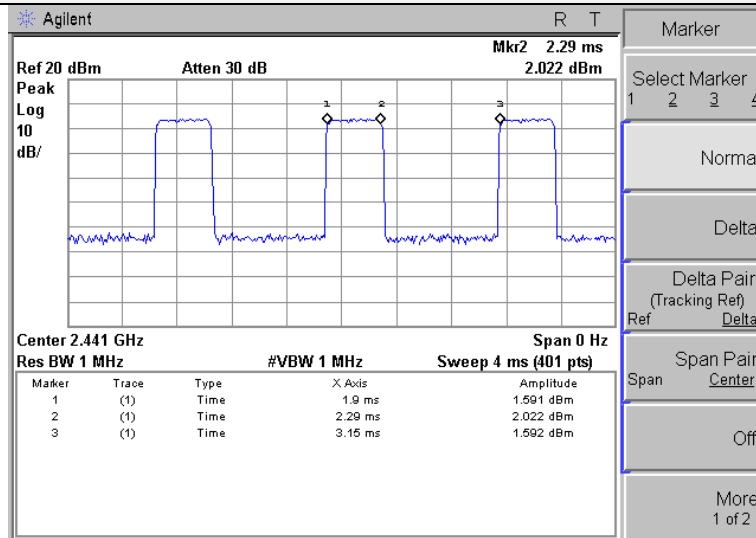

3-DH1

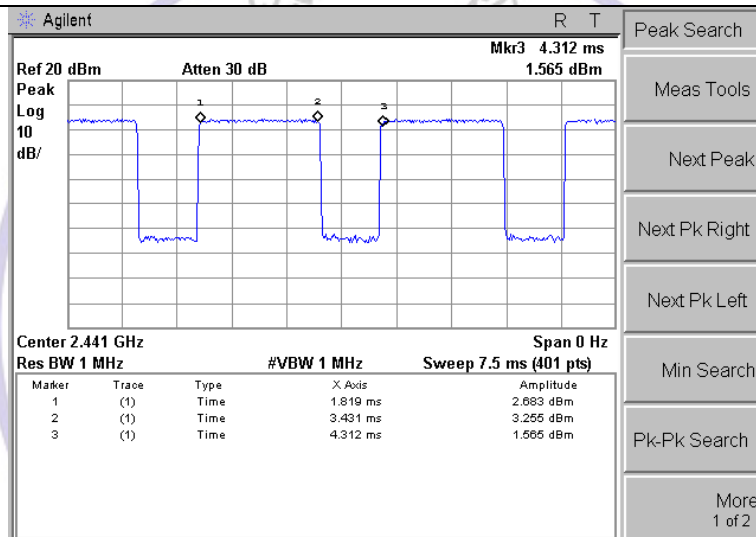

3-DH3

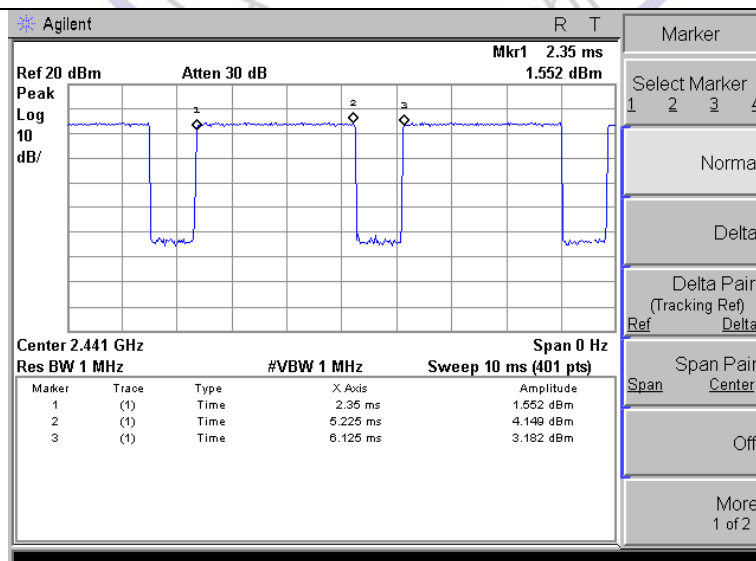

3-DH5

3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration





Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5


Test plot as follows:


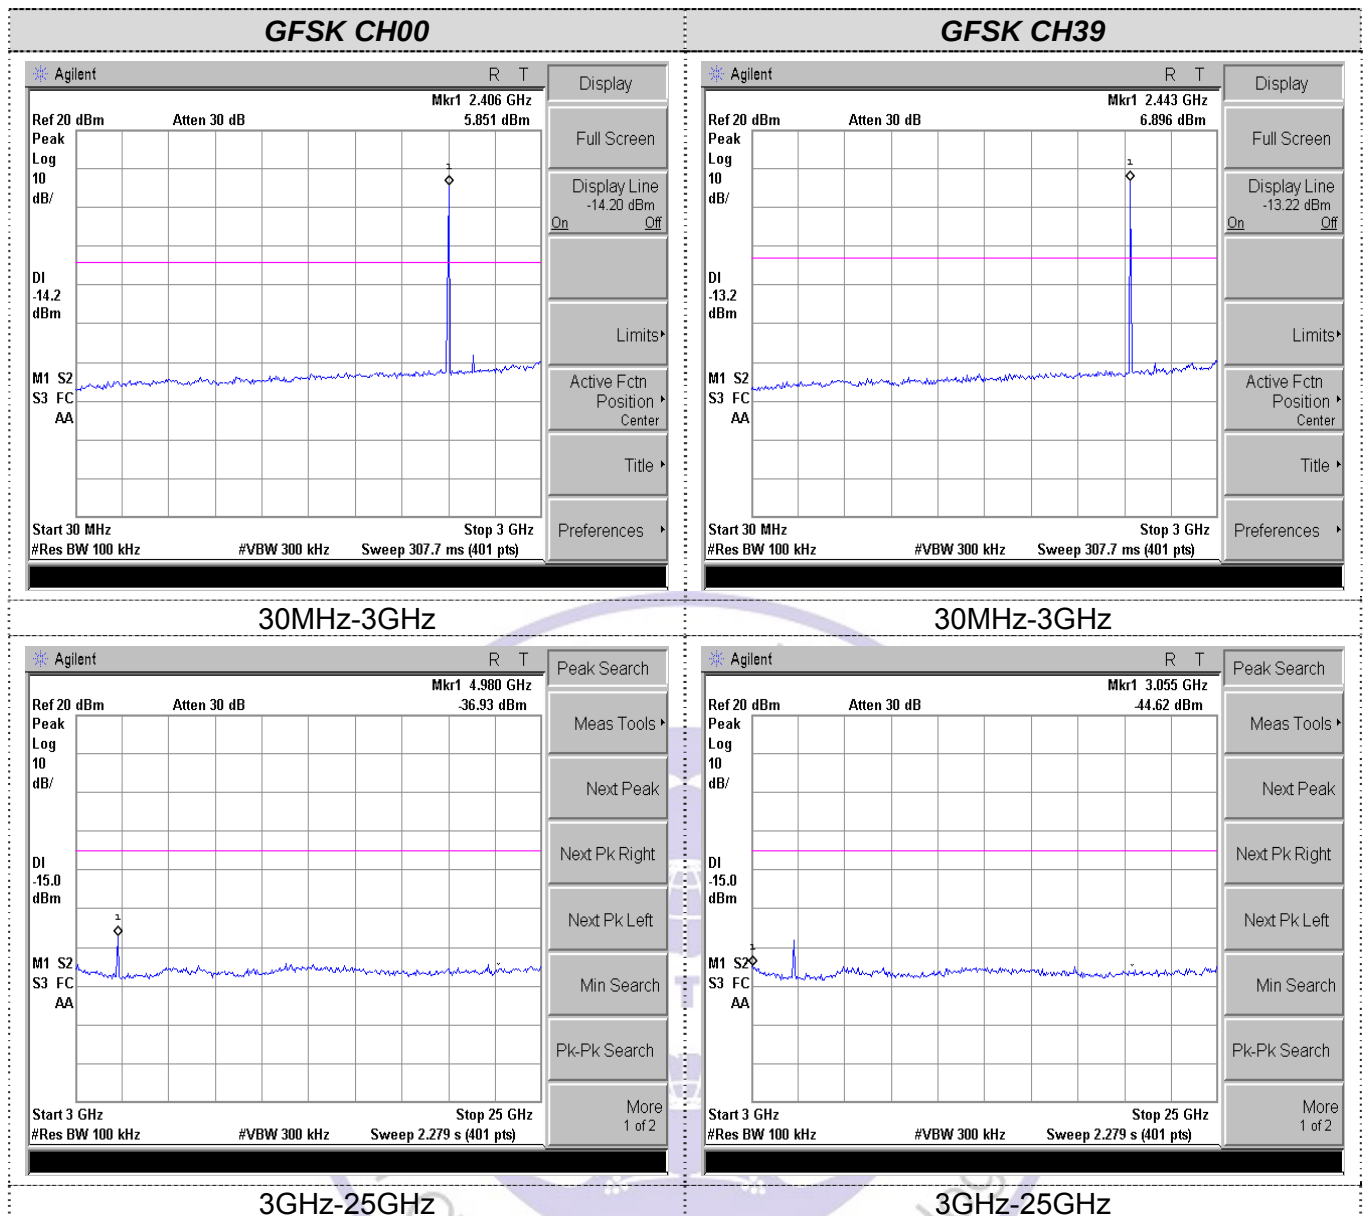


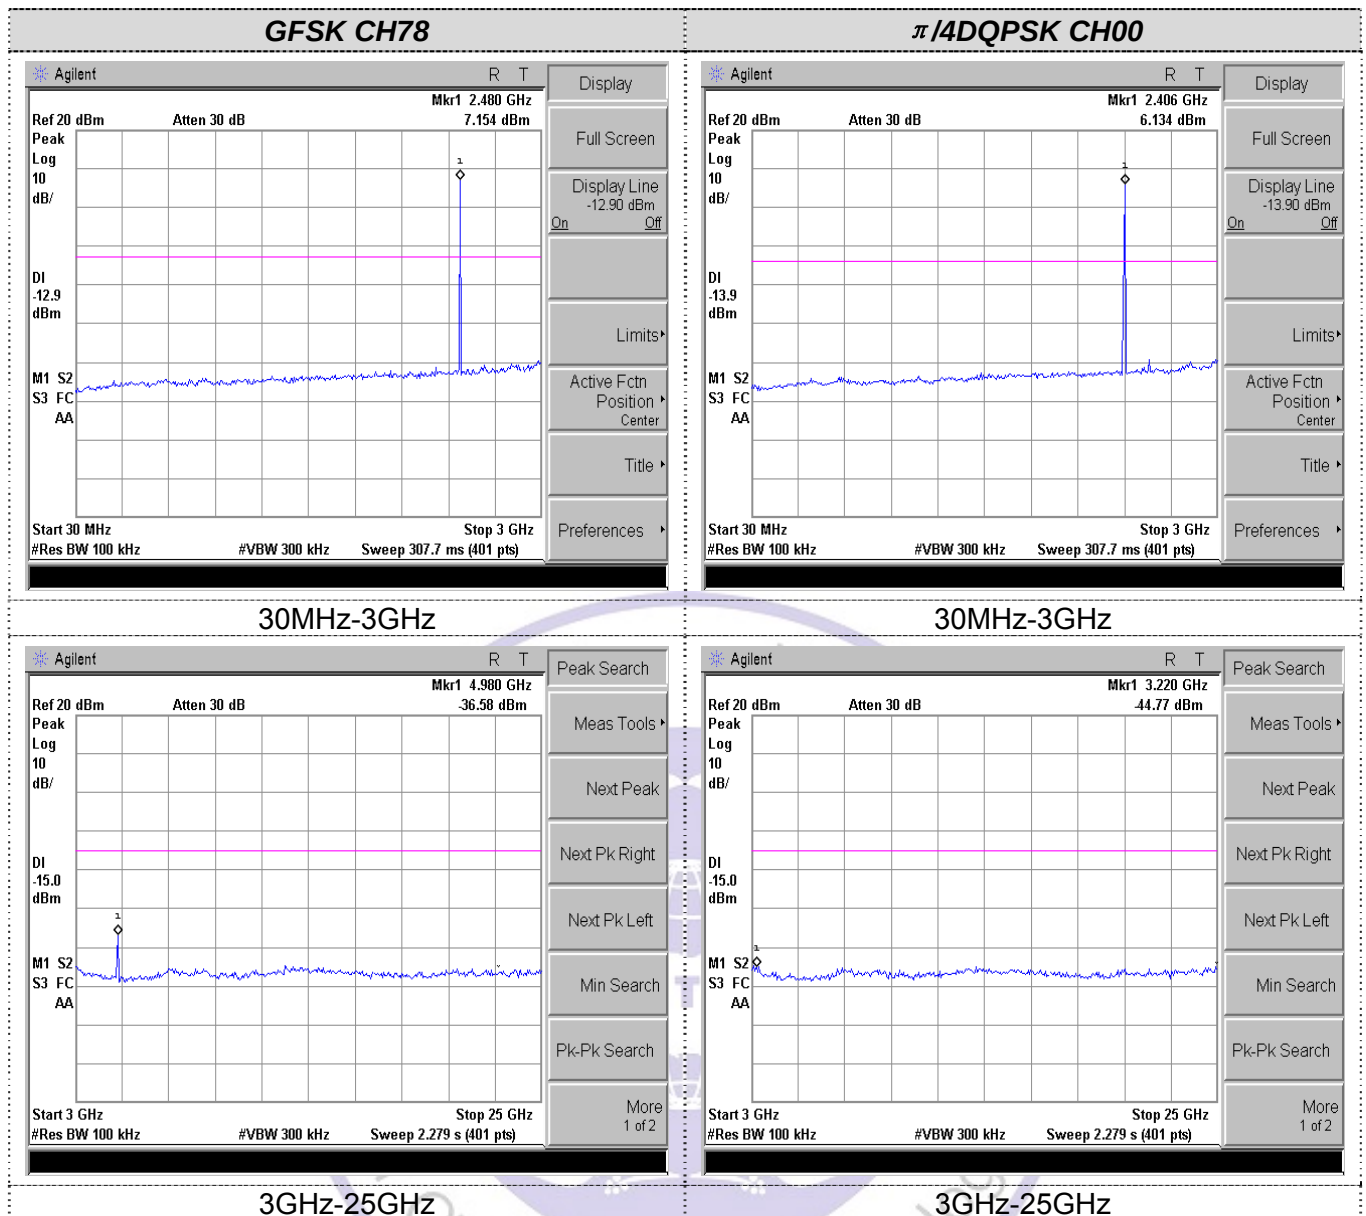

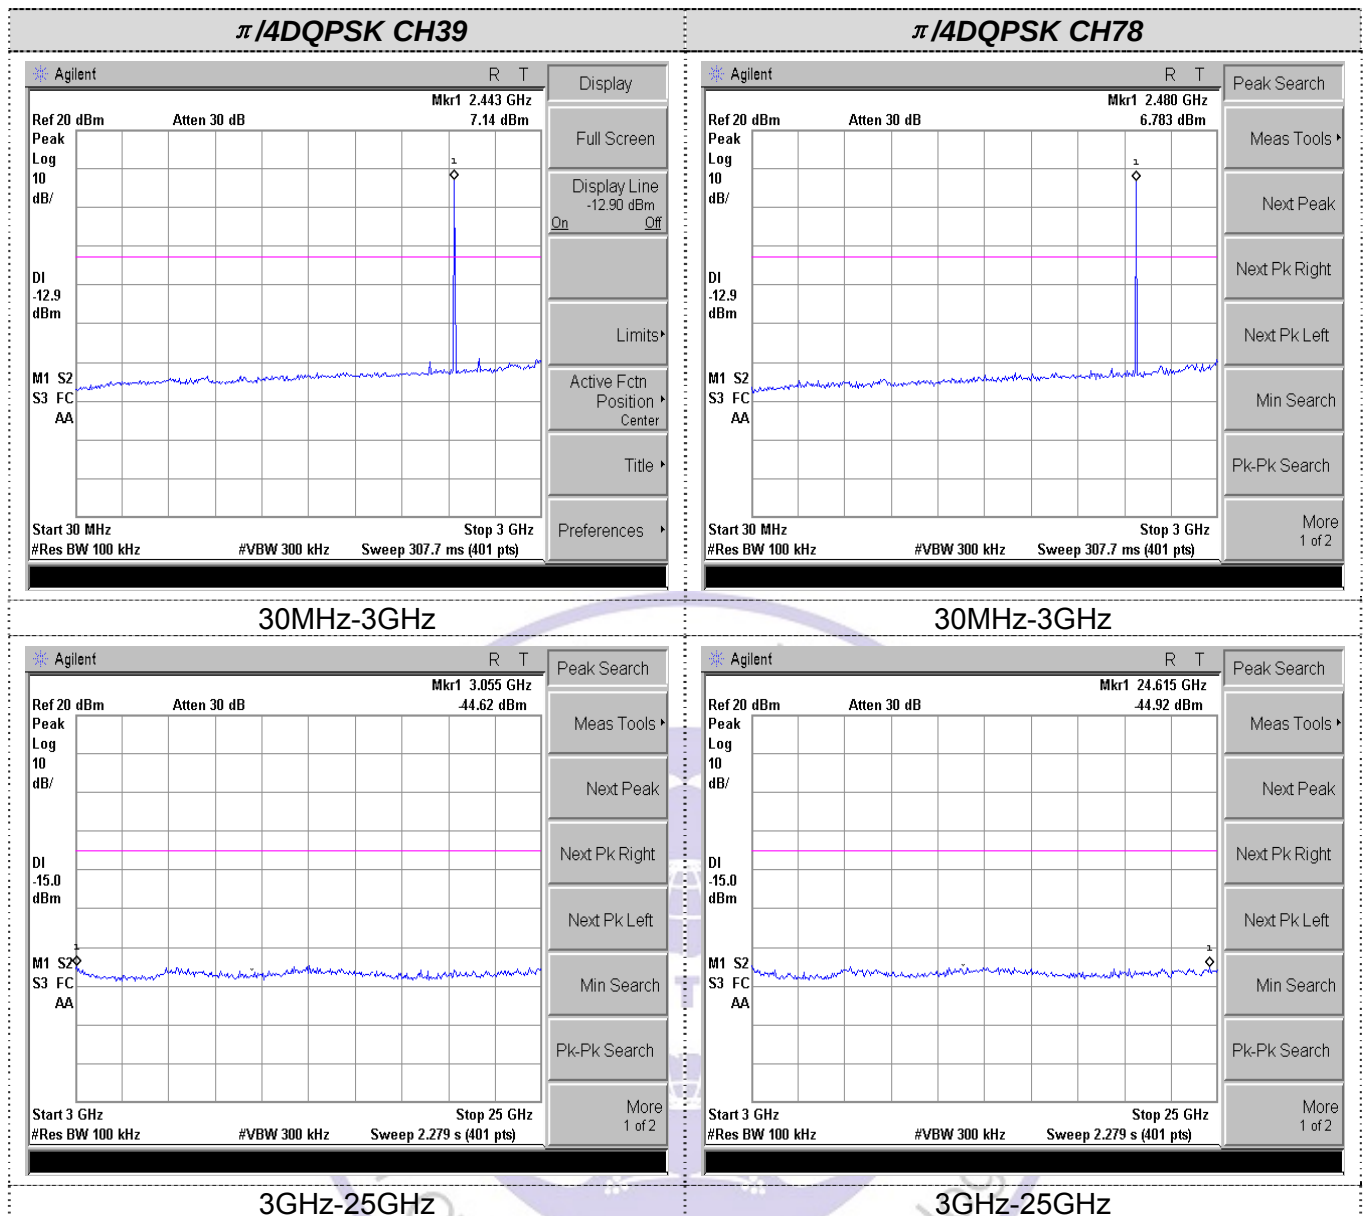


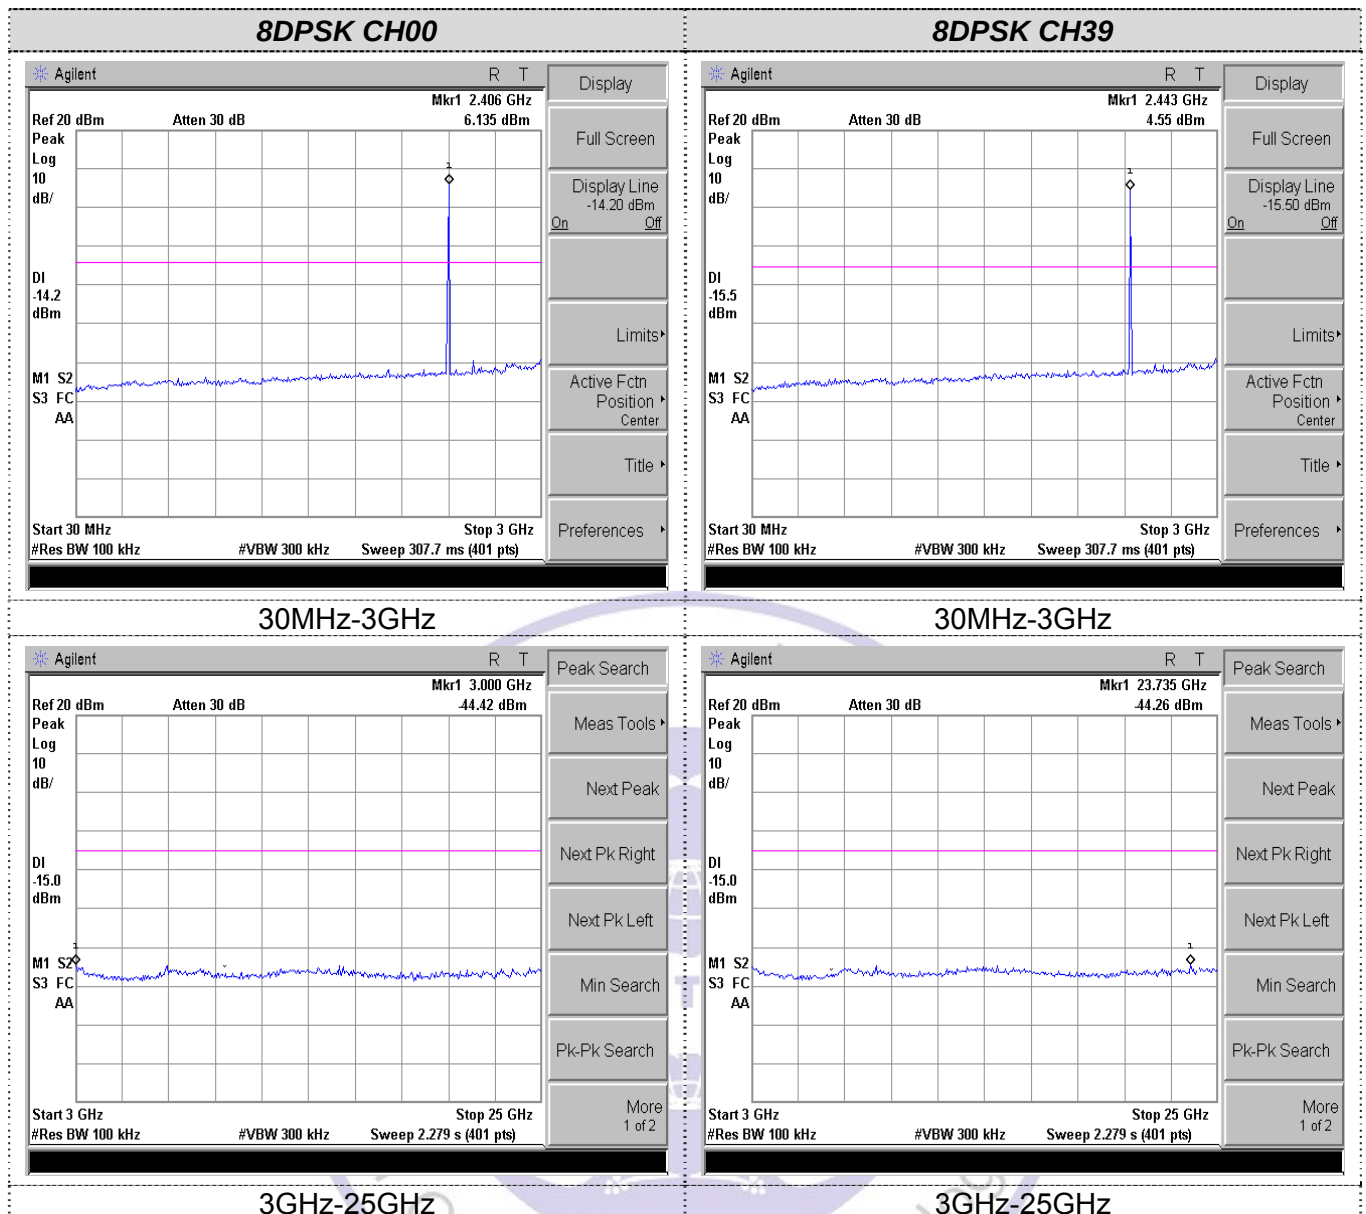


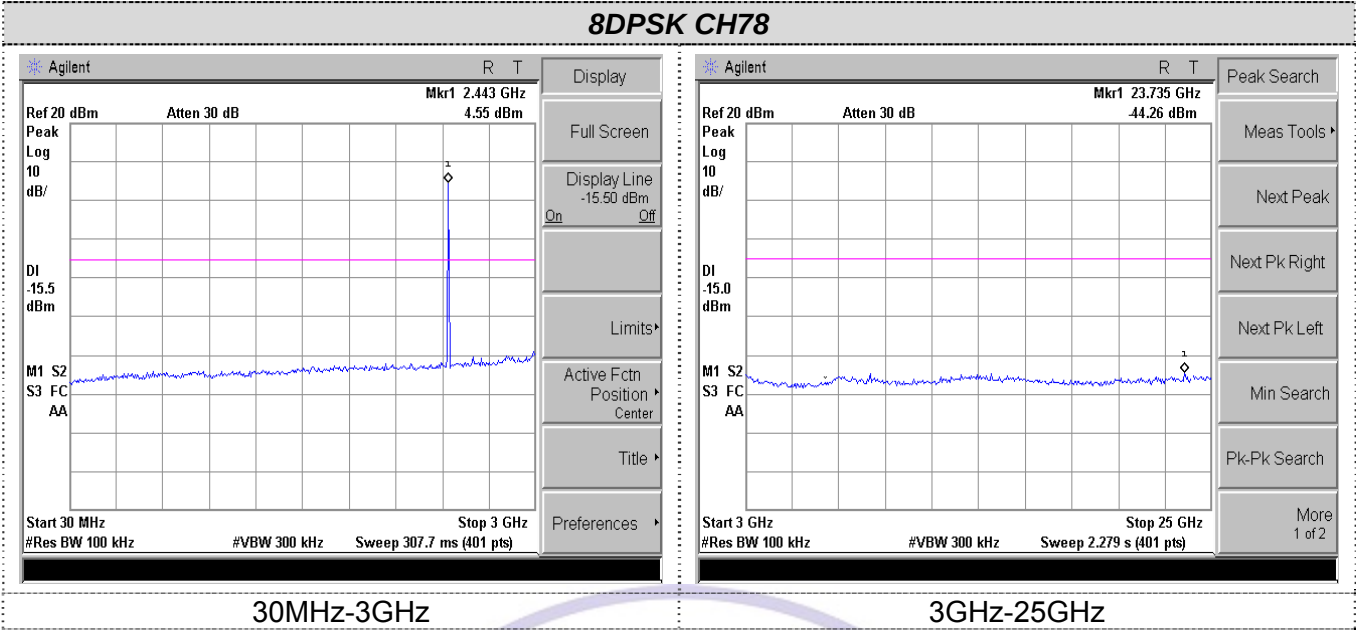

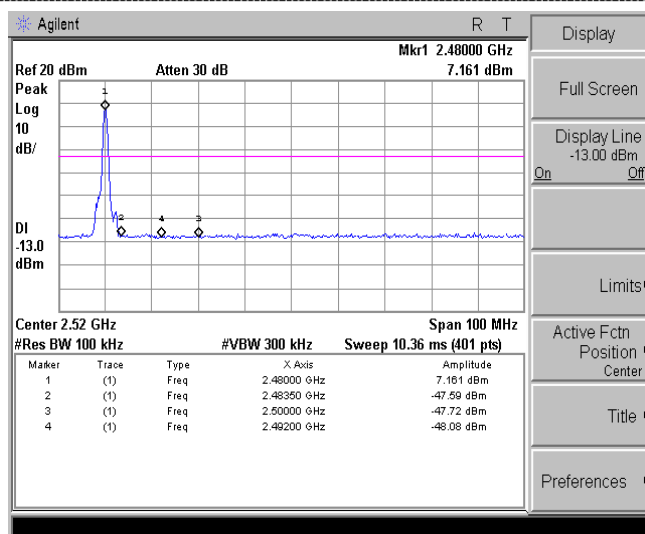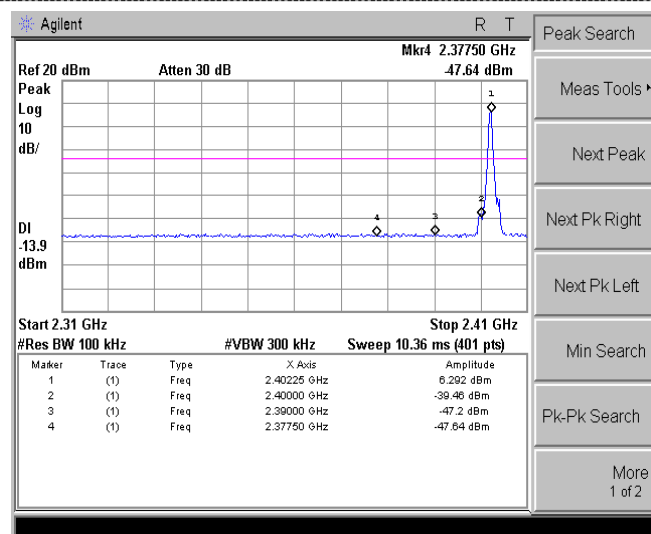Band-edge Measurements for RF Conducted Emissions:**GFSK**



Left Band edge hopping off

Right Band edge hopping off

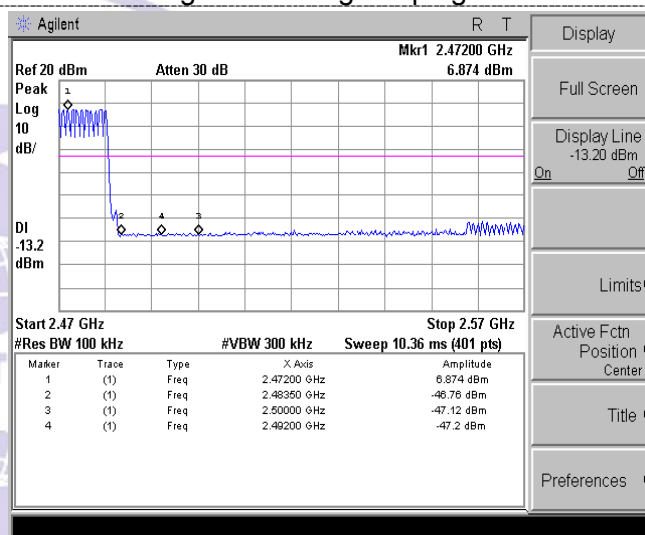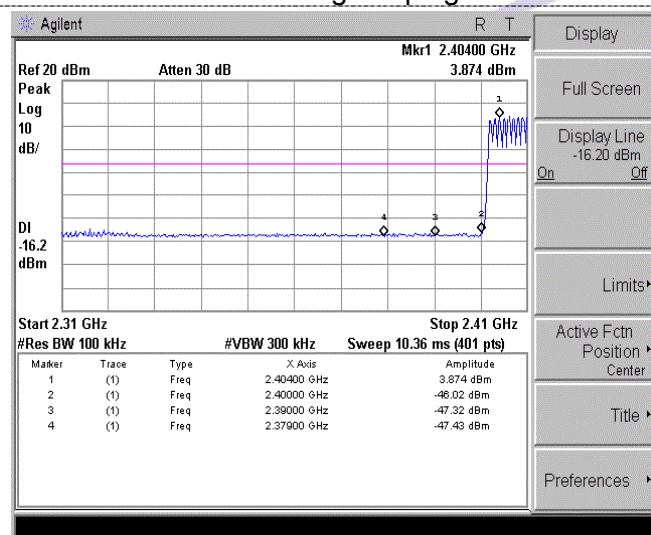


Left Band edge hopping on

Right Band edge hopping on

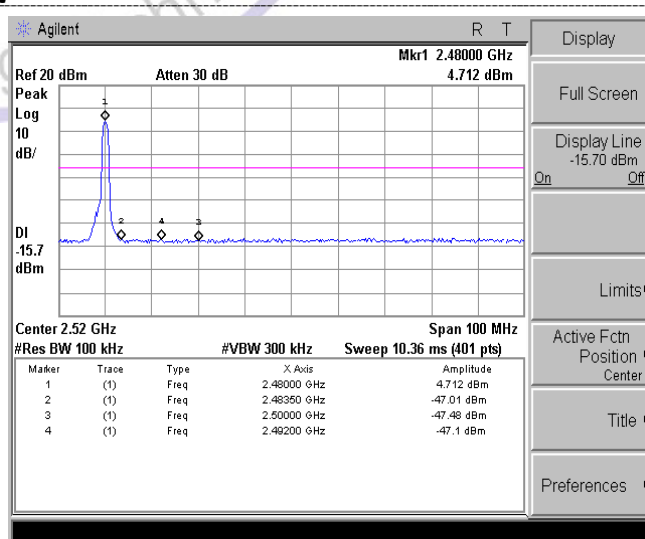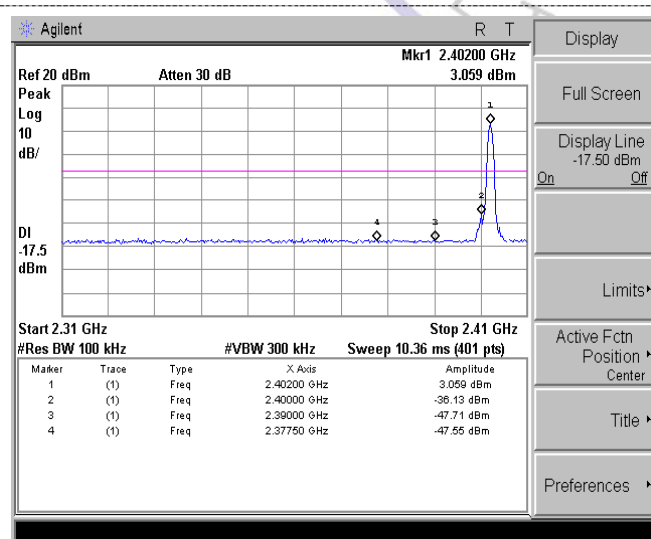
 $\pi/4$ DQPSK

Left Band edge hopping off

Right Band edge hopping off

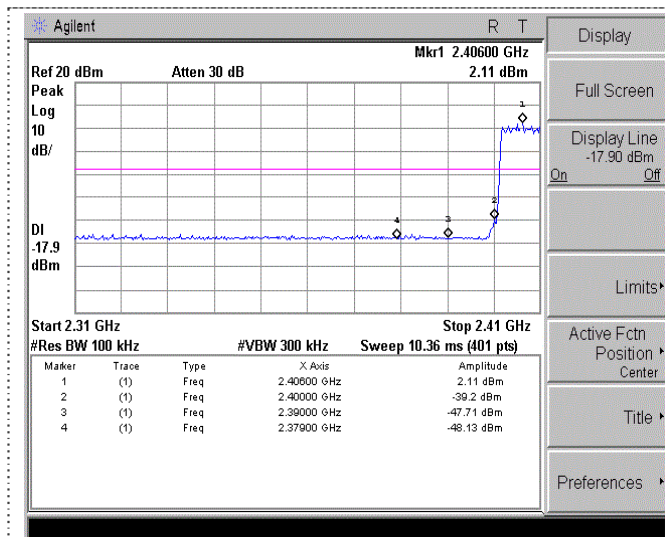


Left Band edge hopping on

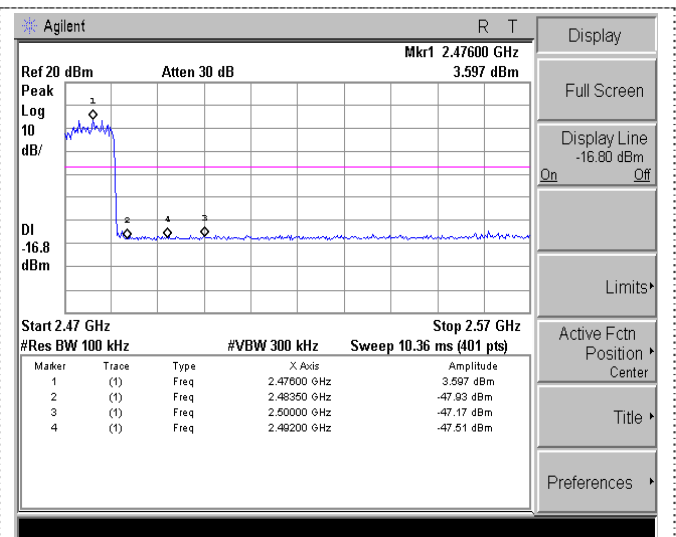


Right Band edge hopping on


8DPSK

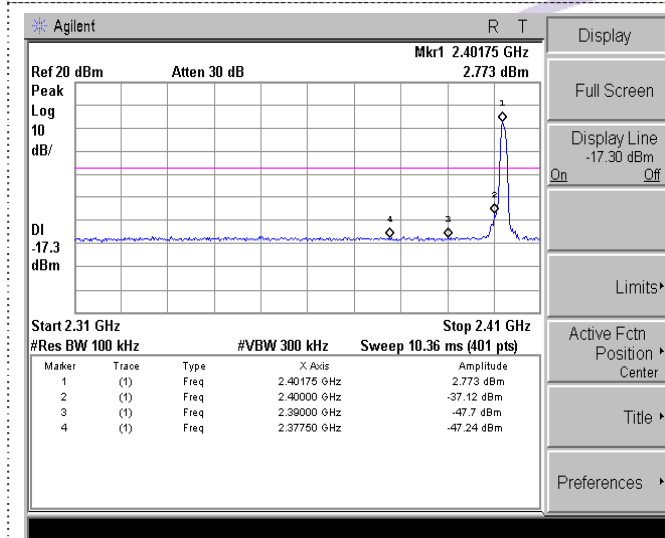


Left Band edge hopping off

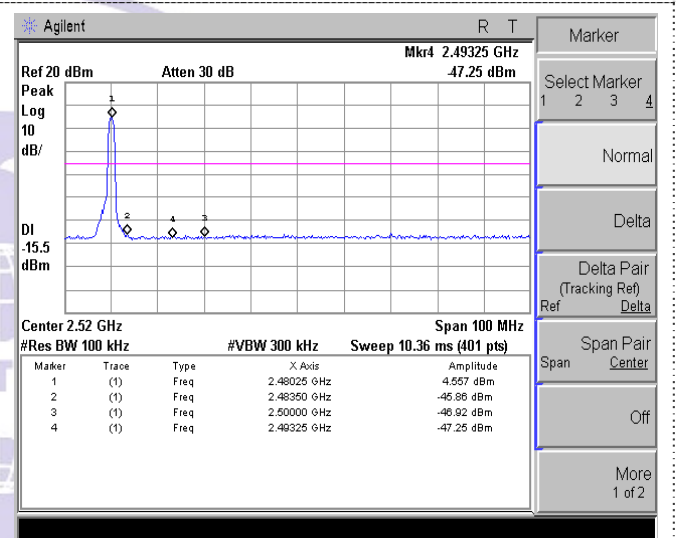

Right Band edge hopping off

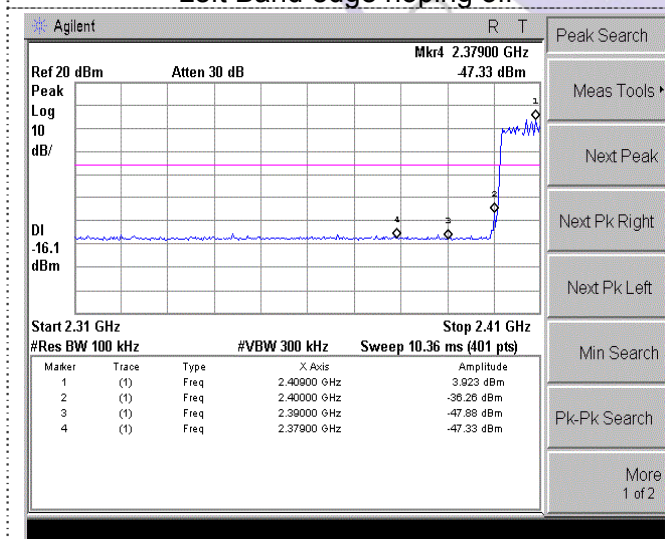

Left Band edge hopping on

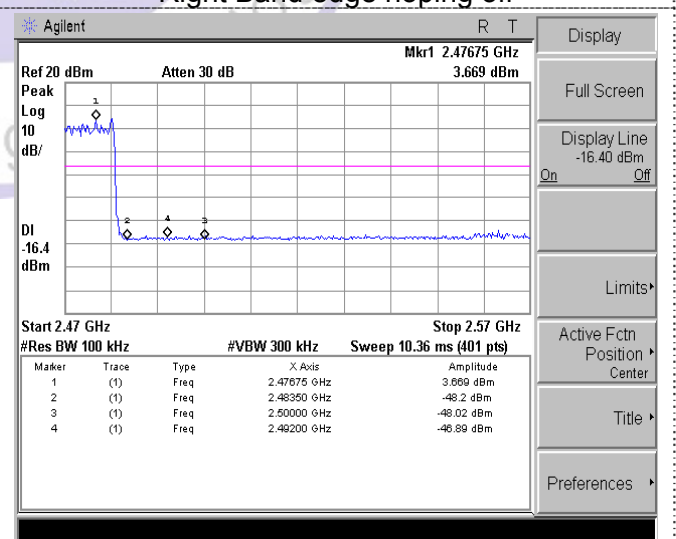

Right Band edge hopping on

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

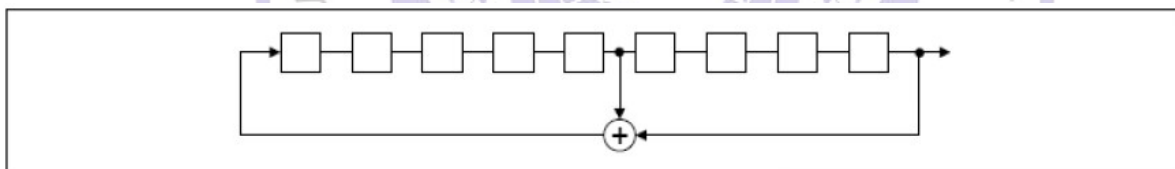

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

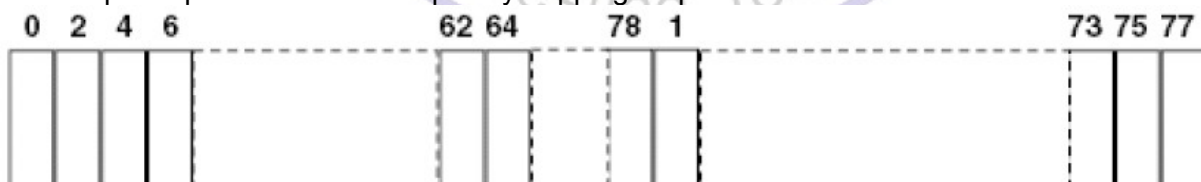

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 3dBi.







4. Test Setup Photos of the EUT




5. Photos of the EUT



BC870FNA with type 1 antenna: External rod antenna

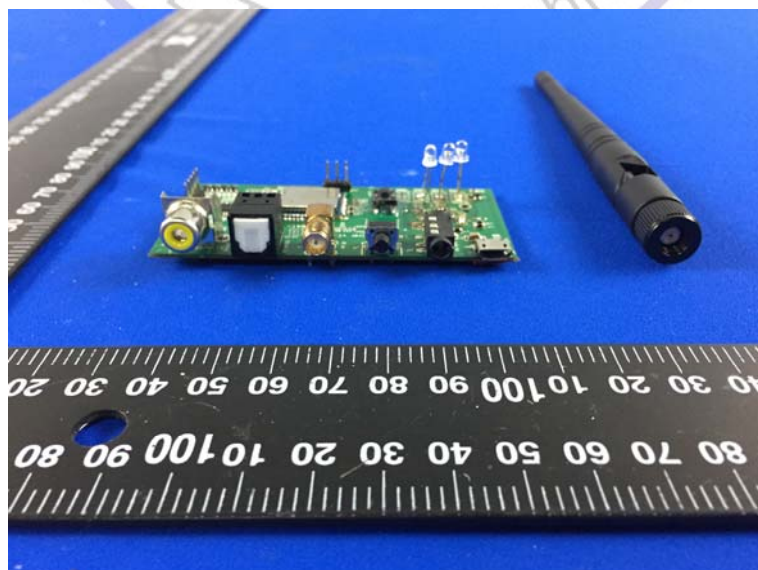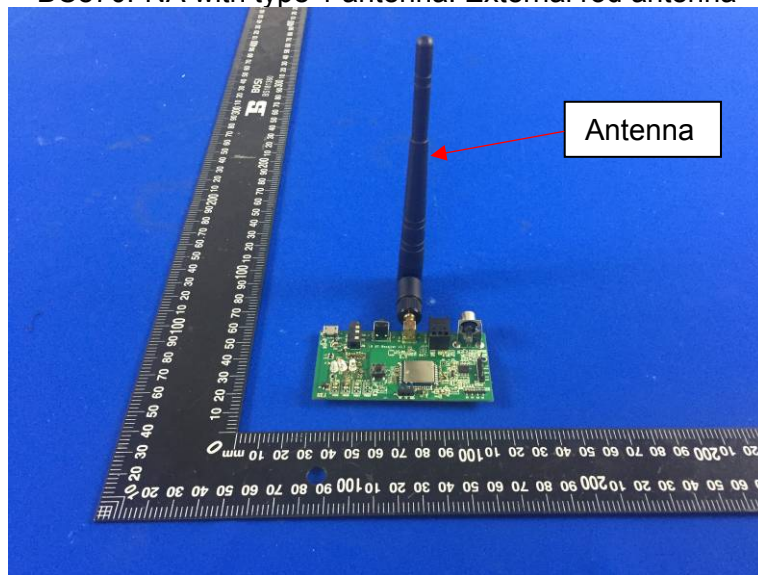

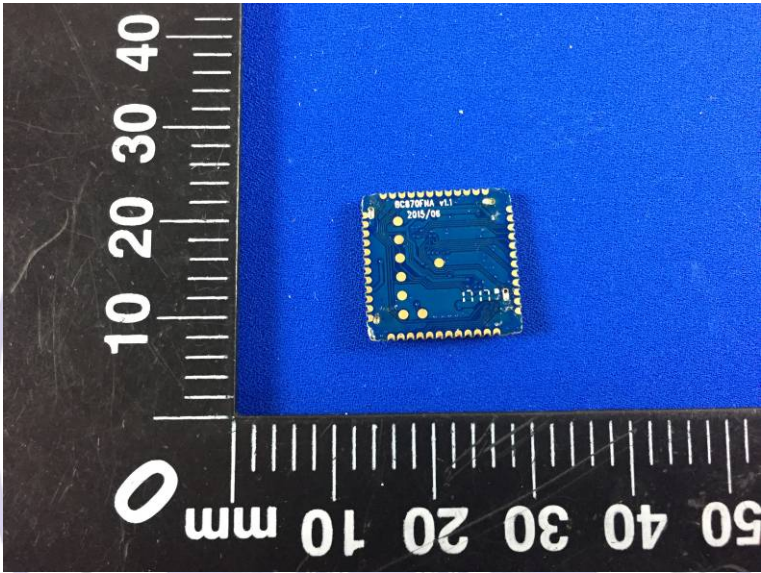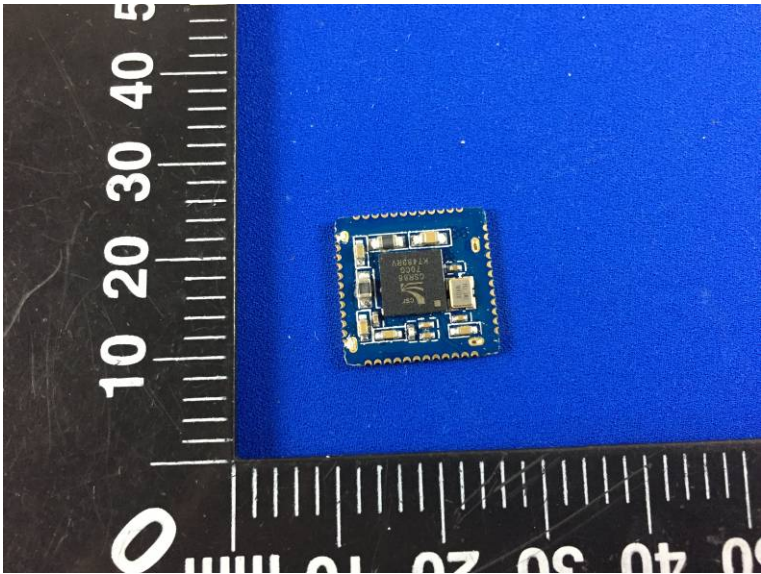




BC870FNA with type 2 antenna: Extend PCB antenna

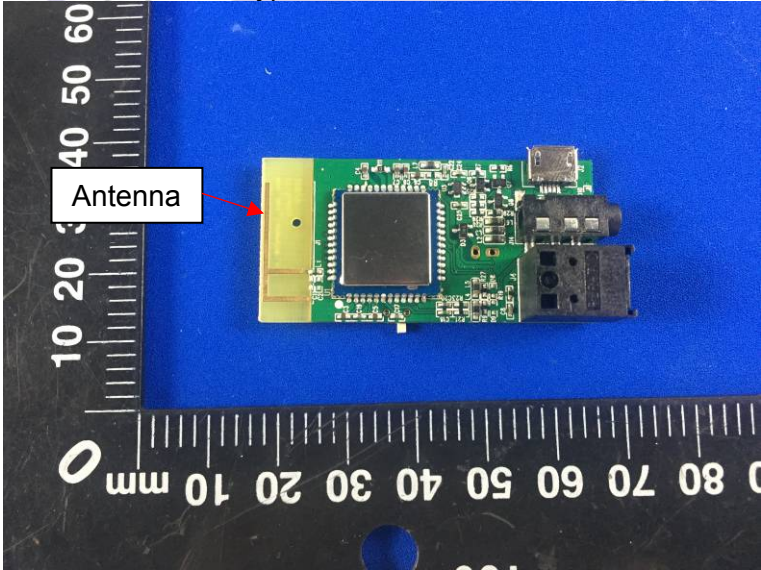

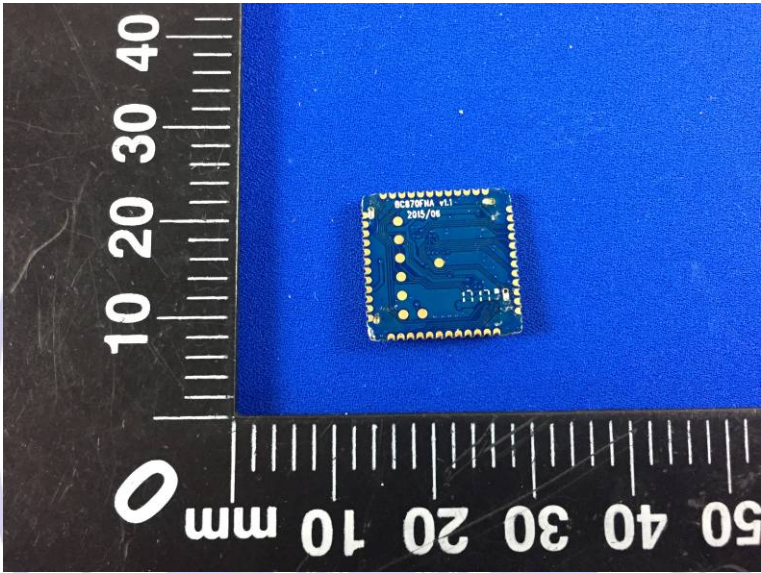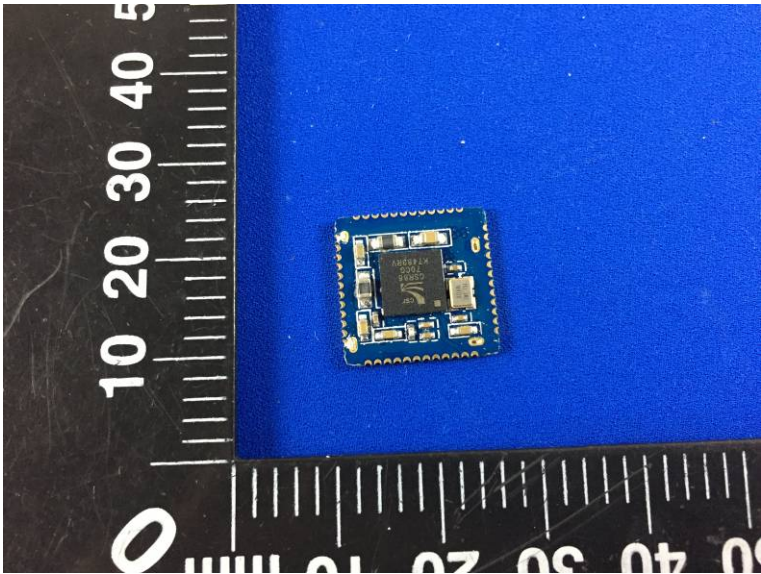

BC870FPA with type 3 antenna: On board PCB antenna

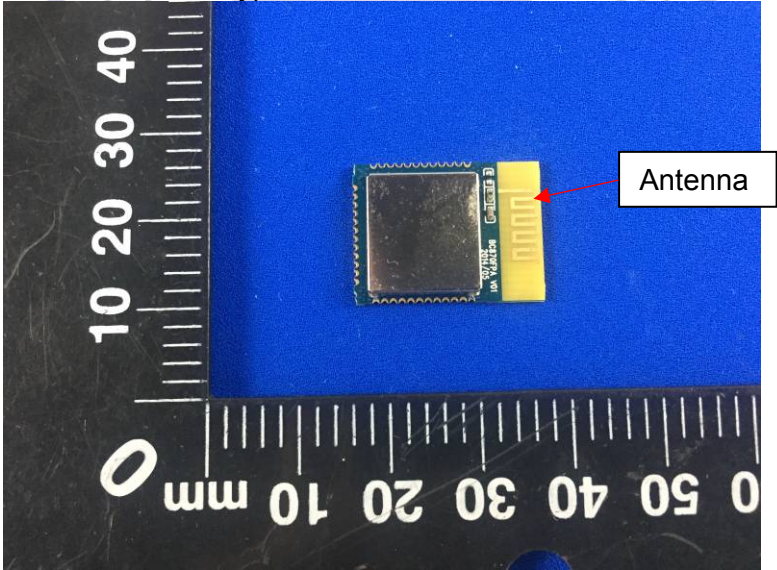

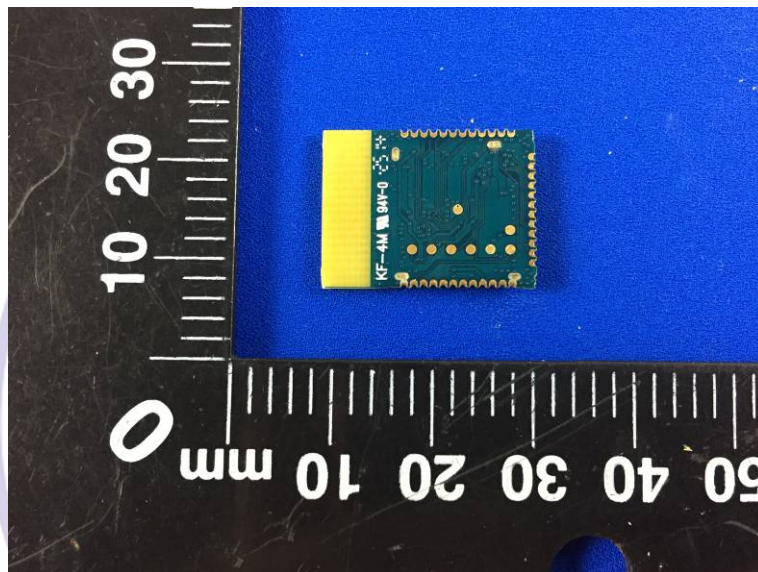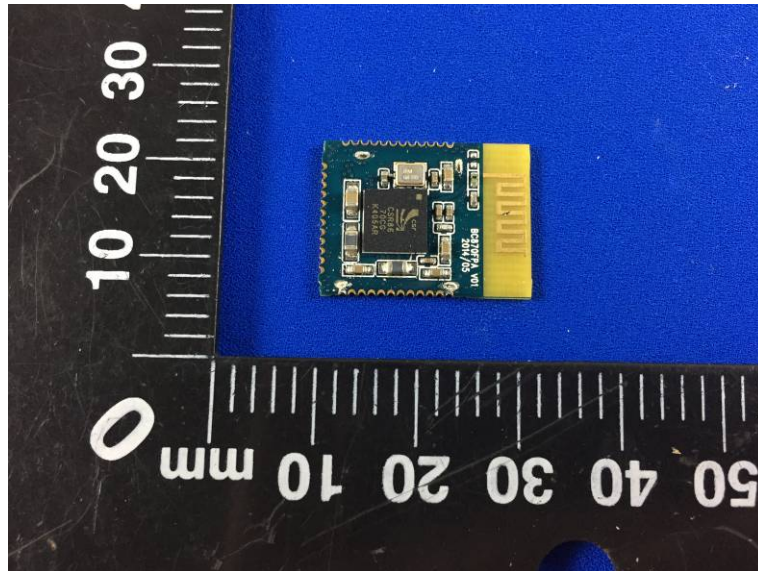

***** End of Report *****

CTL Testing Technology