

APPLICANT	MANUFACTURER
X-10 (USA), Inc. 400 Forge Way, Suite 412 Rockaway, NJ 07866-2033	X-10 Electronics Shenzhen Co. Ltd. X-10 Building Labour Industrial District Shenzhen, Xixiang, Bao An Guang Dong, China, 518102

TEST SPECIFICATION: FCC Rules and Regulations Part 15, Subpart C, Para. 15.231

TEST PROCEDURE: ANSI C63.4:1992

#### TEST SAMPLE DESCRIPTION

BRANDNAME: X-10 (USA), Inc.

MODEL: UR85A

TYPE: Pulsed Transmitter

POWER REQUIREMENTS: 6 VDC derived from (4) new “AAA” 1.5 VDC Batteries

FREQUENCY OF OPERATION: 310 MHz

#### TESTS PERFORMED

Para. 15.231(b)(1), Radiated Emissions, Fundamental and Harmonics

Para. 15.231(c), Radiated Emissions, Spurious Case

Para. 15.35, Duty Cycle Determination

Para. 15.231(c), Occupied Bandwidth

#### REPORT OF MEASUREMENTS

Applicant: X-10 (USA), Inc.

Device: Pulsed Transmitter

FCC ID: B4SUR85A

Power Requirements: 6 VDC derived from (4) new “AAA” 1.5 VDC Batteries

Applicable Rule Section: Part 15, Subpart C, Section 15.231

## REPORT OF MEASUREMENTS (continued)

### TEST RESULTS

15.231 (a): This device is used as a remote control transmitter.

15.231 (a)(1) & 15.231(a)(2): The transmitter is manually operated and ceases transmission within 5 seconds after deactivation.

15.231 (a)(3): The transmitter does not perform periodic transmissions.

15.231 (b): The fundamental field strength did not exceed 5833  $\mu$ V/M (Average) at a test distance of 3 meters. In addition, the requirements of section 15.35 for averaging pulsed emissions and for limiting peak emissions were met.  
The field strength of harmonic and spurious emissions did not exceed 583  $\mu$ V/M (AVERAGE).

### DETERMINATION OF FIELD STRENGTH LIMITS

The field strength limits shown below are found in Section 15.231.

Frequency	Limit
F1 = 260	3750 = L1
Fo = 312	Lo
F2 = 470	12500 = L2

The formula below was utilized to determine the limits:

$$\text{Limit} = L1 + [(Fo-F1)(L2-L1)/(F2-F1)]$$

Solving yields:

Fundamental Limit = 5833  $\mu$ V/M (AVERAGE) @ 3 Meters

Harmonic Limit = 583  $\mu$ V/M (AVERAGE) @ 3 Meters

## REPORT OF MEASUREMENTS (continued)

### DUTY CYCLE DETERMINATION

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information)

Transmitter On Time	=	16.6 milliseconds (maximum- per cycle)
Transmitter Cycle Time	=	47.7 milliseconds
Transmitter Duty Cycle	=	34.8 %

### CALCULATION:

1 Large Pulse	=	4.0 milliseconds
21 x 600 $\mu$ s (small pulse)	=	12.6 milliseconds
4.0 + 12.6	=	16.6 milliseconds
Cycle Time	=	47.7 milliseconds
Duty Cycle	=	$16.6 / 47.7 = 34.8 \%$
Correction Factor = $20 \log(0.348)$	=	-9.2

### SPECTRUM ANALYZER DESENSITIZATION CONSIDERATIONS

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 600 $\mu$ s yields a minimum required bandwidth of 1.11 kHz. FCC specified bandwidths of 100kHz and 1MHz were utilized below and above 1GHz, respectively.

## GENERAL NOTES

1. All readings were taken utilizing a peak detector function at a test distance of 3 meters.
2. The duty cycle was applied to the peak readings in order to determine the average value of the emissions.
3. The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not reported were more than 20 dB below the specified limit.

## EQUIPMENT LIST

### FCC15.231 Compliance Testing

<b>EN</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Model No.</b>	<b>Cal Date</b>	<b>Due Date</b>
067	Open Area Test Site	Retlif	3 Meter	RNY	9/20/00	9/20/03
128C	Double Ridge Guide	Eaton Corporation	1 GHz - 18 GHz	96001	9/18/00	9/18/01
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	6/13/01	6/13/02
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	7/2/01	1/2/02
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	3/5/01	3/5/02
141B	Quasi-Peak Adaptor	Hewlett Packard	100 Hz - 1 GHz	85650A	2/20/01	1/2/02
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	6/13/01	6/13/02
523	Biconilog	Electro-Mechanics	26 - 2000 MHz	3142B	6/8/00	9/8/01
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	6/27/01	6/27/02
617	Interference Analyzer	Electro-Metrics	10 kHz - 1 GHz	EMC-30	2/27/01	2/27/02

FCC 15.231(b) and FCC 15.231(c)

RADIATED EMISSIONS, FUNDAMENTAL & SPURIOUS CASE

See separate e-file attachment named REmundharm.pdf and REspur.pdf

Test Report No. R-9150-1  
FCC ID: B4SUR85A

FCC 15.231(c)

**OCCUPIED BANDWIDTH**

Please refer to separate electronic file named Occbw.pdf


FCC 15.35

DUTY CYCLE

Please refer to separate electronic file named Dutycycle.pdf

Test Report No. R-9150-1  
FCC ID: B4SUR85A

Test Setup Photograph

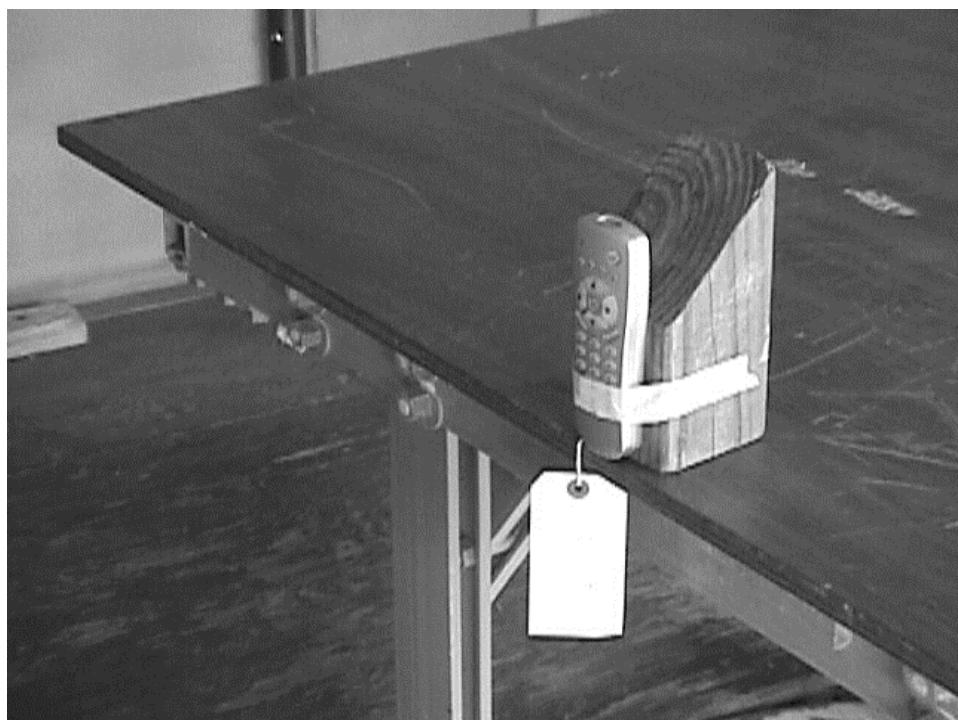

Test Report No. R-9150-1  
FCC ID: B4SUR85A