

TEST REPORT

Report Number: 100077996MIN-004
Project Number: G100077996

**Testing performed on the
Simon iXT ver. 4.3 TT; Z-Wave**

FCC ID: B4Z-801-IXT2
Industry Canada ID: 1175C- 801IXT2

to
47 CFR Part 15. 249:2009
RSS- 210, Issue 7, 2007

For
GE Security Inc.

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128

Test Authorized by:
GE Security Inc.
1275 Red Fox Road
Arden Hills, MN 55112

Prepared by: U. Spector
Uri Spector

Date: March 26, 2010

Reviewed by: S. Khazon
Simon Khazon

Date: March 26, 2010

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

TABLE OF CONTENTS

1.0	GENERAL DESCRIPTION.....	3
1.1	Product Description; Test Facility	4
1.3	Environmental conditions.....	5
1.4	Measurement uncertainty	6
1.5	Field Strength Calculation.....	6
2.0	TEST SUMMARY.....	7
3.0	TEST CONDITIONS AND RESULTS.....	8
3.1	Field strength at fundamental	8
3.2	Field strength of harmonics and spurious emissions	10
3.3	Bandwidth of Emissions.....	13
3.4	Transmitter power line conducted emissions	16
4.0	TEST EQUIPMENT.....	19

1.0 GENERAL DESCRIPTION

Model:	Simon iXT ver. 4.3 TT, Z-Wave
Type of EUT:	Security Alarm
Serial Number:	[REDACTED]
FCC ID:	B4Z-801-IXT2
Industry Canada ID:	1175C- 801IXT2
Related Submittal(s) Grants:	N/A
Company:	GE Security Inc.
Customer:	Rene Christian
Address:	1275 Red Fox Road Arden Hills, MN 55112
Phone:	(877) 699-6787
Fax:	(651) 779-4884
Test Standards:	<input checked="" type="checkbox"/> 47 CFR, Part 15:2009, §15.249 <input checked="" type="checkbox"/> RSS-210, Issue 7, 2007 <input checked="" type="checkbox"/> RSS-Gen, Issue 2, 2007 <input type="checkbox"/> 47 CFR, Part 15:2008, §15.107 and §15.109, Class [REDACTED] <input type="checkbox"/> Other [REDACTED]
Type of radio:	<input type="checkbox"/> Stand -alone <input type="checkbox"/> Module <input type="checkbox"/> Hybrid
Date Sample Submitted:	March 22, 2010
Test Work Started:	March 22, 2010
Test Work Completed:	March 26, 2010
Test Sample Conditions:	<input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good

1.1 Product Description; Test Facility

Product Description:	Z-Wave
Operating Frequency	908.42 MHz
Modulation:	GFSK
Emission Designator:	306KF1D
Antenna(s) Info:	Antenna Type: PCB trace antenna connected with coax cable Gain 2dBi
Antenna Installation:	<input type="checkbox"/> User <input type="checkbox"/> Professional <input type="checkbox"/> Factory
Transmitter Power Configuration:	<input type="checkbox"/> Internal battery <input checked="" type="checkbox"/> External power source <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> 400VAC <input type="checkbox"/> <input type="checkbox"/> VDC <input type="checkbox"/> Other: <input type="checkbox"/> Amp. <input type="checkbox"/> 50Hz <input checked="" type="checkbox"/> 60Hz
Special Test Arrangement:	As a hand-held device the EUT was rotated through three orthogonal axes to determine and tested with the maximum emissions
Test Facility Accreditation:	A2LA (Certificate No. 1427.01)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.4-2003

1.2 EUT Configuration

The equipment under test was operated during the measurement under the following conditions:

- Standby
- Continuous
- Continuous un-modulated
- Test program (customer specific)
- [Redacted]

Operating modes of the EUT:

No.	Description
1	Continuous transmitting mode

Cables:

No.	Type	Length	Designation	Note
1	Phone Cable	> 6ft	Not shielded, RJ11	
2	Line Cable	> 6ft	Not shielded, RJ45	
3	LAN Device Cable	> 6ft	Not shielded, RJ45	
4	HW1 I/O wire	6ft	Not shielded, terminal connector	
5	HW DC OUT wire	6ft	Not shielded, terminal connector	
6	HW2 IN wire	6ft	Not shielded, terminal connector	

Support equipment/Services:

No.	Item	Description
1	None	

1.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

- Normal**

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

1.4 Measurement uncertainty

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be:
 ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be:
 ± 2.6 dB

1.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(m^{-1})

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB(μ V) is obtained. The antenna factor of 7.4 dB(m^{-1}) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB(μ V/m).

$$RA = 48.1 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(\text{m}^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RA + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu\text{V/m})$$

General notes:

2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST SPECIFICATION	TEST PARAMETERS	RESULT
15.249(a) / RSS-210 A2.9(a)	Field strength of fundamental	Pass
15.249(a) / RSS-210 A2.9(a)	Field strength of harmonics	Pass
15.249(d) / RSS-210 A2.9(b)	Field strength of spurious emissions	Pass
15.215(c) / RSS- Gen 4.6.1	Bandwidth of the emission	Pass
15.207/RSS-Gen 7.2.2	Transmitter Power Line conducted emissions	Pass

3.0 TEST CONDITIONS AND RESULTS

3.1 Field strength at fundamental

Test location: OATS Anechoic Chamber Other

Test distance: 10 meters 3 meters

Test result: **Pass**

Max. Emissions margin at fundamental: 1.6dB below the limits

Notes: None

Date:	March 22, 2010	Result:	Pass
Standard:	FCC 15.249(a) / RSS-210 A2.9		
Tested by:	Norman Shpilsher		
Test Point:	Enclosure with antenna		
Operation mode:	See Page 5		
Note:			

Table 3.1.1

Frequency MHz	Antenna		Ant. CF dB1/m	Cable loss dB	Pre-amp Gain (dB)	Reading dB μ V	Total @ 3m dB μ V/m	Limit dB μ V/m	Margin dB	Comments
	Polarity	Hts(cm)								
908.40	V	100	21.8	3.6	0.0	59.2	84.6	94.0	-9.4	
908.40	V	100	21.8	3.6	0.0	67.0	92.4	94.0	-1.6	

3.2 Field strength of harmonics and spurious emissions

Test location: OATS Anechoic Chamber Other

Test distance: 10 meters 3 meters

Frequency range of measurements: 30MHz-10000MHz

Test result: Pass

Max. margin of harmonics and spurious emissions: 3.1dB below the limits

Notes: None


Date:	March 22, 2010	Result:	Pass
Standard:	FCC 15.249(a) and (d) / RSS-210 A2.9		
Tested by:	Norman Shpilsher		
Test Point:	Enclosure with antenna		
Operation mode:	See Page 5		
Note:			

Table 3.2.1


Frequency MHz	Antenna Polarity	Peak Reading dB μ V	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dB μ V/m	AVG Limit dB μ V/m	Margin dB
3.282 GHz	V	51.1	34.9	43.4	42.6	54.0	-11.4
9.924 GHz	V	38.5	45.6	41.0	43.2	54.0	-10.8
2.464 GHz	H	61.9	32.1	43.1	50.8	54.0	-3.1
7.39 GHz	H	41.9	42.5	41.1	43.3	54.0	-10.7

Graph 3.2.1

Vertical antenna polarization

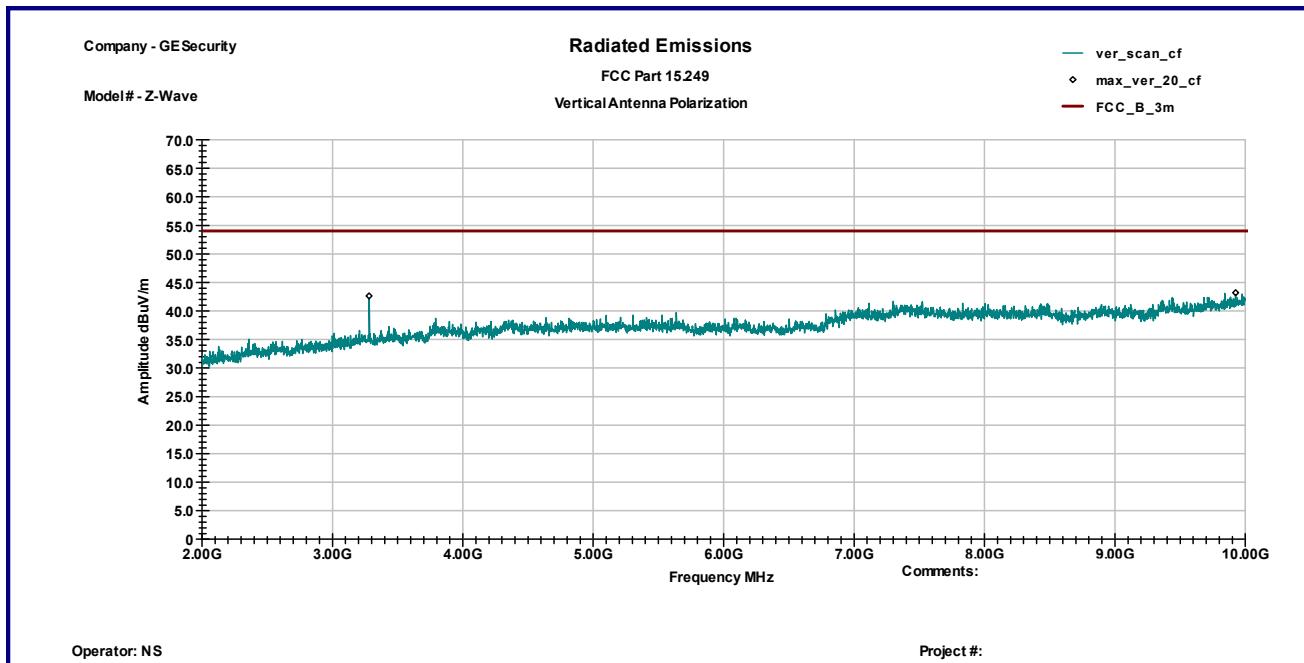

Horizontal antenna polarization

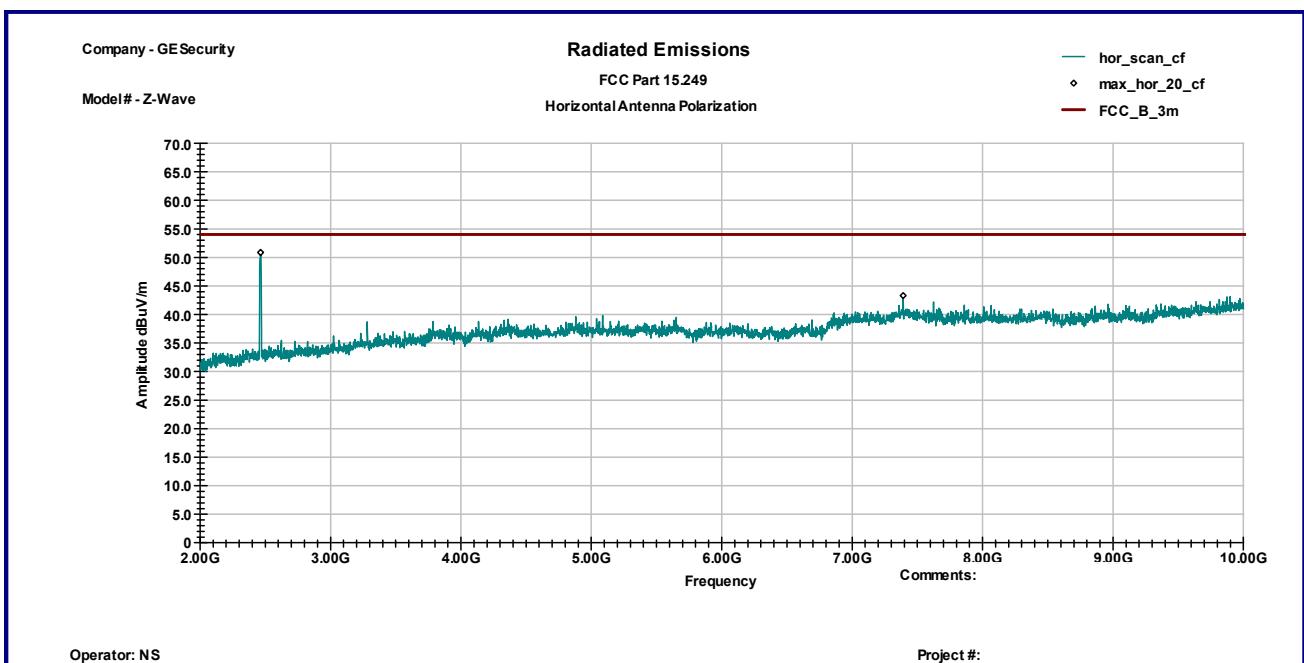


3.3 Bandwidth of Emissions


Center Frequency of operation MHz	Measured 20dB bandwidth kHz	Measured 99% bandwidth kHz
908.40	118	306

Graphs 3-3-1 and 3-3-2 are show bandwidth of emissions

Notes: The bandwidth of emissions is contained within the frequency band of operation

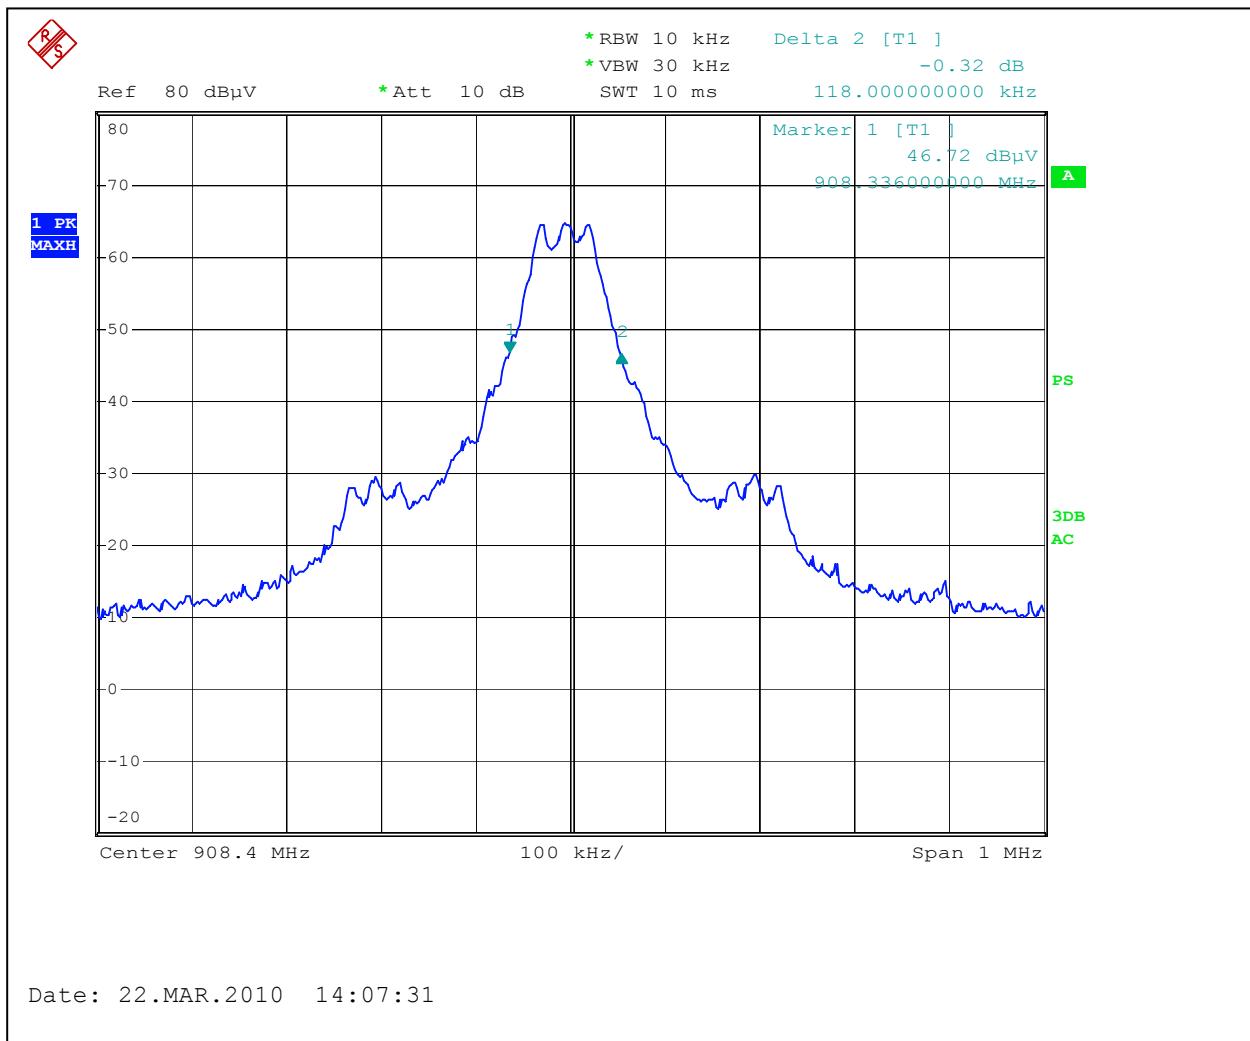Graph 3.3.1

Graph 3.3.2

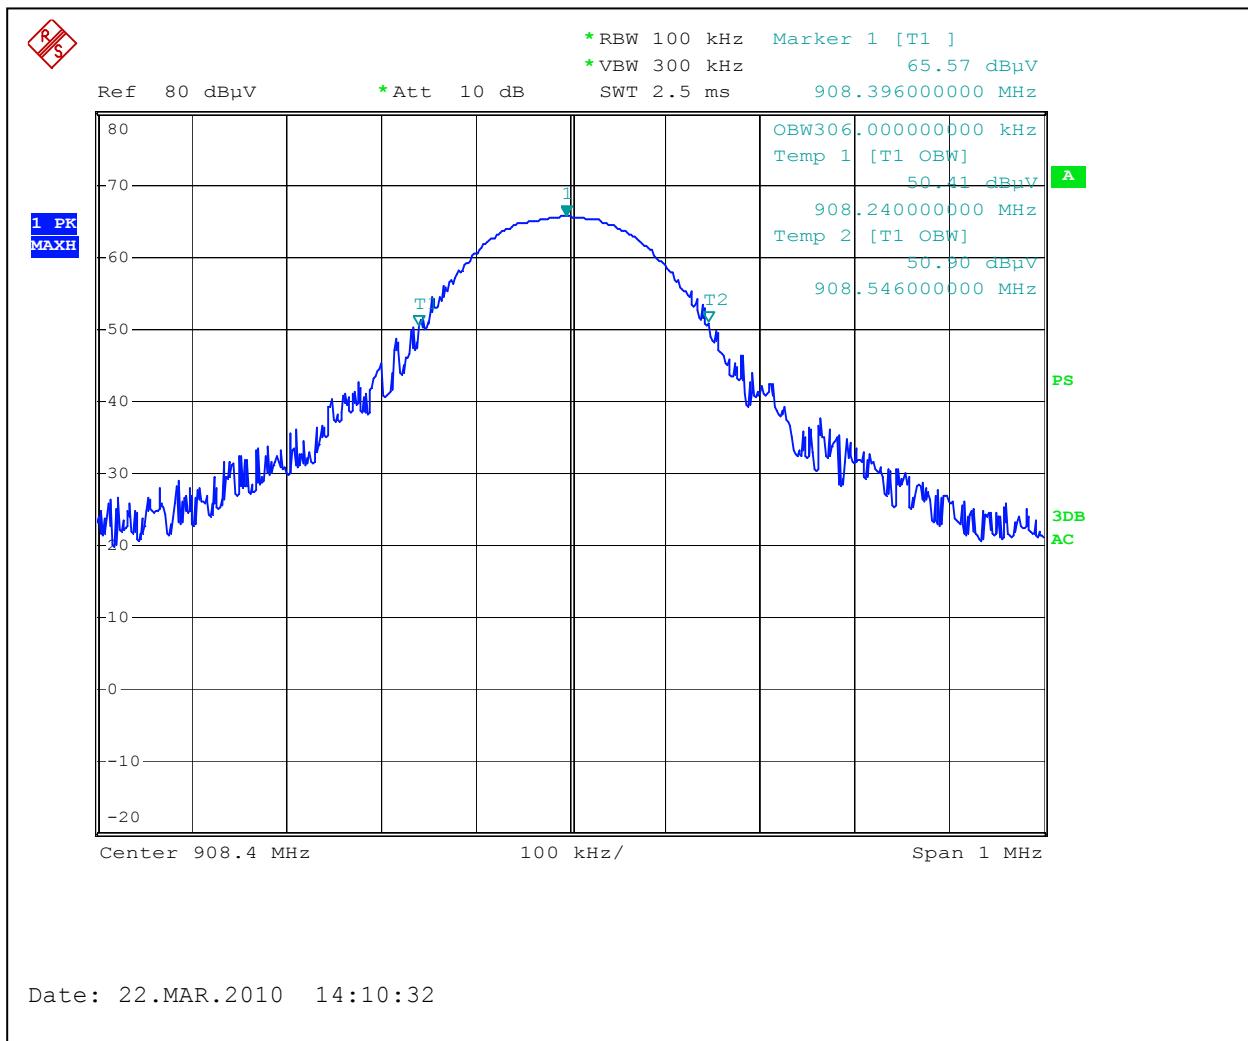

3.4 Transmitter power line conducted emissions

Test location: OATS Anechoic Chamber Other

Test result: **Pass**

Frequency range: 0.15MHz-30MHz

Max. Emissions margin: 13.9dB below the limits

Notes: None

Date:	March 26, 2010	Result: Pass
Standard:	FCC 15.207	
Tested by:	Norman Shpilsher	
Test Point:	Power Line	
Operation mode:	See Page 5	
Note:		

Table 3.4.1

Line 1


Frequency	Peak dB μ V	QP Limit dB μ V	AVG Limit dB μ V	QP Margin dB	AVG Margin dB
150.54 KHz	42.1	66.0	56.0	-23.9	-13.9
154.43 KHz	40.9	65.8	55.8	-24.9	-14.9
157.77 KHz	40.3	65.6	55.6	-25.3	-15.3
3.921 MHz	15.2	56.0	46.0	-40.8	-30.8
5.229 MHz	12.7	60.0	50.0	-47.3	-37.3
27.466 MHz	26.4	60.0	50.0	-33.6	-23.6

Line 2


Frequency	Peak dB μ V	QP Limit dBmV	AVG Limit dBmV	QP Margin dB	AVG Margin dB
150.39 KHz	42.0	66.0	56.0	-24.0	-14.0
154.27 KHz	40.9	65.8	55.8	-24.9	-14.9
158.16 KHz	40.4	65.6	55.6	-25.2	-15.2
3.921 MHz	14.2	56.0	46.0	-41.8	-31.8
5.229 MHz	11.4	60.0	50.0	-48.6	-38.6
27.466 MHz	29.8	60.0	50.0	-30.2	-20.2

Graph 3.4.1

Line 1

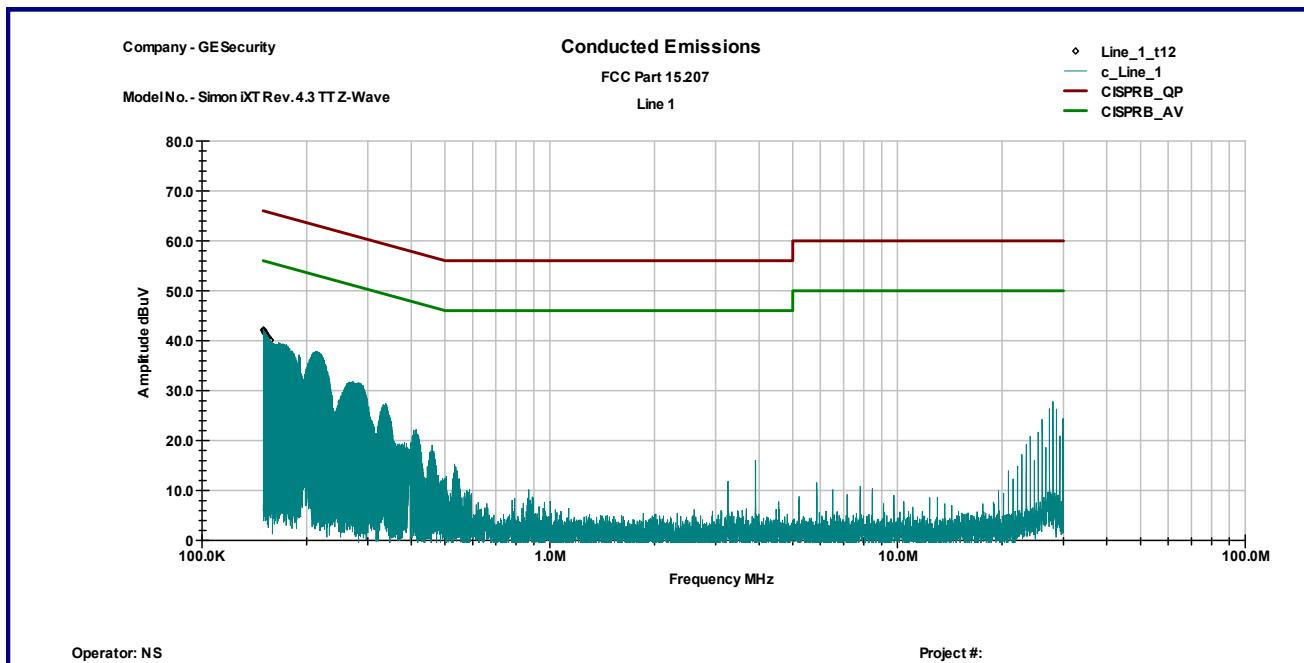

Line 2

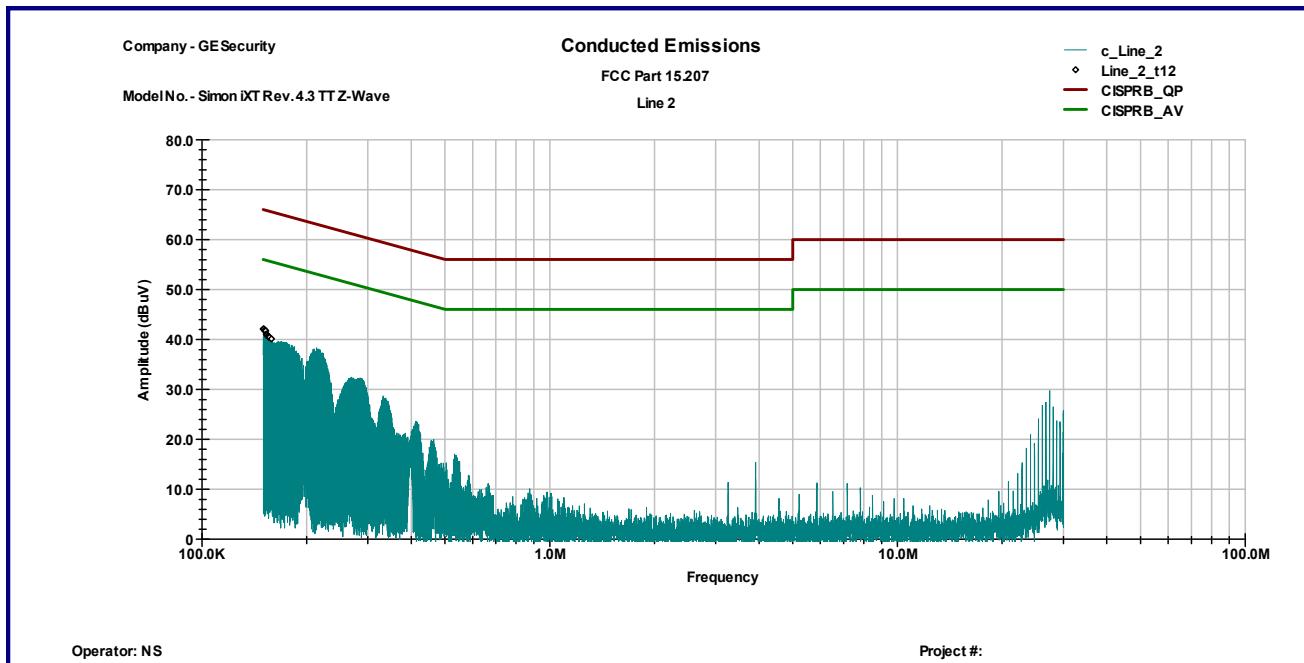

4.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	INTERTEK ID	CAL DUE	USED
Spectrum Analyzer	R & S	FSP 40	100024	12559	09/10/2010	<input checked="" type="checkbox"/>
Spectrum Analyzer	R & S	ESCI	100358	12909	05/18/2010	<input checked="" type="checkbox"/>
Bicono-Log Antenna	Schaffner-Chase	CBL 6112 B	2468	14459	09/22/2010	<input checked="" type="checkbox"/>
Horn Antenna	EMCO	3115	6579	15580	04/03/2010	<input checked="" type="checkbox"/>
LISN	Fischer Custom Communications	FCC-LISN-2 MOD.SD	316	9945	11/06/2010	<input checked="" type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-5D-00501800-28-13P	1402232	172081	08/07/2010	<input checked="" type="checkbox"/>
System	TILE! Instrument Control		Ver. 3.4.K.29	15259	VBU	<input checked="" type="checkbox"/>

Intertek