

Handled by, department  
Jonas Bremholt  
Electronics  
+46 33 16 54 38, jonas.bremholt@sp.se

Date  
2005-04-11  
Rev.date  
2005-04-19  
Reference  
F501802-F24rev1  
Page  
1 (1)

ERICSSON AB  
Per Helmersson  
Färögatan 2, Kista  
164 80 STOCKHOLM

## Equipment Authorization measurements on GSM Base station Transceiver unit with FCC ID: B5KDKRC1311004-1 in the RBS 2107 cabinet

(4 appendices)

This revision replaces the original report F501802-F24. Appendix 4, external photos of the EUT are added.

### Test object

Transceiver Unit dTRU 19, KRC 131 1004/1, R6E

### Summary

Standard	Compliant	Appendix	Remarks
<b>FCC CFR 47</b>			
2.1053 Field strength of spurious radiation	Yes	2	

SP Swedish National Testing and Research Institute  
Electronics - EMC

  
Jan Welinder  
Technical Manager

  
Jonas Bremholt  
Technical Officer

SP Swedish National Testing and Research Institute

Postal address  
SP  
Box 857  
SE-501 15 Borås  
SWEDEN

Office location  
Västerås  
Brinellgatan 4  
Borås

Phone / Fax / E-mail  
+46 33 16 50 00  
+46 33 13 55 02  
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

**Description - Equipment Under Test (EUT)**

Equipment: GSM Base station transceiver 1900 MHz

Tx Frequency range: 1930.2-1989.8 MHz

Modulation: GMSK

**Tested Channels**

Radiated measurements:

dTRU	ARFCN	Frequency	Configuration
No 1	512	1930.2 MHz	With internal combiner
	537	1935.2 MHz	With internal combiner
No 2	661	1960.0 MHz	With internal combiner+TCC
No 3	785	1984.8 MHz	Without internal combiner
	810	1989.8 MHz	Without internal combiner

Three modes were tested at the same time to simulate worst case: with internal combiner, without internal combiner and with internal combiner+TCC.

**Manufacturer's representative**

Per Helmersson, Ericsson AB

**Purpose of test**

The purpose of the tests is to verify compliance to the performance characteristics specified in FCC CFR47 when the EUT is operational in the 2107 cabinet.

**References**

Measurements were done according to relevant parts of the following standards:

ANSI/TIA/EIA-603-B-2002

J-STD007A Vol 1

**Reservation**

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in the report.

**Delivery of test object**


The test object was delivered: 2005-02-07

**Test engineers**

Stefan Larsson and Jonas Bremholt

**Test witnesses**

Dan Westberg, Ericsson AB

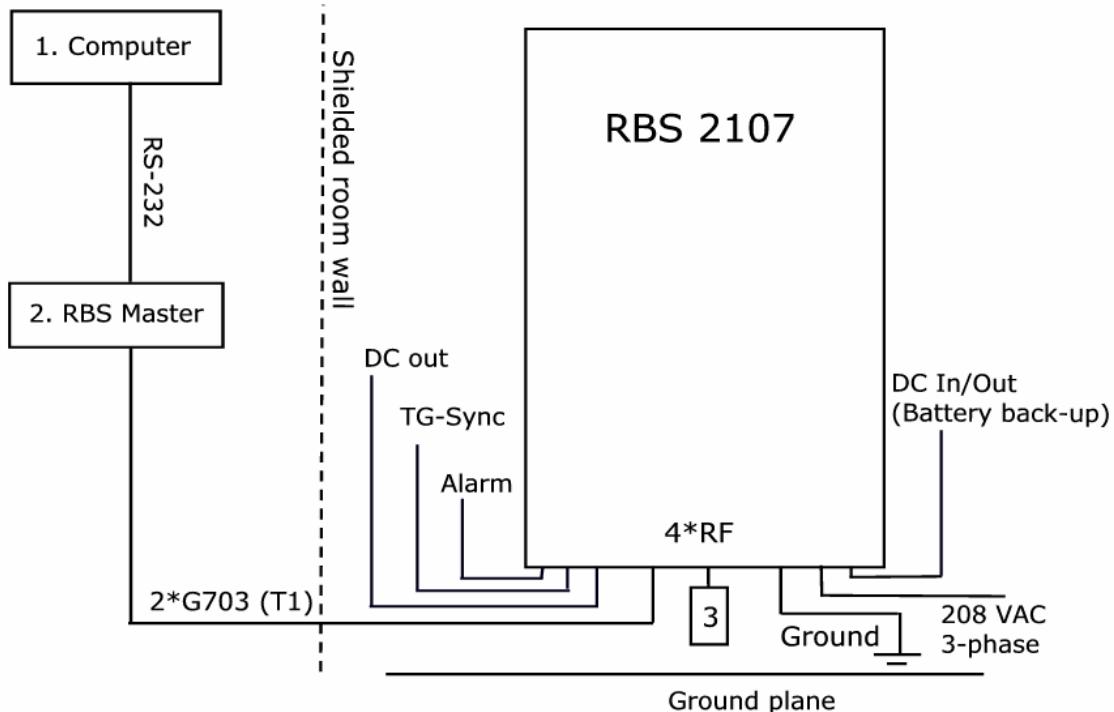**Test set-up**

1. Computer, with software RBSMMI ver. R9A02
2. Ericsson RBS Master 2 LPY 107 1007/1 software ver. R4C01
3. 4 units, Dummy loads (50 ohm)

**Interfaces:**

208 VAC

Antenna: Coaxial cable (50 ohm)

G703: T1, Coaxial cable (75 ohm)

TG-sync: Shielded multi-wire

Alarm: Unshielded multi-wire

24 VDC battery back-up, 2-wire

**Type of port:**

3-phase AC mains

Antenna

Telecom

Signal

Signal

DC power

## Field strength of spurious radiation measurements according to 47CFR 2.1053

Date	Temperature	Humidity
2005-02-18	21 °C ± 3 °C	23 % ± 5 %

### Test set-up and procedure

The chamber is listed at FCC, Columbia with registration number: 93866. The test site also complies with RSS 212, Issue 1, Industry Canada file no.:IC 3482.

The transmitter was modulated with pseudorandom data during the measurements. The antenna ports were terminated with 50 ohm loads.

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18-20 GHz.

A pre-measurement was first performed:

In the frequency range 30 MHz-20 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was,

$$\gamma = 20 \log \left( \frac{4\pi D}{\lambda} \right), \quad \gamma \text{ is the propagation loss in dB and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit is scanned 0-360 degrees and the antenna is scanned 1-4 m for maximum response. The emission is then measured with the average detector and the average value is reported, frequencies closer than 10 dB to the limit measured with the average detector was measured with the substitution method according to the standard.

Measurement equipment	Calibration Due	SP number
Anechoic chamber	-	15:115
R&S ESI 26	2005-08	503 292
Control computer	-	503 479
Software: R&S ES-K1, ver. 1.60	-	-
Chase Bilog antenna CBL 6111A	2006-08	503 182
EMCO Horn Antenna 3115	2006-11	502 548
EMCO Horn Antenna 3116	2007-11	503 279
MITEQ Low Noise Amplifier	2005-04	503 285
Testo 615, Temperature and humidity meter	2005-09	503 505

The measurement was performed with the following configurations that represents worst case scenario:

Without internal combiner, with internal combiner, with internal combiner plus TCC.

The test set-up during the spurious radiation measurements can be seen in the picture below



**Results**

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty		4.7 dB

**Limits**

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log P$  dB.

Complies?	Yes
-----------	-----

## Hardware configuration list RBS 2107

Unit	Product Number	Serial Number	Revision
Cabinet	1/SEB 112 1144/8	TU85378847	R5A
Cabinet Gray	BYB 415 04/08	TU85378859	R2A
CLU	BPD 104 101/1	S781279138	R2B
FCU-01	BGM 136 1001/3	B991836838	R1A
IDM 03	BMG 980 29/1	B351000373	R3A
PSU-shelf	BFL 119 431/1	TU85378883	R1A
PSU-AC	BML 231 202/1	TL93420823	R3C
PSU-AC	BML 231 202/1	TL93420830	R3C
PSU-AC	BML 231 202/1	TL93420903	R3C
BFU-21	BMG 980 13/1	B991550807	R2A
CDU shelf	BFL 119 424/1	--	R1A
CDU-J 19	BFL 119 430/1	A40004XB70	R1B
CDU-J 19	BFL 119 430/1	A40004XB6R	R1B
CDU-J 19	BFL 119 430/1	A40004XB6S	R1B
TRU shelf	BFX 901 39/1	TU85378835	R1A
Dummy	SXK 107 9314/1	--	R1C
Dummy	SXK 107 9314/1	--	R1C
DXU-21A	BOE 602 14/1	TU84969091	R14A
TMA-CM-01	SDK 107 881/1	BF31259359	R1C
dTRU-19	KRC 131 1004/1	AE51609514	R6E
dTRU-19	KRC 131 1004/1	AE51609515	R6E
dTRU-19	KRC 131 1004/1	AE51609516	R6E
Dummy	SXK 107 5031/2	--	R1B
Dummy	SXK 107 5031/2	--	R1B
ACCU-32	BMG 980 26/1	T341010410	R3A
DC-Filter 02	KFE 101 1145/2	X181070463	R1A
DC/DC-200W	BMR 911 20/1	B991782709	R4A
EIM-T1	NCD 901 26/11	--	R1A
EIM-T2	NCD 901 26/12	--	R1A
EIM-T2	NCD 901 26/12	--	R1A
EIM-S1	NCD 901 26/13	--	R1A


Software	Revision
R11A	R07A

### Description of EUT


The EUT is a dTRU that can be installed in a GSM Base station that are designed to provide mobile telephone users with a connection to a mobile network or the PSTN.

**Photos****Transceiver Unit KRC 131 1004/1, R6E**


Front side

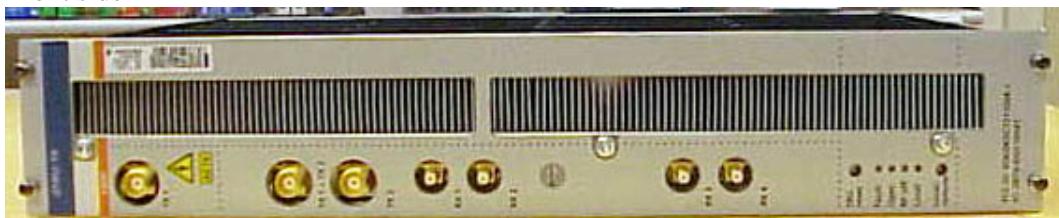

Rear side

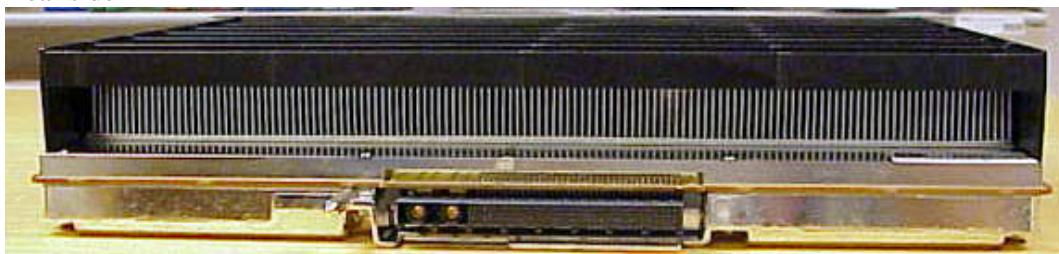

Left side

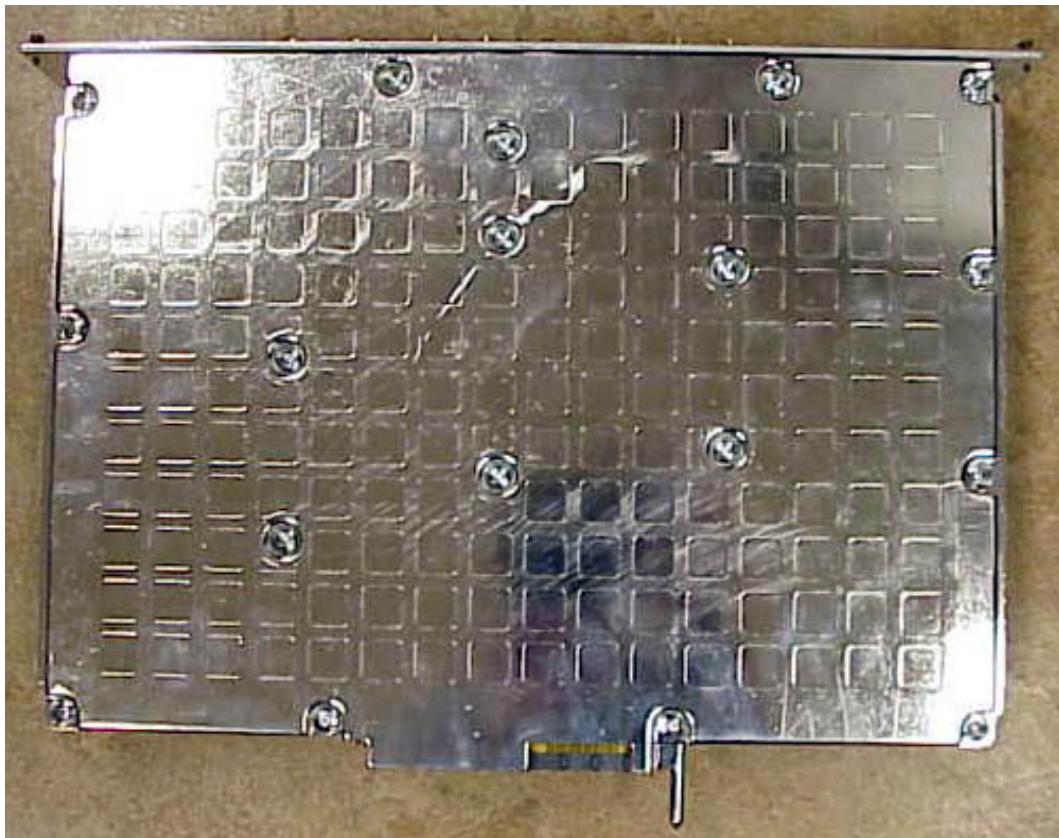

**REPORT**

FCC ID: B5KDKRC1311004-1

Date 2005-04-11 Reference F501802-F24rev1 Page 2 (4)  
Rev.date 2005-04-19

Appendix 4



Right side



**RBS 2107 Cabinet, 208 VAC**

Open door 1



Open door 2

