


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS PROPERTY OF AND BELONGS TO ACR ELECTRONICS, INC. FT LAUDERDALE, FL. IT IS FURNISHED IN CONFIDENCE SOLELY FOR INFORMATIONAL PURPOSES. IT IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ACR.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	RELEASED PER ECO 11393		

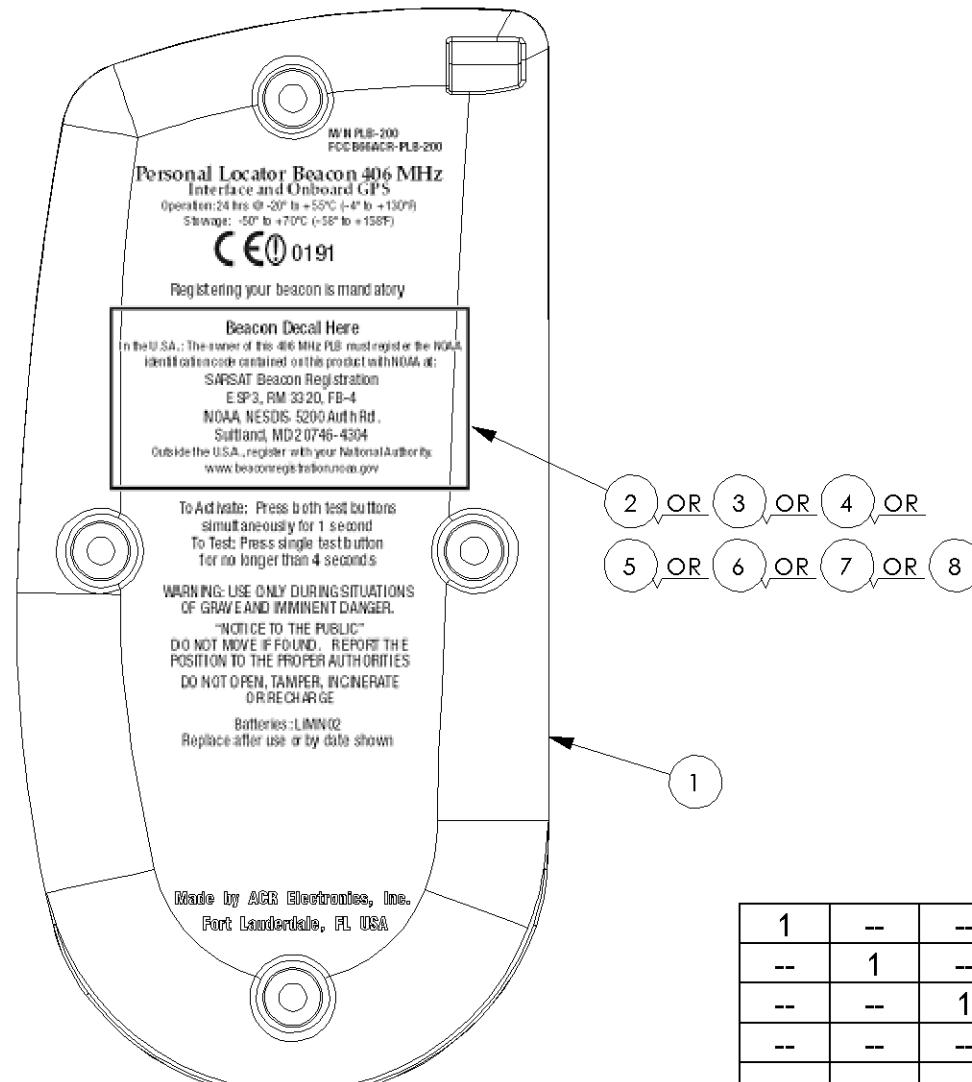

DASH No.	DESCRIPTION	PRODUCT No.	4 DIGIT CODE
-1	BACK CASE, PAD PRINTED, AQUAFIX I	PLB-201	2797.2
-2	BACK CASE, PAD PRINTED, AQUAFIX I/O	PLB-200	2797.4
-3	BACK CASE, PAD PRINTED, TERRAFIX I	PLB-201	2798.2
-4	BACK CASE, PAD PRINTED, TERRAFIX I/O	PLB-200	2798.4
-5	BACK CASE, PAD PRINTED, AEROFIX I	PLB-201	2799.2
-6	BACK CASE, PAD PRINTED, AEROFIX I/O	PLB-200	2799.4
-7	BACK CASE, PAD PRINTED, AQUAFIX 406	PLB-200	2797.1

1	--	--	--	--	--	--	8	A1-20-1194-1	PAD LABEL, BACK CASE, AQUAFIX 406, BLUE, PLB-200
--	1	--	--	--	--	--	7	A1-20-1196-2	PAD LABEL, BACK CASE, AEROFIX I/O, BLACK, PLB-200
--	--	1	--	--	--	--	6	A1-20-1196-1	PAD LABEL, BACK CASE, AEROFIX I, BLACK, PLB-201
--	--	--	1	--	--	--	5	A1-20-1195-2	PAD LABEL, BACK CASE, TERRAFIX I/O, GREEN, PLB-200
--	--	--	--	1	--	--	4	A1-20-1195-1	PAD LABEL, BACK CASE, TERRAFIX I, GREEN, PLB-201
--	--	--	--	--	1	--	3	A1-20-1194-3	PAD LABEL, BACK CASE, AQUAFIX I/O, BLUE, PLB-200
--	--	--	--	--	--	1	2	A1-20-1194-2	PAD LABEL, BACK CASE, AQUAFIX I, BLUE, PLB-201
1	1	1	1	1	1	1	1	A1-18-1919	BACK CASE
QTY.	ITEM	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION						
-7	-6	-5	4	-3	-2	-1	NO.		

LIST OF MATERIALS OR PARTS LIST									
UNLESS OTHERWISE SPECIFIED: ALL ANGLES ARE 90° DIMENSIONS ARE IN INCHES TOLERANCES ON									
FRACTIONS DECIMALS ANGLES +1/64 X + .030 + 1/2 °									
ANSI-B SOLIDWORKS									
(○) DENOTES REVISION CHANGE (+) DENOTES DIMENSION PLUS DRAFT ANGLE (-) DENOTES DIMENSION MINUS DRAFT ANGLE (XX) DENOTES REFERENCE NOTE OR DIMENSION (XXX) DENOTES CRITICAL INSPECTION DIMENSIONS									
DRAWN J.Y.K. 07/02/04									
CHECKED									
ENG.									
APVD.									
ACR ELECTRONICS, INC 5757 RAVENSWOOD RD. FT. LAUDERDALE FL 33312									
BACK CASE, PAD PRINTED, PLB-200/201									
SIZE CODE IDENT. NO. DRAWING NO. B 18560 A1-18-1974-									
REV A									
SCALE 1:1 SHEET 1 OF 1									

Replace after use or by date shown
 Batteries: LiMnO2
 OR RECHARGE
 DO NOT OPEN, TAMPER, INCINERATE
 POSITION TO THE PROPER AUTHORITIES
 DO NOT MOVE IF FOUND, REPORT THE
 "NOTICE TO THE PUBLIC"
 OF GRAVE AND IMMINENT DANGER.

WARNING: USE ONLY DURING SITUATIONS

To Activate: Press both test buttons
 simultaneously for 1 second
 To Test: Press single test button
 for no longer than 4 seconds

Beacon Decal Here
 In the U.S.A.: The owner of this 406 MHz PLB must register the NOAA identification code contained on this product with NOAA at:
 SARSAT Beacon Registration
 NOAA, NESDIS 5200 Auth Rd.
 Suitland, MD 20746-4304
 ESP3, RM 3320, FB-4
 NOAA NESDIS 5200 Auth Rd.
 Suitland, MD 20746-4304
 Outside the U.S.A.: Register with your National Authority
www.beaconregistration.noaa.gov

Registering your beacon is mandatory

CE 0191

Personal Locator Beacon 406 MHz
 Internal Decal and Onboard GPS
 FCC B66ACR-PLB-200
 M/N PLB-200

M/N PLB-201
 FCC B66ACR-PLB-201

**Personal Locator Beacon 406 MHz
 GPS Interface**

Operation: 24 hrs @ -20° to +55°C (-4° to +130°F)

Stowage: -50° to +70°C (-58° to +158°F)

CE 0191

Registering your beacon is mandatory

Beacon Decal Here

In the U.S.A.: The owner of this 406 MHz PLB must register the NOAA identification code contained on this product with NOAA at:

SARSAT Beacon Registration
 NOAA, NESDIS 5200 Auth Rd.
 Suitland, MD 20746-4304
 Outside the U.S.A., register with your National Authority.
www.beaconregistration.noaa.gov

To Activate: Press both test buttons
 simultaneously for 1 second
 To Test: Press single test button
 for no longer than 4 seconds

**WARNING: USE ONLY DURING SITUATIONS
 OF GRAVE AND IMMINENT DANGER**

"NOTICE TO THE PUBLIC"
 DO NOT MOVE IF FOUND, REPORT THE
 POSITION TO THE PROPER AUTHORITIES
 DO NOT OPEN, TAMPER, INCINERATE
 OR RECHARGE

Batteries: LiMnO2
 Replace after use or by date shown

0

ACR

○ A1-20-1197-2 Black