



Nemko Test Report: 10232209RUS1

Applicant: Genie Company
One Door Drive
Mt. Hope, OH 44660
USA

Equipment Under Test: G3T / O3T
(E.U.T.)

FCC ID: B8Q315390T1

In Accordance With: **FCC Part 15, Subpart C**
For Low Power Transmitters Operating Periodically
In The Band 40.66 - 40.77 MHz And Above 70 MHz

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, TX 75057-3136

TESTED BY: *Brian Boyea* **DATE:** 30-Nov-2012
Brian Boyea, EMC Engineer

APPROVED BY: *Michael Cantwell* **DATE:** 30-Nov-2012
Michael Cantwell

Total Number of Pages: 25

TABLE OF CONTENTS

SECTION 1. SUMMARY OF TEST RESULTS	3
SECTION 2. EQUIPMENT UNDER TEST (E.U.T.)	5
SECTION 3. TRANSMISSION REQUIREMENTS	7
SECTION 4. RADIATED EMISSIONS	11
SECTION 5. OCCUPIED BANDWIDTH	18
SECTION 6. BLOCK DIAGRAMS	21
ANNEX A - RESTRICTED BANDS	24

Section 1. Summary of Test Results

Manufacturer: Genie Company

Model No.: G3T / O3T*

*Note: Models G3T and O3T are identical. G3T is marketed under the Genie brand name and O3T is marketed under Overhead Door brand.

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.231. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

<input checked="" type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit
<input type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety, for use by the company's employees only.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

Name of Test	Paragraph No.	Results
Transmission Requirements	15.231(a)	Complies
Radiated Emissions	15.231(b)	Complies
Occupied Bandwidth	15.231(c)	Complies
Frequency Tolerance	15.231(d)	NA
Alternate Field Strength Requirements	15.231(e)	NA
Powerline Conducted Emissions	15.207	NA

Footnotes:

- 1) The device does not operate between 40.66 to 40.70 MHz
- 2) The device does not operate at a periodic rate.
- 3) The device is battery powered.


Section 2. Equipment Under Test (E.U.T.)**General Equipment Information**

Frequency Range:	315 and 390 MHz
Operating Frequency(ies) of Sample:	315 and 390 Mhz
Type of Emission:	FSK
Supply Power Requirement:	3 Vdc (Lithium battery)

Description of E.U.T.

Handheld transmitter for garage door opener.

System Diagram

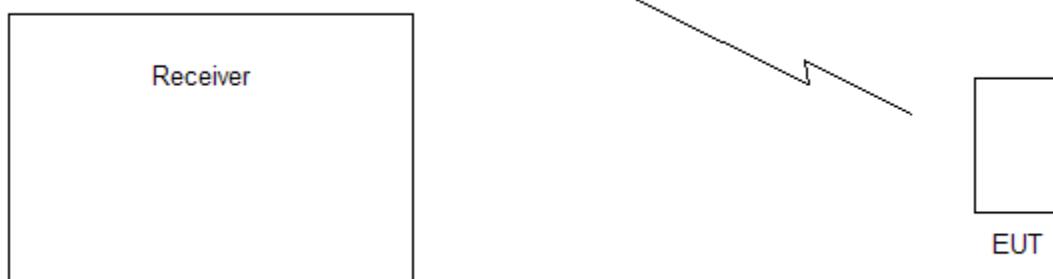

Section 3. Transmission Requirements

NAME OF TEST: Transmission Requirements	PARA. NO.: 15.231(a)
TESTED BY: Brian Boyea	DATE: 31 May 2011

Minimum Standard: 15.231(a) Continuous transmissions such as voice, video or data transmissions are not permitted.

15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after being released.

15.231(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds of activation.

15.231(a)(3) Periodic transmissions at regular pre-determined intervals are not permitted. However polling or supervisory transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

15.231(a)(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm.

Test Results: [Complies.](#)


Test Data: [Compliance was determined by verification of technical specifications and a functional test on the equipment.](#)

Rationale for Compliance with Transmission Requirements

15.231(a)(1)	<input checked="" type="checkbox"/> Manual activation	TX deactivation time: 465.9 msec.
15.231(a)(2) :	<input type="checkbox"/> Automatic activation	
15.231(a)(3) :	<input type="checkbox"/> Regular, predetermined transmissions <input type="checkbox"/> Polling or supervisory transmissions	TX rate and duration: N/A
15.231(a)(4) :	<input type="checkbox"/> Alarm device operating during the pendency of alarm condition <input checked="" type="checkbox"/> Non-alarm device	


Test Data – Transmission Requirements

Deactivation Time 315 MHz

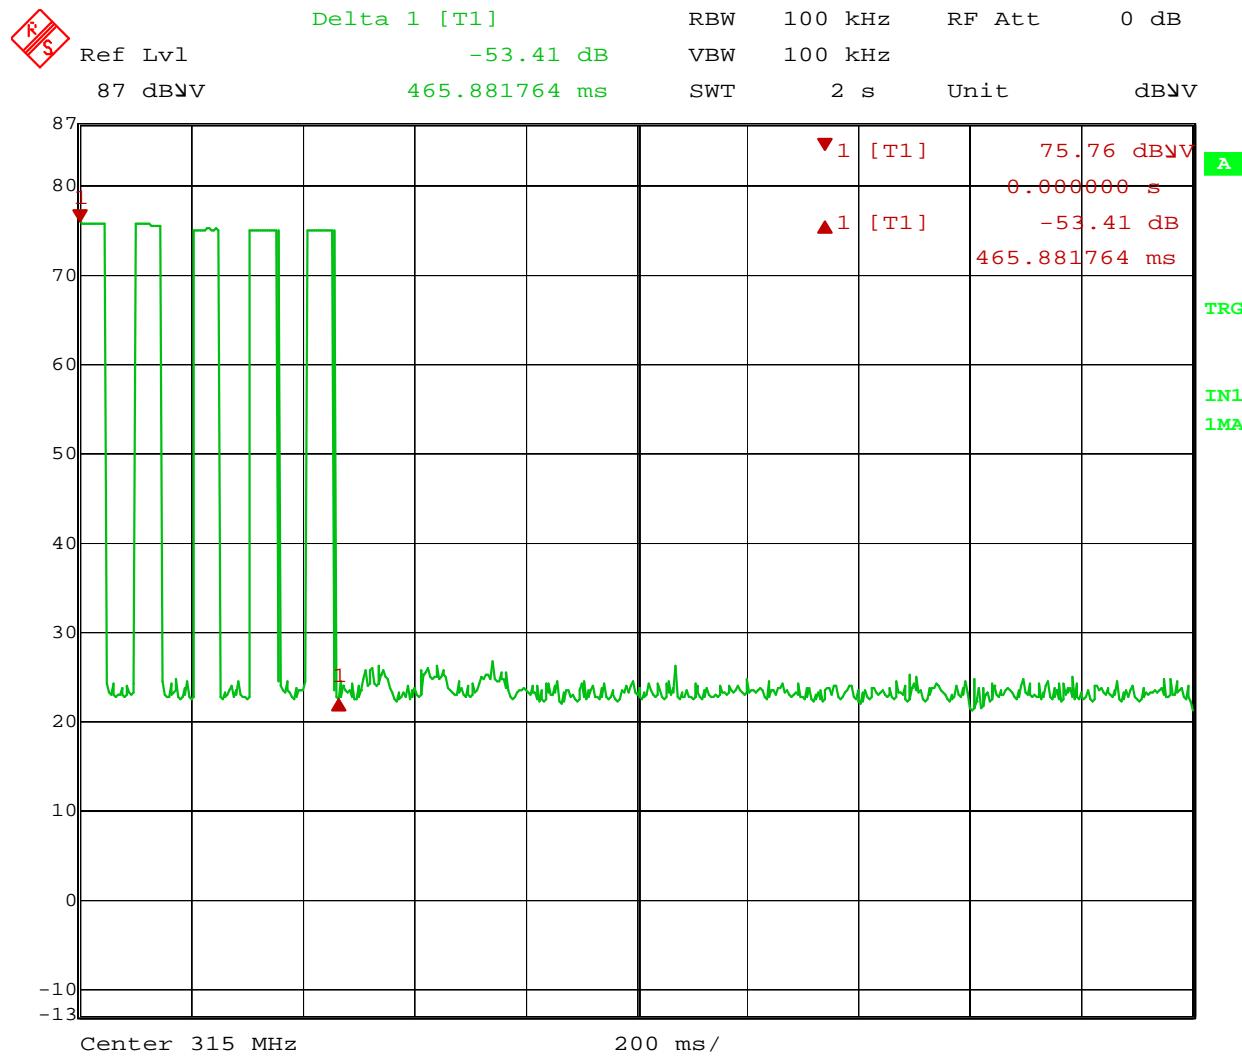

Test Data – Transmission Requirements

Deactivation Time 390 MHz

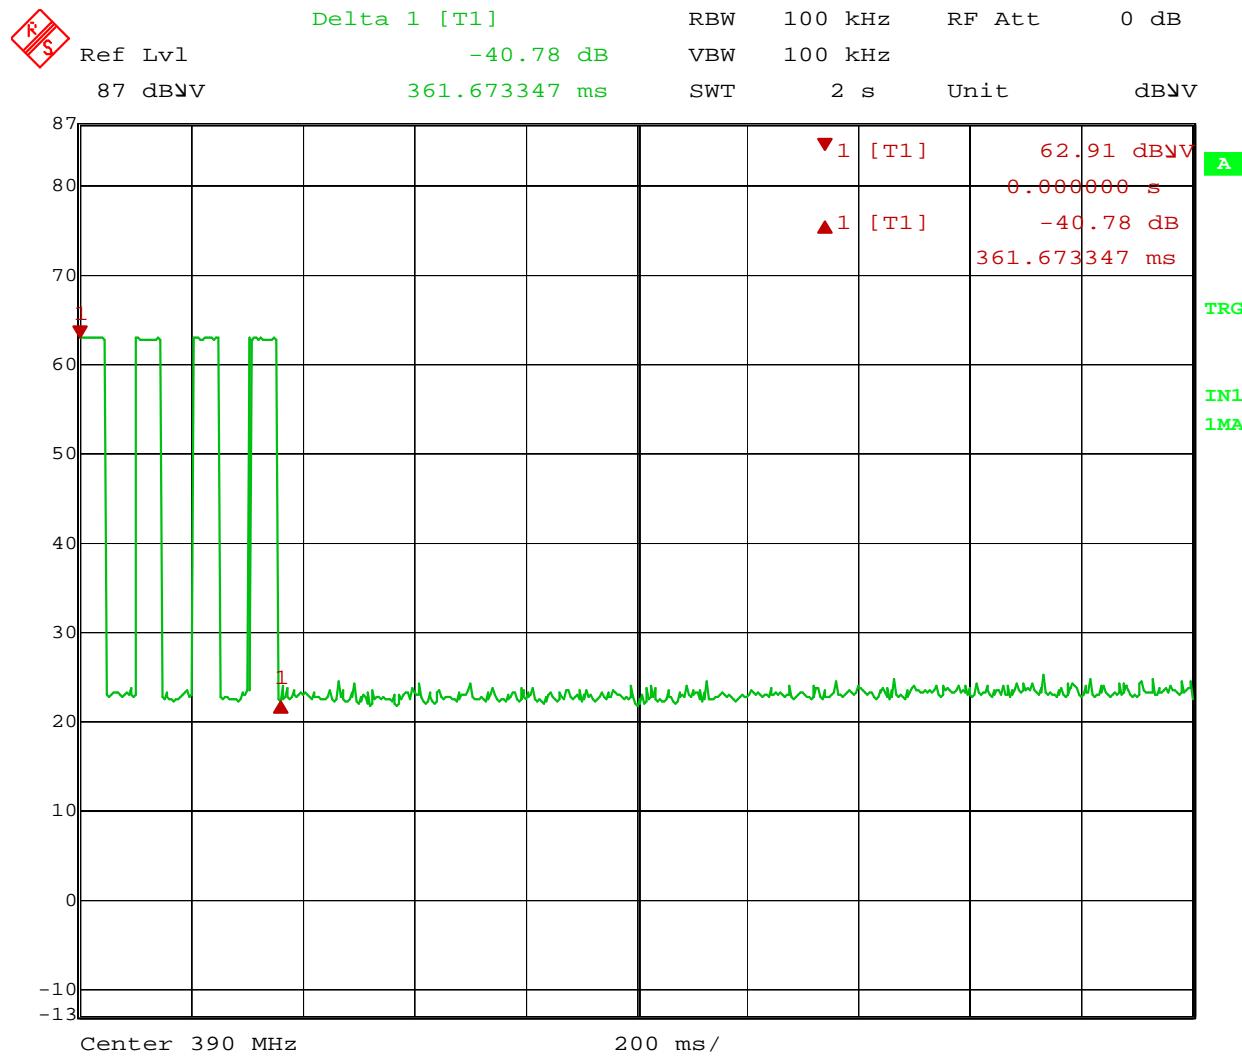

Section 4. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.231(b)
TESTED BY: Brian Boyes	DATE: 01 November 2012

Minimum Standard:**Permissible Field Strength Limits (Momentarily Operated Devices)**

Fundamental Frequency (MHz)	Field Strength of Fundamental Microvolts/Meter at 3 meters; (watts)	Field Strength of Unwanted Emissions Microvolts/Meter at 3 meters; (watts)
40.66 - 40.70	2,250	225
70-130	1, 250	125
130-174	1,250 to 3,750*	125 to 375
174-260 (note 1)	3,750	375
260-470 (note 1)	3,750 to 12,500*	375 to 1,250
Above 470	12,500	1,250

Notes:

Use quasi-peak or averaging meter.

* Linear interpolation with frequency F in MHz

For 130 - 174 MHz: $FS \text{ (microvolts/m)} = (56.82 \times F) - 6136$

For 260 - 470 MHz: $FS \text{ (microvolts/m)} = (41.67 \times F) - 7083$

Any emissions that fall within the restricted bands of 15.205 shall not exceed the following limits:

Frequency (MHz)	Field Strength (μ V/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test Results: Complies. The worst-case emission level is 69.3 dB μ V/m @ 3m at 315 MHz. This is 6.3 dB below the specification limit.

Test Data: See attached table.

Above 1 GHz a spectrum analyzer and low noise amplifier are used to measure emission levels. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was 1 MHz.

Test Data - Radiated Emissions

Meas. Freq. (MHz)	Ant Pol. (H/V)	Duty Cycle	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
315	H	-12.4	65.63	14.1	2.0	0.0	69.3	75.6	-6.3	Pass	
315	V	-12.4	59.8	14.1	2.0	0.0	63.5	75.6	-12.1	Pass	
630	H	-12.4	27.61	20.1	2.5	27.3	10.5	55.6	-45.1	Pass	
630	V	-12.4	35.29	20.1	2.5	27.3	18.2	55.6	-37.4	Pass	
945	H	-12.4	23.37	24.3	3.5	27.3	11.5	55.6	-44.1	Pass	Noise Floor
945	V	-12.4	22.54	24.3	3.5	27.3	10.6	55.6	-45.0	Pass	Noise Floor
1260	H	-12.4	41	25.5	3.5	30.5	27.1	55.6	-28.5	Pass	Noise Floor
1260	V	-12.4	40.74	25.5	3.5	30.5	26.8	55.6	-28.8	Pass	Noise Floor
1575	H	-12.4	41.31	25.6	3.7	31.4	26.8	54.0	-27.2	Pass	Noise Floor
1575	V	-12.4	41.86	25.6	3.7	31.4	27.4	54.0	-26.6	Pass	
1890	H	-12.4	43.31	28	4.3	31.7	31.5	55.6	-24.1	Pass	
1890	V	-12.4	42.4	28	4.3	31.7	30.6	55.6	-25.0	Pass	
2205	H	-12.4	47.47	28.7	5.6	32.0	37.4	54.0	-16.6	Pass	
2205	V	-12.4	49.38	28.7	5.6	32.0	39.3	54.0	-14.7	Pass	
2520	H	-12.4	51.63	29.8	5.5	32.2	42.3	55.6	-13.3	Pass	
2520	V	-12.4	49.1	29.8	5.5	32.2	39.8	55.6	-15.8	Pass	
2835	H	-12.4	44.16	29.9	6.4	32.2	35.9	54.0	-18.1	Pass	
2835	V	-12.4	41.58	29.9	6.4	32.2	33.3	54.0	-20.7	Pass	Noise Floor
3150	H	-12.4	40.49	31.6	6.7	32.3	34.1	55.6	-21.5	Pass	Noise Floor
3150	V	-12.4	40.58	31.6	6.7	32.3	34.2	55.6	-21.4	Pass	Noise Floor

The EUT was tested on three axes.

The EUT was tested with a fresh/new battery.

The spectrum was searched from 30 MHz to 4 GHz.


Test Data - Radiated Emissions

Meas. Freq. (MHz)	Ant Pol. (H/V)	Duty Cycle	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
390	H	-12.4	49.67	16.1	2.2	0.0	55.6	75.6	-20.0	Pass	
390	V	-12.4	47.58	16.1	2.2	0.0	53.5	75.6	-22.1	Pass	
780	H	-12.4	37.1	21.8	3.3	27.3	22.5	55.6	-33.1	Pass	
780	V	-12.4	28.46	21.8	3.3	27.3	13.9	55.6	-41.7	Pass	
1170	H	-12.4	41.85	25.3	3.4	29.9	28.3	50.0	-21.8	Pass	Noise Floor
1170	V	-12.4	41.58	25.3	3.4	29.9	28.0	50.0	-22.0	Pass	Noise Floor
1560	H	-12.4	42.61	25.6	3.7	31.4	28.1	50.0	-21.9	Pass	Noise Floor
1560	V	-12.4	42.77	25.6	3.7	31.4	28.3	50.0	-21.7	Pass	Noise Floor
1950	H	-12.4	48.7	28.5	4.2	31.9	37.1	54.0	-16.9	Pass	
1950	V	-12.4	48.4	28.5	4.2	31.9	36.8	54.0	-17.2	Pass	
2340	H	-12.4	51.93	28.8	5.5	32.0	41.8	50.0	-8.2	Pass	
2340	V	-12.4	46.38	28.8	5.5	32.0	36.3	50.0	-13.7	Pass	
2730	H	-12.4	46.64	29.6	6.2	32.5	37.5	50.0	-12.5	Pass	
2730	V	-12.4	45.74	29.6	6.2	32.5	36.6	50.0	-13.4	Pass	
3120	H	-12.4	44.31	31.6	6.5	32.4	37.6	55.6	-18.0	Pass	Noise Floor
3120	V	-12.4	41.08	31.6	6.5	32.4	34.4	55.6	-21.2	Pass	Noise Floor
3510	H	-12.4	42.38	31.9	6.9	32.2	36.6	54.0	-17.4	Pass	
3510	V	-12.4	40.25	31.9	6.9	32.2	34.5	54.0	-19.6	Pass	Noise Floor
3900	H	-12.4	41.14	32.9	7.9	32.1	37.4	54.0	-16.6	Pass	Noise Floor
3900	V	-12.4	41.65	32.9	7.9	32.1	38.0	54.0	-16.1	Pass	Noise Floor

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
1	Anechoic Chamber	Nemko USA, Inc.	Chamber	1	25-Sep-2012	25-Sep-2013
1016	Preamplifier	Hewlett Packard	8449A	2749A00159	23-Jul-2012	23-Jul-2013
1025	Preamplifier	Nemko USA	LNA25	399	27-Feb-2012	27-Feb-2013
1304	Antenna, Horn	Electro Metrics	RGA-60	6151	24-Nov-2010	24-Nov-2012
1763	Antenna, Bilog	Schaffner	CBL 6111D	22926	21-Feb-2012	21-Feb-2013
1767	Receiver	Rohde & Schwartz	ESIB26	837491/0002	09-Dec-2011	09-Dec-2012
1783	Cable Assy, 3m Chamber	Nemko	Chamber		26-Sep-2012	26-Sep-2013

Duty Cycle Correction

Short pulses

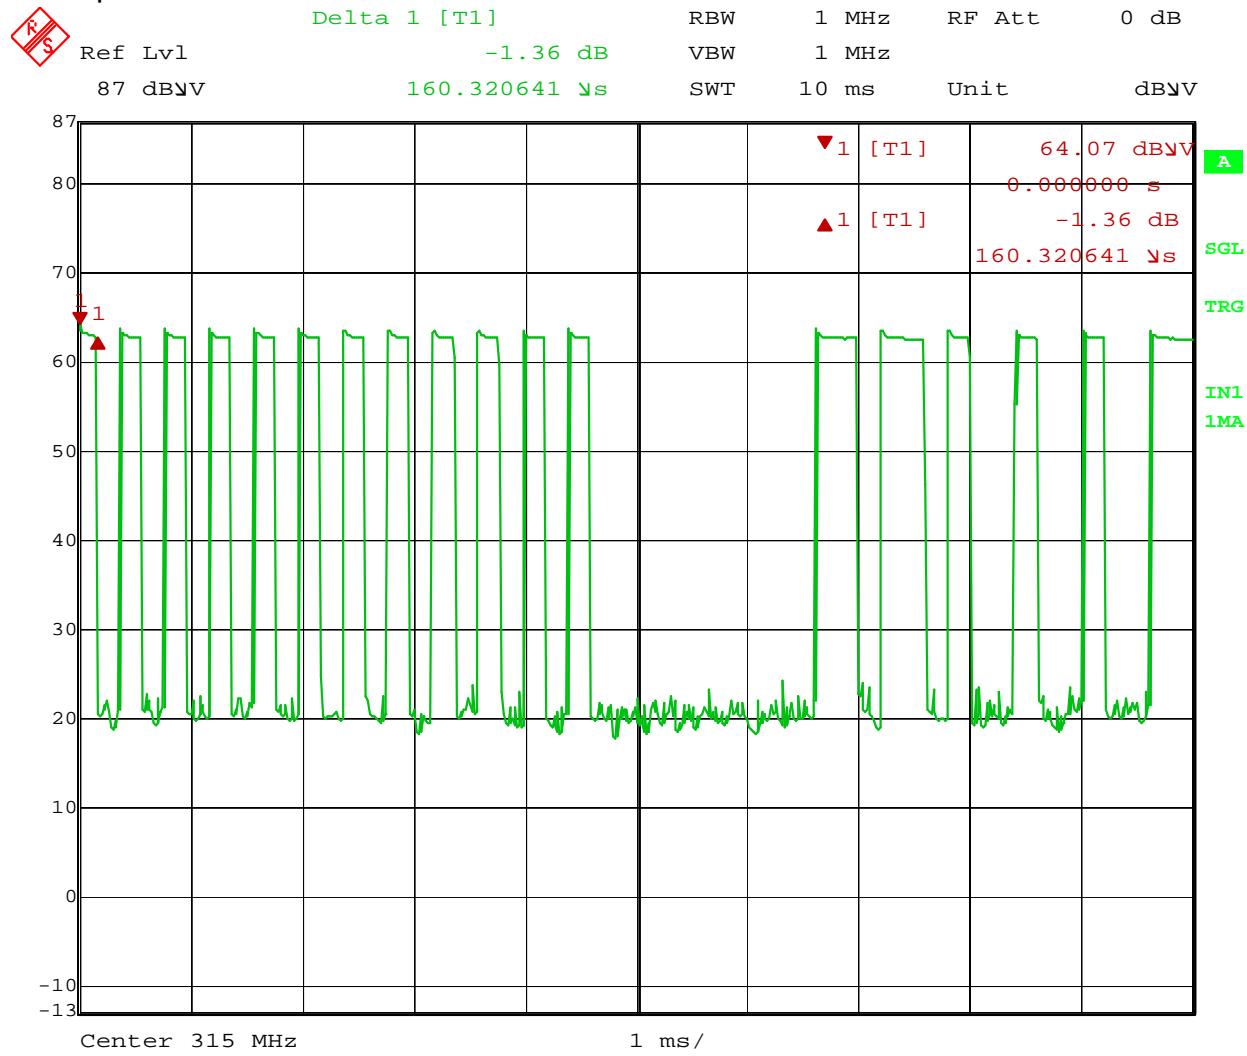

Date: 26.JUN.2012 08:08:23

Nemko USA, Inc.

FCC PART 15, SUBPART C


PERIODICALLY OPERATED LOW POWER TRANSMITTERS

EQUIPMENT: G3T / O3T

PROJECT NO.: 10232209RUS1

Duty Cycle Correction

Wide pulses

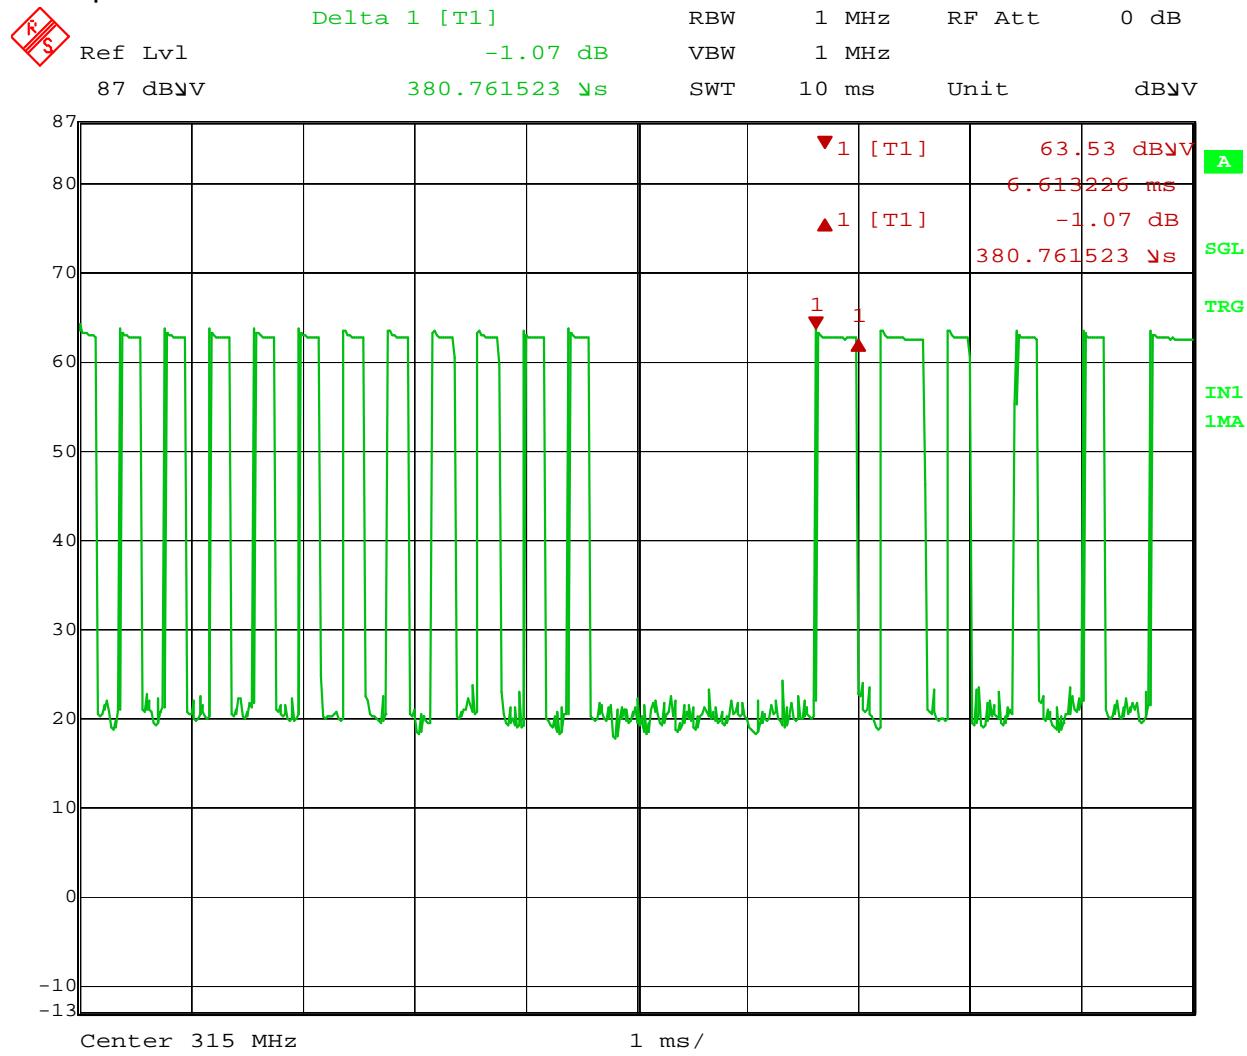

Date: 26.JUN.2012 08:09:42

Nemko USA, Inc.

FCC PART 15, SUBPART C

PERIODICALLY OPERATED LOW POWER TRANSMITTERS

EQUIPMENT: G3T / O3T

PROJECT NO.: **10232209RUS1**

Duty Cycle Correction


100 ms



Ref Lvl

87 dB_{UV}

RBW	100 kHz	RF Att	0 dB
VBW	100 kHz		
SWT	100 ms	Unit	dB _{UV}

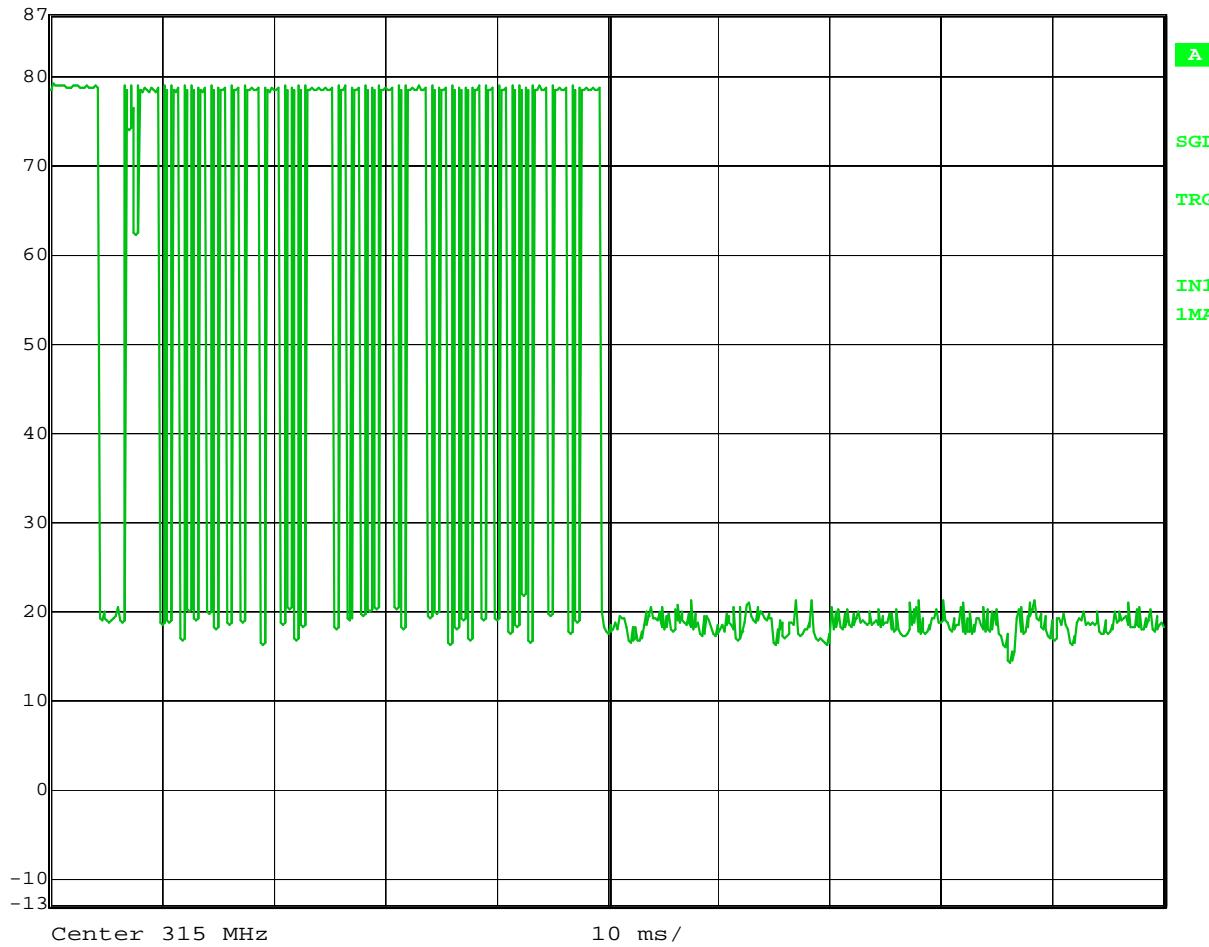

Date: 26.JUN.2012 08:10:57

Duty Cycle Correction


50 ms

34 Narrow pulses = 5.4 ms

49 wide pulses = 18.7 ms

24.1 ms total

20 log (24.1/100) = -12.4 dB

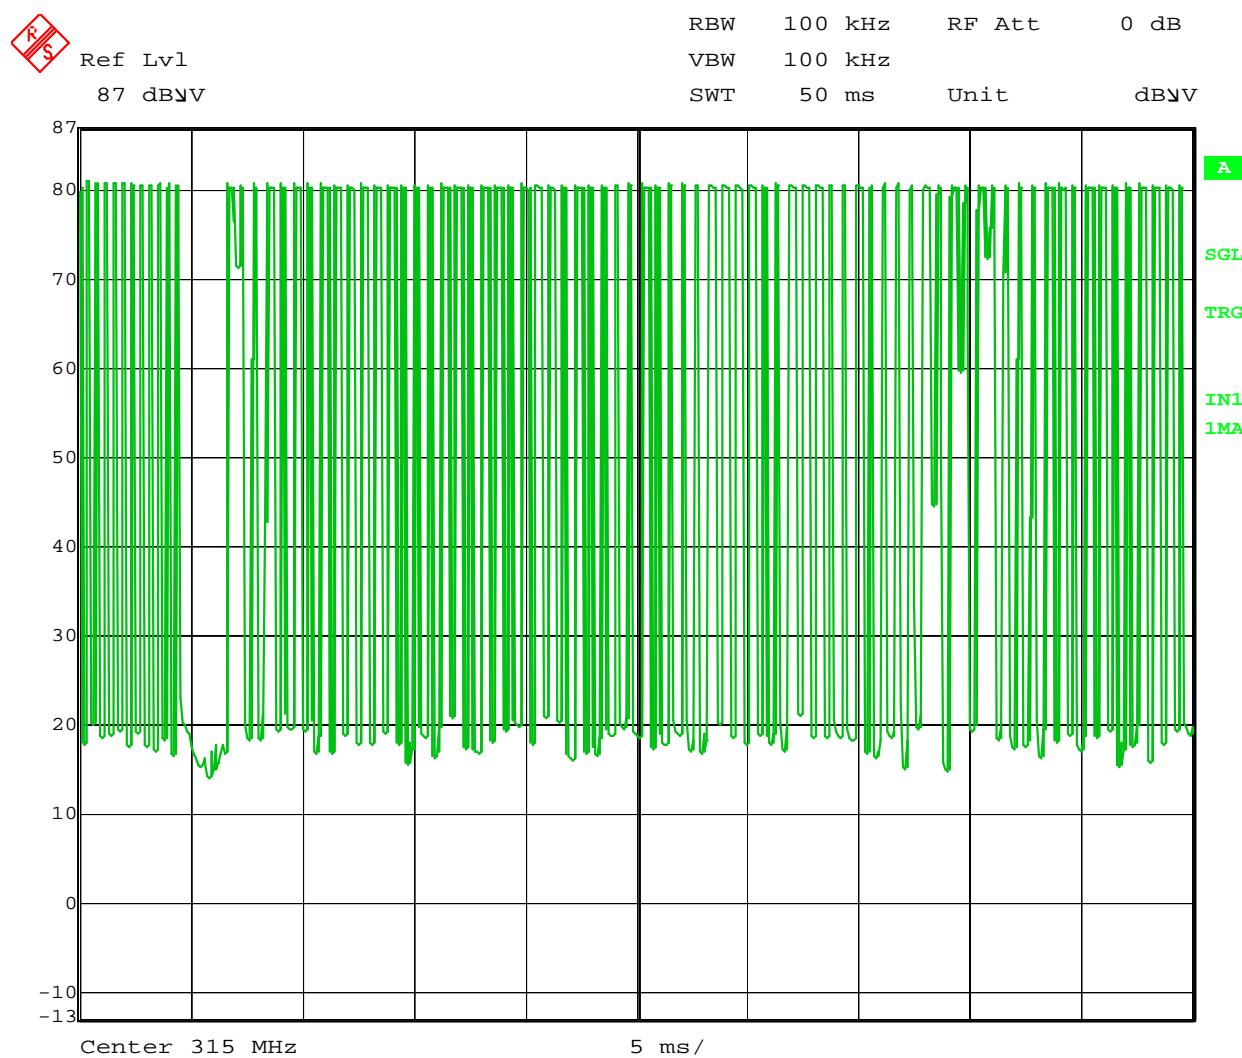

Nemko USA, Inc.

FCC PART 15, SUBPART C

PERIODICALLY OPERATED LOW POWER TRANSMITTERS

EQUIPMENT: G3T / O3T

PROJECT NO.: **10232209RUS1**

Section 5. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.231(c)
TESTED BY: David Light	DATE: 26 June 2012


Minimum Standard: 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Results: [Complies. See attached graph.](#)

Test Data: See attached graph.


Test Data – Occupied Bandwidth

315 MHz

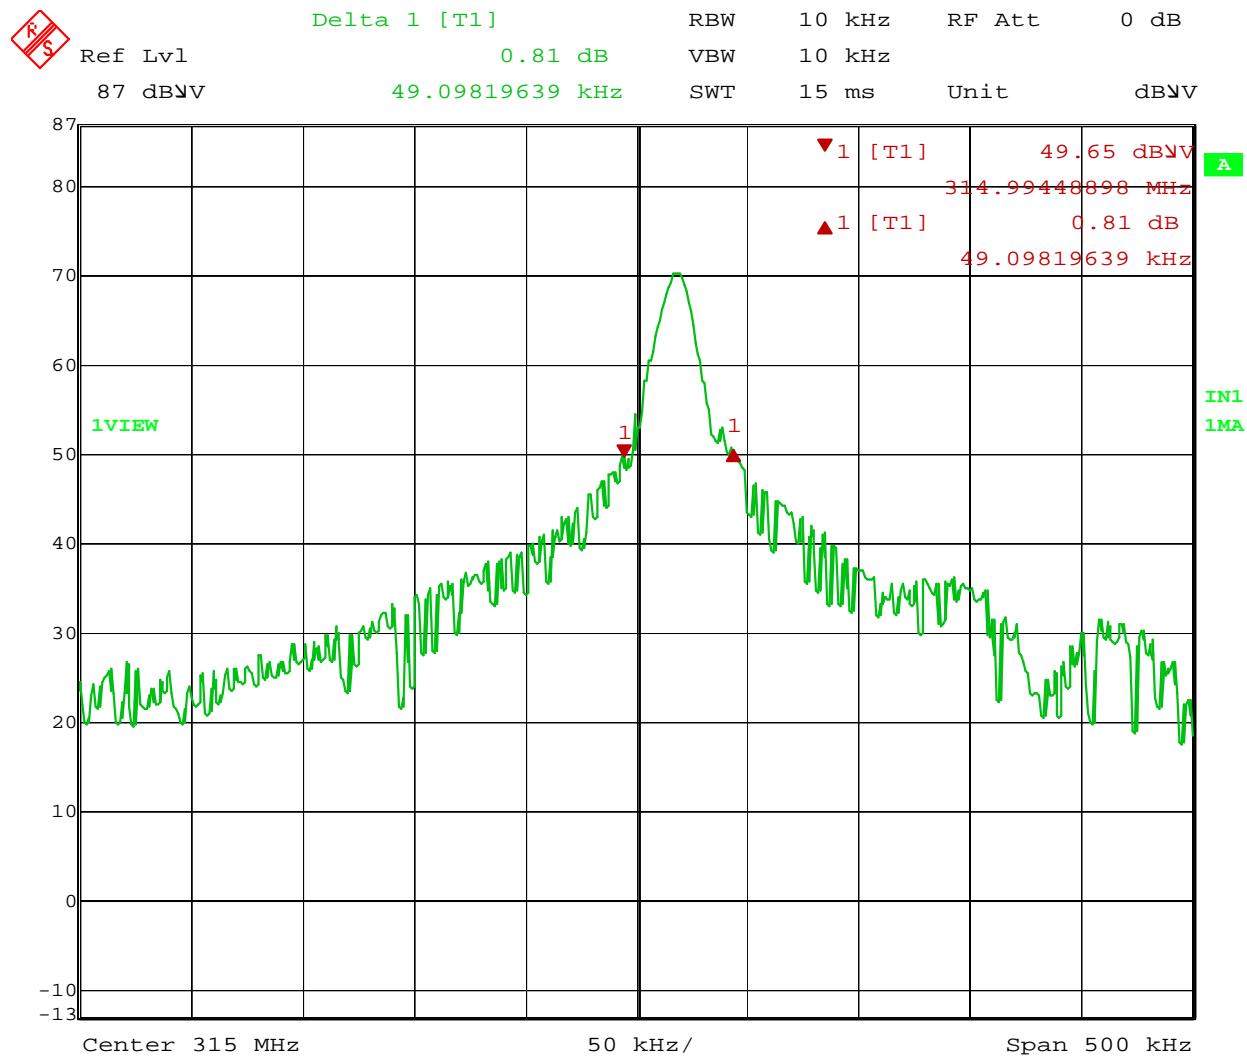**Limit = 787.5 kHz**


Test Data – Occupied Bandwidth

390 MHz

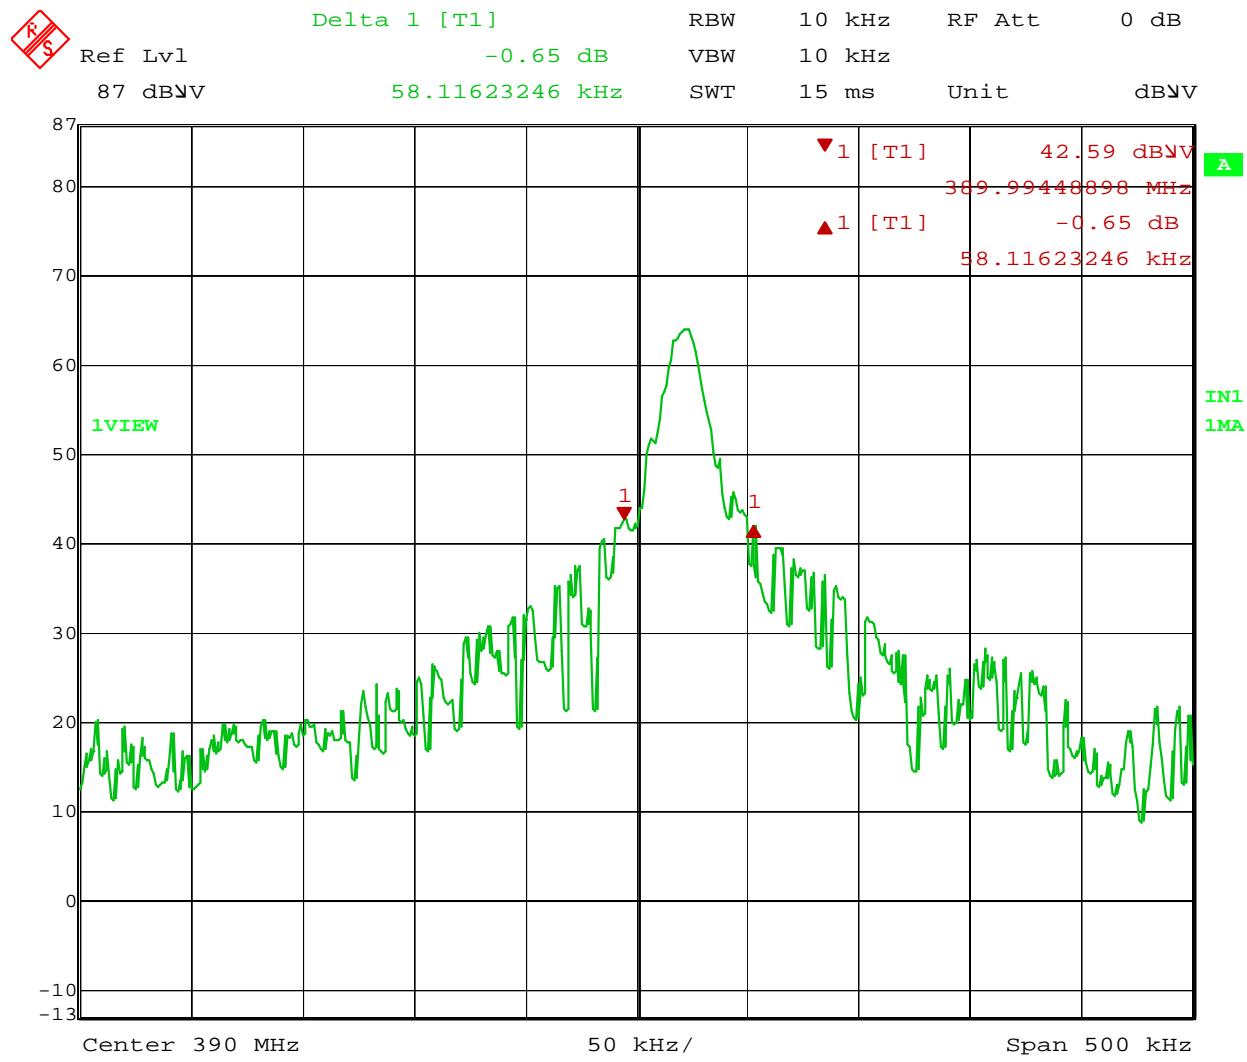
**Limit = 975.0 kHz**


Section 6. Block Diagrams

Conducted Emissions

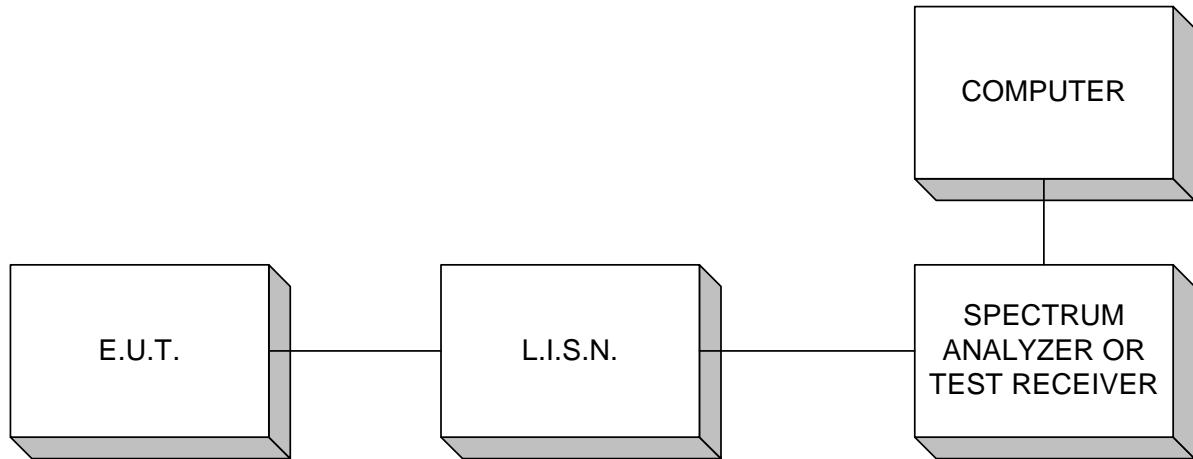


Occupied Bandwidth, Duty Cycle

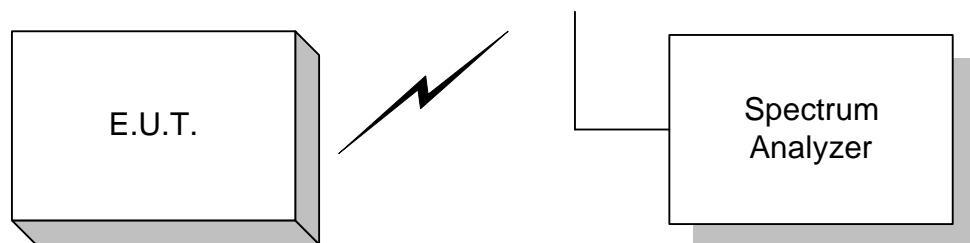

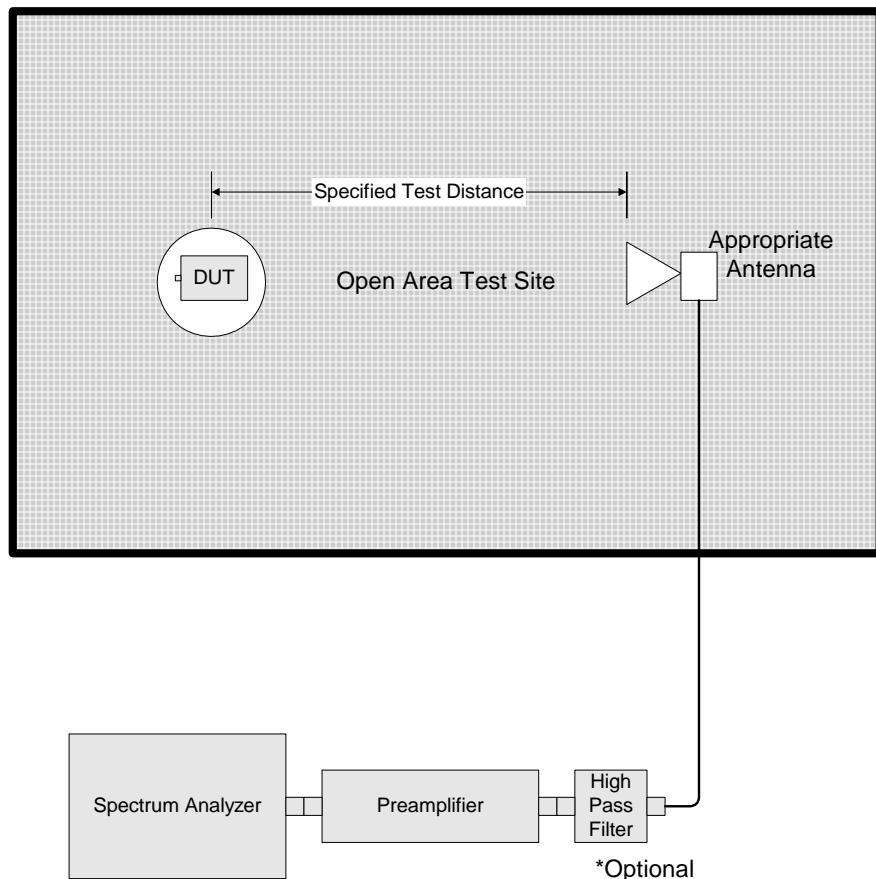Outdoor Test Site For Radiated Emissions**Radiated Emissions 30 MHz - 1 GHz**

The spectrum was searched up to the 10th harmonic of the fundamental frequency of operation.

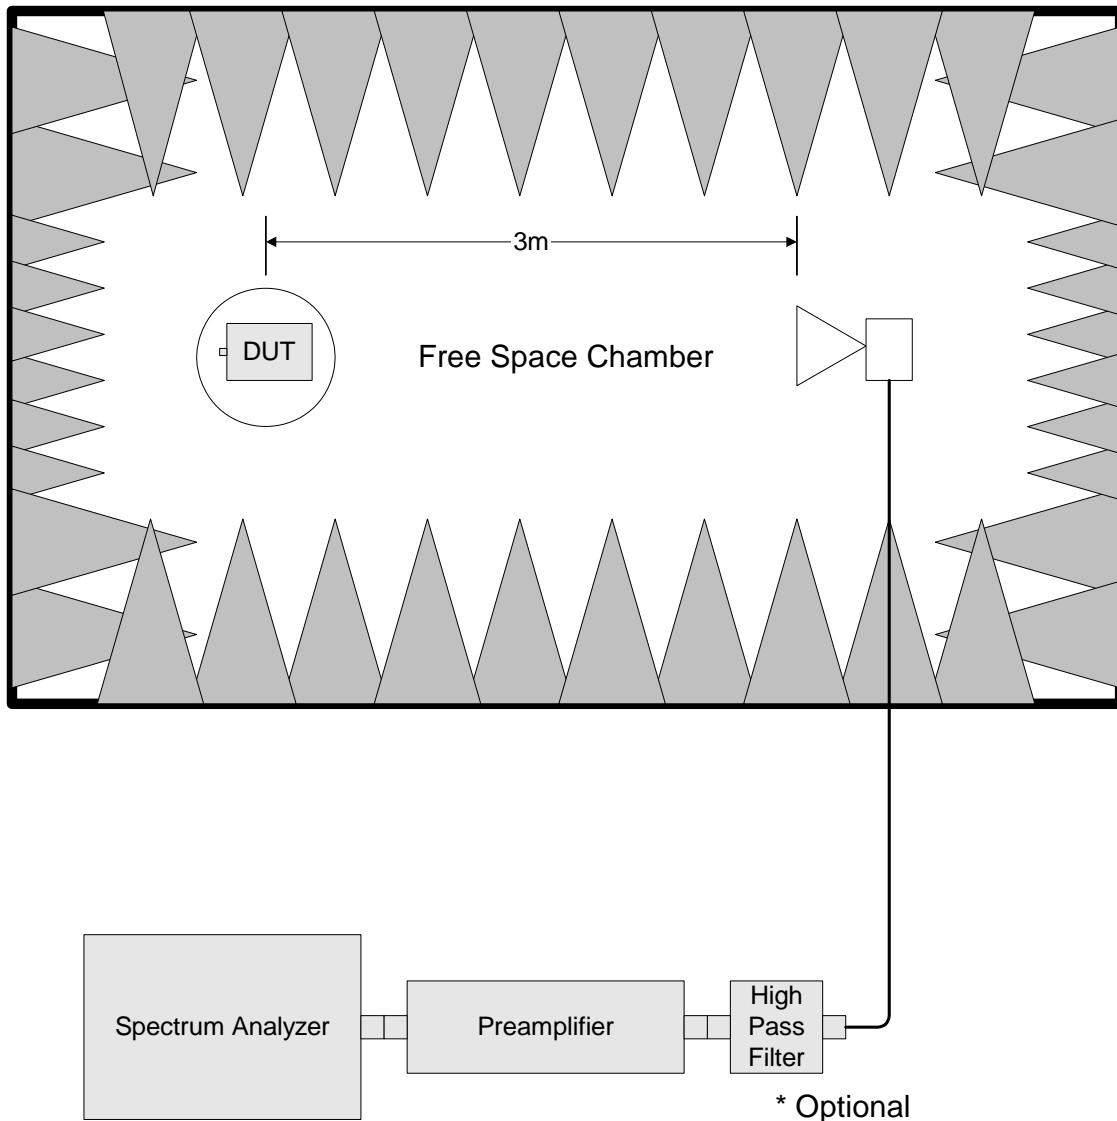

Radiated Emissions above 1 GHz

Nemko USA, Inc.

EQUIPMENT: G3T / O3T

FCC PART 15, SUBPART C

PERIODICALLY OPERATED LOW POWER TRANSMITTERS

PROJECT NO.: **10232209RUS1**

ANNEX A - RESTRICTED BANDS

Annex A**Restricted Bands of Operation**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.49 - 0.51	16.69475-16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425-16.80475	960-1240	7.25-7.75
3.020 - 3.026	25.5-25.67	1300-1427	8.025-8.5
4.125 - 4.128	37.5-38.25	1435-1626.6	9.0-9.2
4.17725 - 4.17775	73-74.6	1645.5-1646.5	9.3-9.5
4.20725 - 4.20775	74.8-75.2	1660-1710	10.6-12.7
6.215 - 6.218	108-121.94	1718.8-1722.2	13.25-13.4
6.31175 - 6.31225	123-138	2220-2300	14.47-14.5
8.291 - 8.294	149.9-150.05	2310-2390	15.35-16.2
8.362 - 8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625 - 8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425 - 8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29 - 12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975 - 12.52025	240-285	3345.8-3358	36.43-36.5
12.57675 - 12.57725	322-335.4	3600-4400	Above 38.6
13.36 - 13.41			