



**Nemko Test Report:** 10236845RUS1

**Applicant:** Genie Company  
One Door Drive  
Mt. Hope, OH 44660

**Equipment Under Test:** G1T and O1T  
(E.U.T.)

**FCC ID#:** B8Q3153901T

**In Accordance With:** **FCC Part 15, Subpart C**  
For Low Power Transmitters Operating Periodically  
In The Band 40.66 - 40.77 MHz And Above 70 MHz

**Tested By:** Nemko USA, Inc.  
802 N. Kealy  
Lewisville, TX 75057-3136

**TESTED BY:**   
\_\_\_\_\_  
David Light, Senior Wireless Engineer

**DATE:** 21-Jan-2013

**APPROVED BY:**   
\_\_\_\_\_  
Michael Cantwell

**DATE:** 30-Jan-2013

**Total Number of Pages:** 26

**TABLE OF CONTENTS**

<b>SECTION 1. SUMMARY OF TEST RESULTS</b>	<b>3</b>
<b>SECTION 2. EQUIPMENT UNDER TEST (E.U.T.)</b>	<b>5</b>
<b>SECTION 3. TRANSMISSION REQUIREMENTS</b>	<b>7</b>
<b>SECTION 4. RADIATED EMISSIONS</b>	<b>11</b>
<b>SECTION 5. OCCUPIED BANDWIDTH</b>	<b>19</b>
<b>SECTION 6. BLOCK DIAGRAMS</b>	<b>22</b>
<b>ANNEX A - RESTRICTED BANDS</b>	<b>25</b>

**Section 1. Summary of Test Results**

Manufacturer: Overhead Door

Model No.: G1T and O1T\*

\*Note: Models G1T and O1T are identical. G1T is marketed under the Genie brand name and O1T is marketed under the Overhead Door brand.

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.231. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

<input checked="" type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit
<input type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety, for use by the company's employees only.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

**Summary Of Test Data**

Name of Test	Paragraph No.	Results
Transmission Requirements	15.231(a)	Complies
Radiated Emissions	15.231(b)	Complies
Occupied Bandwidth	15.231(c)	Complies
Frequency Tolerance	15.231(d)	NA
Alternate Field Strength Requirements	15.231(e)	NA
Powerline Conducted Emissions	15.207	NA

**Footnotes:**

- 1) The device does not operate between 40.66 to 40.70 MHz
- 2) The device does not operate at a periodic rate.
- 3) The device is battery powered. Testing is performed with new batteries.


**Section 2. Equipment Under Test (E.U.T.)****General Equipment Information**

<b>Frequency Range:</b>	315 and 390 MHz
<b>Operating Frequency(ies) of Sample:</b>	315 and 390 MHz
<b>Type of Emission:</b>	FSK
<b>Supply Power Requirement:</b>	3 Vdc (lithium battery)

**Description of E.U.T.**

Key fob wireless door opener.

**System Diagram**

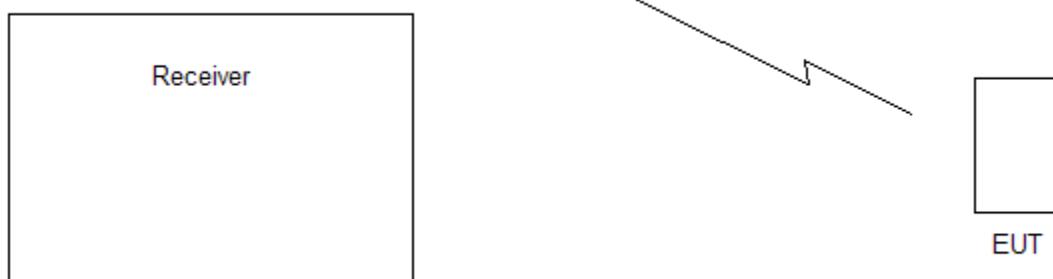

**Section 3.      Transmission Requirements**

NAME OF TEST: Transmission Requirements	PARA. NO.: 15.231(a)
TESTED BY: David Light	DATE: 10 January 2013

**Minimum Standard:** 15.231(a) Continuous transmissions such as voice, video or data transmissions are not permitted.

15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after being released.

15.231(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds of activation.

15.231(a)(3) Periodic transmissions at regular pre-determined intervals are not permitted. However polling or supervisory transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

15.231(a)(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm.


**Test Results:** [Complies.](#)

**Test Data:** [Compliance was determined by verification of technical specifications and a functional test on the equipment.](#)

**Rationale for Compliance with Transmission Requirements**


<b>15.231(a)(1)</b>	<input checked="" type="checkbox"/> Manual activation	TX deactivation time:
<b>15.231(a)(2) :</b>	<input type="checkbox"/> Automatic activation	
<b>15.231(a)(3) :</b>	<input type="checkbox"/> Regular, predetermined transmissions <input type="checkbox"/> Polling or supervisory transmissions	TX rate and duration:
<b>15.231(a)(4) :</b>	<input type="checkbox"/> Alarm device operating during the pendency of alarm condition <input checked="" type="checkbox"/> Non-alarm device	

## Test Data – Transmission Requirements

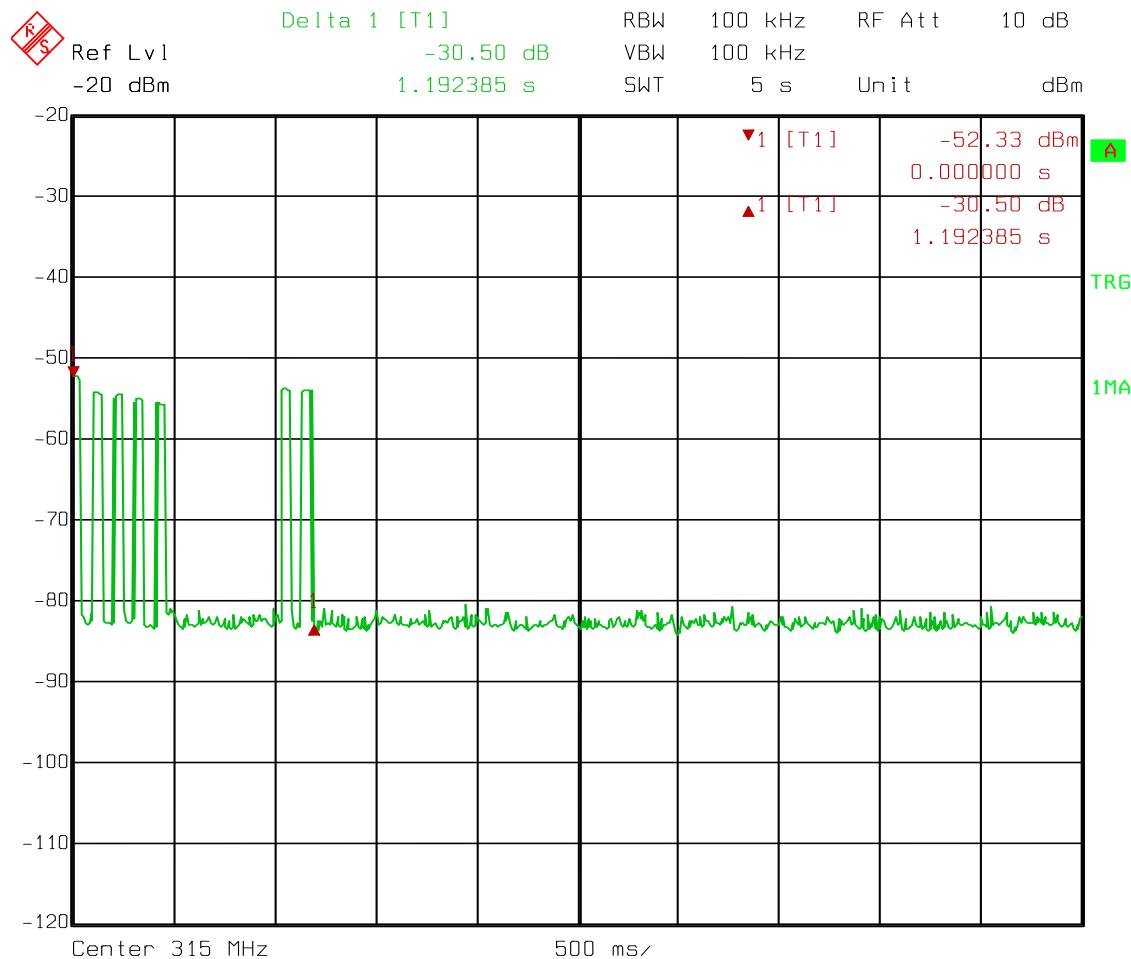

Date: 21.JAN.2013 12:14:04

## Test Data – Transmission Requirements

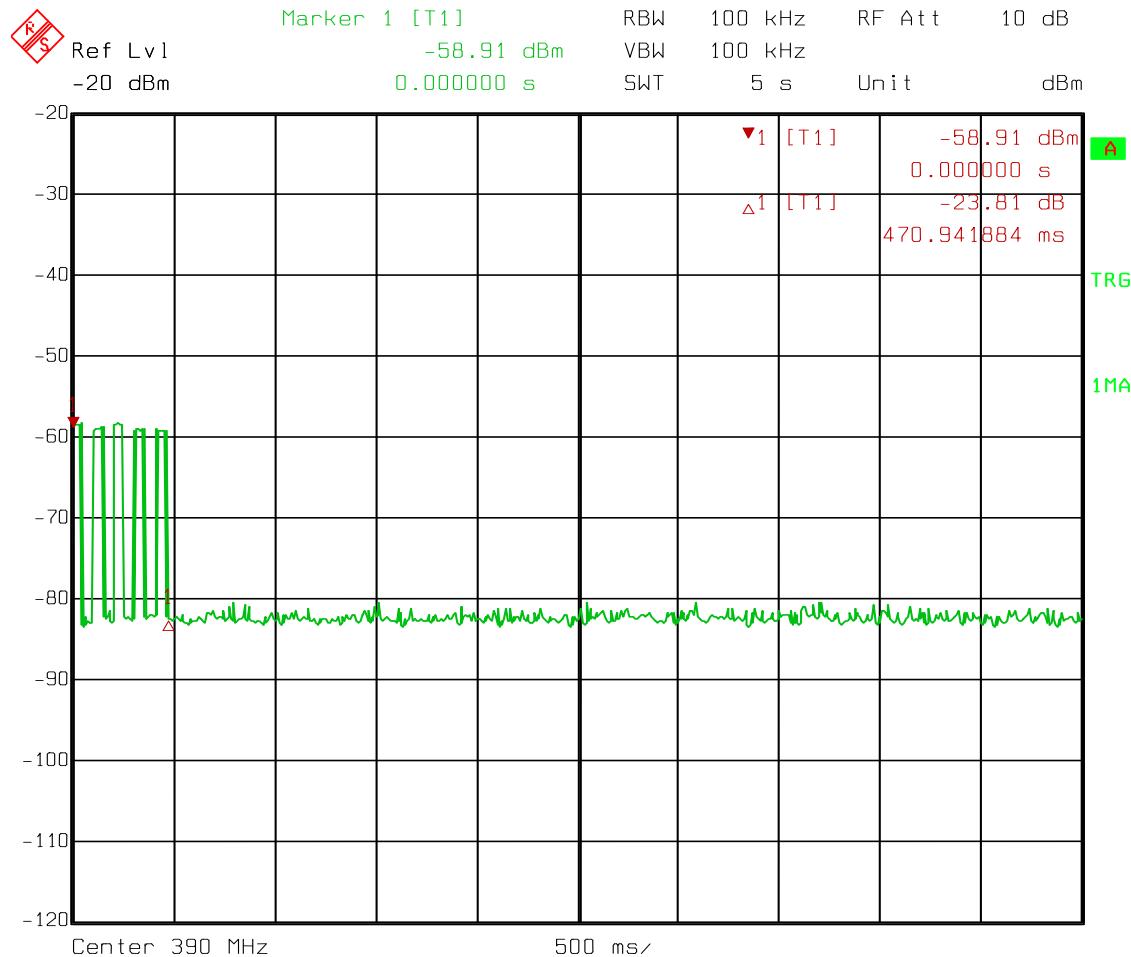

Date: 21.JAN.2013 12:15:13

**Section 4. Radiated Emissions**

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.231(b)
TESTED BY: Brian Boyea	DATE: 15 November 2012

**Minimum Standard:****Permissible Field Strength Limits (Momentarily Operated Devices)**

Fundamental Frequency (MHz)	Field Strength of Fundamental Microvolts/Meter at 3 meters; (watts)	Field Strength of Unwanted Emissions Microvolts/Meter at 3 meters; (watts)
40.66 - 40.70	2,250	225
70-130	1, 250	125
130-174	1,250 to 3,750*	125 to 375
174-260 (note 1)	3,750	375
260-470 (note 1)	3,750 to 12,500*	375 to 1,250
Above 470	12,500	1,250

**Notes:**

# Use quasi-peak or averaging meter.	For 130 - 174 MHz: $FS \text{ (microvolts/m)} = (56.82 \times F) - 6136$
* Linear interpolation with frequency $F$ in MHz	For 260 - 470 MHz: $FS \text{ (microvolts/m)} = (41.67 \times F) - 7083$

Any emissions that fall within the restricted bands of 15.205 shall not exceed the following limits:

Frequency (MHz)	Field Strength ( $\mu\text{V/m} @ 3\text{m}$ )	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

**Test Results:** Complies. The worst-case emission level is 72.1 dB $\mu\text{V/m} @ 3\text{m}$  at 315 MHz. This is 3.5 dB below the specification limit.

**Test Data:** See attached table.

Above 1 GHz a spectrum analyzer and low noise amplifier are used to measure emission levels. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was 1 MHz.

**Test Data - Radiated Emissions**

Meas. Freq. (MHz)	Ant Pol. (H/V)	Duty Cycle	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail	Unc.	Comment
315	H	-11.7	67.67	14.1	2.0	0.0	72.1	75.6	-3.5	Pass		
315	V	-11.7	54.61	14.1	2.0	0.0	59.0	75.6	-16.6	Pass		
630	H	-11.7	38.02	20.1	2.5	27.3	21.6	55.6	-34.0	Pass		
630	V	-11.7	33.09	20.1	2.5	27.3	16.7	55.6	-38.9	Pass		
945	H	-11.7	27.88	24.3	3.5	27.3	16.7	55.6	-38.9	Pass	Noise Floor	
945	V	-11.7	28.76	24.3	3.5	27.3	17.6	55.6	-38.0	Pass	Noise Floor	
1260	H	-11.7	32.72	25.5	3.5	30.5	19.5	55.6	-36.1	Pass	Noise Floor	
1260	V	-11.7	32.09	25.5	3.5	30.5	18.9	55.6	-36.7	Pass	Noise Floor	
1575	H	-11.7	40.76	25.6	3.7	31.4	27.0	54.0	-27.0	Pass		
1575	V	-11.7	33.49	25.6	3.7	31.4	19.7	54.0	-34.3	Pass		
1890	H	-11.7	38.87	28	4.3	31.7	27.8	55.6	-27.8	Pass		
1890	V	-11.7	37.23	28	4.3	31.7	26.1	55.6	-29.5	Pass		
2205	H	-11.7	35.02	28.7	5.6	32.0	25.6	54.0	-28.4	Pass		
2205	V	-11.7	36.08	28.7	5.6	32.0	26.7	54.0	-27.3	Pass		
2520	H	-11.7	43.72	29.8	5.5	32.2	35.1	55.6	-20.5	Pass		
2520	V	-11.7	36.11	29.8	5.5	32.2	27.5	55.6	-28.1	Pass		
2835	H	-11.7	40.95	29.9	6.4	32.2	33.4	54.0	-20.7	Pass		
2835	V	-11.7	36.37	29.9	6.4	32.2	28.8	54.0	-25.2	Pass		
3150	H	-11.7	37.59	31.6	6.7	32.3	31.9	55.6	-23.7	Pass		
3150	V	-11.7	33.8	31.6	6.7	32.3	28.1	55.6	-27.5	Pass		


The EUT was tested on three orthogonal axes.

## Test Data - Radiated Emissions


Meas. Freq. (MHz)	Ant Pol. (H/V)	Duty Cycle	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail	Unc.	Comment
390	H	-11.7	54.6	16.1	2.2	0.0	61.2	75.6	-14.4	Pass		
390	V	-11.7	41.67	16.1	2.2	0.0	48.3	75.6	-27.3	Pass		
780	H	-11.7	33.27	21.8	3.3	27.3	19.4	55.6	-36.2	Pass		
780	V	-11.7	26.56	21.8	3.3	27.3	12.7	55.6	-42.9	Pass		
1170	H	-11.7	31.22	25.3	3.4	29.9	18.3	50.0	-31.7	Pass	Noise Floor	
1170	V	-11.7	31.31	25.3	3.4	29.9	18.4	50.0	-31.6	Pass	Noise Floor	
1560	H	-11.7	37.78	25.6	3.7	31.4	24.0	50.0	-26.0	Pass		
1560	V	-11.7	33.42	25.6	3.7	31.4	19.6	50.0	-30.4	Pass		
1950	H	-11.7	38.89	28.5	4.2	31.9	28.0	54.0	-26.0	Pass		
1950	V	-11.7	35.32	28.5	4.2	31.9	24.4	54.0	-29.6	Pass		
2340	H	-11.7	38.24	28.8	5.5	32.0	28.8	50.0	-21.2	Pass		
2340	V	-11.7	37.9	28.8	5.5	32.0	28.5	50.0	-21.5	Pass		
2730	H	-11.7	35.72	29.6	6.2	32.5	27.3	50.0	-22.7	Pass		
2730	V	-11.7	34.5	29.6	6.2	32.5	26.1	50.0	-23.9	Pass		
3120	H	-11.7	35.62	31.6	6.5	32.4	29.6	55.6	-26.0	Pass		
3120	V	-11.7	31.54	31.6	6.5	32.4	25.5	55.6	-30.1	Pass	Noise Floor	
3510	H	-11.7	33.84	31.9	6.9	32.2	28.7	54.0	-25.3	Pass		
3510	V	-11.7	37.33	31.9	6.9	32.2	32.2	54.0	-21.8	Pass		
3900	H	-11.7	37.3	32.9	7.9	32.1	34.3	54.0	-19.7	Pass		
3900	V	-11.7	33.4	32.9	7.9	32.1	30.4	54.0	-23.6	Pass	Noise Floor	

The spectrum was searched from 30 MHz to 4 GHz. All emissions within 20 dB of the specification limit are reported.

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
993	Antenna, Horn	A.H. Systems	SAS-200/571	162	22-Sep-2011	22-Sep-2013
1016	Preamplifier	Hewlett Packard	8449A	2749A00159	23-Jul-2012	23-Jul-2013
1025	Preamplifier, 25dB	Nemko USA, Inc.	LNA25	399	27-Feb-2012	27-Feb-2013
1480	Antenna, Bilog	Schaffner-Chase	CBL6111C	2572	07-Feb-2012	07-Feb-2013
1767	Receiver	Rohde & Schwartz	ESIB26	837491/0002	19-Dec-2012	19-Dec-2013
1783	Cable Assy, 3m Chamber	Nemko	Chamber		26-Sep-2012	26-Sep-2013

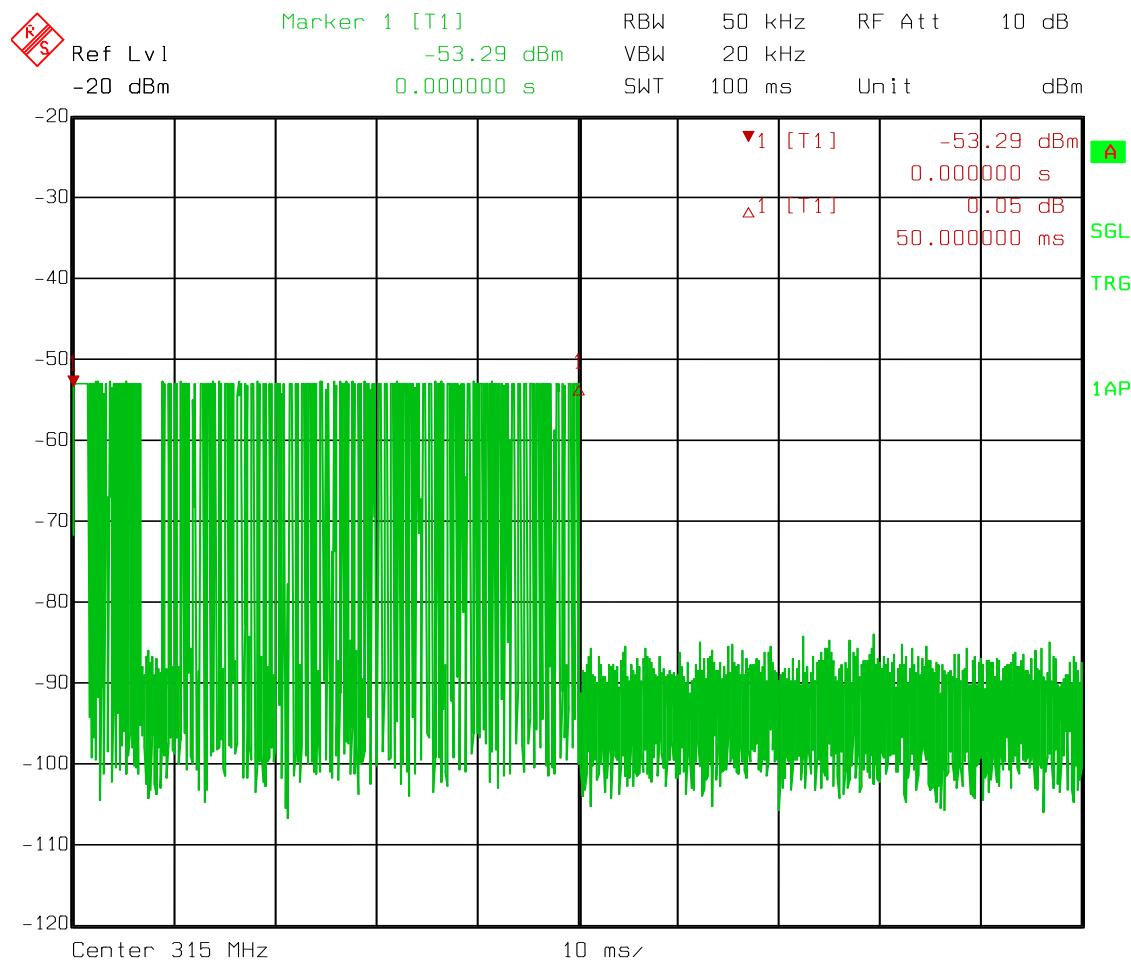**Duty Cycle Correction**  
315 MHz

Date: 10.JAN.2013 12:45:58

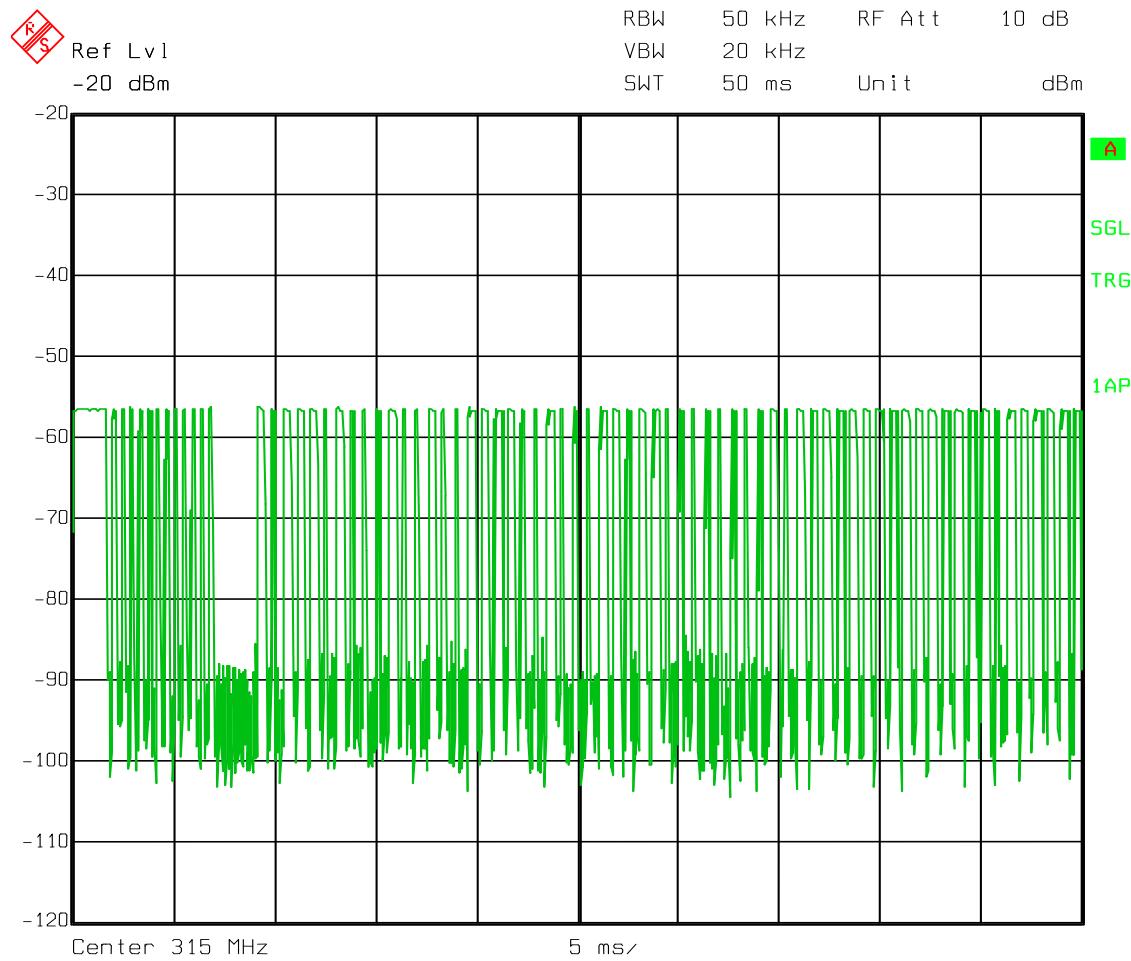**Duty Cycle Correction**  
315 MHz


Date: 10.JAN.2013 12:47:26

Preamble + narrow pulses + wide pulses = 1.68 ms + 8.58 ms + 15.6 ms = 25.9 ms

Duty Cycle Correction =  $20 \log (25.9/100) = -11.7 \text{ dB}$

**Duty Cycle Correction**

315 MHz

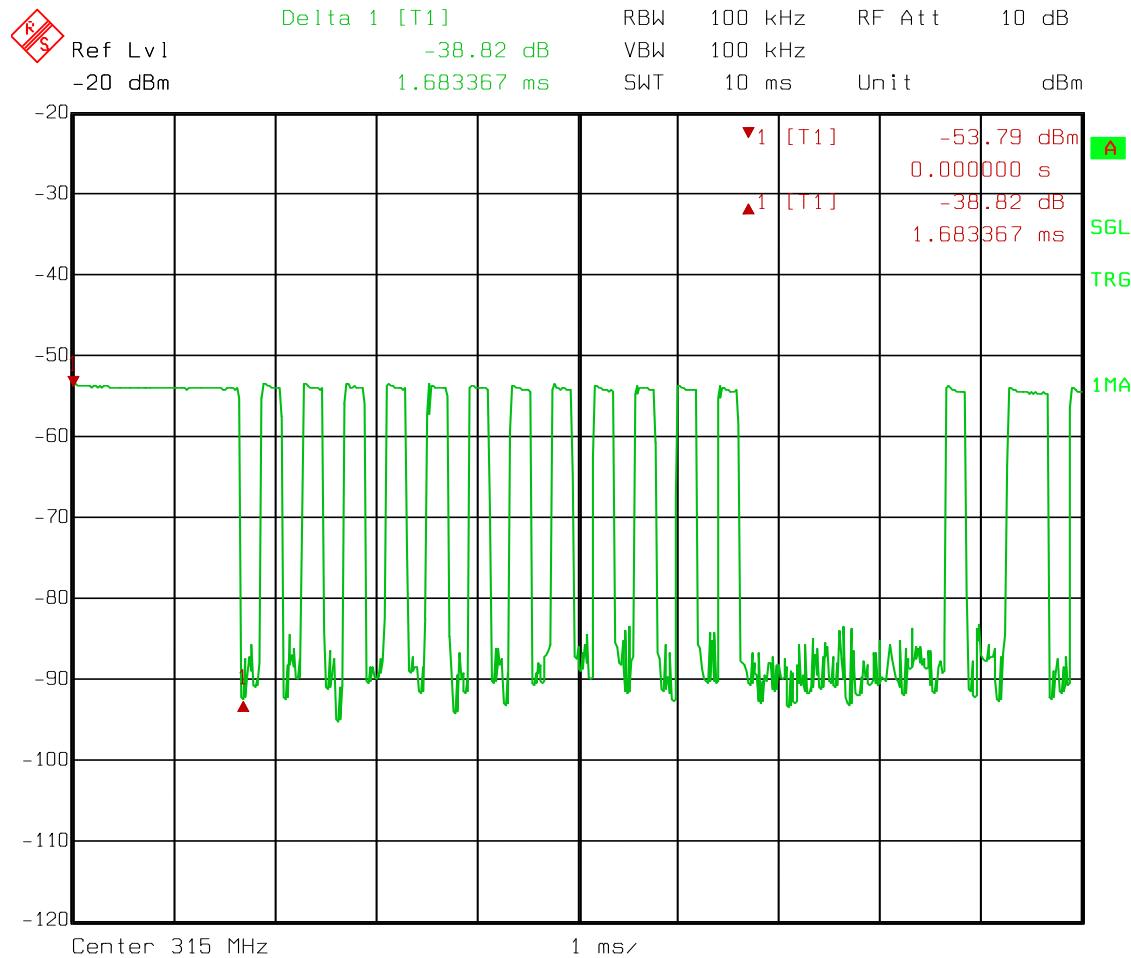


Date: 22.JAN.2013 12:40:04

Preamble = 1.68 ms

**Duty Cycle Correction**

315 MHz

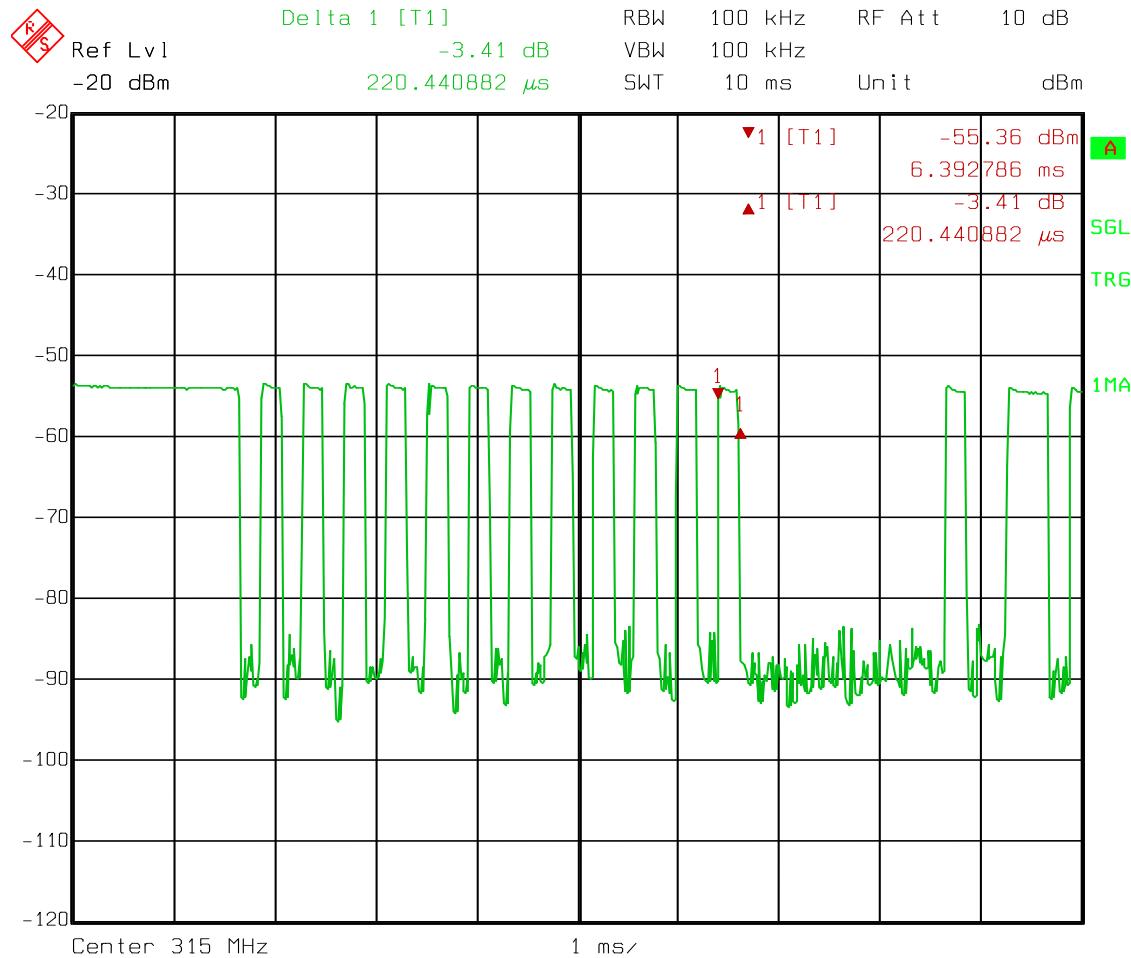


Date: 22.JAN.2013 12:39:41

Narrow pulses = 220  $\mu$ s

**Duty Cycle Correction**

315 MHz

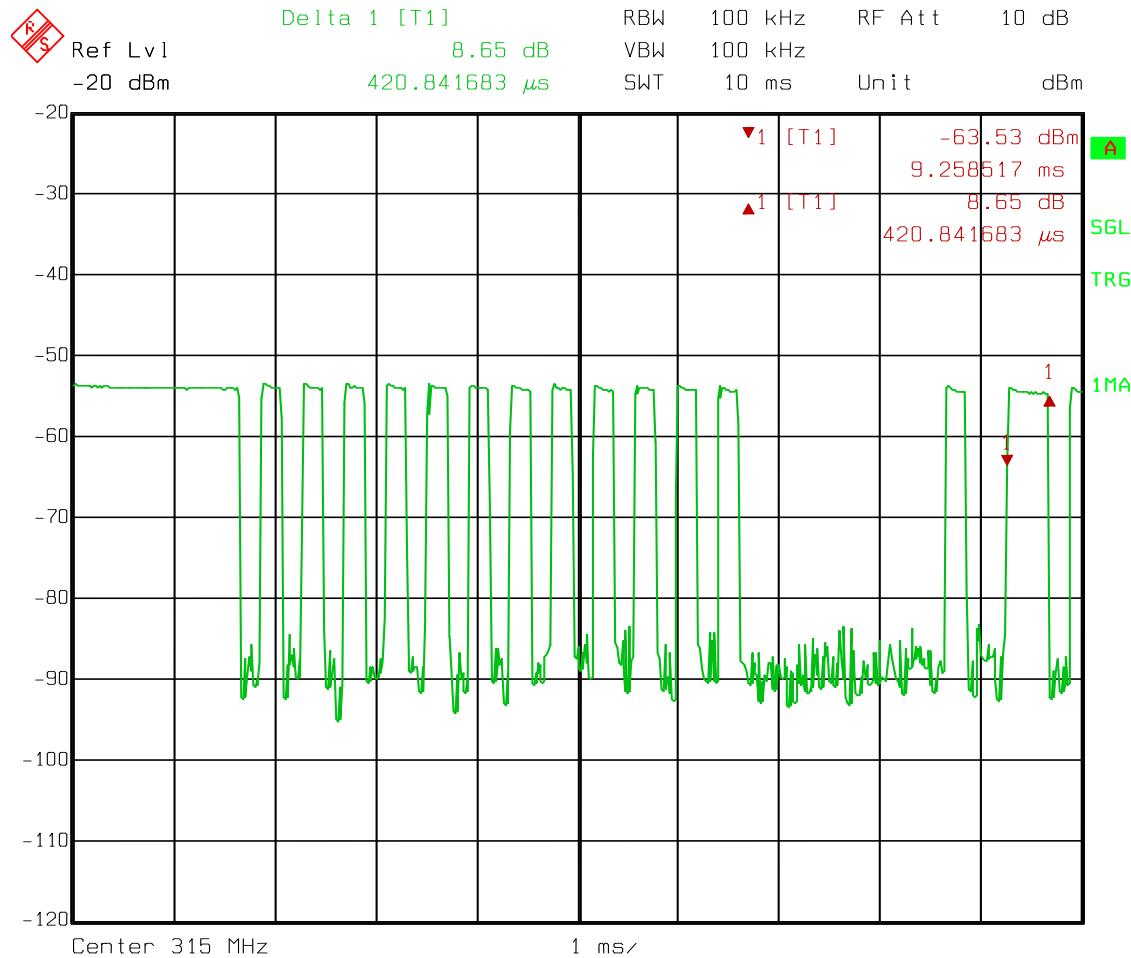

Date: 22.JAN.2013 12:38:56

Wide pulses = 421  $\mu$ s

**Section 5. Occupied Bandwidth**

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.231(c)
TESTED BY: David Light	DATE: 21 January 2013


**Minimum Standard:** 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Results:** [Complies. See attached graph\(s\).](#)

**Test Data:** See attached graph.

## Test Data – Occupied Bandwidth


315 MHz

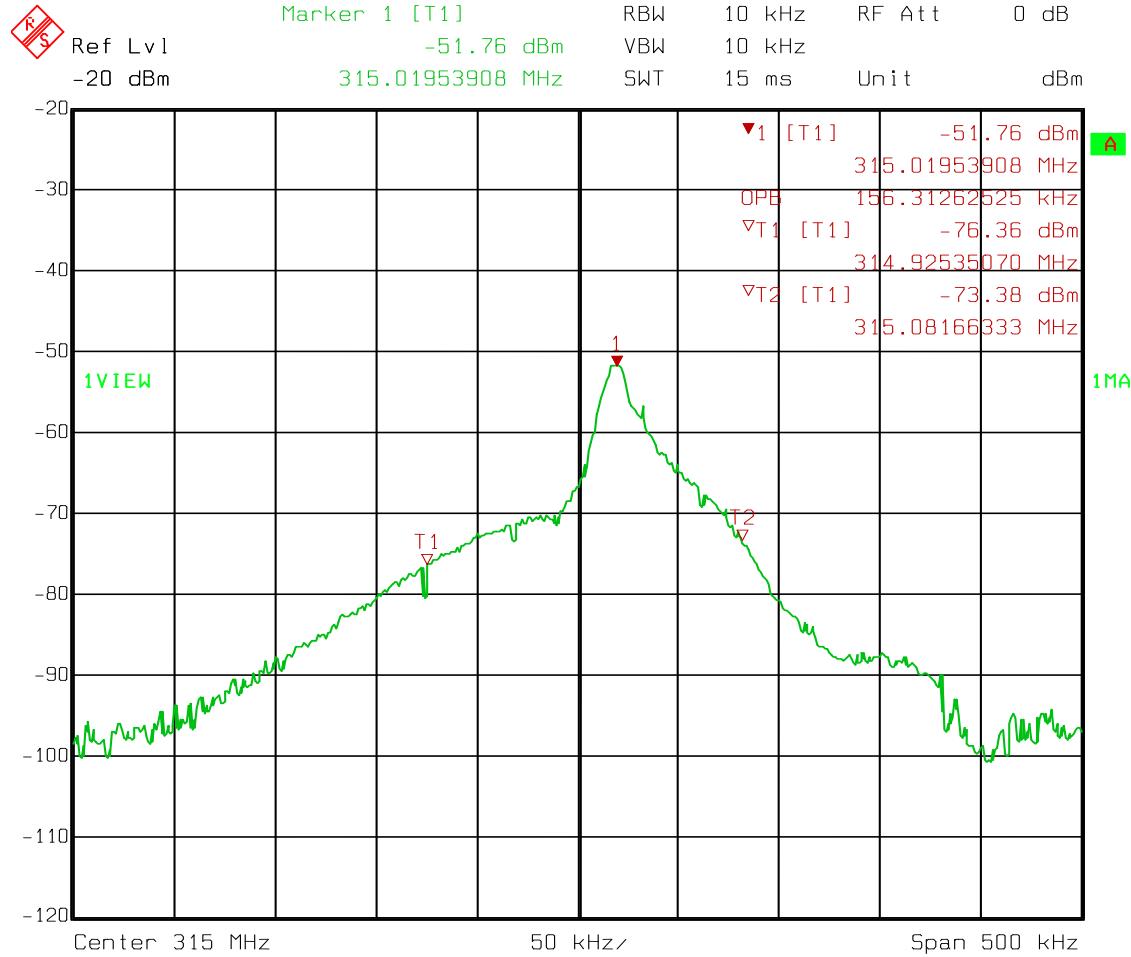

Limit = 787.5 kHz

## Test Data – Occupied Bandwidth

390 MHz

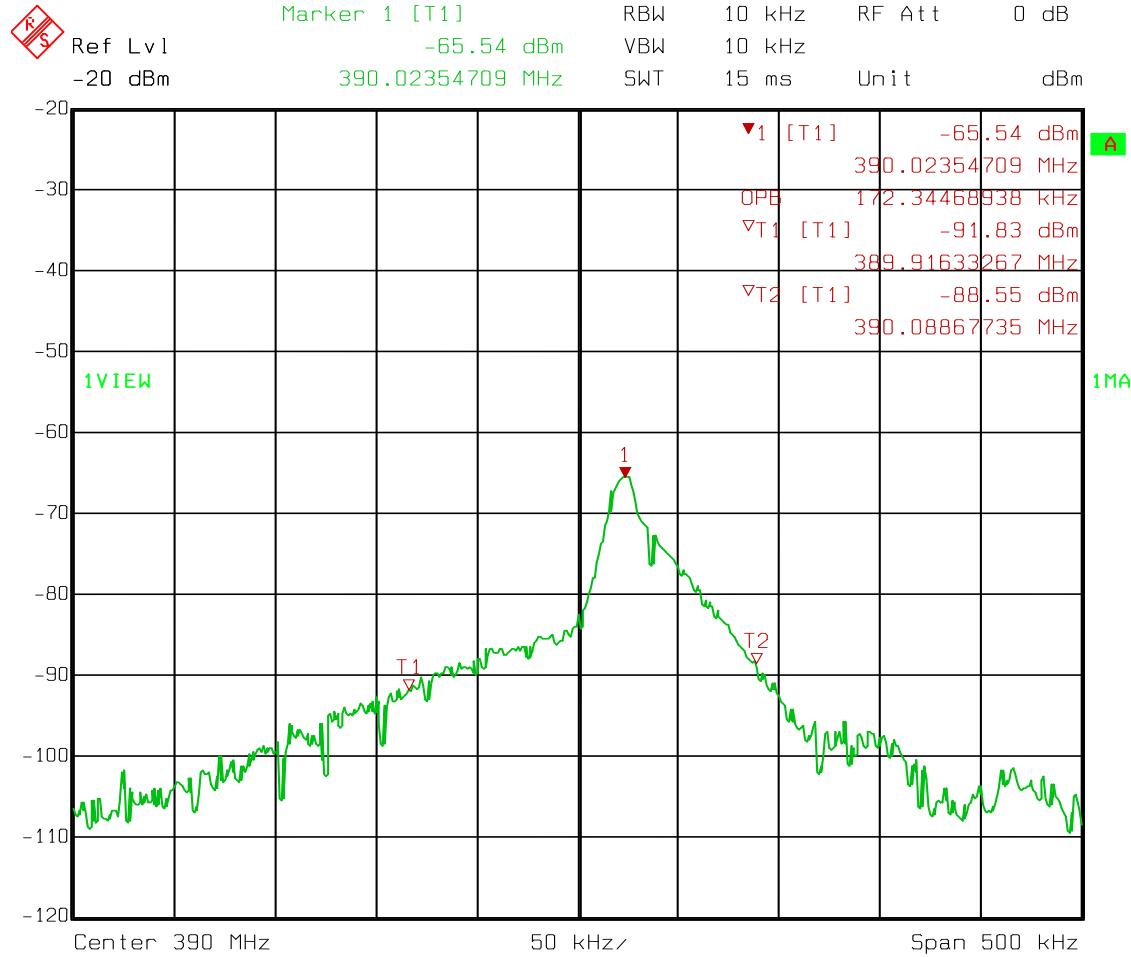


Date: 10.JAN.2013 12:56:10


Limit = 975.0 kHz


## Section 6. Block Diagrams

### Conducted Emissions

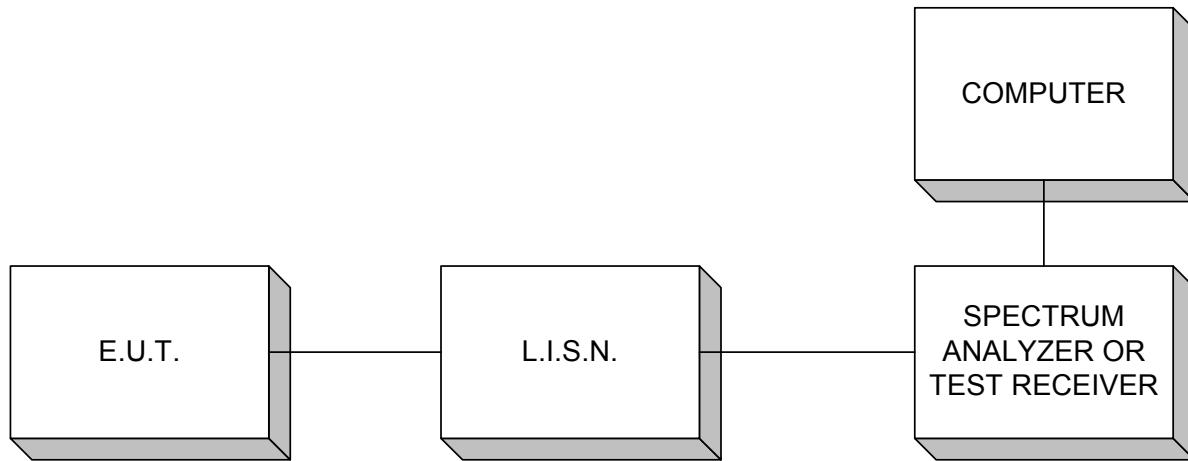


### Occupied Bandwidth, Duty Cycle

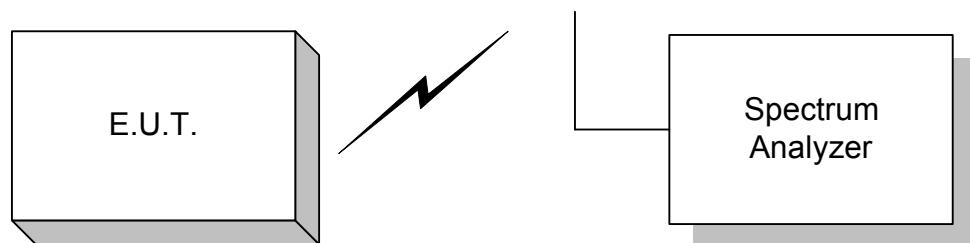

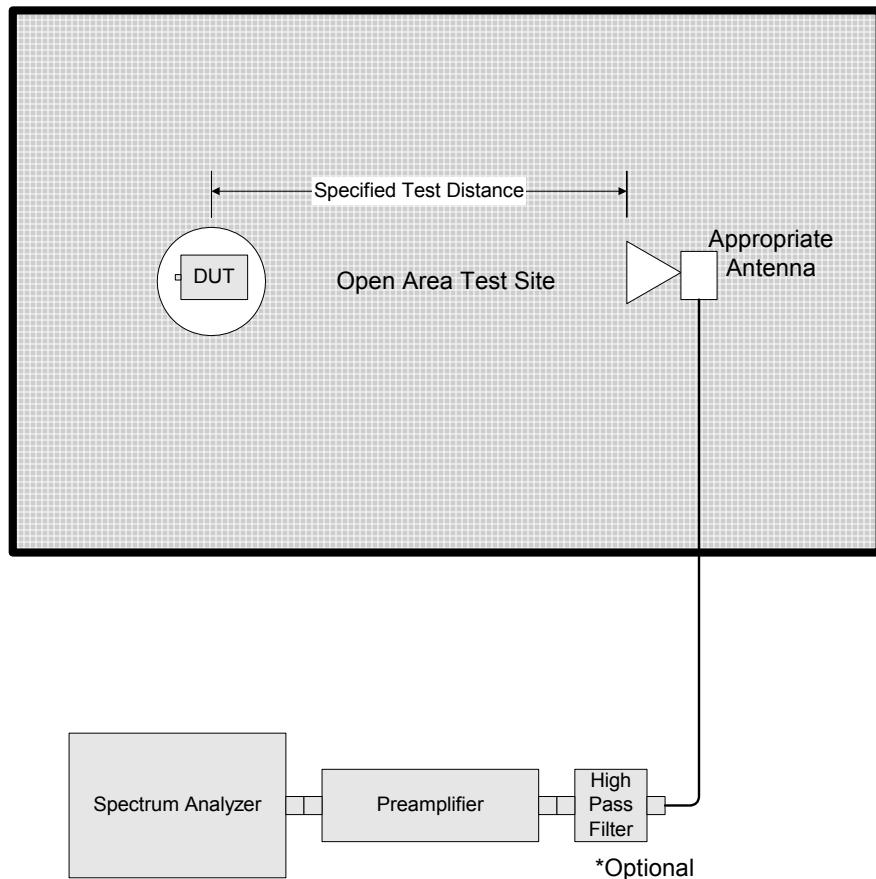**Outdoor Test Site For Radiated Emissions****Radiated Emissions 30 MHz - 1 GHz**

The spectrum was searched up to the 10<sup>th</sup> harmonic of the fundamental frequency of operation.

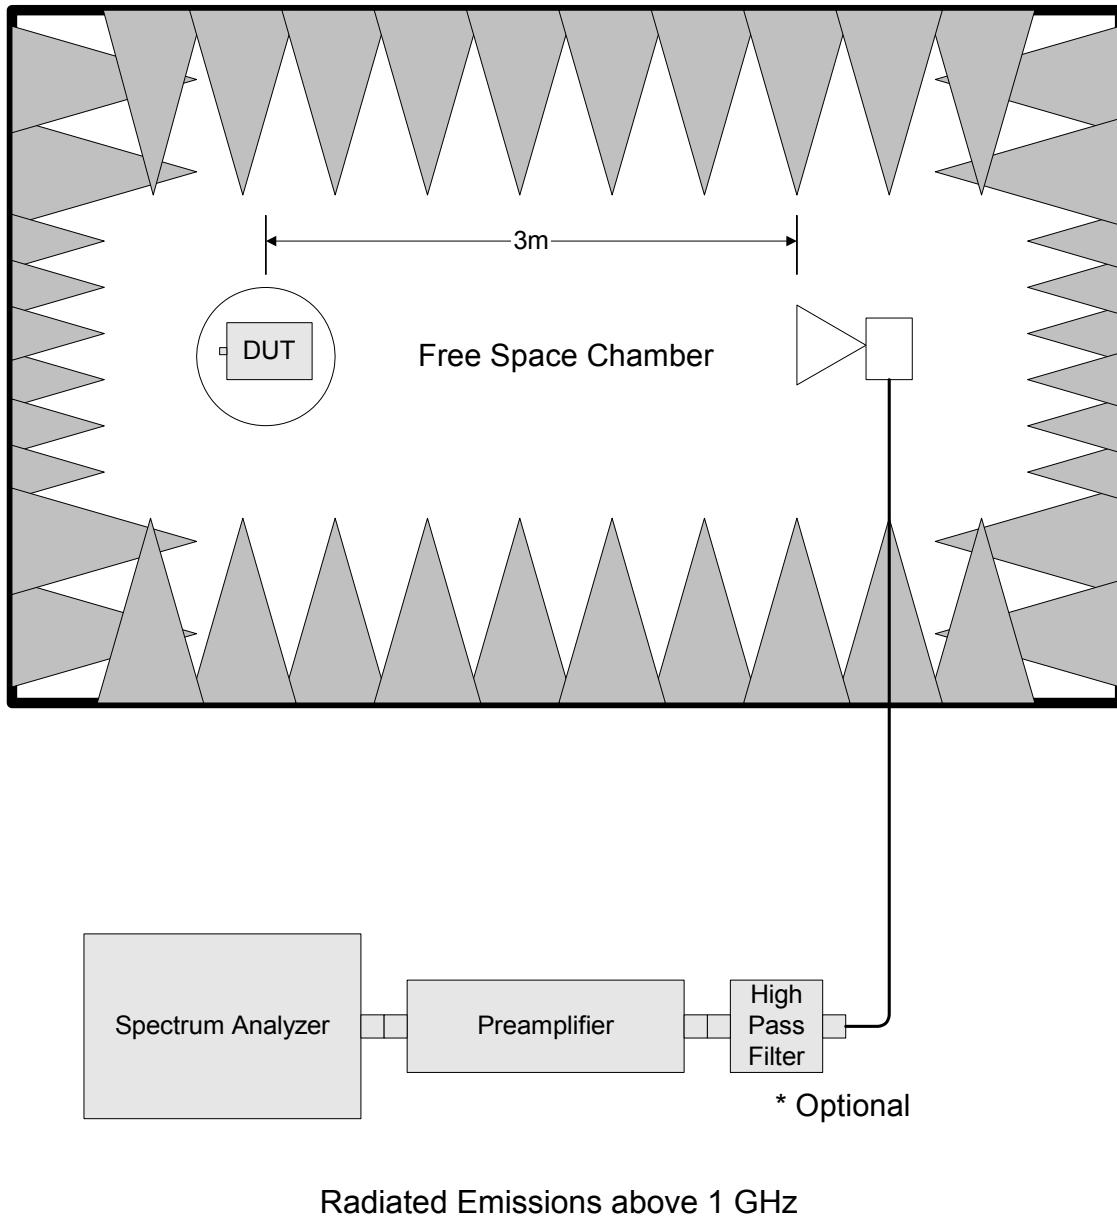

**Nemko USA, Inc.**

FCC PART 15, SUBPART C

PERIODICALLY OPERATED LOW POWER TRANSMITTERS  
EQUIPMENT: G1T and O1T PROJECT NO.: 102136845RUS1

---

**ANNEX A - RESTRICTED BANDS**

**Annex A****Restricted Bands of Operation**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.49 - 0.51	16.69475-16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425-16.80475	960-1240	7.25-7.75
3.020 - 3.026	25.5-25.67	1300-1427	8.025-8.5
4.125 - 4.128	37.5-38.25	1435-1626.6	9.0-9.2
4.17725 - 4.17775	73-74.6	1645.5-1646.5	9.3-9.5
4.20725 - 4.20775	74.8-75.2	1660-1710	10.6-12.7
6.215 - 6.218	108-121.94	1718.8-1722.2	13.25-13.4
6.31175 - 6.31225	123-138	2220-2300	14.47-14.5
8.291 - 8.294	149.9-150.05	2310-2390	15.35-16.2
8.362 - 8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625 - 8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425 - 8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29 - 12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975 - 12.52025	240-285	3345.8-3358	36.43-36.5
12.57675 - 12.57725	322-335.4	3600-4400	Above 38.6
13.36 - 13.41			