

NOTES

1. 6.50" MAX. ROLL DIA.
2. LABEL TO BE DIE CUT.
3. ACCEPTABLE CORNER RADIUS TO BE WITHIN .00/.12 RANGE TYP. UNLESS SPECIFIED.
4. LABEL MATERIAL AND ADHESIVE MUST BE UL LISTED TO UL969 AND CSA CERTIFIED TO C22.2 NO. 0.15 APPROVED FOR USE ON POLYPHENYLENE OXIDE PLASTIC & FR-ABS (ACRILONITRILE BUTADINE STYRENE). MAX. TEMP. 60°C. SUITABLE FOR EXPOSURE TO HIGH HUMIDITY OR OCCASIONAL EXPOSURE TO WATER.
5. EACH ROLL OF LABELS AND EACH CARTON OF LABELS MUST BE MARKED WITH THE MANUFACTURERS U.L. DESIGNATION FOR THIS LABEL.
6. LABEL MUST HAVE 1 MIL MATTE MYLAR OVERLAY.
7. LABEL MUST HAVE SILICONE RELEASE AGENT.




THE MINIMUM HEIGHT OF THE REGISTERED TRADEMARK SYMBOL® SHALL BE 3/64 OF AN INCH. WHEN THE OVERALL DIAMETER OF THE UL MARK IS LESS THAN 3/8 OF AN INCH, THE TRADEMARK SYMBOL MAY BE OMITTED IF IT IS NOT LEGIBLE TO THE NAKED EYE.

SEE TABULATION "B" TEXT TO BE BOLD AND .188 HIGH.

3.00

SEE TABULATION "A"

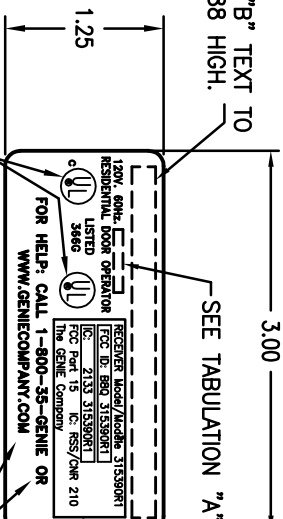

ALL TEXT TO BE .06 HIGH UNLESS OTHERWISE SPECIFIED.

TEXT TO BE .09 HIGH

REVISIONS

EN	REV	DESCRIPTION	DATE	APPROVAL
35770	-	ORIGINAL ISSUE		

Plotted 08-11-05 13:05

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.

		TOLERANCES UNLESS OTHERWISE SPECIFIED		A Subsidiary of Overhead Door Corporation 22790 Lake Park Blvd Alliance, Ohio, 44601		NAME		DATE	DRAWING TITLE:	
		WHOLE NUMBERS: ±.25				DRAWN BY: JMW		05/16/05	LABEL, MODEL, GENIE, LHCG, ML, RETAIL	
		XX ±.1				CHECKED BY: DRU		08/11/05		
		.XXX ±.005				APPROVED BY: BQ		08/12/05	DRAWING NUMBER B-35592	
34950		ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.							SCALE: FULL	
REF DWG	USED ON	HOLES: ±.003							SHEET 2 OF 2	