



Measurement of RF Emissions from a Model No. G4BT-R Four Button Remote Transmitter

For	Genie Company One Door Drive Mount Hope, OH 60523
P.O. Number	934030
Date Tested	April 20 & 21, 2020
Test Personnel	Tylar Jozefczyk
Test Specification	FCC "Code of Federal Regulations" Title 47 Part15, Subpart C Industry Canada RSS-GEN Industry Canada RSS-210

Test Report By:

Tylar Jozefczyk
EMC Engineer

Requested By:

Mike Whitley
Genie Company

Approved By:

Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

PARAGRAPH	TABLE OF CONTENTS	PAGE NO.
	DESCRIPTION OF CONTENTS	
1. Introduction.....		5
1.1. Scope of Tests.....		5
1.2. Purpose		5
1.3. Deviations, Additions and Exclusions.....		5
1.4. EMC Laboratory Identification		5
1.5. Laboratory Conditions.....		5
2. Applicable Documents.....		5
3. EUT Setup and Operation.....		5
3.1. General Description		5
3.1.1. Power Input.....		6
3.1.2. Grounding		6
3.2. Software.....		6
3.3. Operational Mode		6
3.4. EUT Modifications.....		6
4. Test Facility and Test Instrumentation.....		6
4.1. Shielded Enclosure.....		6
4.2. Test Instrumentation		6
4.3. Calibration Traceability		7
4.4. Measurement Uncertainty		7
5. Test Procedures		7
5.1. Powerline Conducted Emissions.....		7
5.1.1. Requirements.....		7
5.2. Periodic Operation Measurements		7
5.2.1. Requirements.....		7
5.2.2. Procedures.....		7
5.2.3. Results		7
5.3. Duty Cycle Factor Measurements		7
5.3.1. Procedures.....		7
5.3.2. Results		8
5.4. Radiated Measurements		8
5.4.1. Requirements.....		8
5.4.2. Procedures.....		9
5.4.3. Results		9
5.5. Occupied Bandwidth Measurements.....		9
5.5.1. Requirement.....		9
5.5.2. Procedures.....		10
5.5.3. Results		10
6. Other Test Conditions		10
6.1. Test Personnel and Witnesses.....		10
6.2. Disposition of the EUT		10

 THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
 WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
7.	Conclusions	10
8.	Certification.....	10
9.	Equipment List.....	11

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**

REVISION HISTORY

Revision	Date	Description
—	27 April 2020	Initial release

Measurement of RF Emissions from a Four Button Remote, Model No. G4BT-R Transmitter

1. INTRODUCTION

1.1. Scope of Tests

This report presents the results of the RF emissions measurements performed on a Four Button Remote, Model No. G4BT-R (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was designed to transmit in the 300-390MHz range using an integral antenna. The EUT was manufactured and submitted for testing by Genie Company located in Mount Hope, OH.

1.2. Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.231 for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-2014.

1.3. Deviations, Additions and Exclusions

The following addition to this test series is listed below:

- Spurious Emissions: Three additional boards were spot checked to show that the number of buttons on the PCB would not have any significant effect on the emissions of the EUT. The descriptions of the three additional boards are located in Section 3.1 and the test results are located in Section 5.4.3.

1.4. EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by The American Association for Laboratory Accreditation (A2LA). A2LA Certificate Number: 1786.01.

1.5. Laboratory Conditions

The temperature at the time of the test was 21.7°C and the relative humidity was 14%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada Radio Standards Specification, RSS-Gen, "General Requirements for Compliance of Radio Apparatus", Issue 5, March 2019
- Industry Canada Radio Standards Specification, RSS-210, "License-Exempt Radio Apparatus: Category I Equipment", Issue 10, December 2019

3. EUT SETUP AND OPERATION

3.1. General Description

The EUT is a Genie Company Four Button Remote, Model No. G4BT-R. A block diagram of the EUT setup is shown as Figure 1.

The board that was tested has three additional variations: a one button, a two button, and a three button board that were spot checked (the main board that was tested is a four button board). See Section 5.4.3 for more

information.

The board that was used is representative of the following models –

Model Numbers	
Genie Models	G1BT-P, G2BT-P, G3BT-P, G4BT-P, GOCS-P, G1BT-R, G2BT-R, G3BT-R, G4BT-R
Overhead Door Models	O1BT-P, O2BT-P, O3BT-P, O4BT-P, OOCS-P

3.1.1. Power Input

The EUT obtained 3VDC from a cell battery.

3.1.2. Grounding

The EUT was not connected to ground.

3.2. Software

For all tests, the EUT had the following firmware version loaded onto the device to provide correct load characteristics:

- BT4-v2.1.100-CW.hex for spurious emissions tests (unmodulated carrier)
- OCS-v2.1.100-Rev2.hex for all other tests (modulated carrier)

3.3. Operational Mode

The EUT was placed on an 80cm high non-conductive stand when testing below 1GHz. While testing above 1GHz, the EUT was placed on a 150cm high non-conductive stand. The EUT was energized and programmed for one of the following modes:

Mode	Description
Tx	The EUT was powered on and set to transmit at one of two frequencies: <ul style="list-style-type: none">- 315MHz- 390MHz
Single Click	The EUT was powered on and one of the transmit buttons was pushed.

Note: Both modes used the Genie Intelicode 1 modulation.

3.4. EUT Modifications

No modifications were required for compliance to the FCC 15.231 requirements.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1. Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

4.2. Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

Conducted and radiated emission measurements were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths and detector functions specified by the FCC. The receiver bandwidth was 120kHz for the 30MHz to 1GHz radiated emissions data and 1MHz for the 1GHz to 4GHz

radiated emissions data.

4.3. Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4. Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence) are presented below:

Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

5. TEST PROCEDURES

5.1. Powerline Conducted Emissions

5.1.1. Requirements

Since the EUT was powered by internal batteries with no provisions for AC power, no conducted emissions tests are required.

5.2. Periodic Operation Measurements

5.2.1. Requirements

As stated in FCC 15.231(a) and RSS-210 A.1.1, a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. Also, a transmitter activated automatically shall cease transmission within 5 seconds after activation.

5.2.2. Procedures

The spectrum analyzer was set up to display the time domain trace. The EUT was set to transmit normally. The spectrum analyzer was used to record the amount of time that the EUT remained active following activation.

5.2.3. Results

The plot of the periodic timing is shown on data page 17. The data shows that the EUT ceases operation within the allotted time.

5.3. Duty Cycle Factor Measurements

5.3.1. Procedures

The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal. Since this EUT utilizes a rolling code modulation,

the duty is calculated based on the worst case. The following procedure was used to measure a representative sample:

- 1) With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer.
- 2) The pulse width is measured and a plot of this measurement is recorded.
- 3) Next the number of pulses in the word period is measured and a plot is recorded.
- 4) Finally the length of the word period is measured and a third plot is recorded. If the word period exceeds 100msec, the word period is limited to 100msec.
- 5) The pulse width and number of pulses for the word period are used to compute the on-time. The duty cycle is then computed as the (on-time/ word period).
- 6) The duty cycle factor is computed from the duty cycle.

5.3.2. Results

The plots of the duty cycles for each code used at each frequency are shown on data pages 18 through 23. Since the plots were made for rolling codes, the duty cycle factor shown on the plots may not show the worst case but was found to be no greater than the worst case duty cycle factor.

5.4. Radiated Measurements

5.4.1. Requirements

The EUT must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

FCC 15.231(b) has the following radiated emission limits:

Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹ = Linear interpolations

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.

RSS-210 (A.1.2) has the following radiated emission limits:

Fundamental Frequency (MHz) – Excluding Restricted Frequency Bands Specified in RSS-Gen	Field Strength of Fundamental (microvolts/meter)
70-130	1,250
130-174	1,250 to 3,750 ¹
174-260 ¹	3,750
260-470 ¹	3,750 to 12,500 ¹
Above 470	12,500

¹ = Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Field Strength (μ V/m) = $(56.82 \times f) - 6136$

For 260-470 MHz: Field Strength (μ V/m) = $(41.67 \times f) - 7083$

All measurements are specified at a distance of 3 meters.

5.4.2. Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

A preliminary radiated emissions test was performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 4GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 4GHz. Between 30MHz and 1GHz, a tuned dipole antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded. The peak detected levels were converted to average levels using a duty cycle factor, which was computed from the pulse train.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- 1) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- 2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- 3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 4) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

5.4.3. Results

The preliminary plots are presented on data pages 24 through 31. The plots are presented for a reference only, and are not used to determine compliance.

The final open area radiated levels are presented on data pages 32 and 33. As can be seen from the data, all emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 780MHz (when testing the 390MHz frequency) and was 6.59dB within the limit. Photographs of the test configuration which yielded the highest or worst case radiated emission levels are shown in Figures 3 and 4.

As described in section 3.1, three additional boards were spot checked and compared to the G4BT-R board that was used. They are presented on data pages 34 through 36. As can be seen from the data, all three boards are within specification limits from the spot checks performed, and have been found to be similar to the main board. This data represents that the number of buttons on the PCB will not have any significant change in the emissions of the board itself.

5.5. Occupied Bandwidth Measurements

5.5.1. Requirement

In accordance with FCC 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide. Also, in accordance with RSS-210 A.1.3, the 99% bandwidth of momentarily operated devices shall be less than or equal to 0.25%

of the center frequency for devices operating between 70MHz and 900MHz.

5.5.2. Procedures

The EUT was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30kHz and span was set to 4MHz. The frequency spectrum near the fundamental was plotted.

5.5.3. Results

The plots of the emissions near the fundamental frequency are presented on data pages 37 through 40. As can be seen from this data page, the transmitter met the occupied bandwidth requirements. See below for the 99% bandwidth measurements:

Frequency (MHz)	Description	99% BW
315	Genie Intelicode 1	99.9kHz
390	Genie Intelicode 1	173.82kHz

6. OTHER TEST CONDITIONS

6.1. Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated.

6.2. Disposition of the EUT

The EUT and all associated equipment were returned to Genie Company upon completion of the tests.

7. CONCLUSIONS

It was determined that the Genie Company Four Button Remote, Model No. G4BT-R did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.231 et seq. for Intentional Radiators, when tested per ANSI C63.4-2014.

8. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

9. EQUIPMENT LIST


Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	9/23/2019	9/23/2020
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	4/10/2018	5/10/2020
PHA0	MAGNETIC FIELD PROBE	ELECTRO-METRICS	EM-6882	134	22-230MHZ	NOTE 1	
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	3/23/2020	3/23/2021
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

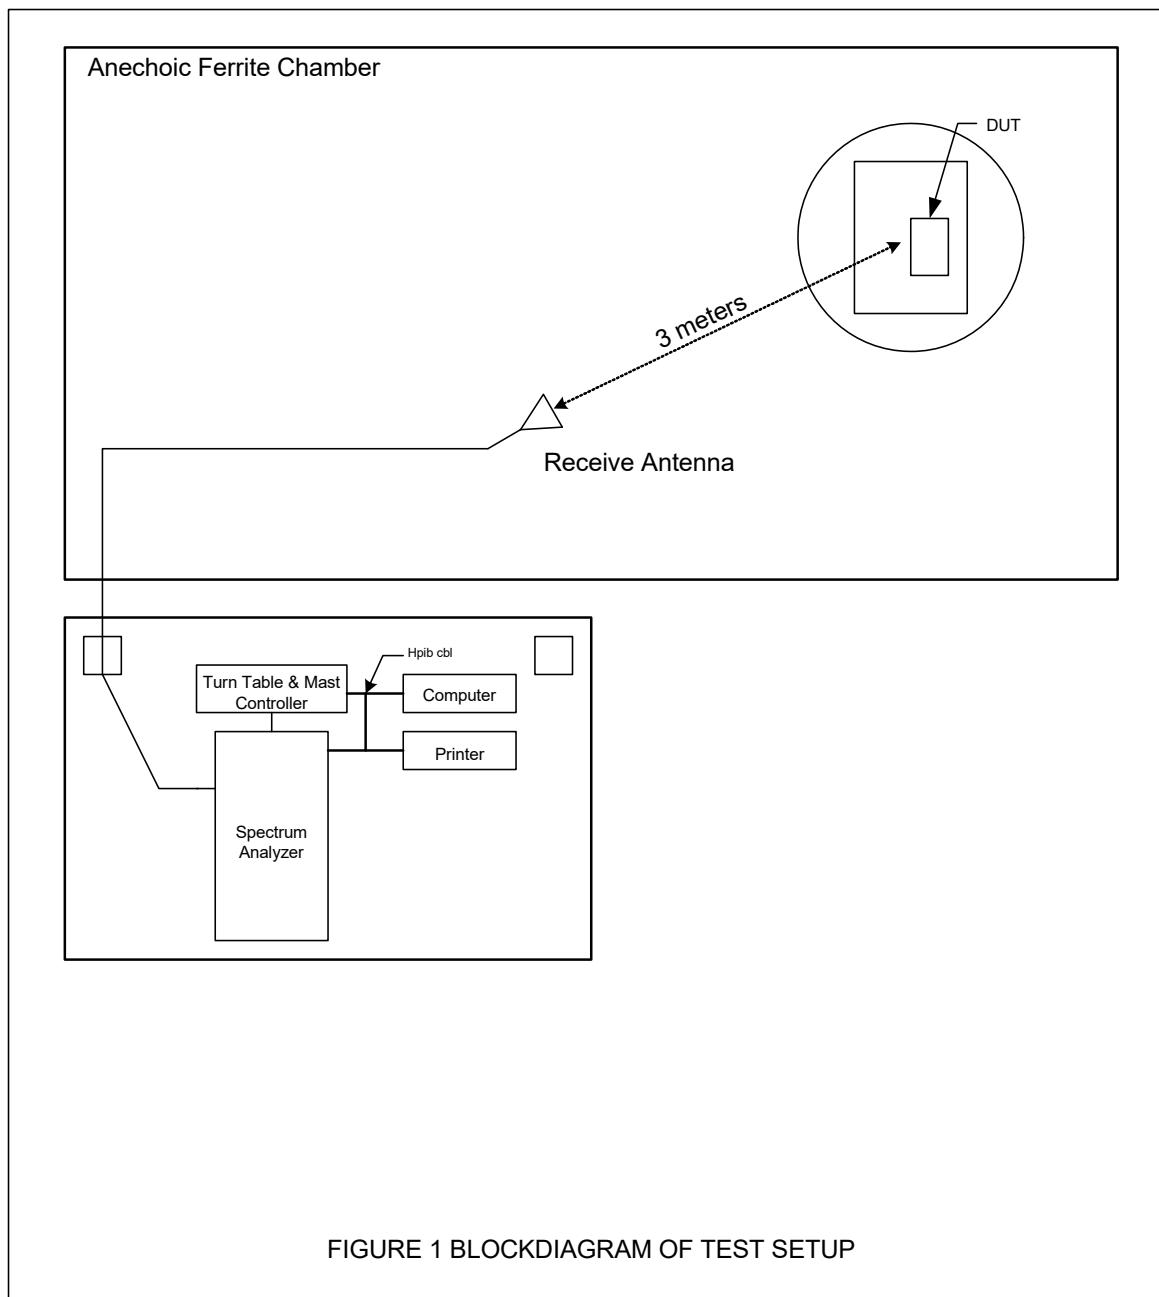

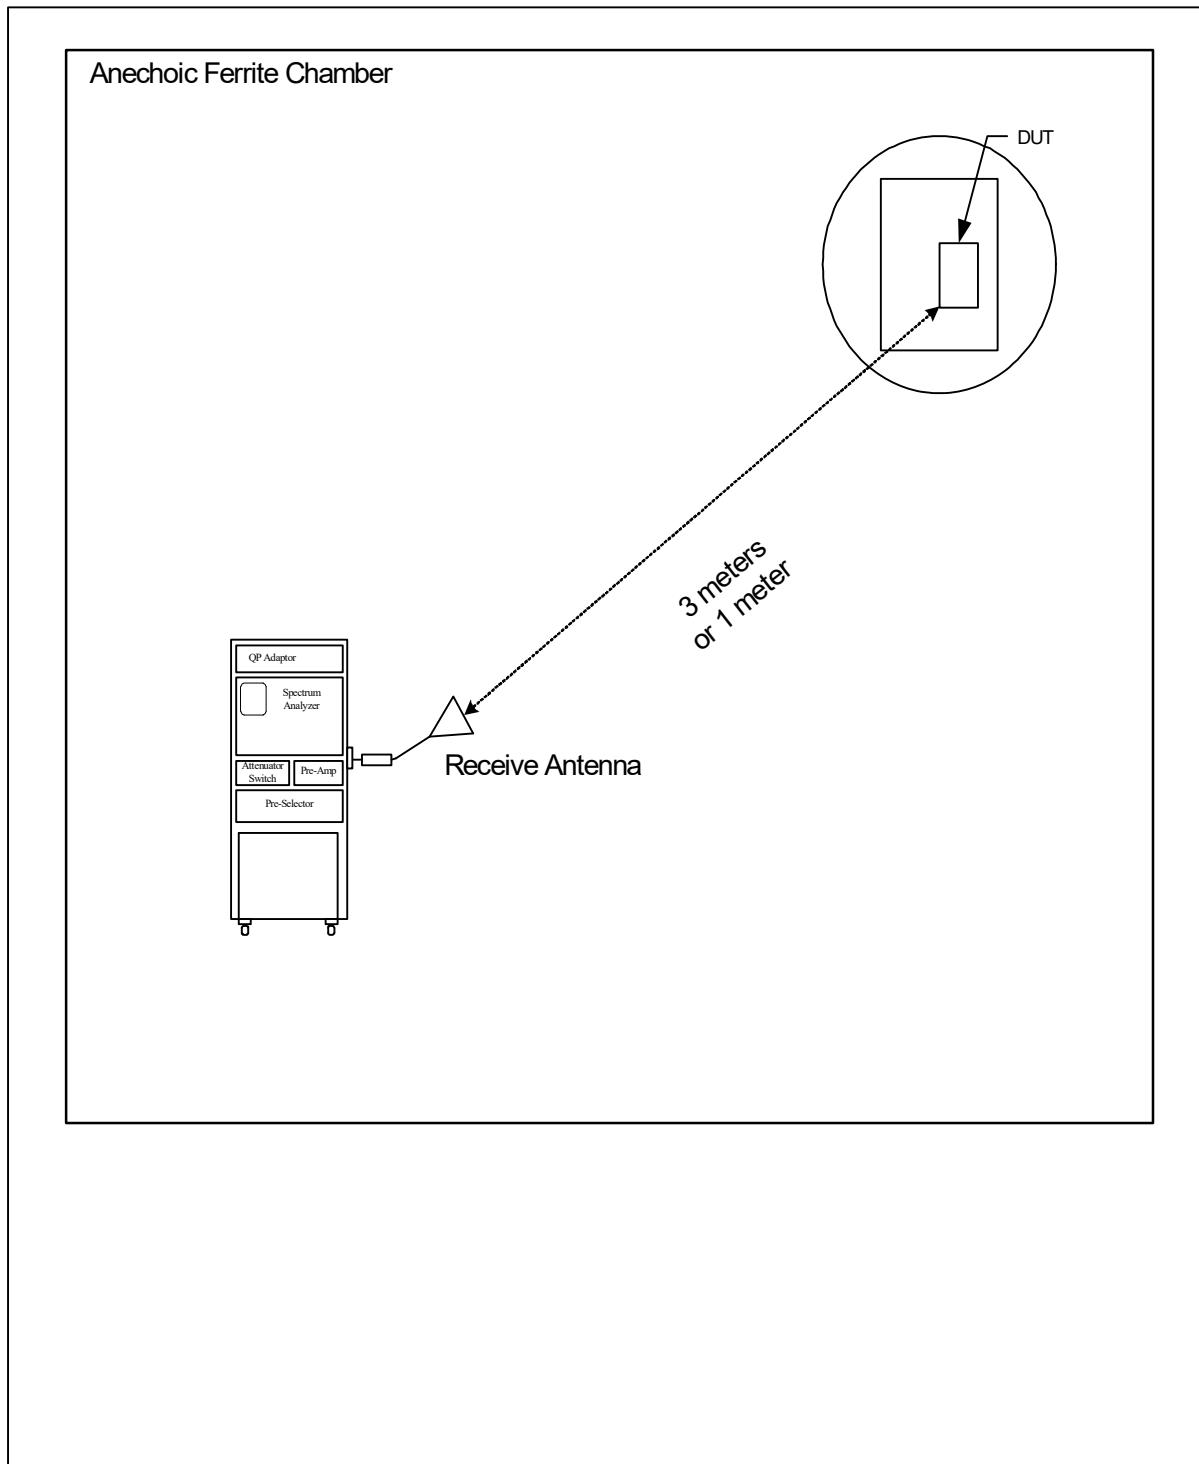


Figure 2




Test Item




Test Item

Figure 3

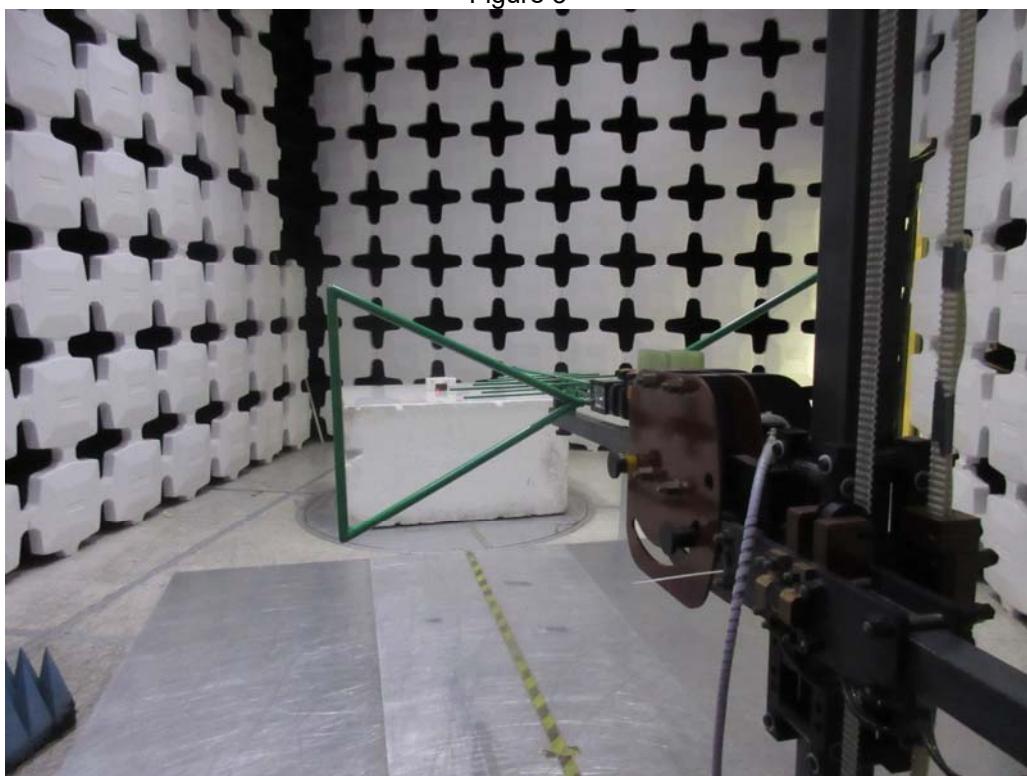


Test Setup for Radiated Emissions, 30MHz to 1GHz – Horizontal Polarization

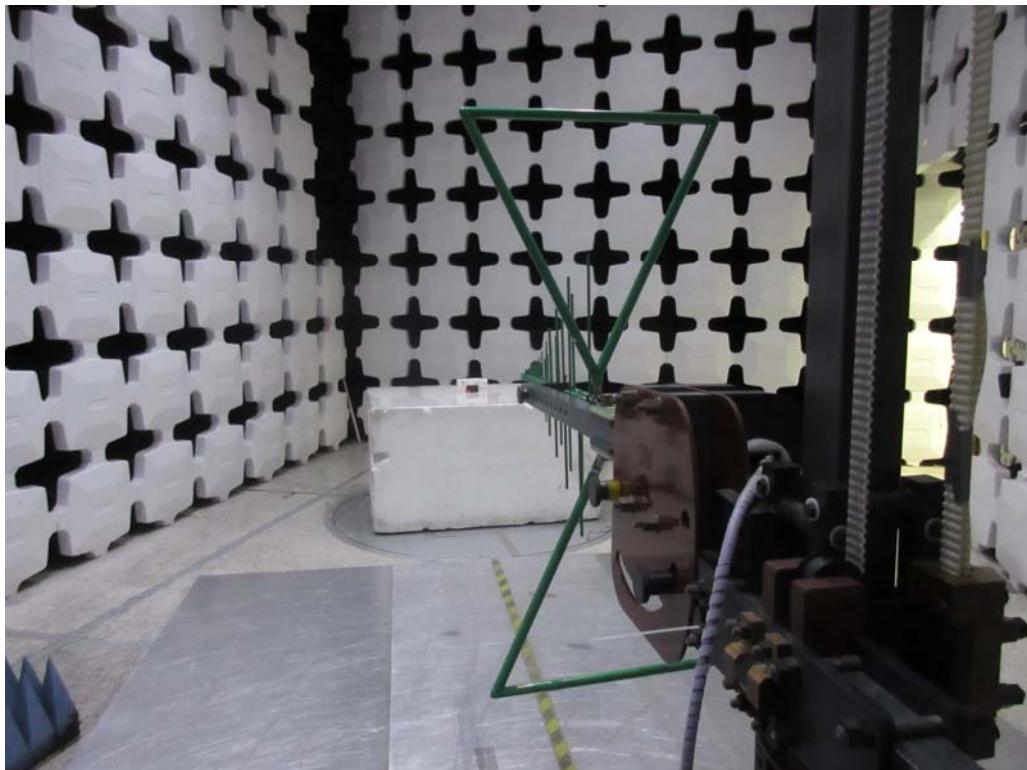


Test Setup for Radiated Emissions, 30MHz to 1GHz – Vertical Polarization

Figure 4

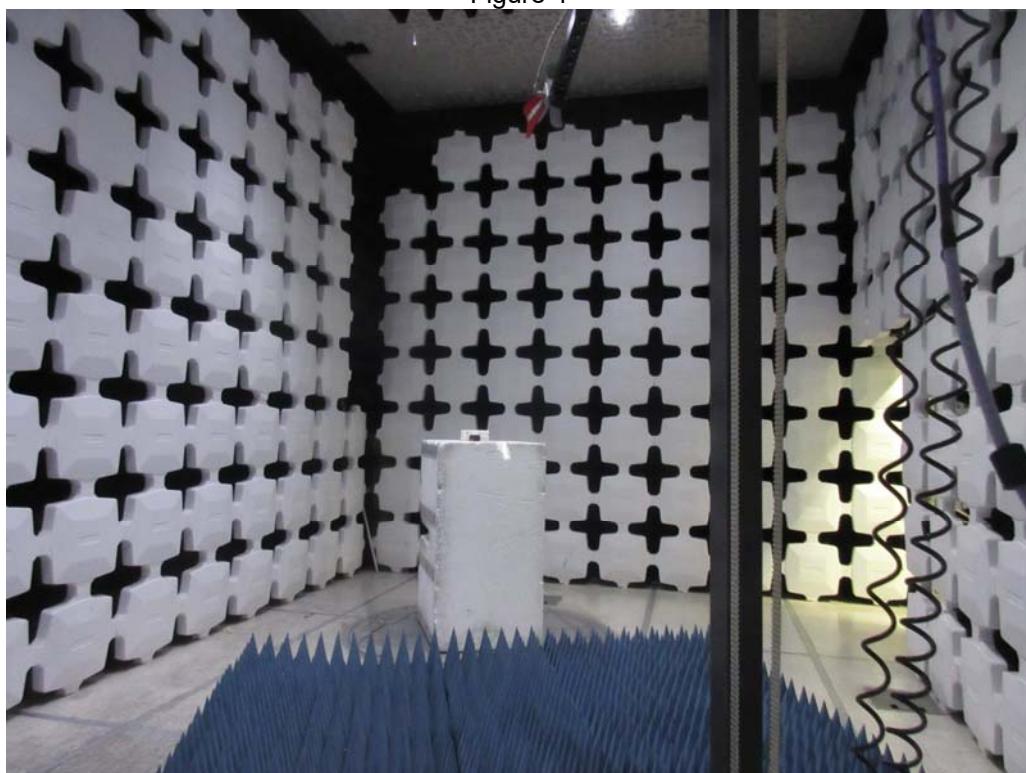


Test Setup for Radiated Emissions, 1 to 4GHz – Horizontal Polarization

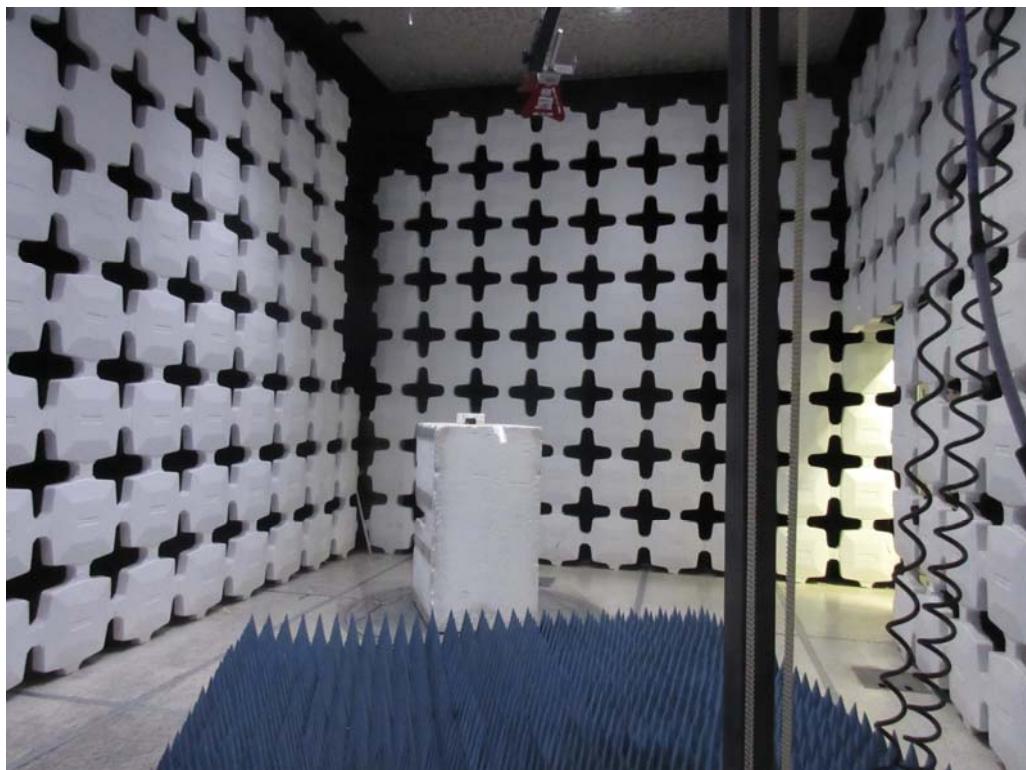

Test Setup for Radiated Emissions, 1 to 4GHz – Vertical Polarization

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Periodic Operation Measurement
MODE	Single Click
DATE TESTED	April 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Periodic Operation time = 460ms

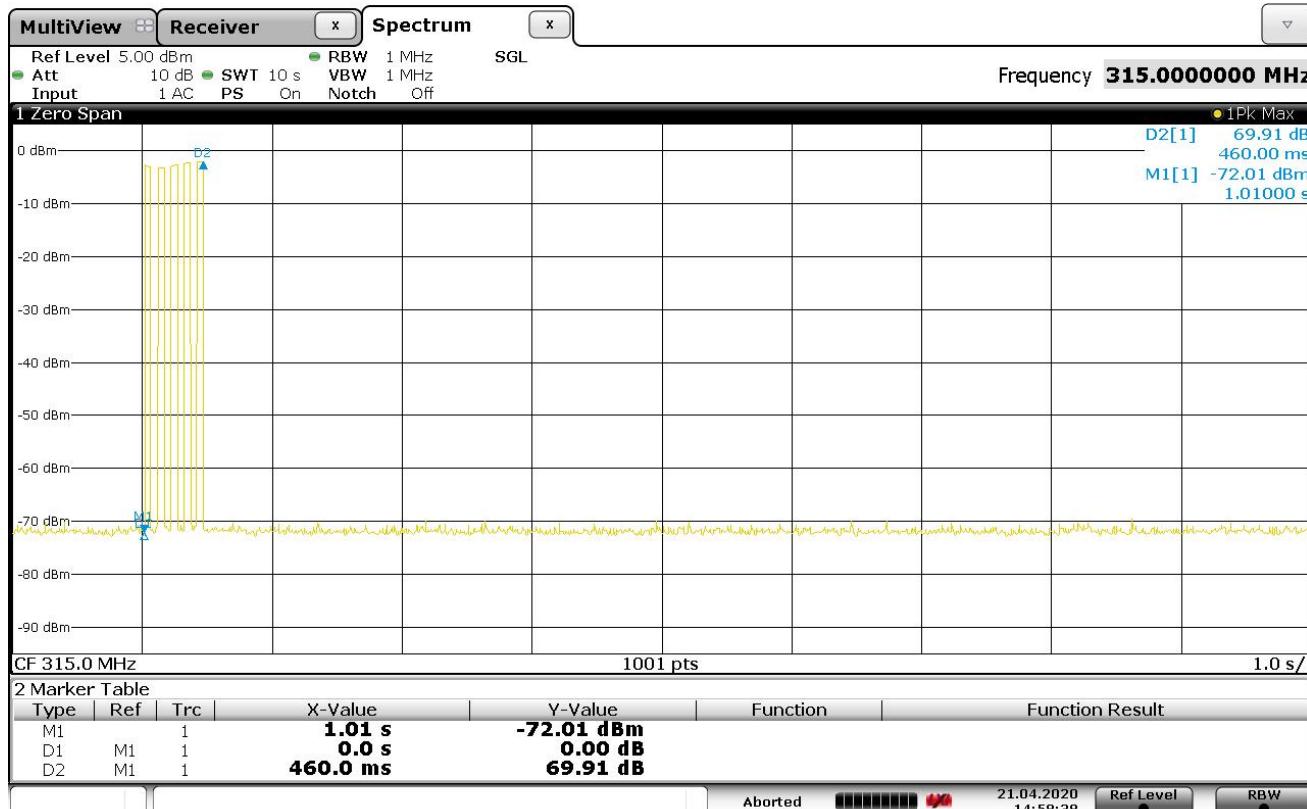
PERIODIC OPERATION


Date: 21.APR.2020 14:58:38

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 315MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Wide Pulse = 385.82 μ s = 0.38582ms

DUTY CYCLE – WIDE PULSE

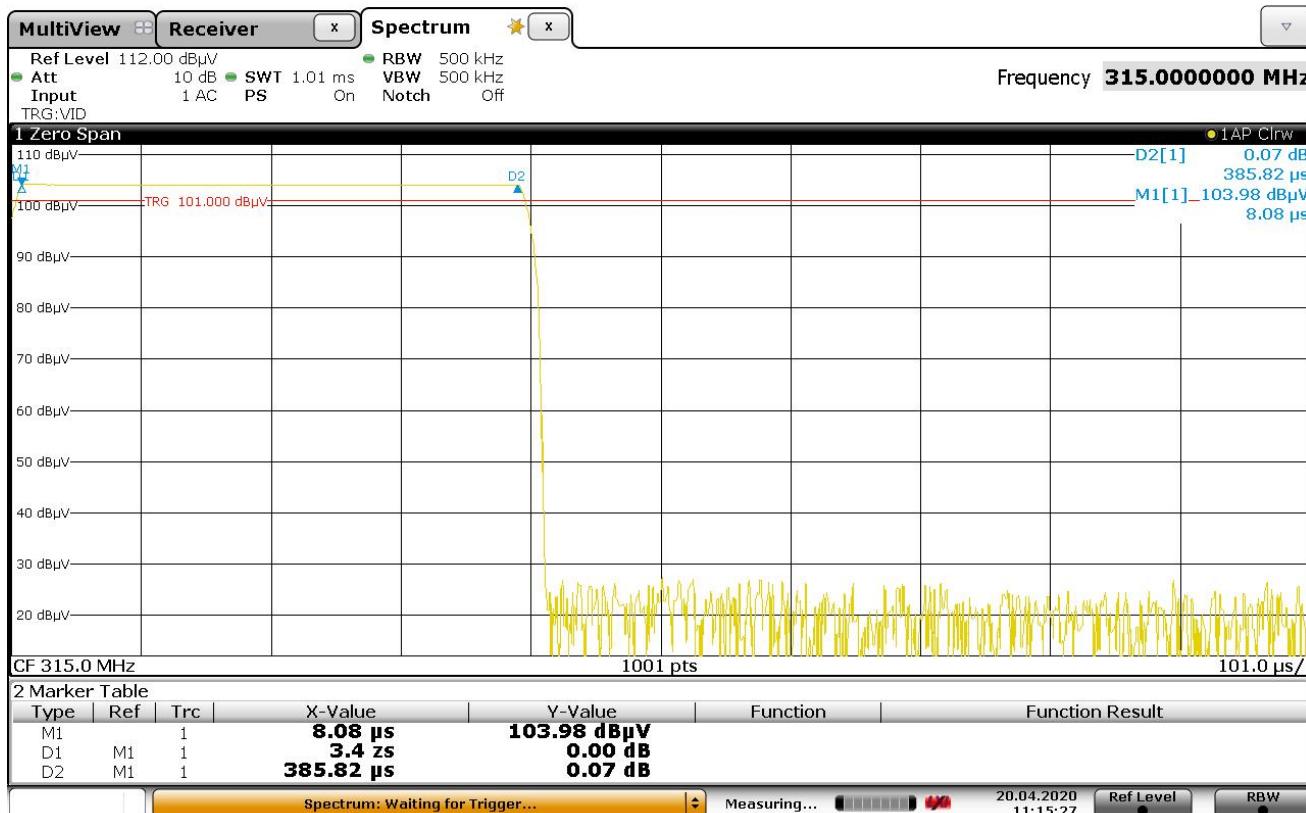


Date: 20.APR.2020 11:15:27

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 315MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Narrow Pulse = 185 μ s = 0.185ms

DUTY CYCLE – NARROW PULSE

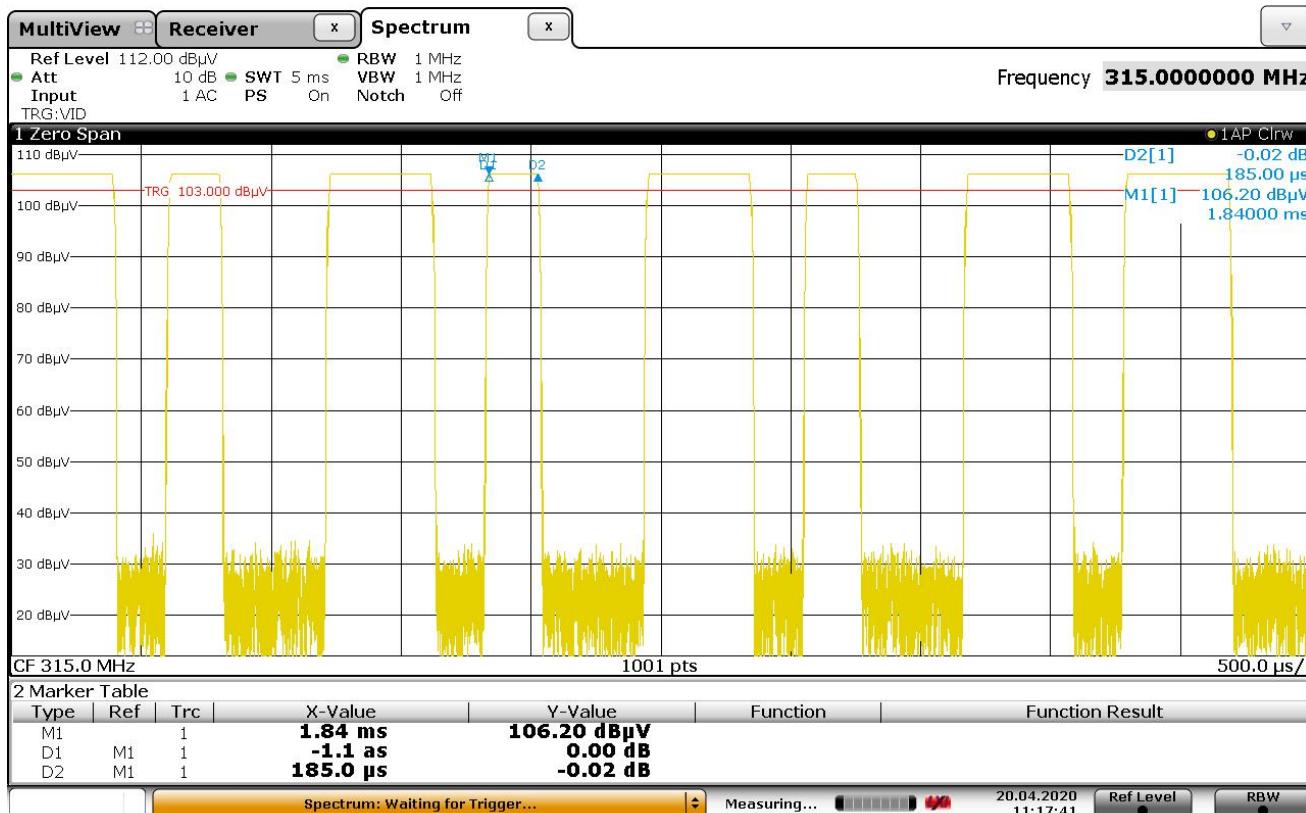


Date: 20.APR.2020 11:17:41

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 315MHz
DATE TESTED	April 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	<p>Duty Cycle Calculation:</p> $31 \times 0.38582\text{ms} = 11.96042\text{ms}$ $48 \times 0.185\text{ms} = 8.88\text{ms}$ $11.96042 + 8.88 = 15.98\text{ms}$ $\text{D.C.} = 20\log(15.98/100) = \mathbf{-13.62\text{dB}}$

DUTY CYCLE

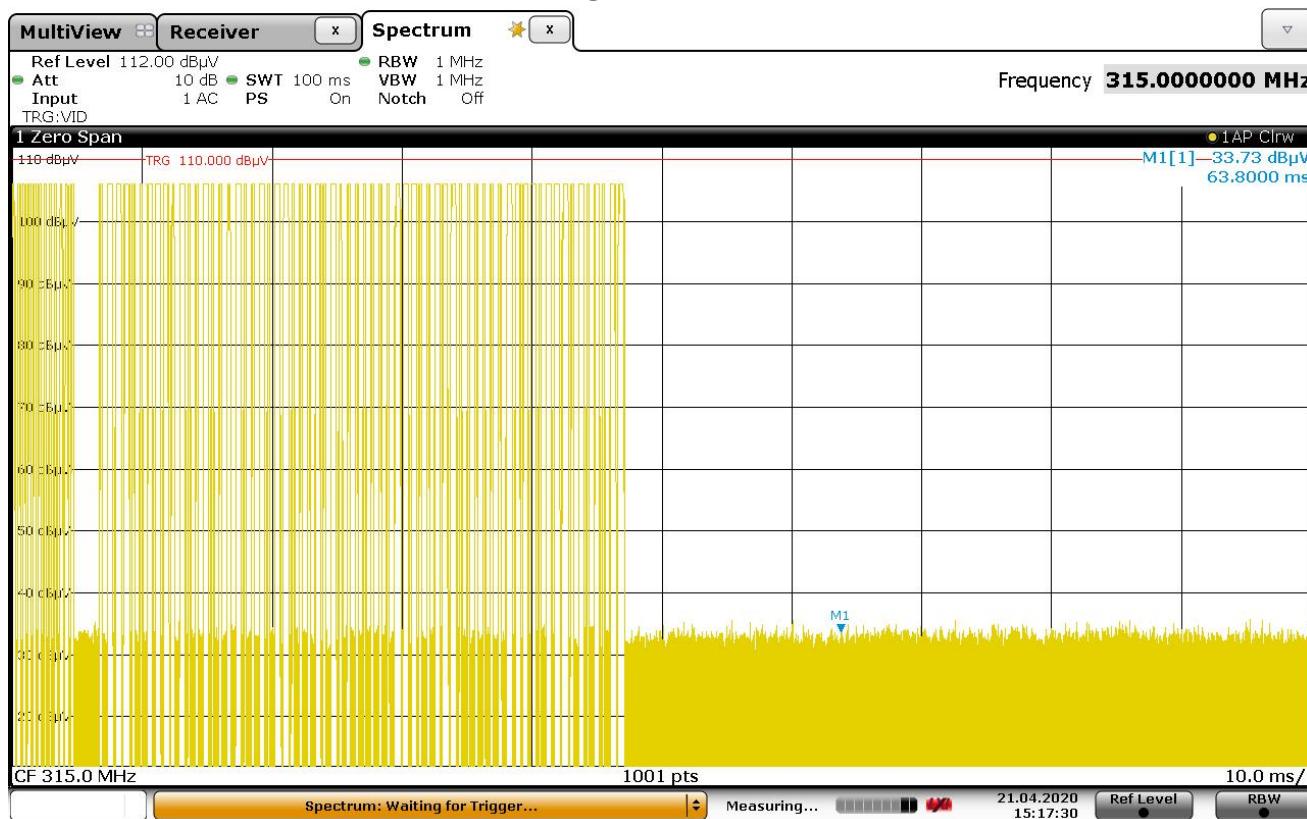


Date: 21.APR.2020 15:17:31

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 390MHz
DATE TESTED	April 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Wide Pulse = 405μs = 0.405ms

DUTY CYCLE – WIDE PULSE

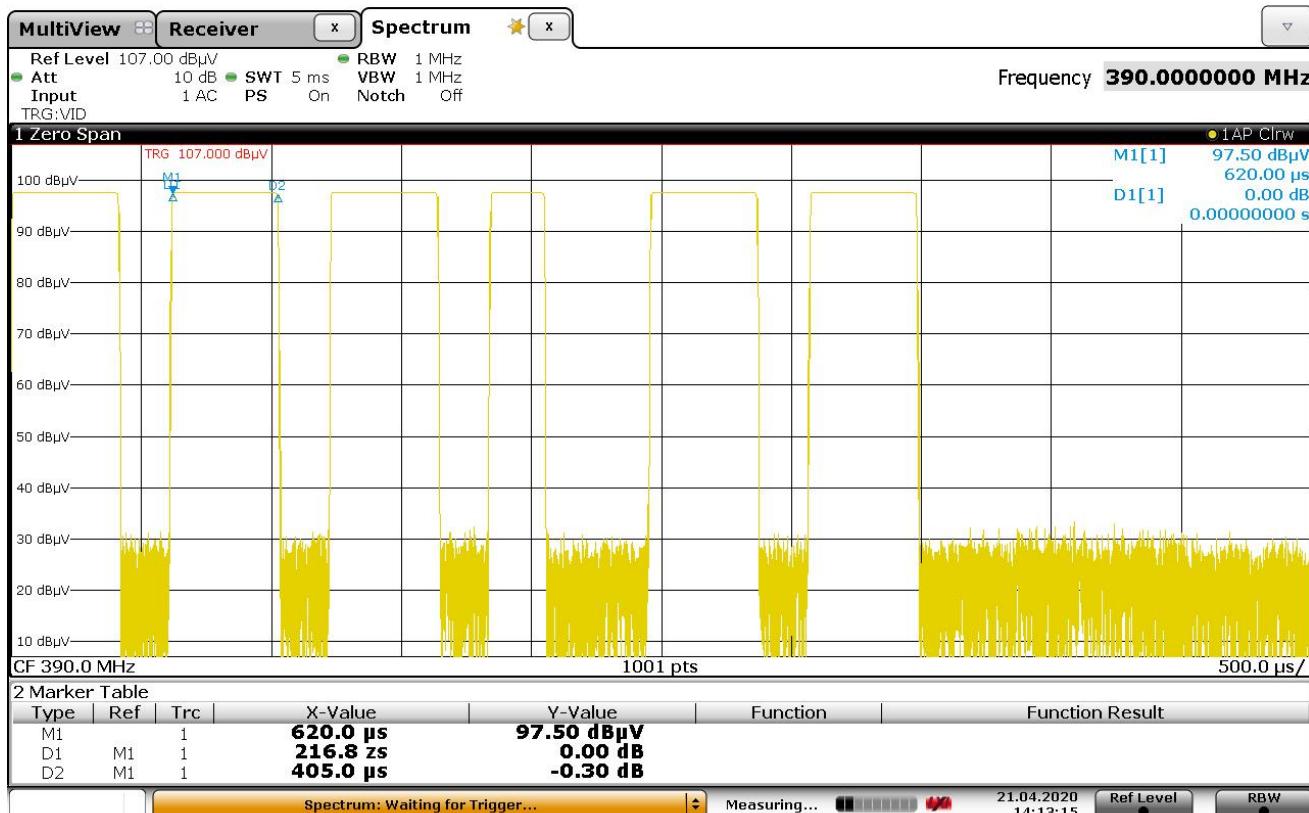


Date: 21.APR.2020 14:13:15

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 390MHz
DATE TESTED	April 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Narrow Pulse = 207 μ s = 0.207ms

DUTY CYCLE – NARROW PULSE

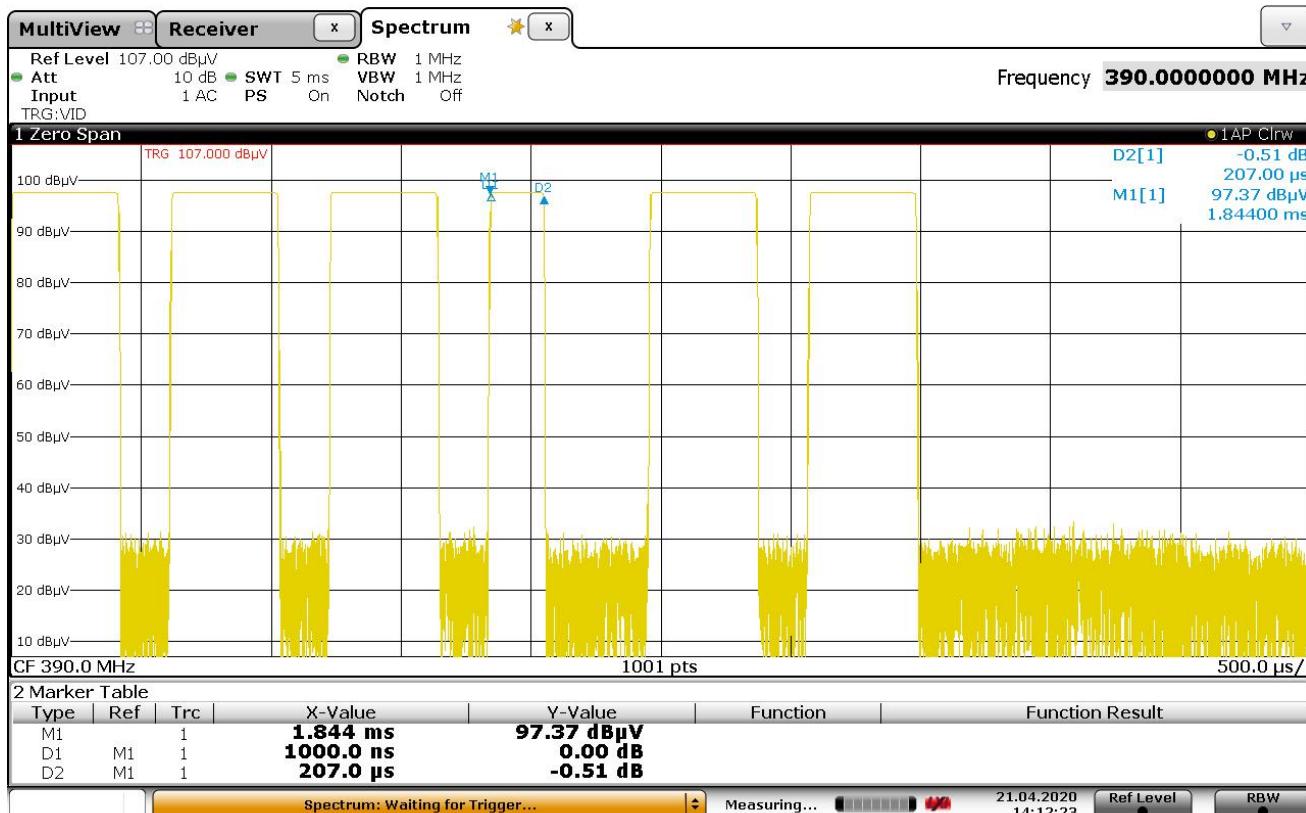


Date: 21.APR.2020 14:12:24


DATA PAGE


MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Duty Cycle
MODE	Single Click – 390MHz
DATE TESTED	April 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	<p>Duty Cycle Calculation:</p> $38 \times 0.405\text{ms} = 15.39\text{ms}$ $40 \times 0.207\text{ms} = 8.28\text{ms}$ $15.39 + 8.28 = 23.67\text{ms}$ $\text{D.C.} = 20\log(23.67/100) = -12.516\text{dB}$


DUTY CYCLE

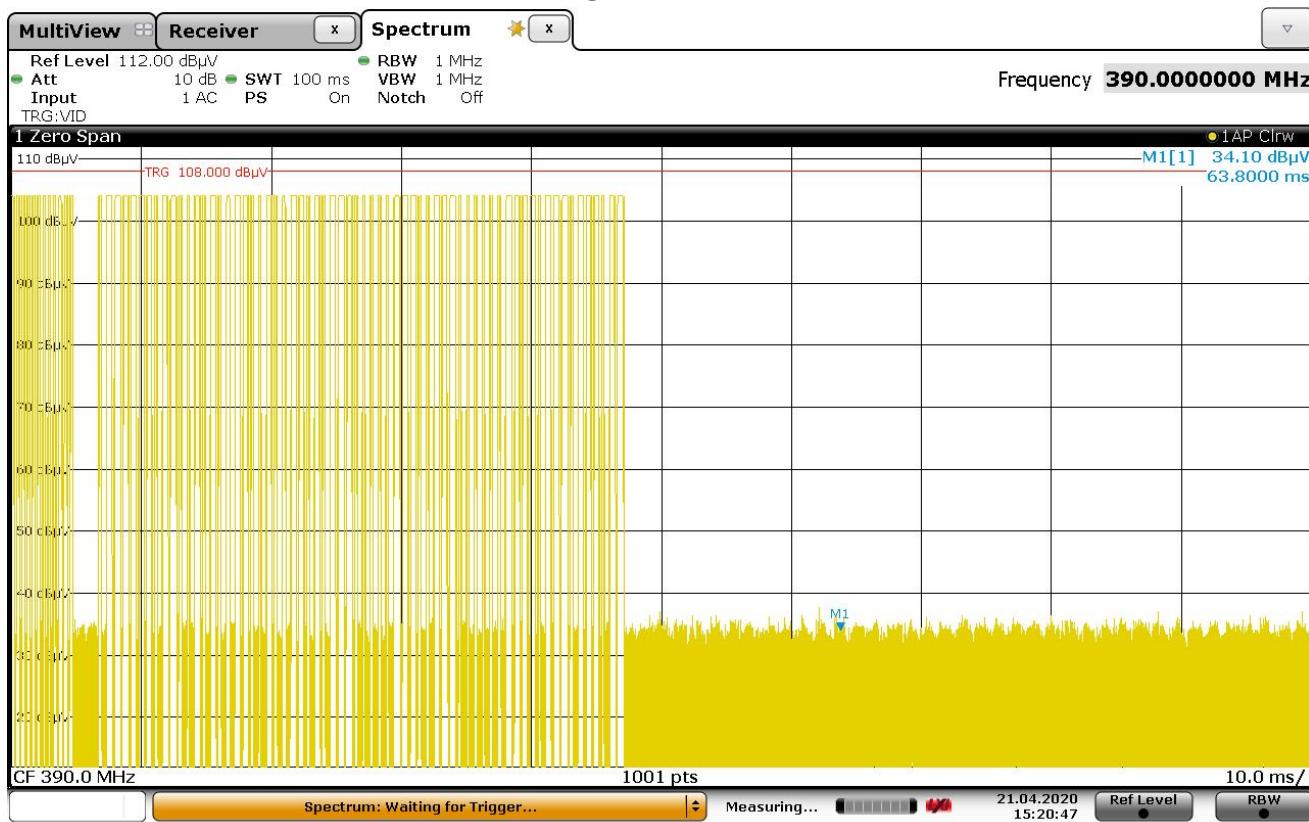



Date: 21.APR.2020 15:20:48

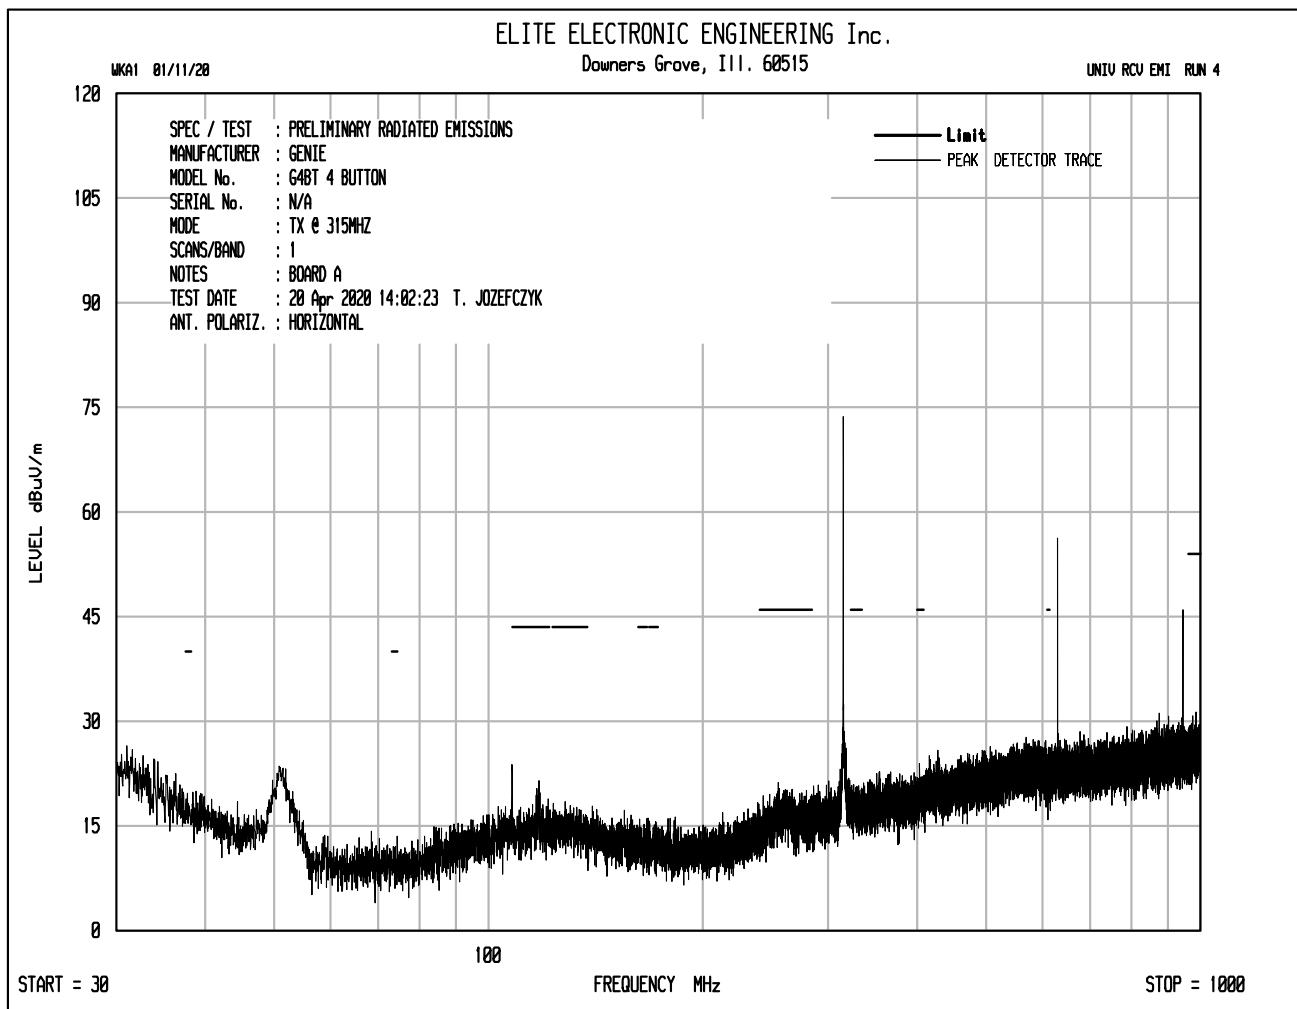


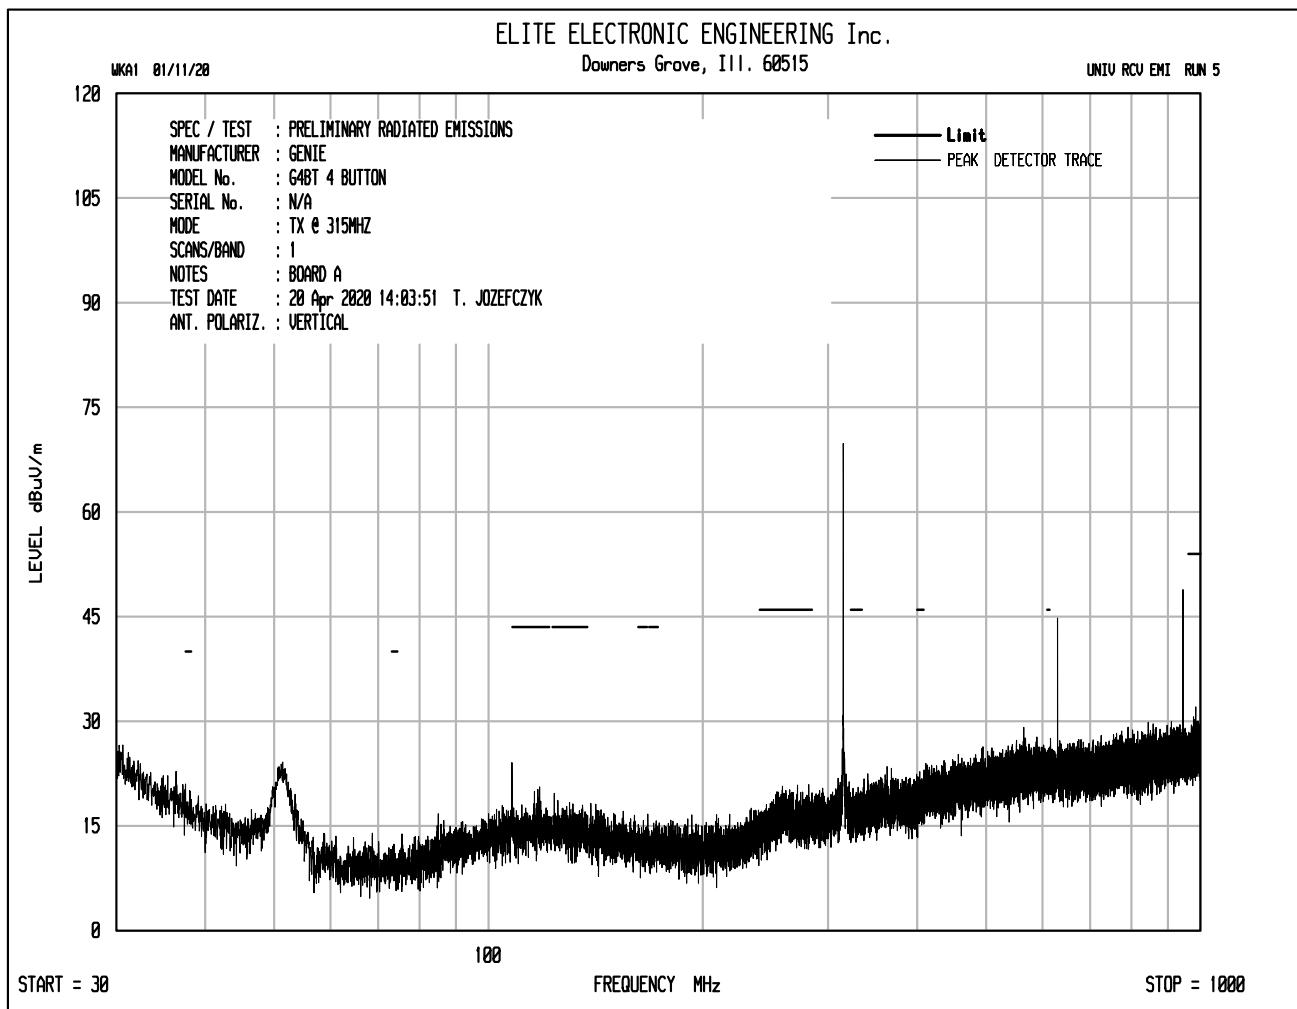


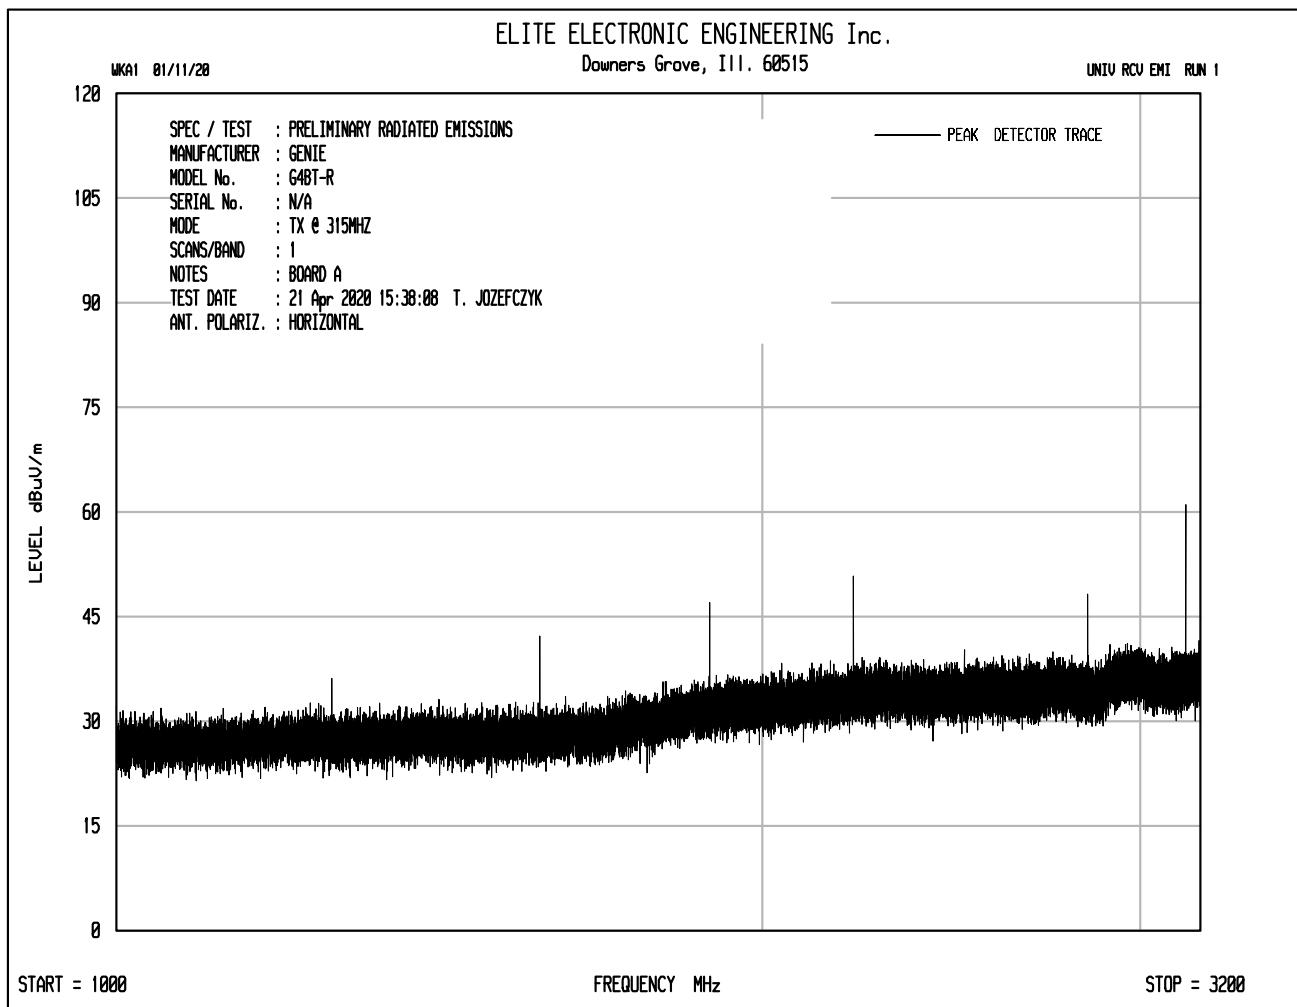


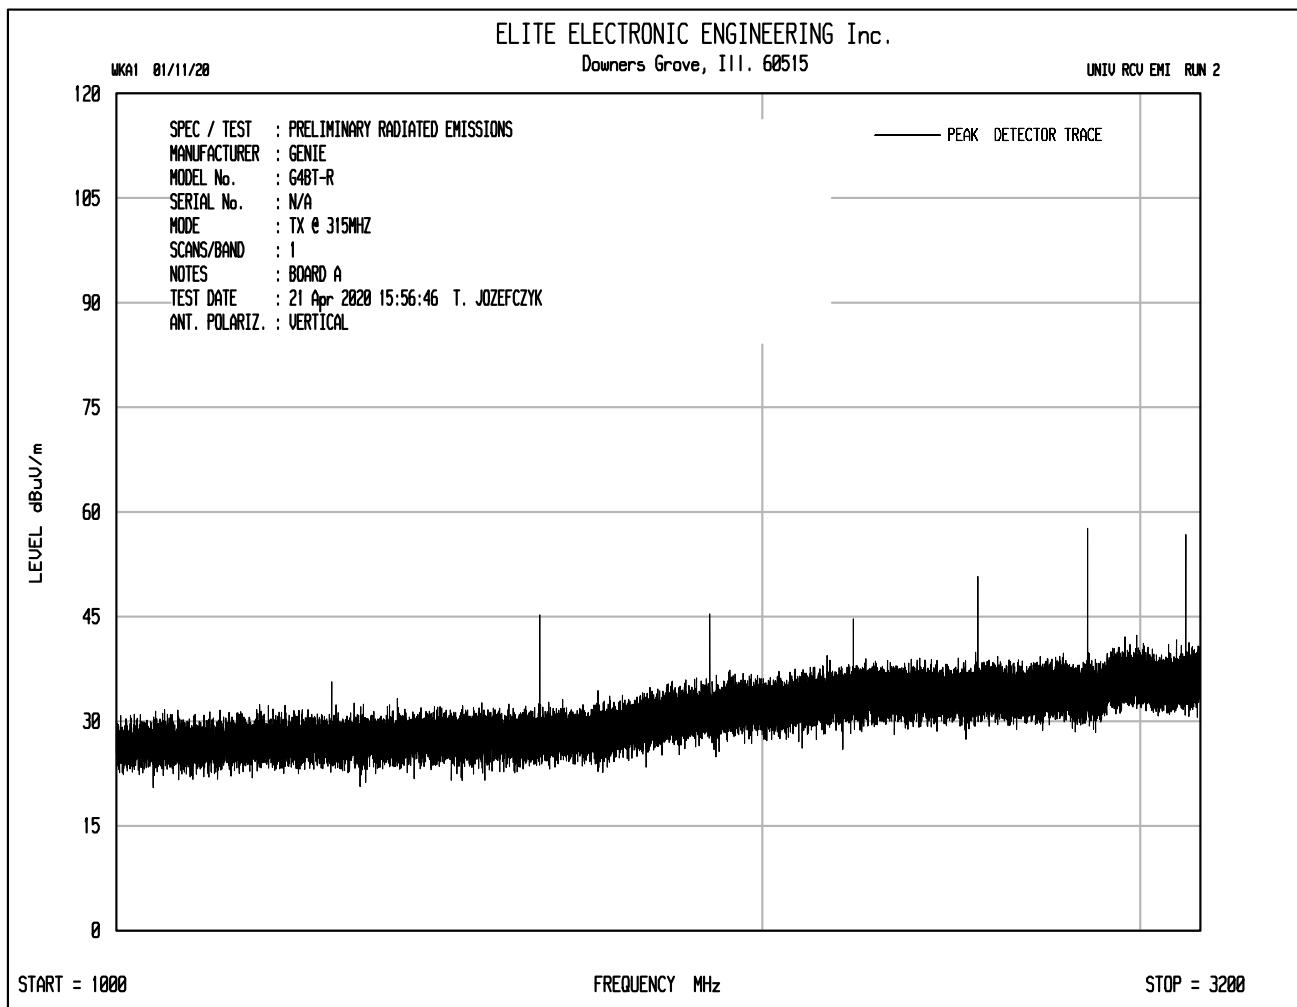

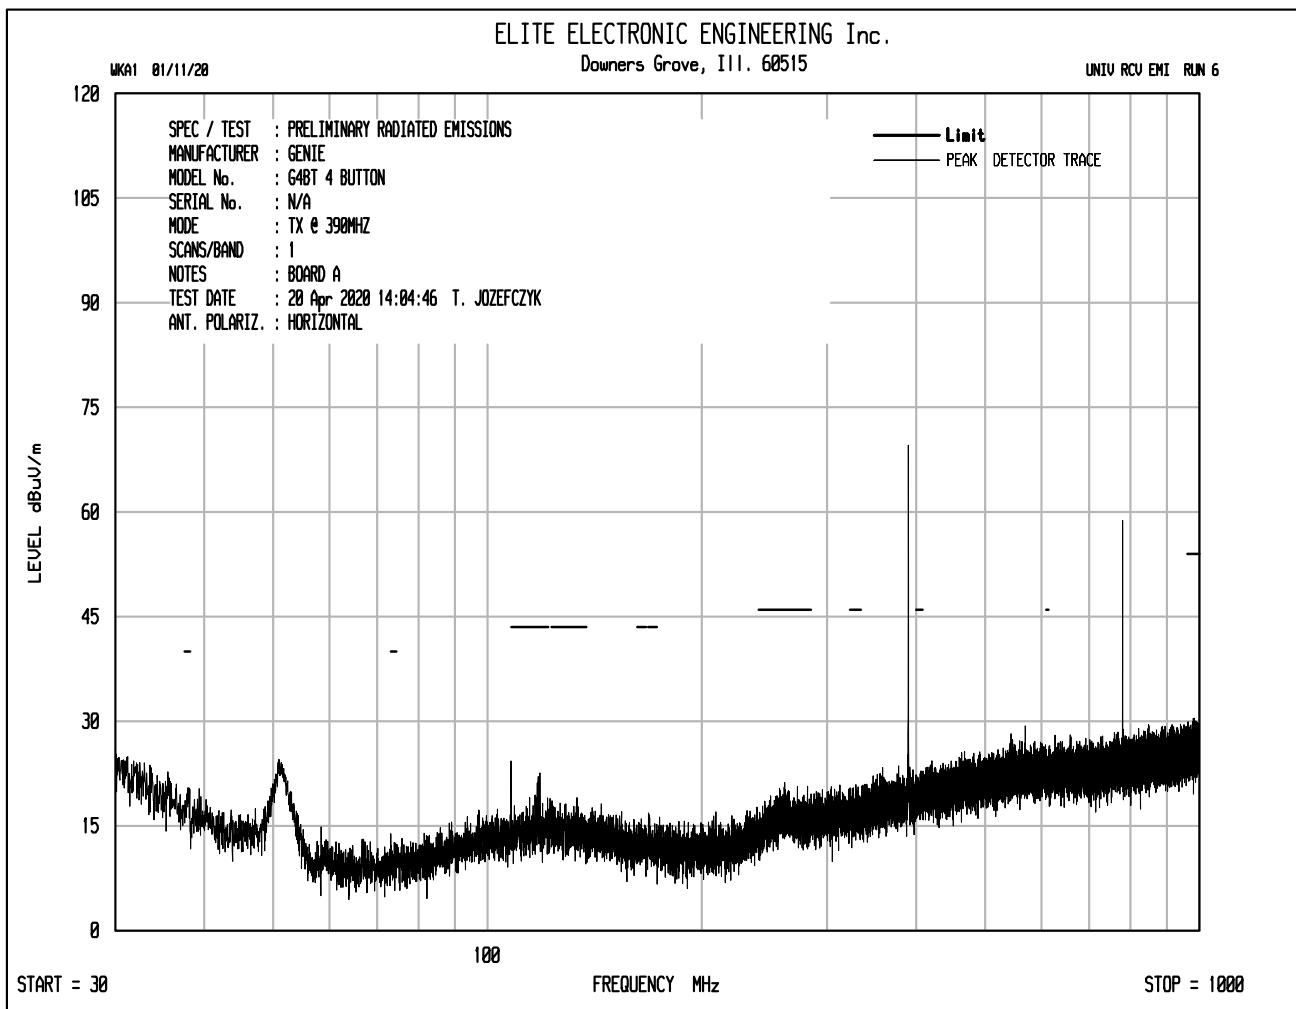

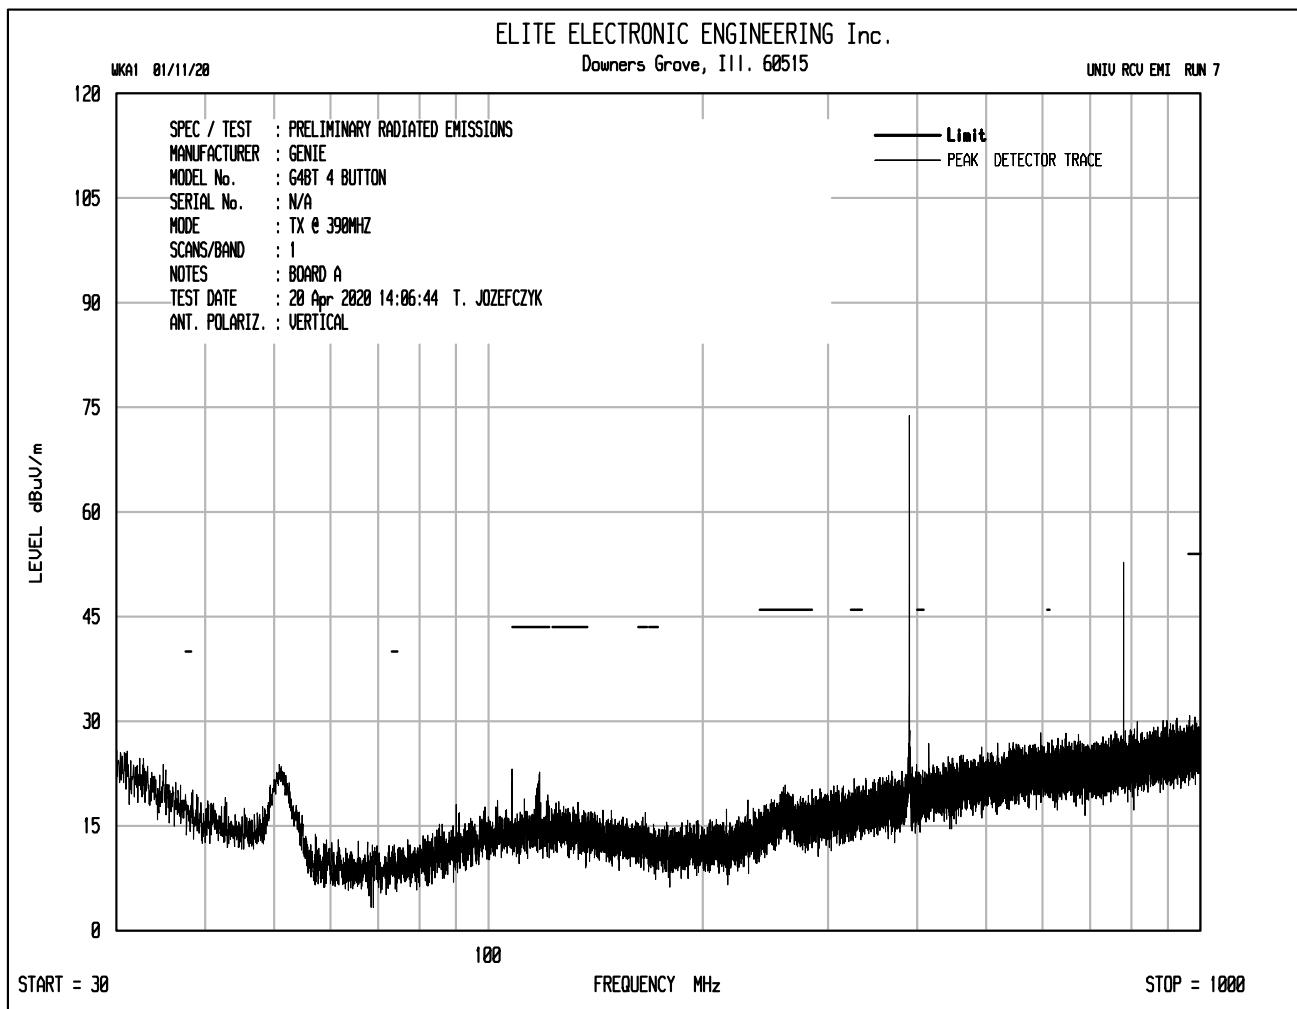

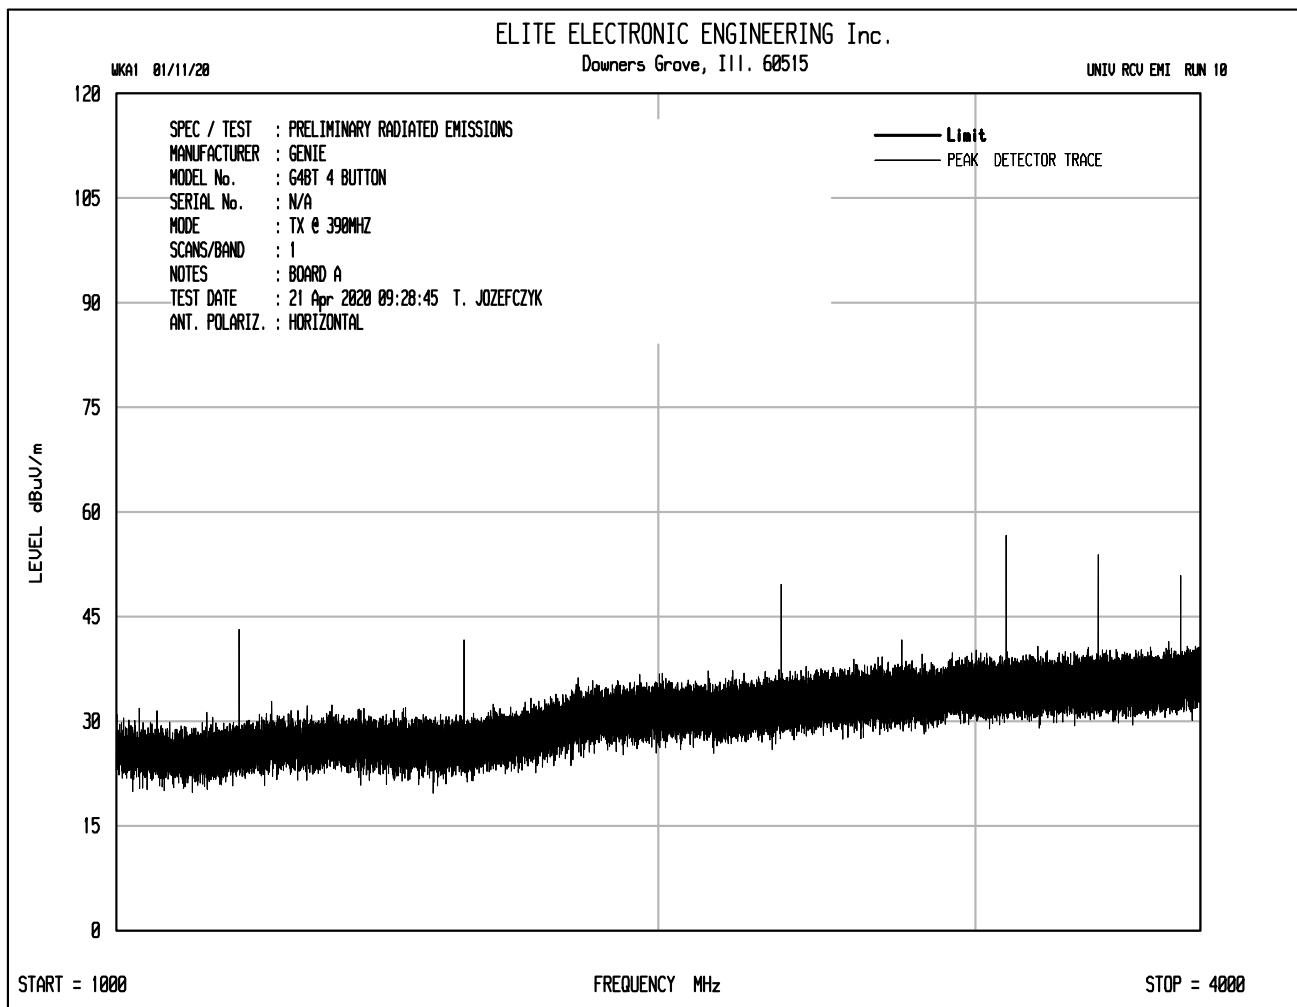

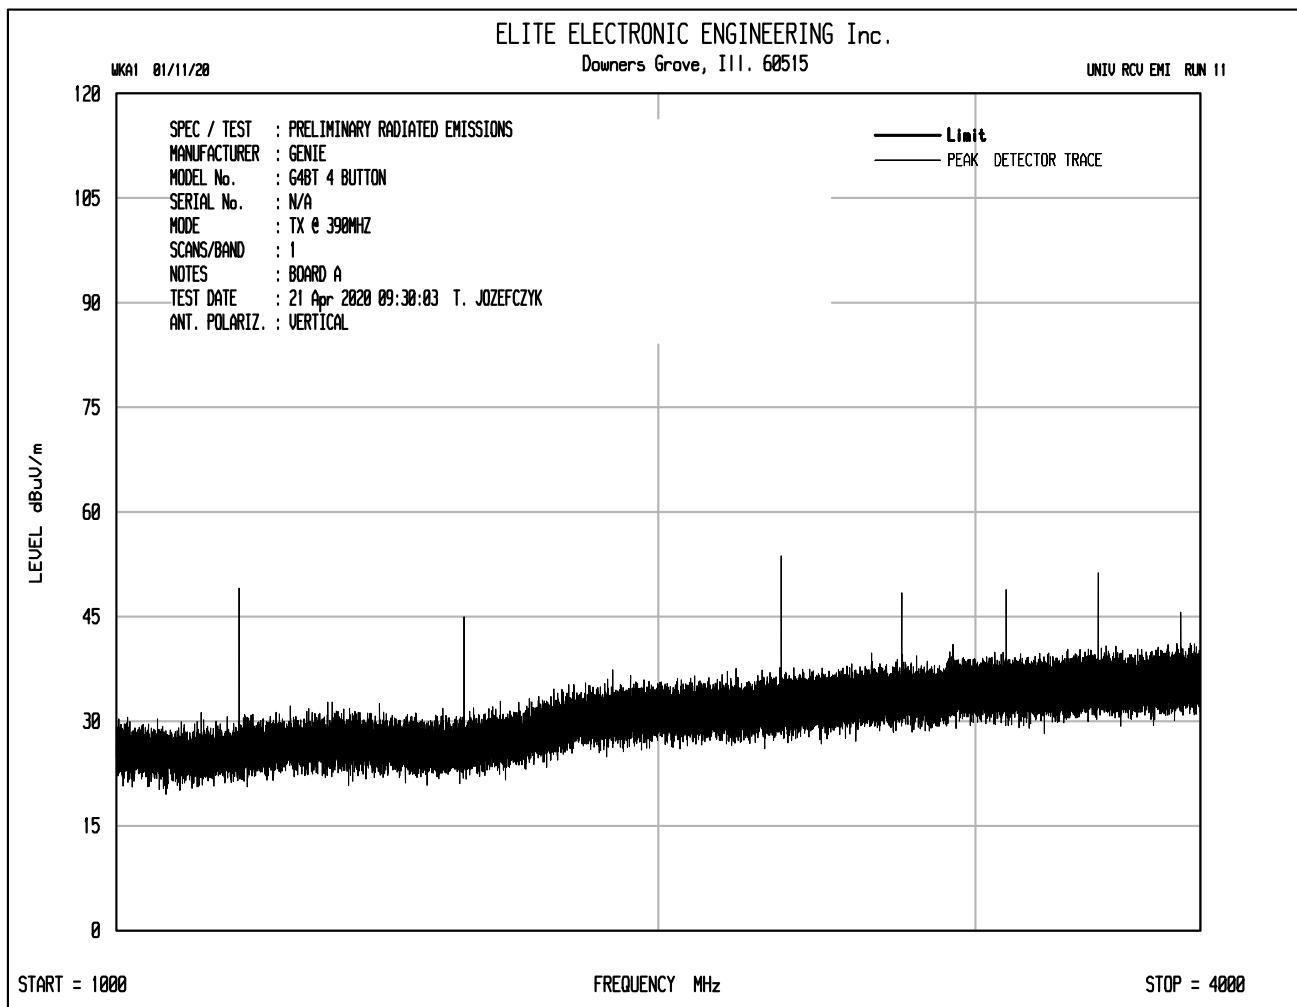

DATA PAGE

MANUFACTURER	Genie Company										
EUT	Four Button Remote										
MODEL NO.	G4BT-R										
TEST	FCC §15.231, RSS-210 Radiated Spurious Emissions - Harmonics										
MODE	Tx – 315MHz										
DATE TESTED	April 20 & 21, 2020										
TEST PERFORMED BY	Tylar Jozefczyk										
NOTES	Duty Cycle = -13.62dB										

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dB μ V)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total (dB μ V/m)	Total (μ V/m)	Limit (μ V/m)	Margin (dB)
315.000	H	57.55		1.81	19.71	0.00	-13.62	65.44	1871.60	6041.67	-10.18
315.000	V	62.31		1.81	19.71	0.00	-13.62	70.20	3237.53	6041.67	-5.42
630.000	H	33.65		2.51	25.09	0.00	-13.62	47.64	240.97	604.17	-7.98
630.000	V	33.58		2.51	25.09	0.00	-13.62	47.57	239.03	604.17	-8.05
945.000	H	29.84		2.91	26.69	0.00	-13.62	45.82	195.48	604.17	-9.80
945.000	V	22.11		2.91	26.69	0.00	-13.62	38.09	80.28	604.17	-17.53
1260.000	H	15.42	Ambient	3.07	29.11	0.00	-13.62	33.97	49.97	604.17	-21.65
1260.000	V	15.77	Ambient	3.07	29.11	0.00	-13.62	34.32	52.03	604.17	-21.30
1575.000	H	23.56		3.18	28.04	0.00	-13.62	41.17	114.36	500.00	-12.81
1575.000	V	22.95		3.18	28.04	0.00	-13.62	40.56	106.61	500.00	-13.42
1890.000	H	21.93		3.27	31.15	0.00	-13.62	42.73	136.86	604.17	-12.90
1890.000	V	19.69		3.27	31.15	0.00	-13.62	40.49	105.75	604.17	-15.14
2205.000	H	23.24		3.34	31.45	0.00	-13.62	44.41	166.22	500.00	-9.57
2205.000	V	20.25		3.34	31.45	0.00	-13.62	41.42	117.81	500.00	-12.56
2520.000	H	20.65		3.41	32.60	0.00	-13.62	43.03	141.82	604.17	-12.59
2520.000	V	21.89		3.41	32.60	0.00	-13.62	44.27	163.59	604.17	-11.35
2835.000	H	30.48		3.88	32.46	0.00	-13.62	53.20	457.03	500.00	-0.78
2835.000	V	29.78		3.88	32.46	0.00	-13.62	52.50	421.64	500.00	-1.48
3150.000	H	30.45		4.35	32.80	0.00	-13.62	53.98	500.20	604.17	-1.64
3150.000	V	27.99		4.35	32.80	0.00	-13.62	51.52	376.83	604.17	-4.10

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 Radiated Spurious Emissions - Harmonics
MODE	Tx – 390MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Duty Cycle = -12.516dB

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dB μ V)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total (dB μ V/m)	Total (μ V/m)	Limit (μ V/m)	Margin (dB)
390.000	H	61.06		1.94	20.83	0.00	-12.52	71.31	3678.72	9166.67	-7.93
390.000	V	65.23		1.94	20.83	0.00	-12.52	75.48	5945.61	9166.67	-3.76
780.000	H	36.33		2.80	26.04	0.00	-12.52	52.65	429.12	916.67	-6.59
780.000	V	33.73		2.80	26.04	0.00	-12.52	50.05	318.11	916.67	-9.19
1170.000	H	23.91		3.03	28.29	0.00	-12.52	42.71	136.58	500.00	-11.27
1170.000	V	30.04		3.03	28.29	0.00	-12.52	48.84	276.62	500.00	-5.14
1560.000	H	21.71		3.18	27.97	0.00	-12.52	40.35	104.07	500.00	-13.63
1560.000	V	26.13		3.18	27.97	0.00	-12.52	44.77	173.12	500.00	-9.21
1950.000	H	17.25	Ambient	3.28	31.17	0.00	-12.52	39.19	91.12	916.67	-20.05
1950.000	V	17.67	Ambient	3.28	31.17	0.00	-12.52	39.61	95.63	916.67	-19.63
2340.000	H	27.31		3.37	31.87	0.00	-12.52	50.04	317.55	500.00	-3.94
2340.000	V	30.51		3.37	31.87	0.00	-12.52	53.24	459.00	500.00	-0.74
2730.000	H	23.48		3.71	32.53	0.00	-12.52	47.21	229.31	500.00	-6.77
2730.000	V	25.93		3.71	32.53	0.00	-12.52	49.66	304.03	500.00	-4.32
3120.000	H	23.85		4.31	32.80	0.00	-12.52	48.44	264.20	916.67	-10.81
3120.000	V	26.14		4.31	32.80	0.00	-12.52	50.73	343.90	916.67	-8.52
3510.000	H	32.88		4.76	32.91	0.00	-12.52	58.04	797.68	916.67	-1.21
3510.000	V	30.55		4.76	32.91	0.00	-12.52	55.71	610.00	916.67	-3.54
3900.000	H	27.27		4.78	33.24	0.00	-12.52	52.77	435.10	500.00	-1.21
3900.000	V	24.69		4.78	33.24	0.00	-12.52	50.19	323.29	500.00	-3.79

DATA PAGE

MANUFACTURER	Genie Company
EUT	1 Button Transmitter
MODEL NO.	G1BT-R
TEST	FCC §15.231, RSS-210 Radiated Spurious Emissions - Harmonics
MODE	Tx – 315MHz
DATE TESTED	April 20, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Duty Cycle = -13.62dB Spot checks done for similarity

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dB μ V)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total (dB μ V/m)	Total (μ V/m)	Limit (μ V/m)	Margin (dB)
315.000	H	58.68		1.81	19.71	0.00	-13.62	66.57	2131.64	6041.67	-9.05
315.000	V	63.51		1.81	19.71	0.00	-13.62	71.40	3717.18	6041.67	-4.22
630.000	H	34.87		2.51	25.09	0.00	-13.62	48.86	277.30	604.17	-6.76
630.000	V	26.27		2.51	25.09	0.00	-13.62	40.26	103.03	604.17	-15.36

DATA PAGE

MANUFACTURER	Genie Company										
EUT	2 Button Transmitter										
MODEL NO.	G2BT-R										
TEST	FCC §15.231, RSS-210 Radiated Spurious Emissions - Harmonics										
MODE	Tx – 315MHz										
DATE TESTED	April 20, 2020										
TEST PERFORMED BY	Tylar Jozefczyk										
NOTES	Duty Cycle = -13.62dB Spot checks done for similarity										

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dB μ V)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total (dB μ V/m)	Total (μ V/m)	Limit (μ V/m)	Margin (dB)
315.000	H	56.10		1.81	19.71	0.00	-13.62	63.99	1583.85	6041.67	-11.63
315.000	V	61.59		1.81	19.71	0.00	-13.62	69.48	2979.98	6041.67	-6.14
630.000	H	34.12		2.51	25.09	0.00	-13.62	48.11	254.36	604.17	-7.51
630.000	V	32.74		2.51	25.09	0.00	-13.62	46.73	217.00	604.17	-8.89

DATA PAGE

MANUFACTURER	Genie Company
EUT	3 Button Transmitter
MODEL NO.	G3BT-R
TEST	FCC §15.231, RSS-210 Radiated Spurious Emissions - Harmonics
MODE	Tx – 315MHz
DATE TESTED	April 20, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Duty Cycle = -13.62dB Spot checks done for similarity


RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dB μ V)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total (dB μ V/m)	Total (μ V/m)	Limit (μ V/m)	Margin (dB)
315.000	H	56.60		1.81	19.71	0.00	-13.62	64.49	1677.70	6041.67	-11.13
315.000	V	61.69		1.81	19.71	0.00	-13.62	69.58	3014.49	6041.67	-6.04
630.000	H	33.80		2.51	25.09	0.00	-13.62	47.79	245.16	604.17	-7.83
630.000	V	28.94		2.51	25.09	0.00	-13.62	42.93	140.11	604.17	-12.69

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 20dB Bandwidth
MODE	Tx – 315MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Vertical Lines V1 and V2 represent the 0.25% bandwidth of the center frequency of the EUT. Horizontal line H1 represents the level 20dB down from the peak of the modulated carrier. Max allowed BW = (0.25% BW = 787.5kHz)

20DB BANDWIDTH

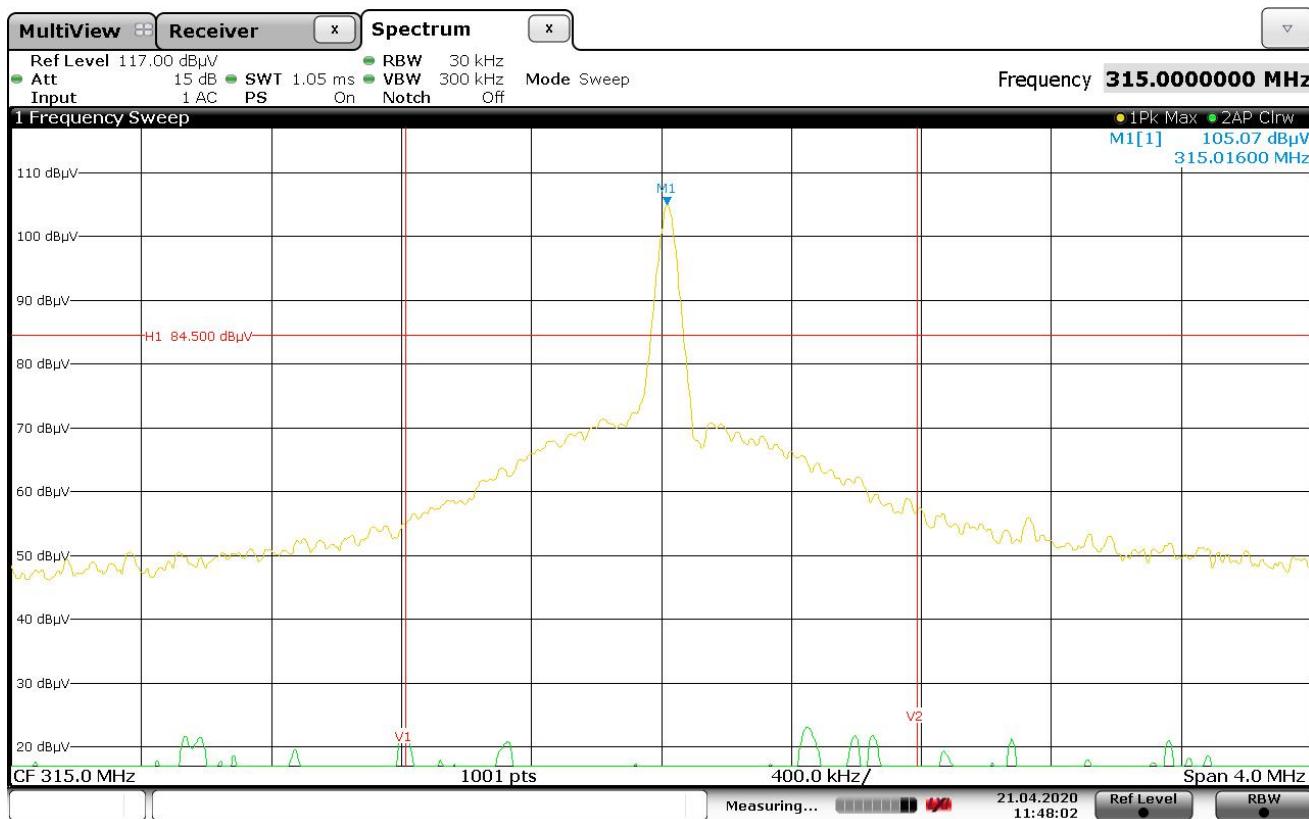


Date: 21.APR.2020 11:48:02

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 99% Bandwidth
MODE	Tx – 303MHz (Guardian Fix Code)
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	99% BW = 99.9kHz Max Allowed BW = (0.25% BW = 787.5kHz)

99% BANDWIDTH

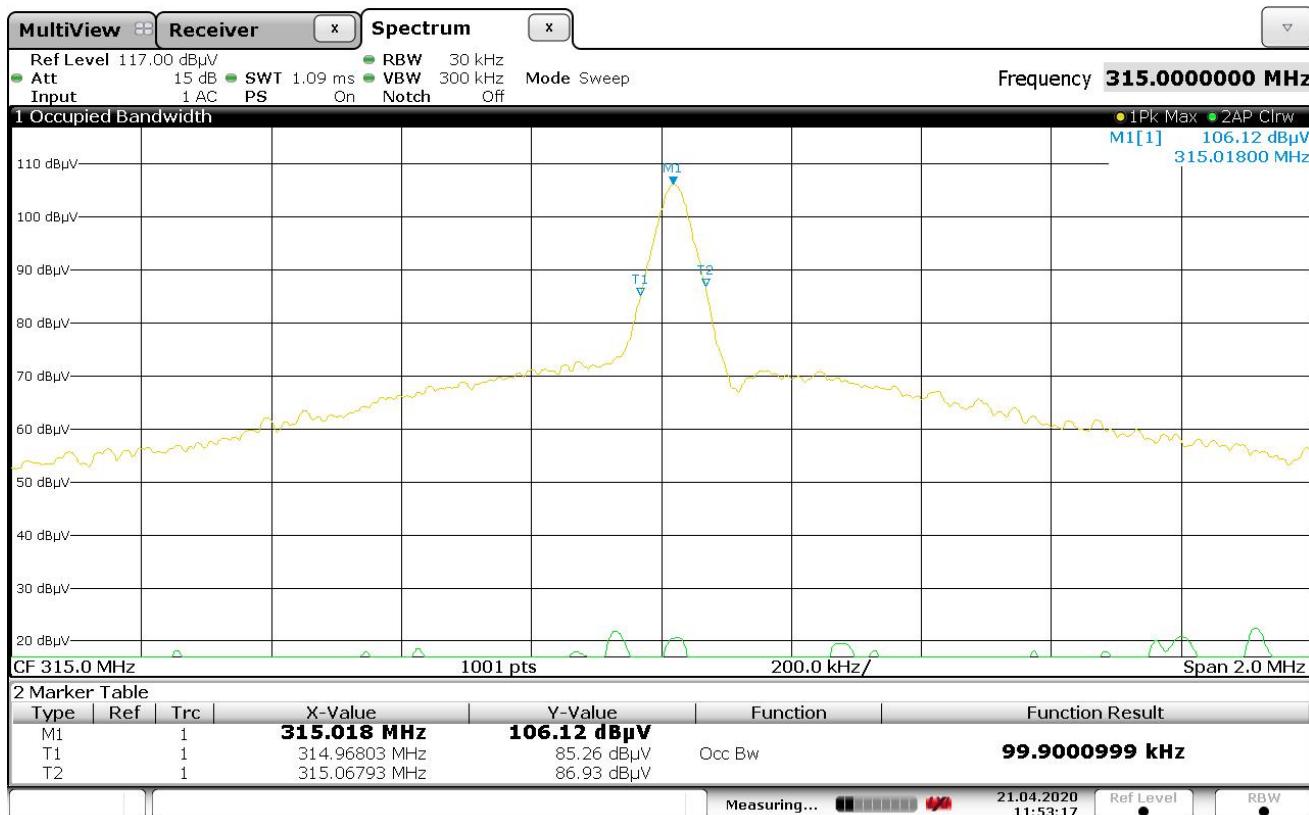


Date: 21/APR/2020 11:53:17

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 20dB Bandwidth
MODE	Tx – 390MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	Vertical Lines V1 and V2 represent the 0.25% bandwidth of the center frequency of the EUT. Horizontal line H1 represents the level 20dB down from the peak of the modulated carrier. Max allowed BW = (0.25% BW = 975kHz)

20DB BANDWIDTH

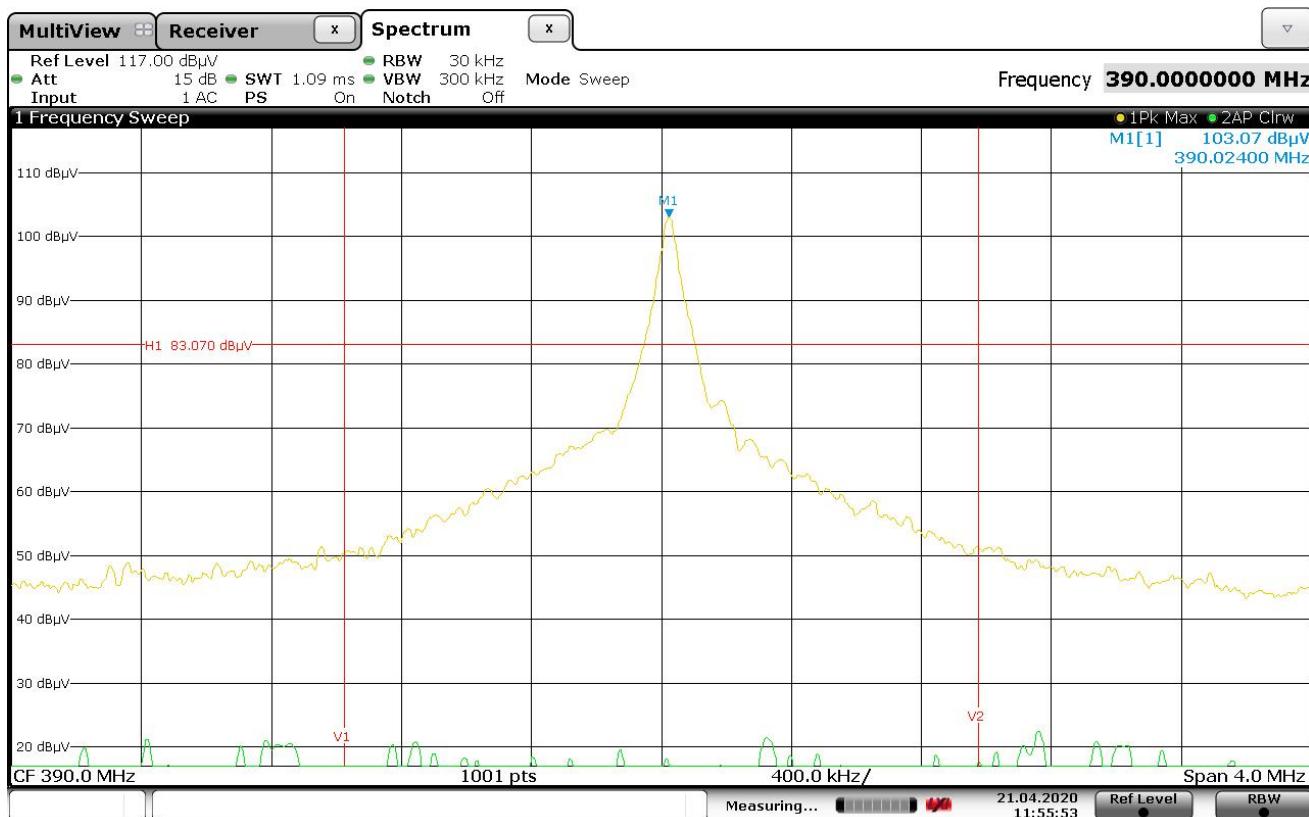


Date: 21.APR.2020 11:55:53

DATA PAGE

MANUFACTURER	Genie Company
EUT	Four Button Remote
MODEL NO.	G4BT-R
TEST	FCC §15.231, RSS-210 99% Bandwidth
MODE	Tx – 390MHz
DATE TESTED	April 20 & 21, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	99% BW = 173.82kHz Max Allowed BW = (0.25% BW = 975kHz)

99% BANDWIDTH

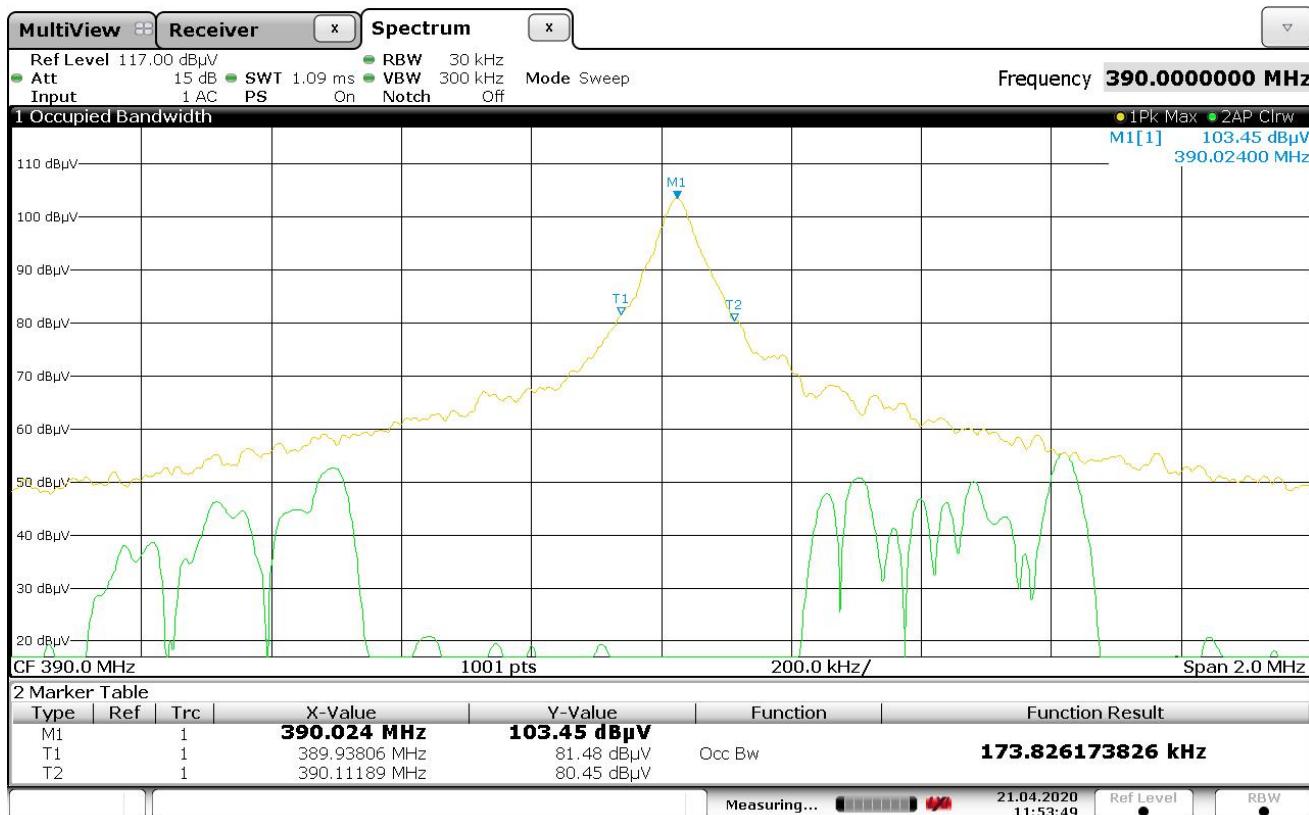

Date: 21/APR/2020 11:53:49