

SPECIFICATION



Shenzhen Daxian Technology Co., Ltd.

Takstar TH-005A BT Antenna assembly

Material Recognition Letter

Guest households	Takstar	frequency band	2400MHz~2500MHz
Project name	TH-005A	version	V1.0
Material No.	1T-H005A-004	color	Black
R F design	Xiao.Liu	structure design	RuiBin.Zhou
Quality Manager	YongJie.Pan	R & D director	Lei.Zhang
Date	2025-05-16		

client confirmation:

Whether the assembly meets your requirements: OK NG

Shenzhen DanXian Technology Co., Ltd.

Shangshuijing Village, No. 513, ihua Road, BujiTown, Longgang District, Shenzhen (opposite to theNational Defense Training Base)reached the 7thfloor of the Industrial Park Complex

TEL:0755-28576002

FAX:0755-84276383

Shanghai Branch: Room 201, Building 8 No, 3000Longdong Avenue, Integrated Circuit IndustrialZone, Zhangjiang Hi-tech Park, Shanghai

TEL:021-61630552

FAX:755-84276383

Index

I、 Project description.....	4
II、 BT antenna.....	4
1、 specifications.....	4
1.1 Electrical specification standard.....	5
1.2 Motherboard antenna end match:.....	5
1.3 Antenna composition.....	5
2、 The Equipment of Active Test.....	6
3、 test.....	7
3.1 The Test of standing Wave (VSWR).....	7
3.1.1 test connection.....	7
3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS).....	7
3.2.1 Test site.....	7
3.2.2 Test instrument.....	7
3.2.3 test data	7-8
4、 VSWR parameter diagram.....	8
5、 Passive field pattern diagram.....	9
6、 Test systems and equipment.....	10
7、 conclusion.....	10
III、 schedule drawing.....	11

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

I、 Project description

Customer name:	Takstar
Whole machine type:	Headphones
Antenna band:	2400 ~ 2500MHz
Antenna form:	FPC+Cable
Feed form:	weld
Hardware version:	V3.0

II、 BT Antenna assembly

This report provides a variety of measurements of the electrical performance of the TH-005A antenna. Figure 1 shows the antenna designed by the display.

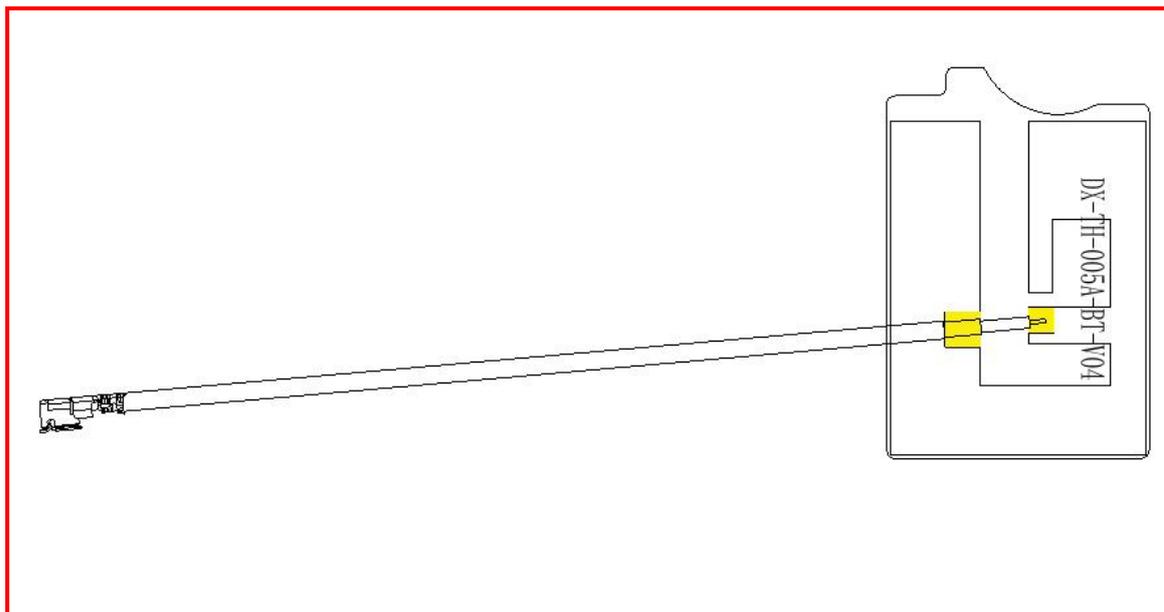

antenna appearing diagram

Figure 1

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.

Frequency Range	Frequency (MHz)	VSWR
BT	2400 ~ 2500	≤ 2

1.2 Motherboard antenna end match:

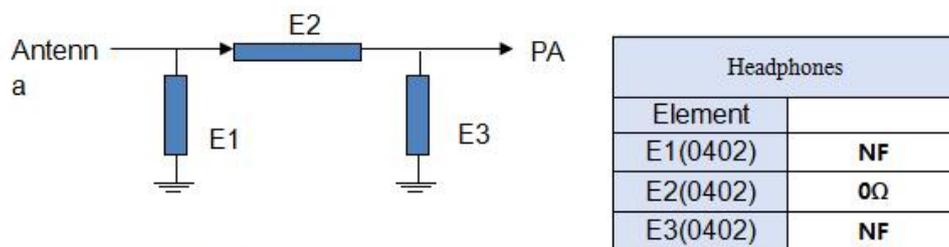

1.3 Antenna composition

The antenna is mainly composed of FPC+Cable .

www.Topant.com.cn
Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than-50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

OTA Active Test:

Channels	TRP	TIS
0	6.64	-91.37
39	7.21	-90.66
78	7.42	-92.32

www.Topant.com.cn


Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

Passive efficiency&gain:

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400	61.61	0.51
2410	61.34	0.51
2420	60.25	0.35
2430	58.43	0.29
2440	57.29	0.49
2450	56.81	0.74
2460	55.7	0.76
2470	54.38	0.8
2480	52	0.73

4、 VSWR parameter diagram

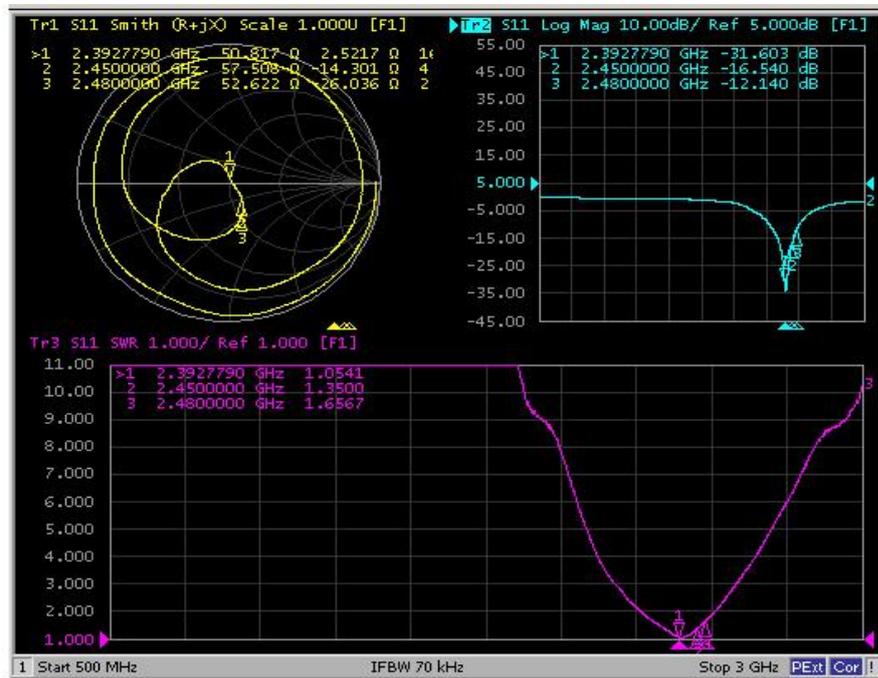


www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

9、Passive Field Pattern Diagram

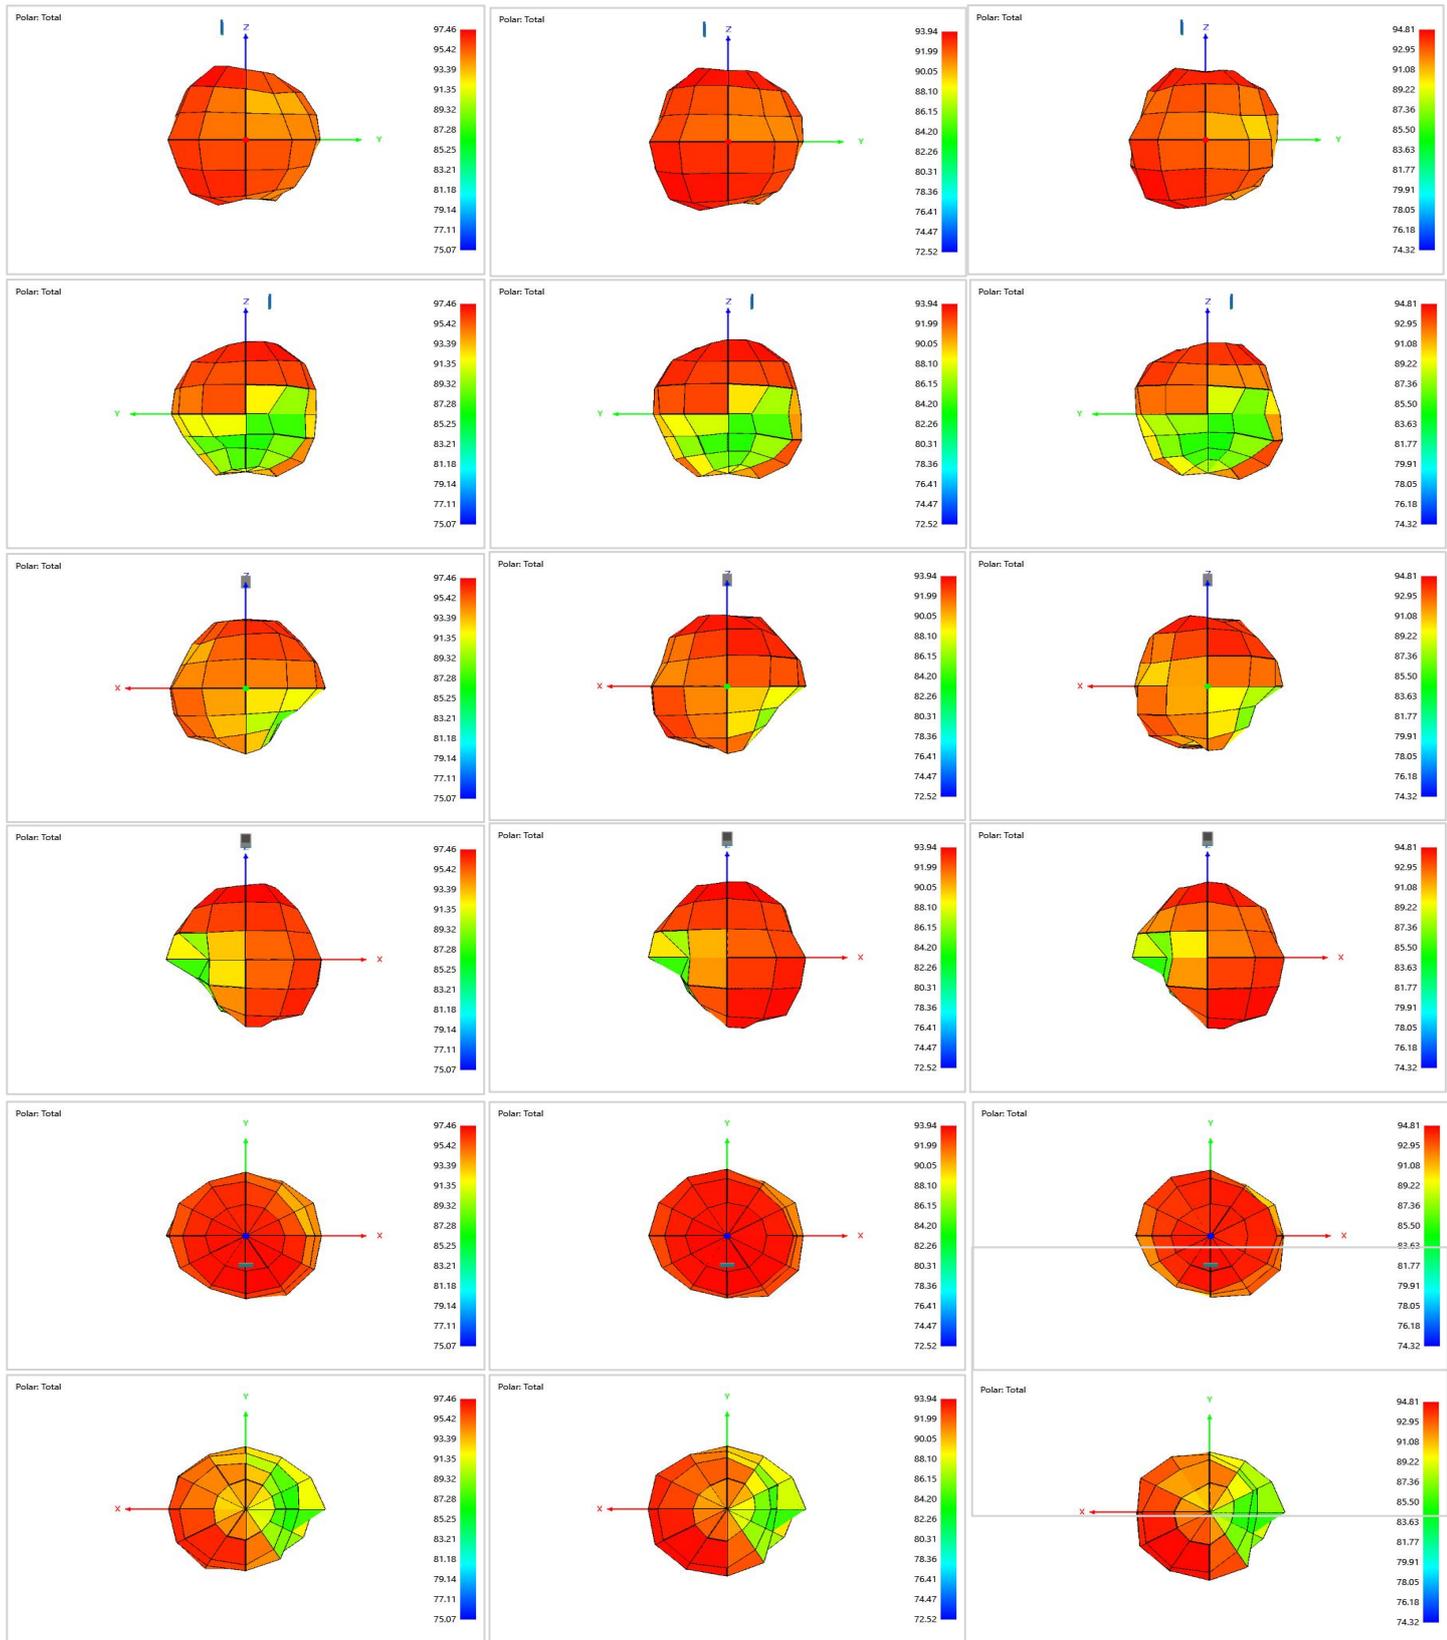

[www. Topant.com.cn](http://www.Topant.com.cn)
Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

