

FCC Test Report

(PART 24)

Report No.: RF200518C05-6

FCC ID: B94HHF135P

Test Model: TPC-F135P

Marketing Name: HP Bridge

Received Date: May 18, 2020

Test Date: Jun. 16 ~ Sep. 28, 2020

Issued Date: Oct. 08, 2020

Applicant: HP Inc.

Address: 3390 East Harmony Road Fort Collins, Colorado 80528 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards and references	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	34
4.2.1 Limits of Modulation Characteristics	34
4.2.2 Test Setup	34
4.2.3 Test Procedure	34
4.2.4 Test Results	34
4.3 Frequency Stability Measurement	37
4.3.1 Limits of Frequency Stability Measurement	37
4.3.2 Test Procedure	37
4.3.3 Test Setup	37
4.3.4 Test Results	38
4.4 Occupied Bandwidth Measurement	51
4.4.1 Test Procedure	51
4.4.2 Test Setup	51
4.4.3 Test Result	52
4.5 Band Edge Measurement	59
4.5.1 Limits of Band Edge Measurement	59
4.5.2 Test Setup	59
4.5.3 Test Procedures	59
4.5.4 Test Results	60
4.6 Peak to Average Ratio	73
4.6.1 Limits of Peak to Average Ratio Measurement	73
4.6.2 Test Setup	73
4.6.3 Test Procedures	73
4.6.4 Test Results	73
4.7 Conducted Spurious Emissions	80
4.7.1 Limits of Conducted Spurious Emissions Measurement	80
4.7.2 Test Setup	80
4.7.3 Test Procedure	80
4.7.4 Test Results	81
4.8 Radiated Emission Measurement	94
4.8.1 Limits of Radiated Emission Measurement	94
4.8.2 Test Procedure	94
4.8.3 Deviation from Test Standard	94
4.8.4 Test Setup	95
4.8.5 Test Results	96

5 Pictures of Test Arrangements.....	116
Appendix – Information of the Testing Laboratories	117

Release Control Record

Issue No.	Description	Date Issued
RF200518C05-6	Original Release	Oct. 08, 2020

1 Certificate of Conformity

Product: HP tablet

Brand: HP

Test Model: TPC-F135P

Marketing Name: HP Bridge

Sample Status: Engineering Sample

Applicant: HP Inc.

Test Date: Jun. 16 ~ Sep. 28, 2020

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Oct. 08, 2020
Gina Liu / Specialist

Approved by : , **Date:** Oct. 08, 2020
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -28.20 dB at 74.62 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	3.86 dB
	200 MHz ~ 1000 MHz	3.87 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jun. 27, 2019	Jun. 26, 2020
			Jul. 07, 2020	Jul. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Mar. 31, 2020	Mar. 30, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
			Jul. 06, 2020	Jul. 05, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 11, 2019	Nov. 10, 2020
HORN Antenna SCHWARZBECK	9120D	209	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna ETS	3117	00034130	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 23, 2020	Mar. 22, 2021
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-SM- 8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Standard Temperature And Humidity Chamber GIANT FORCE	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2019	Sep. 09, 2020
			Sep. 09, 2020	Sep. 08, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun 06, 2020	Jun 05, 2021
DC power supply Keysight	U8002A	MY56330015	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 25, 2019	Dec. 24, 2020
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 18, 2020	Jan. 17, 2021
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2019	Nov. 24, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.

3 General Information

3.1 General Description of EUT

Product	HP tablet	
Brand	HP	
Test Model	TPC-F135P	
Marketing Name	HP Bridge	
Status of EUT	Engineering Sample	
Power Supply Rating	3.8 Vdc (Li-ion battery) 5.0 / 9.0 / 12.0 Vdc (adapter)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz
Max. EIRP Power	WCDMA	309.030 mW (24.90 dBm)
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	354.813 mW (25.50 dBm)
	LTE Band 2 (Channel Bandwidth: 3 MHz)	380.189 mW (25.80 dBm)
	LTE Band 2 (Channel Bandwidth: 5 MHz)	354.813 mW (25.50 dBm)
	LTE Band 2 (Channel Bandwidth: 10 MHz)	346.737 mW (25.40 dBm)
	LTE Band 2 (Channel Bandwidth: 15 MHz)	371.535 mW (25.70 dBm)
	LTE Band 2 (Channel Bandwidth: 20 MHz)	363.078 mW (25.60 dBm)
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	269.153 mW (24.30 dBm)
	LTE Band 25 (Channel Bandwidth: 3 MHz)	295.121 mW (24.70 dBm)
	LTE Band 25 (Channel Bandwidth: 5 MHz)	275.423 mW (24.40 dBm)
	LTE Band 25 (Channel Bandwidth: 10 MHz)	281.838 mW (24.50 dBm)
	LTE Band 25 (Channel Bandwidth: 15 MHz)	275.423 mW (24.40 dBm)
	LTE Band 25 (Channel Bandwidth: 20 MHz)	281.838 mW (24.50 dBm)
Emission Designator	WCDMA	4M15F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M98D7W
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	18M0D7W

	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE Band 25 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 25 (Channel Bandwidth: 5 MHz)	4M51D7W
	LTE Band 25 (Channel Bandwidth: 10 MHz)	8M98G7D
	LTE Band 25 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 25 (Channel Bandwidth: 20 MHz)	18M0D7W
Antenna Type	PIFA Antenna with 0.42 dBi gain (for LTE Band 2) PIFA Antenna with 0.70 dBi gain (for LTE Band 25)	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	


Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	HP	DSA-18QFE FUS A	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 5.0 Vdc, 3 A, 15.0 W; +9.0 Vdc, 2.0 A, 18.0 W; 12.0 Vdc, 1.5A, 18 W
Battery	HP	HSP 1CP5/34/77	3.8 Vdc, 1500 mAh, 5.7 Wh
BT/WLAN Module	Qualcomm	SDM660-3	--
USB Cable	HP	WU-0093-00	1.47 m shielded cable w/o core
Holster	HP	HP Bridge Holster	HP holster Marketing Name: HP Bridge Holster

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

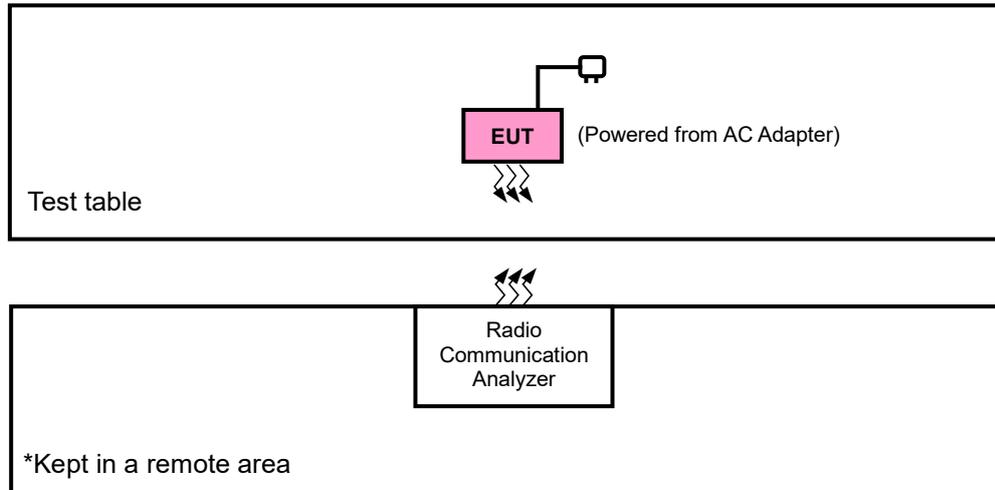

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	X-plane	X-plane
LTE Band 2	X-plane	X-plane
LTE Band 25	X-plane	X-plane

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

Note: For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 1 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	15 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	25 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	50 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 1 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			19193	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			19185	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			19175	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			19150	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			19125	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			19100	20 MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	3 RB / 1 RB Offset
				18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
				18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
				18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	3 RB / 1 RB Offset		
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset		

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM, 64QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	26090 to 26640	26365	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	26047 to 26683	26047, 26683	1.4 MHz	QPSK	6 RB / 0 RB Offset
		26055 to 26675	26055, 26675	3 MHz	QPSK	15 RB / 0 RB Offset
		26065 to 26665	26065, 26665	5 MHz	QPSK	25 RB / 0 RB Offset
		26090 to 26640	26090, 26640	10 MHz	QPSK	50 RB / 0 RB Offset
		26115 to 26615	26115, 26615	15 MHz	QPSK	75 RB / 0 RB Offset
		26140 to 26590	26140, 26590	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM, 64QAM	3 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	Band Edge	26047 to 26683	26047	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			26683	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		26055 to 26675	26055	3 MHz	QPSK	1 RB / 0 RB Offset 1 RB / 0 RB Offset		
			26675	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		26065 to 26665	26065	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			26665	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		26090 to 26640	26090	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			26640	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		26115 to 26615	26115	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			26615	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		26140 to 26590	26140	20 MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			26590	20 MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		-	Conducted Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	3 RB / 0 RB Offset
				26055 to 26675	26055, 26365, 26675	3 MHz	QPSK	1 RB / 0 RB Offset
				26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset
				26090 to 26640	26090, 26365, 26640	10 MHz	QPSK	1 RB / 0 RB Offset
26115 to 26615	26115, 26365, 26615			15 MHz	QPSK	1 RB / 0 RB Offset		
26140 to 26590	26140, 26365, 26590			20 MHz	QPSK	1 RB / 0 RB Offset		
-	Radiated Emission	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK	3 RB / 0 RB Offset		
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK	1 RB / 0 RB Offset		
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset		

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM, 64QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	120 Vac, 60 Hz	Adair Peng, Luis Lee
Modulation Characteristics	26 deg. C, 58 % RH	120 Vac, 60 Hz	Gavin Wu
Frequency Stability	26 deg. C, 58 % RH	3.8Vdc	Gavin Wu
Occupied Bandwidth	26 deg. C, 58 % RH	120 Vac, 60 Hz	Gavin Wu
Band Edge	26 deg. C, 58 % RH	120 Vac, 60 Hz	Gavin Wu
Peak to Average Ratio	26 deg. C, 58 % RH	120 Vac, 60 Hz	Gavin Wu
Conducted Emission	26 deg. C, 58 % RH	120 Vac, 60 Hz	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Luis Lee, Noah Chang, Titan Hsu

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

3GPP TS 36.521-1 V16.3.0 (2019-12)

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 5 MHz for WCDMA, and 5 MHz ∙ 10 MHz ∙ 15 MHz ∙ 20 MHz for LTE mode, VBW ≥ 3 x RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

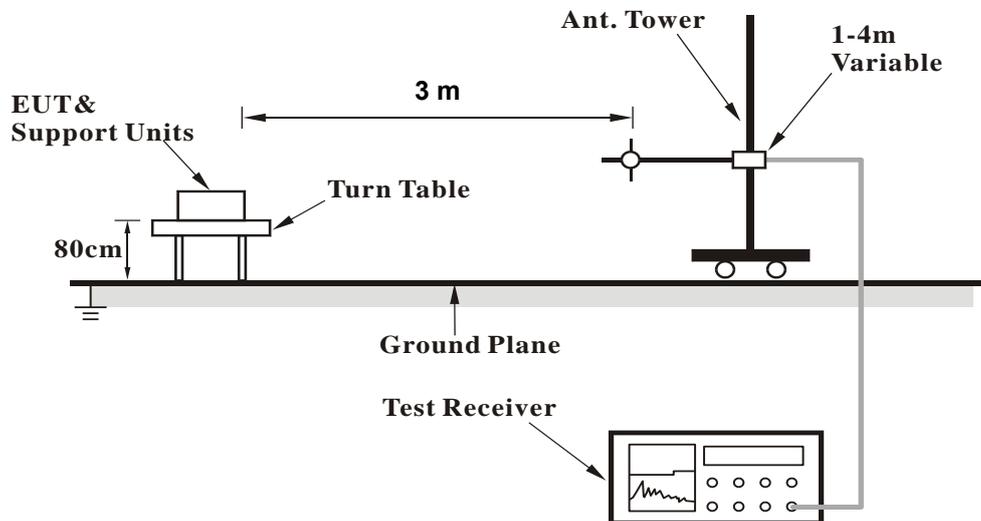


<Radiated Emission above 1 GHz>

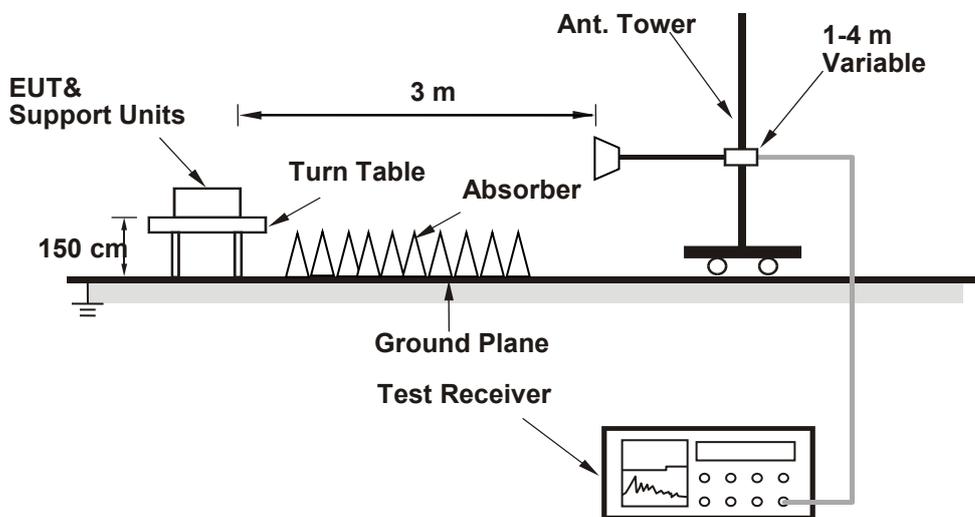

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:

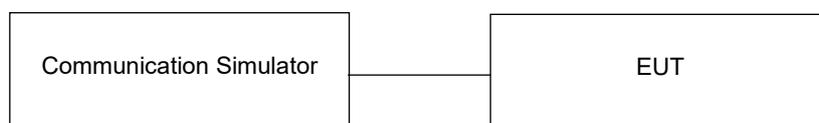

4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
	9262	9400	9538
Channel	1852.4	1880.0	1907.6
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	24.63	24.69	24.53
HSDPA Subtest-1	23.72	23.73	23.63
HSDPA Subtest-2	23.70	23.76	23.63
HSDPA Subtest-3	23.15	23.22	23.07
HSDPA Subtest-4	23.17	23.22	23.07
DC-HSDPA Subtest-1	23.56	23.66	23.53
DC-HSDPA Subtest-2	23.63	23.73	23.50
DC-HSDPA Subtest-3	23.12	23.12	22.98
DC-HSDPA Subtest-4	23.15	23.19	22.99
HSUPA Subtest-1	23.63	23.73	23.55
HSUPA Subtest-2	21.61	21.71	21.54
HSUPA Subtest-3	22.67	22.77	22.56
HSUPA Subtest-4	21.65	21.74	21.59
HSUPA Subtest-5	23.69	23.74	23.62

LTE Band 2																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				Channel	18700	18900						19100	Channel	18675		18900	19125
				Frequency (MHz)	1860.0	1880.0						1900.0	Frequency (MHz)	1857.5		1880.0	1902.5
20M	QPSK	1	0	23.65	23.77	23.56	0	15M	QPSK	1	0	23.56	23.73	23.55	0		
		1	50	23.55	23.68	23.47	0			1	37	23.52	23.63	23.47	0		
		1	99	23.51	23.64	23.43	0			1	74	23.45	23.58	23.37	0		
		50	0	22.68	22.81	22.60	1			36	0	22.59	22.75	22.54	1		
		50	25	22.67	22.80	22.59	1			36	19	22.62	22.74	22.58	1		
		50	50	22.64	22.77	22.56	1			36	39	22.55	22.69	22.55	1		
	100	0	22.66	22.79	22.58	1	75		0	22.62	22.71	22.49	1				
	16QAM	1	0	22.70	22.83	22.62	1		16QAM	1	0	22.69	22.74	22.60	1		
		1	50	22.92	23.05	22.84	1			1	37	22.83	23.05	22.83	1		
		1	99	22.69	22.82	22.61	1			1	74	22.65	22.72	22.60	1		
		50	0	21.75	21.88	21.67	2			36	0	21.72	21.81	21.64	2		
		50	25	21.81	21.94	21.73	2			36	19	21.81	21.92	21.65	2		
		50	50	21.71	21.84	21.63	2			36	39	21.68	21.82	21.59	2		
	100	0	21.73	21.86	21.65	2	75		0	21.63	21.79	21.55	2				
	64QAM	1	0	21.65	21.81	21.58	2		64QAM	1	0	21.50	21.76	21.43	2		
		1	50	21.86	21.97	21.84	2			1	37	21.83	21.87	21.69	2		
		1	99	21.65	21.74	21.51	2			1	74	21.46	21.67	21.47	2		
		50	0	20.68	20.87	20.60	3			36	0	20.56	20.73	20.64	3		
50		25	20.71	20.91	20.68	3	36	19		20.75	20.77	20.62	3				
50		50	20.61	20.83	20.62	3	36	39		20.59	20.70	20.49	3				
100	0	20.68	20.76	20.56	3	75	0	20.59	20.77	20.51	3						
10M	QPSK	1	0	23.49	23.65	23.47	0	5M	QPSK	1	0	23.49	23.70	23.26	0		
		1	24	23.32	23.44	23.44	0			1	12	23.37	23.64	23.28	0		
		1	49	23.27	23.41	23.29	0			1	24	23.46	23.40	23.39	0		
		25	0	22.49	22.78	22.40	1			12	0	22.60	22.72	22.45	1		
		25	12	22.61	22.76	22.50	1			12	6	22.54	22.72	22.29	1		
		25	25	22.46	22.62	22.49	1			12	13	22.57	22.62	22.32	1		
	50	0	22.52	22.66	22.52	1	25		0	22.65	22.69	22.42	1				
	16QAM	1	0	22.62	22.72	22.47	1		16QAM	1	0	22.49	22.72	22.41	1		
		1	24	22.77	23.01	22.67	1			1	12	22.76	22.98	22.66	1		
		1	49	22.47	22.58	22.48	1			1	24	22.66	22.59	22.57	1		
		25	0	21.67	21.82	21.61	2			12	0	21.61	21.88	21.49	2		
		25	12	21.67	21.80	21.53	2			12	6	21.77	21.94	21.64	2		
		25	25	21.61	21.76	21.53	2			12	13	21.65	21.80	21.48	2		
	50	0	21.57	21.85	21.53	2	25		0	21.58	21.81	21.52	2				
	64QAM	1	0	21.64	21.66	21.42	2		64QAM	1	0	21.66	21.75	21.46	2		
		1	24	21.75	21.83	21.71	2			1	12	21.83	21.98	21.71	2		
		1	49	21.58	21.72	21.52	2			1	24	21.55	21.61	21.52	2		
		25	0	20.69	20.86	20.52	3			12	0	20.52	20.82	20.55	3		
25		12	20.79	20.73	20.59	3	12	6		20.75	20.86	20.65	3				
25		25	20.65	20.73	20.58	3	12	13		20.65	20.76	20.49	3				
50	0	20.64	20.76	20.49	3	25	0	20.54	20.68	20.52	3						
3M	QPSK	1	0	23.63	23.58	23.42	0	1.4M	QPSK	1	0	23.56	23.60	23.51	0		
		1	7	23.37	23.52	23.30	0			1	2	23.34	23.64	23.32	0		
		1	14	23.36	23.53	23.33	0			1	5	23.37	23.50	23.31	0		
		8	0	22.57	22.63	22.43	1			3	0	23.51	23.67	23.37	0		
		8	3	22.51	22.75	22.49	1			3	1	23.45	23.76	23.47	0		
		8	7	22.42	22.63	22.44	1			3	3	23.55	23.72	23.37	0		
	15	0	22.52	22.68	22.44	1	6		0	22.54	22.64	22.37	1				
	16QAM	1	0	22.57	22.71	22.60	1		16QAM	1	0	22.63	22.69	22.47	1		
		1	7	22.73	22.97	22.64	1			1	2	22.78	22.96	22.73	1		
		1	14	22.56	22.66	22.55	1			1	5	22.54	22.60	22.45	1		
		8	0	21.63	21.68	21.58	2			3	0	22.61	22.80	22.52	1		
		8	3	21.71	21.93	21.49	2			3	1	22.60	22.83	22.66	1		
		8	7	21.56	21.82	21.49	2			3	3	22.53	22.72	22.44	1		
	15	0	21.57	21.78	21.48	2	6		0	21.70	21.74	21.50	2				
	64QAM	1	0	21.53	21.79	21.43	2		64QAM	1	0	21.46	21.71	21.43	2		
		1	7	21.69	21.86	21.74	2			1	2	21.77	21.95	21.67	2		
		1	14	21.57	21.75	21.59	2			1	5	21.48	21.76	21.53	2		
		8	0	20.53	20.69	20.54	3			3	0	21.55	21.82	21.52	2		
8		3	20.69	20.89	20.65	3	3	1		21.74	21.94	21.56	2				
8		7	20.66	20.59	20.50	3	3	3		21.61	21.68	21.59	2				
15	0	20.70	20.76	20.54	3	6	0	20.55	20.76	20.49	3						

LTE Band 25																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		26140	26365	26590				Channel		26115	26365	26615			
		Frequency (MHz)		1860.0	1882.5	1905.0				Frequency (MHz)		1857.5	1882.5	1907.5			
20M	QPSK	1	0	22.62	22.55	22.35	0	15M	QPSK	1	0	22.55	22.51	22.35	0		
		1	50	22.52	22.46	22.25	0			1	37	22.51	22.38	22.17	0		
		1	99	22.50	22.44	22.23	0			1	74	22.41	22.42	22.18	0		
		50	0	21.58	21.52	21.31	1			36	0	21.50	21.46	21.26	1		
		50	25	21.56	21.50	21.29	1			36	19	21.50	21.49	21.23	1		
		50	50	21.52	21.46	21.25	1			36	39	21.51	21.45	21.24	1		
	100	0	21.55	21.49	21.28	1	75		0	21.54	21.43	21.19	1				
	16QAM	1	0	21.86	21.80	21.59	1		16QAM	1	0	21.86	21.77	21.55	1		
		1	50	21.76	21.70	21.49	1			1	37	21.71	21.64	21.41	1		
		1	99	21.80	21.74	21.53	1			1	74	21.73	21.69	21.51	1		
		50	0	20.66	20.60	20.39	2			36	0	20.57	20.51	20.33	2		
		50	25	20.65	20.59	20.38	2			36	19	20.58	20.52	20.32	2		
		50	50	20.60	20.54	20.33	2			36	39	20.54	20.51	20.26	2		
	100	0	20.61	20.55	20.34	2	75		0	20.56	20.52	20.25	2				
	64QAM	1	0	20.86	20.73	20.51	2		64QAM	1	0	20.77	20.68	20.41	2		
		1	50	20.74	20.69	20.48	2			1	37	20.64	20.61	20.36	2		
		1	99	20.71	20.73	20.46	2			1	74	20.62	20.70	20.35	2		
		50	0	19.59	19.56	19.37	3			36	0	19.49	19.45	19.19	3		
		50	25	19.60	19.53	19.35	3			36	19	19.46	19.45	19.28	3		
		50	50	19.51	19.52	19.27	3			36	39	19.52	19.49	19.15	3		
	100	0	19.60	19.53	19.32	3	75		0	19.54	19.43	19.19	3				
	10M	QPSK	1	0	22.40	22.43	22.23		0	5M	QPSK	1	0	22.51	22.50	22.22	0
			1	24	22.33	22.29	22.10		0			1	12	22.40	22.25	22.18	0
			1	49	22.27	22.29	22.14		0			1	24	22.30	22.31	22.12	0
25			0	21.49	21.37	21.12	1	12	0			21.51	21.40	21.11	1		
25			12	21.46	21.48	21.20	1	12	6			21.34	21.42	21.14	1		
25			25	21.34	21.29	21.04	1	12	13			21.41	21.38	21.07	1		
50		0	21.53	21.35	21.19	1	25	0	21.50		21.39	21.02	1				
16QAM		1	0	21.63	21.59	21.54	1	16QAM	1		0	21.76	21.71	21.49	1		
		1	24	21.62	21.58	21.42	1		1		12	21.73	21.56	21.37	1		
		1	49	21.63	21.68	21.36	1		1		24	21.62	21.62	21.41	1		
		25	0	20.61	20.53	20.30	2		12		0	20.56	20.43	20.17	2		
		25	12	20.45	20.42	20.30	2		12		6	20.64	20.48	20.17	2		
		25	25	20.46	20.32	20.21	2		12		13	20.44	20.39	20.22	2		
50		0	20.49	20.37	20.13	2	25	0	20.43		20.33	20.20	2				
64QAM		1	0	20.67	20.70	20.45	2	64QAM	1		0	20.71	20.70	20.50	2		
		1	24	20.60	20.59	20.37	2		1		12	20.64	20.52	20.42	2		
		1	49	20.70	20.55	20.43	2		1		24	20.76	20.51	20.40	2		
		25	0	19.57	19.51	19.14	3		12		0	19.54	19.44	19.30	3		
		25	12	19.45	19.48	19.26	3		12		6	19.54	19.55	19.18	3		
		25	25	19.54	19.37	19.10	3		12		13	19.40	19.46	19.23	3		
50		0	19.50	19.42	19.29	3	25	0	19.46		19.41	19.25	3				
3M		QPSK	1	0	22.46	22.42	22.26	0	1.4M		QPSK	1	0	22.52	22.32	22.13	0
			1	7	22.34	22.38	22.06	0				1	2	22.40	22.30	22.06	0
			1	14	22.35	22.26	22.09	0				1	5	22.30	22.21	22.13	0
	8		0	21.41	21.44	21.18	1	3		0		22.54	22.42	22.11	0		
	8		3	21.55	21.41	21.14	1	3		1		22.44	22.37	22.19	0		
	8		7	21.44	21.32	21.11	1	3		3		22.49	22.32	22.11	0		
	15	0	21.40	21.36	21.14	1	6	0		21.42	21.27	21.24	1				
	16QAM	1	0	21.69	21.79	21.50	1	16QAM		1	0	21.71	21.72	21.42	1		
		1	7	21.54	21.66	21.40	1			1	2	21.60	21.65	21.40	1		
		1	14	21.65	21.57	21.38	1			1	5	21.70	21.63	21.37	1		
		8	0	20.55	20.45	20.24	2			3	0	21.51	21.57	21.31	1		
		8	3	20.57	20.54	20.31	2			3	1	21.52	21.45	21.34	1		
		8	7	20.52	20.39	20.19	2			3	3	21.54	21.36	21.23	1		
	15	0	20.48	20.38	20.19	2	6	0		20.40	20.39	20.32	2				
	64QAM	1	0	20.63	20.75	20.49	2	64QAM		1	0	20.71	20.70	20.47	2		
		1	7	20.70	20.62	20.32	2			1	2	20.62	20.60	20.42	2		
		1	14	20.60	20.61	20.45	2			1	5	20.77	20.58	20.48	2		
		8	0	19.59	19.51	19.30	3			3	0	20.58	20.46	20.33	2		
		8	3	19.57	19.48	19.27	3			3	1	20.60	20.36	20.27	2		
		8	7	19.53	19.47	19.17	3			3	3	20.52	20.47	20.30	2		
	15	0	19.55	19.43	19.32	3	6	0		19.47	19.38	19.23	3				

EIRP Power (dBm)

WCDMA Band 2

MODE		TX channel 9262, 9400, 9538					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-16.60	23.30	1.00	24.30	33.00	-8.70
2	1880.00	-16.50	23.60	1.10	24.70	33.00	-8.30
3	1907.60	-16.60	23.80	1.10	24.90	33.00	-8.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.40	-20.30	18.50	1.00	19.50	33.00	-13.50
2	1880.00	-20.40	18.10	1.10	19.20	33.00	-13.80
3	1907.60	-20.10	18.30	1.10	19.40	33.00	-13.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: QPSK

LTE Band 2, Channel Bandwidth 1.4MHz

MODE		TX channel 18607, 18900, 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-14.80	24.10	1.00	25.10	33.00	-7.90
2	1880.00	-14.90	24.40	1.10	25.50	33.00	-7.50
3	1909.30	-15.70	24.00	1.10	25.10	33.00	-7.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-17.40	21.00	1.00	22.00	33.00	-11.00
2	1880.00	-17.40	21.00	1.10	22.10	33.00	-10.90
3	1909.30	-17.70	20.80	1.10	21.90	33.00	-11.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 3MHz

MODE		TX channel 18615, 18900, 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-14.30	24.60	1.00	25.60	33.00	-7.40
2	1880.00	-14.60	24.70	1.10	25.80	33.00	-7.20
3	1908.50	-15.90	23.80	1.10	24.90	33.00	-8.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-17.30	21.10	1.00	22.10	33.00	-10.90
2	1880.00	-17.30	21.10	1.10	22.20	33.00	-10.80
3	1908.50	-18.10	20.40	1.10	21.50	33.00	-11.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

MODE		TX channel 18625, 18900, 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-14.40	24.50	1.00	25.50	33.00	-7.50
2	1880.00	-15.00	24.30	1.10	25.40	33.00	-7.60
3	1907.50	-15.60	24.10	1.10	25.20	33.00	-7.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-17.60	20.80	1.00	21.80	33.00	-11.20
2	1880.00	-18.10	20.30	1.10	21.40	33.00	-11.60
3	1907.50	-17.90	20.60	1.10	21.70	33.00	-11.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 10MHz

MODE		TX channel 18650, 18900, 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-14.90	24.00	1.00	25.00	33.00	-8.00
2	1880.00	-15.20	24.10	1.10	25.20	33.00	-7.80
3	1905.00	-15.30	24.30	1.10	25.40	33.00	-7.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-18.10	20.30	1.00	21.30	33.00	-11.70
2	1880.00	-18.00	20.40	1.10	21.50	33.00	-11.50
3	1905.00	-18.00	20.50	1.10	21.60	33.00	-11.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 15MHz

MODE		TX channel 18675, 18900, 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-14.30	24.60	1.10	25.70	33.00	-7.30
2	1880.00	-15.20	24.10	1.10	25.20	33.00	-7.80
3	1902.50	-15.50	24.10	1.10	25.20	33.00	-7.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-17.20	21.10	1.10	22.20	33.00	-10.80
2	1880.00	-17.90	20.50	1.10	21.60	33.00	-11.40
3	1902.50	-18.10	20.40	1.10	21.50	33.00	-11.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 20MHz

MODE		TX channel 18700, 18900, 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-14.40	24.50	1.10	25.60	33.00	-7.40
2	1880.00	-15.00	24.30	1.10	25.40	33.00	-7.60
3	1900.00	-15.70	23.90	1.10	25.00	33.00	-8.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-17.50	20.80	1.10	21.90	33.00	-11.10
2	1880.00	-17.30	21.10	1.10	22.20	33.00	-10.80
3	1900.00	-17.90	20.50	1.10	21.60	33.00	-11.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 16QAM

LTE Band 2, Channel Bandwidth 1.4MHz

MODE		TX channel 18607, 18900, 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-15.70	23.20	1.00	24.20	33.00	-8.80
2	1880.00	-15.40	23.90	1.10	25.00	33.00	-8.00
3	1909.30	-16.10	23.60	1.10	24.70	33.00	-8.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-18.10	20.30	1.00	21.30	33.00	-11.70
2	1880.00	-18.50	19.90	1.10	21.00	33.00	-12.00
3	1909.30	-18.70	19.80	1.10	20.90	33.00	-12.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 3MHz

MODE		TX channel 18615, 18900, 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-15.00	23.90	1.00	24.90	33.00	-8.10
2	1880.00	-15.40	23.90	1.10	25.00	33.00	-8.00
3	1908.50	-15.90	23.80	1.10	24.90	33.00	-8.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-18.90	19.50	1.00	20.50	33.00	-12.50
2	1880.00	-18.20	20.20	1.10	21.30	33.00	-11.70
3	1908.50	-19.00	19.50	1.10	20.60	33.00	-12.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

MODE		TX channel 18625, 18900, 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-15.70	23.20	1.00	24.20	33.00	-8.80
2	1880.00	-15.90	23.40	1.10	24.50	33.00	-8.50
3	1907.50	-16.50	23.20	1.10	24.30	33.00	-8.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-18.40	20.00	1.00	21.00	33.00	-12.00
2	1880.00	-18.80	19.60	1.10	20.70	33.00	-12.30
3	1907.50	-18.70	19.80	1.10	20.90	33.00	-12.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 10MHz

MODE		TX channel 18650, 18900, 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-15.10	23.80	1.00	24.80	33.00	-8.20
2	1880.00	-15.50	23.80	1.10	24.90	33.00	-8.10
3	1905.00	-16.00	23.60	1.10	24.70	33.00	-8.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-18.40	20.00	1.00	21.00	33.00	-12.00
2	1880.00	-18.90	19.50	1.10	20.60	33.00	-12.40
3	1905.00	-19.20	19.30	1.10	20.40	33.00	-12.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 15MHz

MODE		TX channel 18675, 18900, 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-15.30	23.60	1.10	24.70	33.00	-8.30
2	1880.00	-15.60	23.70	1.10	24.80	33.00	-8.20
3	1902.50	-15.70	23.90	1.10	25.00	33.00	-8.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-18.10	20.20	1.10	21.30	33.00	-11.70
2	1880.00	-18.50	19.90	1.10	21.00	33.00	-12.00
3	1902.50	-19.00	19.50	1.10	20.60	33.00	-12.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 20MHz

MODE		TX channel 18700, 18900, 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-15.60	23.30	1.10	24.40	33.00	-8.60
2	1880.00	-16.00	23.30	1.10	24.40	33.00	-8.60
3	1900.00	-16.60	23.00	1.10	24.10	33.00	-8.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-18.00	20.30	1.10	21.40	33.00	-11.60
2	1880.00	-18.60	19.80	1.10	20.90	33.00	-12.10
3	1900.00	-19.10	19.30	1.10	20.40	33.00	-12.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 64QAM

LTE Band 2, Channel Bandwidth 1.4MHz

MODE		TX channel 18607, 18900, 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-16.00	22.90	1.00	23.90	33.00	-9.10
2	1880.00	-16.10	23.20	1.10	24.30	33.00	-8.70
3	1909.30	-17.00	22.70	1.10	23.80	33.00	-9.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-18.60	19.80	1.00	20.80	33.00	-12.20
2	1880.00	-19.10	19.30	1.10	20.40	33.00	-12.60
3	1909.30	-19.40	19.10	1.10	20.20	33.00	-12.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 3MHz

MODE		TX channel 18615, 18900, 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-15.80	23.10	1.00	24.10	33.00	-8.90
2	1880.00	-16.00	23.30	1.10	24.40	33.00	-8.60
3	1908.50	-17.50	22.20	1.10	23.30	33.00	-9.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-19.30	19.10	1.00	20.10	33.00	-12.90
2	1880.00	-18.80	19.60	1.10	20.70	33.00	-12.30
3	1908.50	-19.60	18.90	1.10	20.00	33.00	-13.00

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

MODE		TX channel 18625, 18900, 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-16.10	22.80	1.00	23.80	33.00	-9.20
2	1880.00	-16.40	22.90	1.10	24.00	33.00	-9.00
3	1907.50	-17.30	22.40	1.10	23.50	33.00	-9.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-18.90	19.50	1.00	20.50	33.00	-12.50
2	1880.00	-19.30	19.10	1.10	20.20	33.00	-12.80
3	1907.50	-19.10	19.40	1.10	20.50	33.00	-12.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 10MHz

MODE		TX channel 18650, 18900, 19150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-16.40	22.50	1.00	23.50	33.00	-9.50
2	1880.00	-16.90	22.40	1.10	23.50	33.00	-9.50
3	1905.00	-17.10	22.50	1.10	23.60	33.00	-9.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-18.80	19.60	1.00	20.60	33.00	-12.40
2	1880.00	-19.20	19.20	1.10	20.30	33.00	-12.70
3	1905.00	-19.60	18.90	1.10	20.00	33.00	-13.00

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 15MHz

MODE		TX channel 18675, 18900, 19125					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-15.70	23.20	1.10	24.30	33.00	-8.70
2	1880.00	-16.80	22.50	1.10	23.60	33.00	-9.40
3	1902.50	-17.10	22.50	1.10	23.60	33.00	-9.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-18.70	19.60	1.10	20.70	33.00	-12.30
2	1880.00	-18.90	19.50	1.10	20.60	33.00	-12.40
3	1902.50	-19.40	19.10	1.10	20.20	33.00	-12.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 20MHz

MODE		TX channel 18700, 18900, 19100					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-15.90	23.00	1.10	24.10	33.00	-8.90
2	1880.00	-16.70	22.60	1.10	23.70	33.00	-9.30
3	1900.00	-17.20	22.40	1.10	23.50	33.00	-9.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-18.60	19.70	1.10	20.80	33.00	-12.20
2	1880.00	-19.30	19.10	1.10	20.20	33.00	-12.80
3	1900.00	-19.40	19.00	1.10	20.10	33.00	-12.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: QPSK

LTE Band 25, Channel Bandwidth 1.4MHz

MODE		TX channel 26047, 26365, 26683					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-15.80	23.10	1.00	24.10	33.00	-8.90
2	1882.50	-16.10	23.20	1.10	24.30	33.00	-8.70
3	1914.30	-16.80	23.30	0.70	24.00	33.00	-9.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-19.90	18.50	1.00	19.50	33.00	-13.50
2	1882.50	-20.20	18.20	1.10	19.30	33.00	-13.70
3	1914.30	-20.00	19.00	0.70	19.70	33.00	-13.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 3MHz

MODE		TX channel 26055, 26365, 26675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-15.20	23.70	1.00	24.70	33.00	-8.30
2	1882.50	-16.00	23.30	1.10	24.40	33.00	-8.60
3	1913.50	-16.50	23.60	0.70	24.30	33.00	-8.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-19.70	18.70	1.00	19.70	33.00	-13.30
2	1882.50	-19.90	18.50	1.10	19.60	33.00	-13.40
3	1913.50	-20.30	18.70	0.70	19.40	33.00	-13.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 5MHz

MODE		TX channel 26065, 26365, 26665					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-15.90	23.00	1.00	24.00	33.00	-9.00
2	1882.50	-16.00	23.30	1.10	24.40	33.00	-8.60
3	1912.50	-16.40	23.70	0.70	24.40	33.00	-8.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-19.80	18.60	1.00	19.60	33.00	-13.40
2	1882.50	-20.00	18.40	1.10	19.50	33.00	-13.50
3	1912.50	-20.00	19.00	0.70	19.70	33.00	-13.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 10MHz

MODE		TX channel 26090, 26365, 26640					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-15.60	23.30	1.00	24.30	33.00	-8.70
2	1882.50	-16.40	22.90	1.10	24.00	33.00	-9.00
3	1910.00	-16.30	23.80	0.70	24.50	33.00	-8.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-20.10	18.30	1.00	19.30	33.00	-13.70
2	1882.50	-20.10	18.30	1.10	19.40	33.00	-13.60
3	1910.00	-20.00	19.00	0.70	19.70	33.00	-13.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 15MHz

MODE		TX channel 26115, 26365, 26615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-16.00	22.90	1.10	24.00	33.00	-9.00
2	1882.50	-16.50	22.80	1.10	23.90	33.00	-9.10
3	1907.50	-16.40	23.30	1.10	24.40	33.00	-8.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-20.20	18.10	1.10	19.20	33.00	-13.80
2	1882.50	-19.80	18.60	1.10	19.70	33.00	-13.30
3	1907.50	-20.00	18.50	1.10	19.60	33.00	-13.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 20MHz

MODE		TX channel 26140, 26365, 26590					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-15.70	23.20	1.10	24.30	33.00	-8.70
2	1882.50	-16.30	23.00	1.10	24.10	33.00	-8.90
3	1905.00	-16.20	23.40	1.10	24.50	33.00	-8.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-20.30	18.00	1.10	19.10	33.00	-13.90
2	1882.50	-20.30	18.10	1.10	19.20	33.00	-13.80
3	1905.00	-20.30	18.20	1.10	19.30	33.00	-13.70

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 16QAM

LTE Band 25, Channel Bandwidth 1.4MHz

MODE		TX channel 26047, 26365, 26683					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-16.60	22.30	1.00	23.30	33.00	-9.70
2	1882.50	-17.00	22.30	1.10	23.40	33.00	-9.60
3	1914.30	-17.30	22.80	0.70	23.50	33.00	-9.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-20.90	17.50	1.00	18.50	33.00	-14.50
2	1882.50	-21.10	17.30	1.10	18.40	33.00	-14.60
3	1914.30	-21.00	18.00	0.70	18.70	33.00	-14.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 3MHz

MODE		TX channel 26055, 26365, 26675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-16.20	22.70	1.00	23.70	33.00	-9.30
2	1882.50	-17.10	22.20	1.10	23.30	33.00	-9.70
3	1913.50	-17.60	22.50	0.70	23.20	33.00	-9.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-20.80	17.60	1.00	18.60	33.00	-14.40
2	1882.50	-21.00	17.40	1.10	18.50	33.00	-14.50
3	1913.50	-21.10	17.90	0.70	18.60	33.00	-14.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 5MHz

MODE		TX channel 26065, 26365, 26665					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-16.70	22.20	1.00	23.20	33.00	-9.80
2	1882.50	-16.80	22.50	1.10	23.60	33.00	-9.40
3	1912.50	-17.40	22.70	0.70	23.40	33.00	-9.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-21.00	17.40	1.00	18.40	33.00	-14.60
2	1882.50	-21.20	17.20	1.10	18.30	33.00	-14.70
3	1912.50	-21.10	17.90	0.70	18.60	33.00	-14.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 10MHz

MODE		TX channel 26090, 26365, 26640					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-16.40	22.50	1.00	23.50	33.00	-9.50
2	1882.50	-17.40	21.90	1.10	23.00	33.00	-10.00
3	1910.00	-17.00	23.10	0.70	23.80	33.00	-9.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-20.80	17.60	1.00	18.60	33.00	-14.40
2	1882.50	-21.10	17.30	1.10	18.40	33.00	-14.60
3	1910.00	-21.30	17.70	0.70	18.40	33.00	-14.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 15MHz

MODE		TX channel 26115, 26365, 26615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-16.40	22.50	1.10	23.60	33.00	-9.40
2	1882.50	-16.90	22.40	1.10	23.50	33.00	-9.50
3	1907.50	-17.30	22.40	1.10	23.50	33.00	-9.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-21.40	16.90	1.10	18.00	33.00	-15.00
2	1882.50	-21.40	17.00	1.10	18.10	33.00	-14.90
3	1907.50	-21.60	16.90	1.10	18.00	33.00	-15.00

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 20MHz

MODE		TX channel 26140, 26365, 26590					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-17.00	21.90	1.10	23.00	33.00	-10.00
2	1882.50	-16.90	22.40	1.10	23.50	33.00	-9.50
3	1905.00	-17.50	22.10	1.10	23.20	33.00	-9.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-21.10	17.20	1.10	18.30	33.00	-14.70
2	1882.50	-20.70	17.70	1.10	18.80	33.00	-14.20
3	1905.00	-21.10	17.40	1.10	18.50	33.00	-14.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 64QAM

LTE Band 25, Channel Bandwidth 1.4MHz

MODE		TX channel 26047, 26365, 26683					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-17.60	21.30	1.00	22.30	33.00	-10.70
2	1882.50	-17.80	21.50	1.10	22.60	33.00	-10.40
3	1914.30	-17.60	22.50	0.70	23.20	33.00	-9.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-21.70	16.70	1.00	17.70	33.00	-15.30
2	1882.50	-21.70	16.70	1.10	17.80	33.00	-15.20
3	1914.30	-21.50	17.50	0.70	18.20	33.00	-14.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 3MHz

MODE		TX channel 26055, 26365, 26675					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-16.60	22.30	1.00	23.30	33.00	-9.70
2	1882.50	-17.30	22.00	1.10	23.10	33.00	-9.90
3	1913.50	-18.10	22.00	0.70	22.70	33.00	-10.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-21.20	17.20	1.00	18.20	33.00	-14.80
2	1882.50	-21.60	16.80	1.10	17.90	33.00	-15.10
3	1913.50	-22.20	16.80	0.70	17.50	33.00	-15.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 5MHz

MODE		TX channel 26065, 26365, 26665					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-16.70	22.20	1.00	23.20	33.00	-9.80
2	1882.50	-17.80	21.50	1.10	22.60	33.00	-10.40
3	1912.50	-18.30	21.80	0.70	22.50	33.00	-10.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-21.80	16.60	1.00	17.60	33.00	-15.40
2	1882.50	-22.00	16.40	1.10	17.50	33.00	-15.50
3	1912.50	-21.60	17.40	0.70	18.10	33.00	-14.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 10MHz

MODE		TX channel 26090, 26365, 26640					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-16.80	22.10	1.00	23.10	33.00	-9.90
2	1882.50	-17.60	21.70	1.10	22.80	33.00	-10.20
3	1910.00	-17.40	22.70	0.70	23.40	33.00	-9.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1855.00	-21.20	17.20	1.00	18.20	33.00	-14.80
2	1882.50	-21.50	16.90	1.10	18.00	33.00	-15.00
3	1910.00	-21.80	17.20	0.70	17.90	33.00	-15.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 15MHz

MODE		TX channel 26115, 26365, 26615					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-16.80	22.10	1.10	23.20	33.00	-9.80
2	1882.50	-17.30	22.00	1.10	23.10	33.00	-9.90
3	1907.50	-17.90	21.80	1.10	22.90	33.00	-10.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1857.50	-22.00	16.30	1.10	17.40	33.00	-15.60
2	1882.50	-22.00	16.40	1.10	17.50	33.00	-15.50
3	1907.50	-22.00	16.50	1.10	17.60	33.00	-15.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 25, Channel Bandwidth 20MHz

MODE		TX channel 26140, 26365, 26590					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-17.80	21.10	1.10	22.20	33.00	-10.80
2	1882.50	-17.50	21.80	1.10	22.90	33.00	-10.10
3	1905.00	-18.10	21.50	1.10	22.60	33.00	-10.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1860.00	-21.60	16.70	1.10	17.80	33.00	-15.20
2	1882.50	-21.10	17.30	1.10	18.40	33.00	-14.60
3	1905.00	-21.50	17.00	1.10	18.10	33.00	-14.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

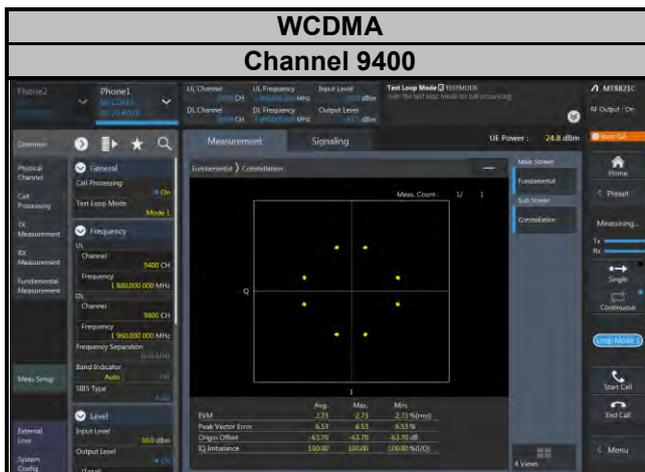



Spectrum Plot of Measurement

LTE Band 2


Channel 18900

QPSK

16QAM

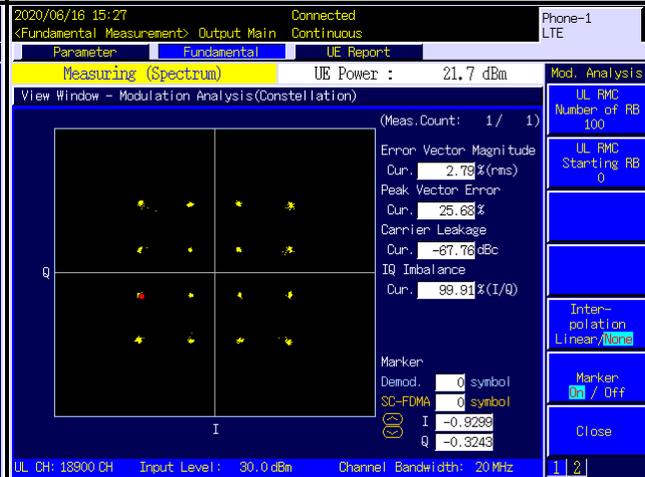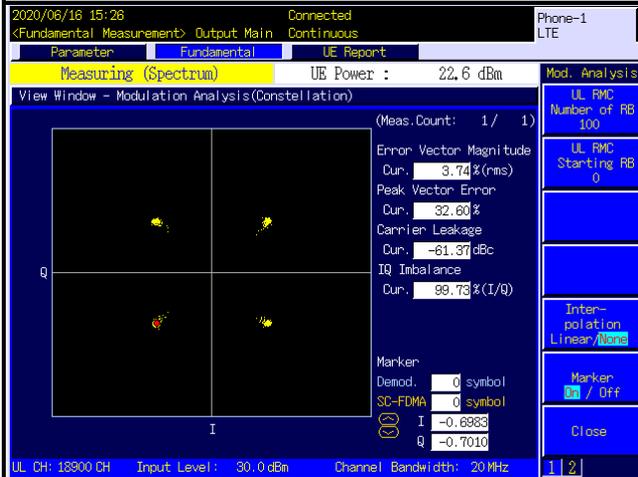

64QAM

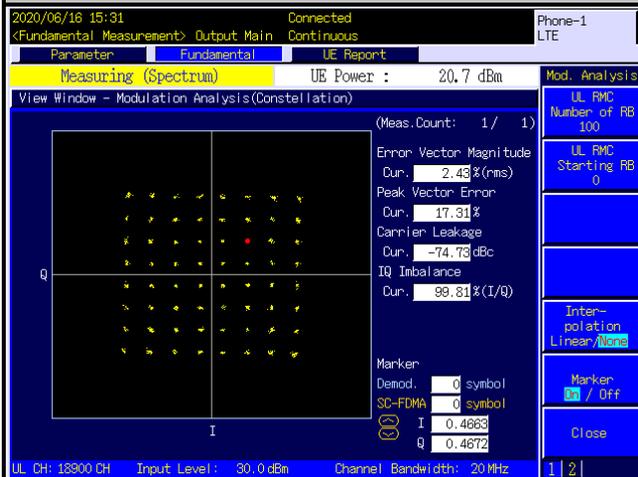


Spectrum Plot of Measurement


LTE Band 25

Channel 26365


QPSK

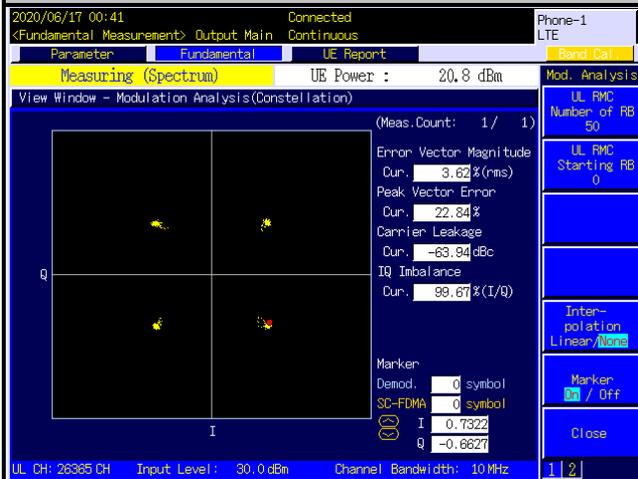

16QAM

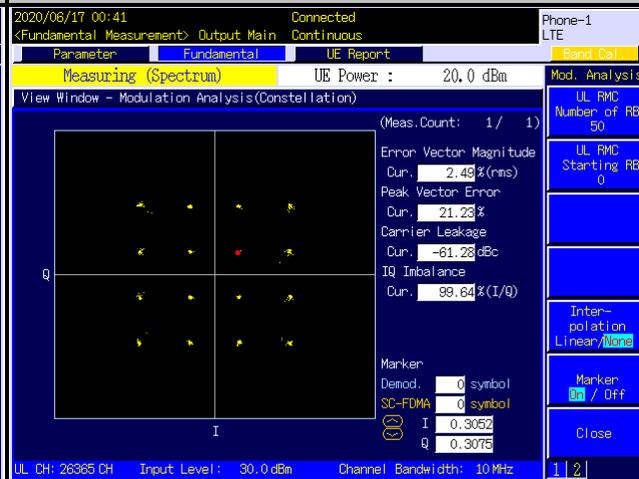

64QAM

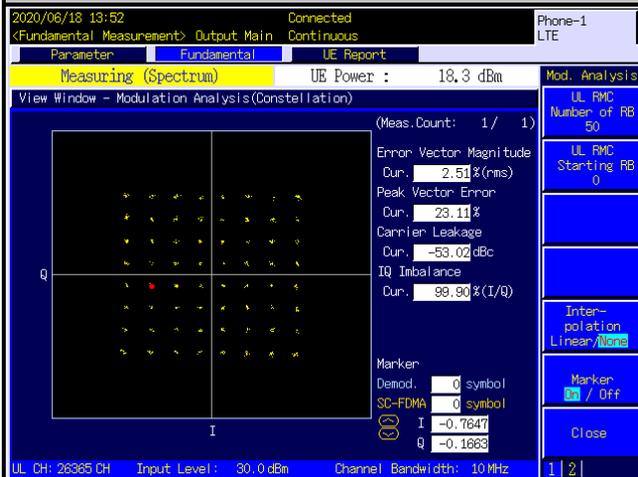

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

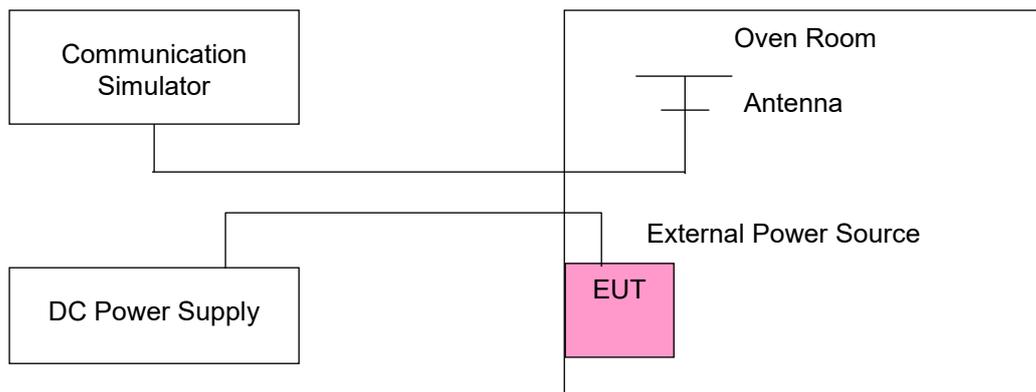

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1852.400001	0.001	1907.600002	0.001
3.23	1852.400001	0.001	1907.600003	0.001
4.37	1852.400001	0.001	1907.600002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.400001	0.001	1907.600003	0.001
-20	1852.400003	0.002	1907.600004	0.002
-10	1852.400003	0.002	1907.600003	0.001
0	1852.399997	-0.002	1907.599998	-0.001
10	1852.399998	-0.001	1907.599997	-0.002
20	1852.399998	-0.001	1907.599999	-0.001
30	1852.399998	-0.001	1907.599999	-0.001
40	1852.399996	-0.002	1907.599999	-0.001
50	1852.399998	-0.001	1907.599997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1850.700004	0.002	1909.300000	0.002
3.23	1850.700002	0.001	1909.300002	0.001
4.37	1850.700002	0.001	1909.300002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700003	0.002	1909.300004	0.002
-20	1850.700001	0.001	1909.300003	0.002
-10	1850.700002	0.001	1909.300004	0.002
0	1850.699997	-0.002	1909.299999	-0.001
10	1850.699998	-0.001	1909.299999	-0.001
20	1850.699998	-0.001	1909.299997	-0.002
30	1850.699996	-0.002	1909.299997	-0.002
40	1850.699999	-0.001	1909.299997	-0.002
50	1850.699999	-0.001	1909.299997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1851.500004	0.002	1908.500002	0.001
3.23	1851.500004	0.002	1908.500002	0.001
4.37	1851.500003	0.002	1908.500002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500004	0.002	1908.500003	0.002
-20	1851.500001	0.001	1908.500003	0.002
-10	1851.500003	0.002	1908.500001	0.001
0	1851.499998	-0.001	1908.499998	-0.001
10	1851.499996	-0.002	1908.499996	-0.002
20	1851.499998	-0.001	1908.499997	-0.002
30	1851.499999	-0.001	1908.499999	-0.001
40	1851.499998	-0.001	1908.499996	-0.002
50	1851.499998	-0.001	1908.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1852.500003	0.001	1907.500002	0.001
3.23	1852.500001	0.001	1907.500001	0.001
4.37	1852.500002	0.001	1907.500004	0.002

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500001	0.001	1907.500004	0.002
-20	1852.500002	0.001	1907.500004	0.002
-10	1852.500004	0.002	1907.500002	0.001
0	1852.499998	-0.001	1907.499998	-0.001
10	1852.499997	-0.002	1907.499997	-0.002
20	1852.499997	-0.002	1907.499998	-0.001
30	1852.499997	-0.002	1907.499998	-0.001
40	1852.499997	-0.002	1907.499997	-0.002
50	1852.499996	-0.002	1907.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1855.000002	0.001	1905.000002	0.001
3.23	1855.000004	0.002	1905.000004	0.002
4.37	1855.000003	0.002	1905.000001	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1855.000003	0.001	1905.000003	0.001
-20	1855.000004	0.002	1905.000003	0.002
-10	1855.000003	0.001	1905.000003	0.002
0	1854.999996	-0.002	1904.999997	-0.001
10	1854.999997	-0.002	1904.999998	-0.001
20	1854.999998	-0.001	1904.999998	-0.001
30	1854.999998	-0.001	1904.999999	-0.001
40	1854.999997	-0.002	1904.999997	-0.002
50	1854.999998	-0.001	1904.999996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1857.500003	0.001	1902.500002	0.001
3.23	1857.500002	0.001	1902.500004	0.002
4.37	1857.500004	0.002	1902.500003	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500004	0.002	1902.500002	0.001
-20	1857.500004	0.002	1902.500003	0.002
-10	1857.500003	0.001	1902.500003	0.001
0	1857.499997	-0.002	1902.499997	-0.001
10	1857.499997	-0.002	1902.499997	-0.001
20	1857.499997	-0.002	1902.499998	-0.001
30	1857.499999	-0.001	1902.499998	-0.001
40	1857.499999	-0.001	1902.499998	-0.001
50	1857.499998	-0.001	1902.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1860.000002	0.001	1900.000004	0.002
3.23	1860.000003	0.002	1900.000002	0.001
4.37	1860.000003	0.001	1900.000002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000004	0.002	1900.000001	0.001
-20	1860.000002	0.001	1900.000003	0.002
-10	1860.000003	0.002	1900.000003	0.002
0	1859.999996	-0.002	1899.999999	-0.001
10	1859.999999	-0.001	1899.999999	-0.001
20	1859.999998	-0.001	1899.999999	-0.001
30	1859.999998	-0.001	1899.999997	-0.002
40	1859.999997	-0.002	1899.999999	-0.001
50	1859.999996	-0.002	1899.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1850.700001	0.001	1914.300004	0.002
3.23	1850.700004	0.002	1914.300003	0.002
4.37	1850.700002	0.001	1914.300001	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700002	0.001	1914.300003	0.001
-20	1850.700004	0.002	1914.300004	0.002
-10	1850.700001	0.001	1914.300004	0.002
0	1850.699999	-0.001	1914.299997	-0.001
10	1850.699998	-0.001	1914.299999	-0.001
20	1850.699998	-0.001	1914.299997	-0.001
30	1850.699997	-0.002	1914.299997	-0.002
40	1850.699998	-0.001	1914.299998	-0.001
50	1850.699997	-0.002	1914.299996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1851.500002	0.001	1913.500003	0.001
3.23	1851.500004	0.002	1913.500001	0.001
4.37	1851.500003	0.002	1913.500002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500004	0.002	1913.500002	0.001
-20	1851.500004	0.002	1913.500003	0.002
-10	1851.500002	0.001	1913.500002	0.001
0	1851.499998	-0.001	1913.499998	-0.001
10	1851.499998	-0.001	1913.499999	-0.001
20	1851.499997	-0.001	1913.499998	-0.001
30	1851.499998	-0.001	1913.499996	-0.002
40	1851.499997	-0.002	1913.499999	-0.001
50	1851.499998	-0.001	1913.499996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1852.500004	0.002	1912.500001	0.001
3.23	1852.500001	0.001	1912.500002	0.001
4.37	1852.500003	0.001	1912.500003	0.002

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500001	0.001	1912.500002	0.001
-20	1852.500003	0.001	1912.500003	0.002
-10	1852.500003	0.002	1912.500002	0.001
0	1852.499997	-0.002	1912.499998	-0.001
10	1852.499997	-0.001	1912.499998	-0.001
20	1852.499998	-0.001	1912.499998	-0.001
30	1852.499997	-0.002	1912.499996	-0.002
40	1852.499999	-0.001	1912.499999	-0.001
50	1852.499997	-0.002	1912.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1855.000003	0.002	1910.000003	0.001
3.23	1855.000003	0.002	1910.000002	0.001
4.37	1855.000001	0.001	1910.000002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1855.000003	0.002	1910.000003	0.001
-20	1855.000003	0.002	1910.000004	0.002
-10	1855.000001	0.001	1910.000001	0.001
0	1854.999998	-0.001	1909.999998	-0.001
10	1854.999998	-0.001	1909.999997	-0.002
20	1854.999996	-0.002	1909.999998	-0.001
30	1854.999998	-0.001	1909.999996	-0.002
40	1854.999997	-0.001	1909.999998	-0.001
50	1854.999996	-0.002	1909.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1857.500002	0.001	1907.500001	0.001
3.23	1857.500002	0.001	1907.500003	0.002
4.37	1857.500001	0.001	1907.500003	0.002

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500002	0.001	1907.500004	0.002
-20	1857.500002	0.001	1907.500002	0.001
-10	1857.500002	0.001	1907.500001	0.001
0	1857.499997	-0.001	1907.499999	-0.001
10	1857.499998	-0.001	1907.499999	-0.001
20	1857.499999	-0.001	1907.499997	-0.001
30	1857.499998	-0.001	1907.499998	-0.001
40	1857.499998	-0.001	1907.499998	-0.001
50	1857.499997	-0.002	1907.499999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 25			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	1860.000001	0.001	1905.000003	0.002
3.23	1860.000003	0.002	1905.000002	0.001
4.37	1860.000002	0.001	1905.000001	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 25			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000002	0.001	1905.000002	0.001
-20	1860.000003	0.002	1905.000003	0.001
-10	1860.000002	0.001	1905.000004	0.002
0	1859.999998	-0.001	1904.999998	-0.001
10	1859.999999	-0.001	1904.999998	-0.001
20	1859.999997	-0.002	1904.999998	-0.001
30	1859.999998	-0.001	1904.999997	-0.002
40	1859.999996	-0.002	1904.999999	-0.001
50	1859.999999	-0.001	1904.999998	-0.001

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

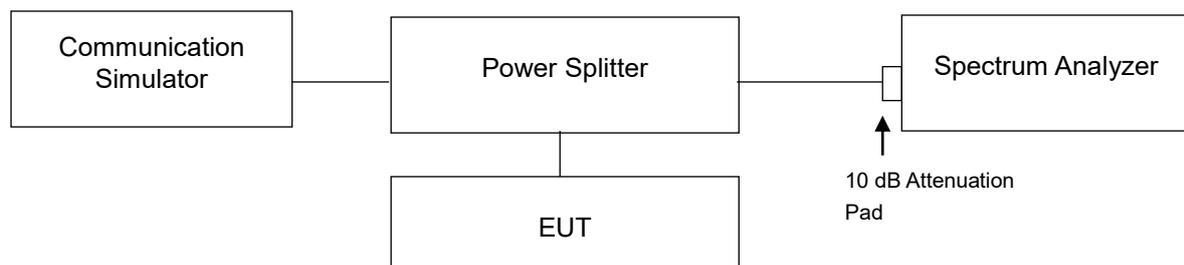

4.4.3 Test Result

WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.1523	4.756
9400	1880.0	4.1365	4.715
9538	1907.6	4.1331	4.716

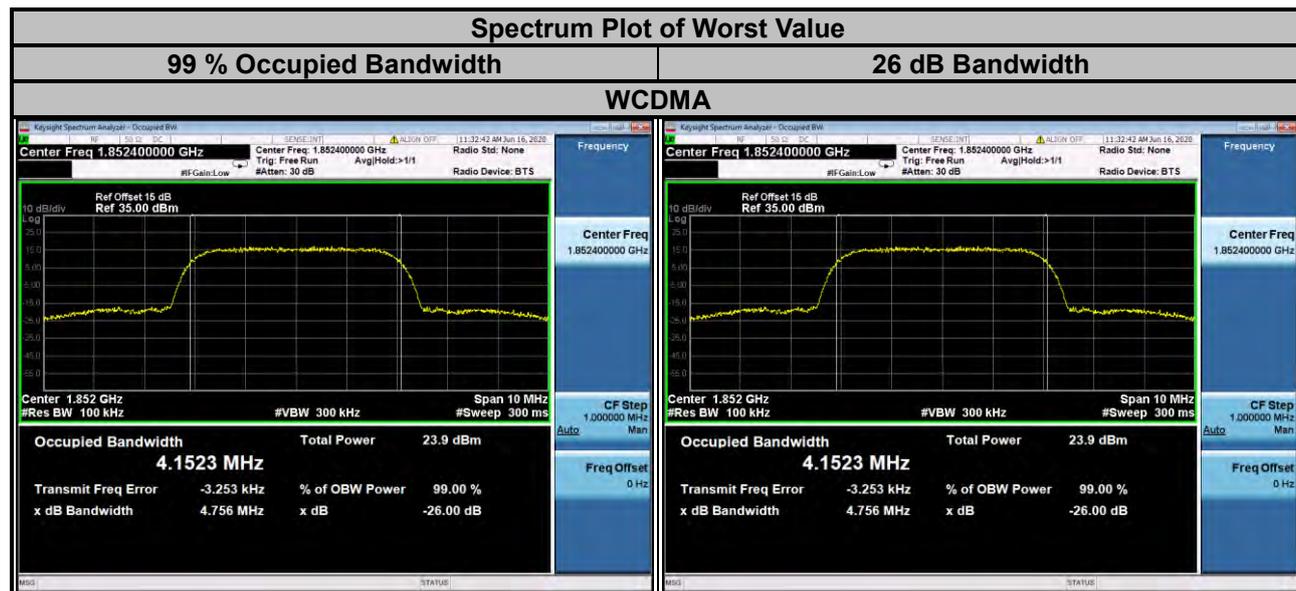


LTE Band 2							
Channel Bandwidth: 1.4 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18607	1850.7	1.0879	1.0918	1.0884	1.222	1.215	1.215
18900	1880.0	1.0872	1.0875	1.0883	1.228	1.214	1.221
19193	1909.3	1.0880	1.0907	1.0892	1.234	1.225	1.218

Channel Bandwidth: 3 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18615	1851.5	2.7005	2.6993	2.6987	2.956	2.954	2.911
18900	1880.0	2.7010	2.6985	2.6993	2.939	2.942	2.904
19185	1908.5	2.7005	2.6988	2.7006	2.984	2.946	2.915



LTE Band 2							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18625	1852.5	4.4943	4.4936	4.5033	4.842	4.836	4.846
18900	1880.0	4.4938	4.4944	4.5021	4.853	4.817	4.833
19175	1907.5	4.4927	4.4943	4.5023	4.854	4.835	4.842

Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18650	1855.0	8.9753	8.9775	8.9834	9.574	9.531	9.537
18900	1880.0	8.9708	8.9730	8.9732	9.537	9.529	9.542
19150	1905.0	8.9606	8.9632	8.9628	9.518	9.520	9.529

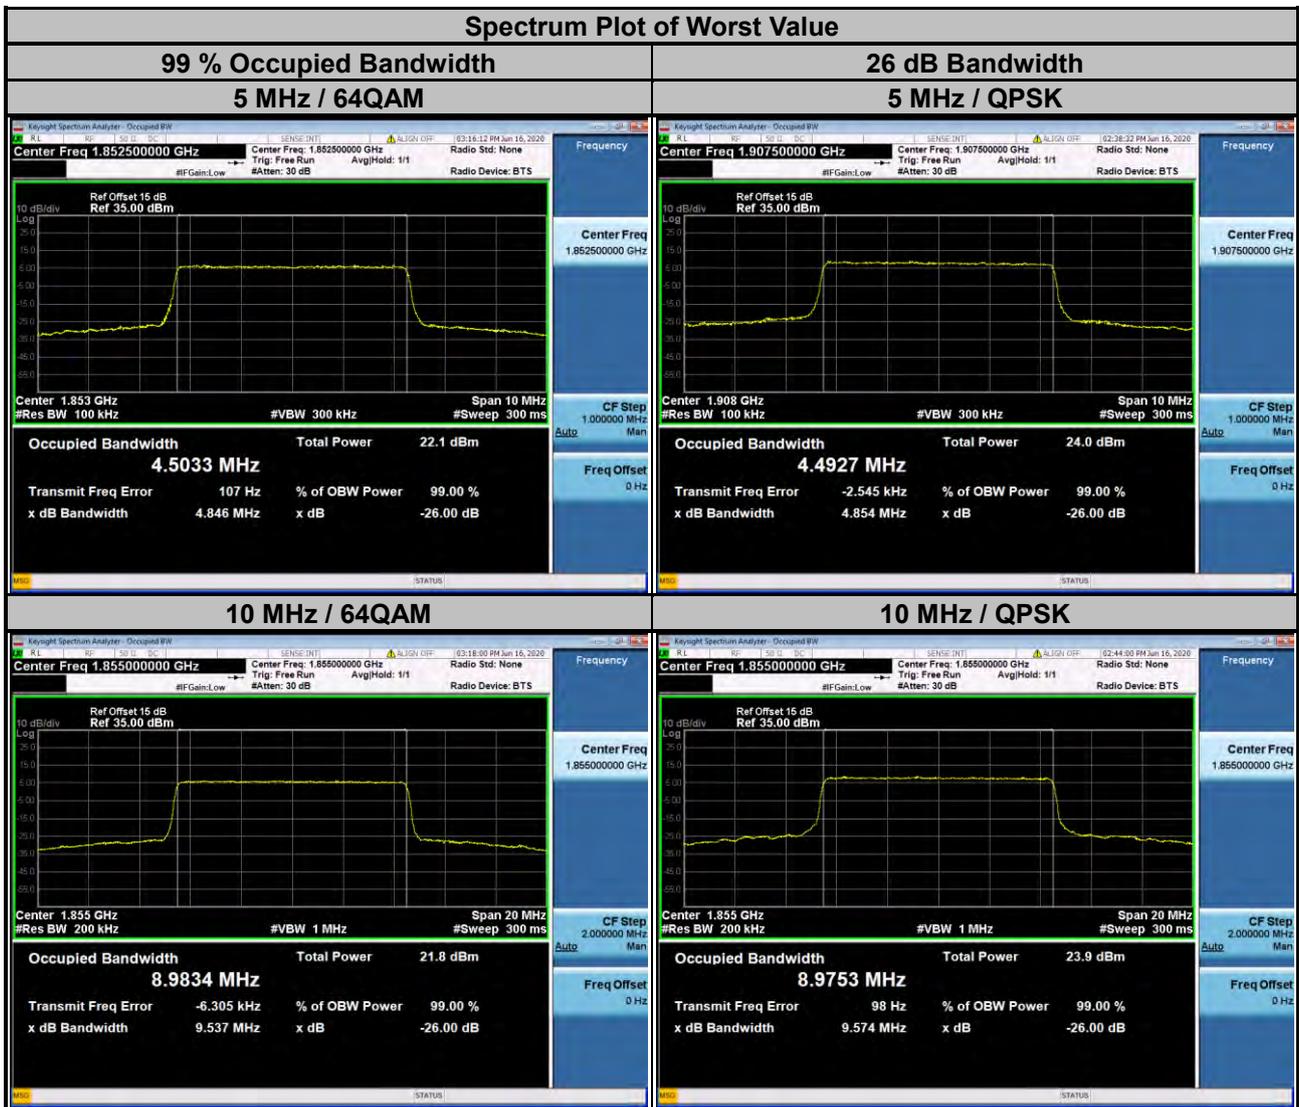

LTE Band 2							
Channel Bandwidth: 15 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18675	1857.5	13.467	13.458	13.443	14.36	14.27	14.26
18900	1880.0	13.446	13.436	13.427	14.28	14.26	14.25
19125	1902.5	13.437	13.425	13.421	14.27	14.25	14.25

Channel Bandwidth: 20 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18700	1860.0	17.938	17.956	17.949	19.15	19.07	19.04
18900	1880.0	17.903	17.919	17.917	19.07	19.02	19.02
19100	1900.0	17.913	17.947	17.938	19.09	19.03	19.03



LTE Band 25							
Channel Bandwidth: 1.4 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26047	1850.7	1.0865	1.0886	1.0881	1.227	1.215	1.219
26365	1882.5	1.0857	1.0921	1.0884	1.222	1.212	1.218
26683	1914.3	1.0863	1.0889	1.0892	1.233	1.220	1.220

Channel Bandwidth: 3 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26055	1851.5	2.7023	2.6984	2.7003	2.951	2.939	2.924
26365	1882.5	2.7009	2.7001	2.6987	2.943	2.941	2.917
26675	1913.5	2.7031	2.7019	2.7024	2.945	2.949	2.938



LTE Band 25							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26065	1852.5	4.4956	4.4938	4.4999	4.828	4.817	4.827
26365	1882.5	4.4941	4.4936	4.5018	4.824	4.817	4.839
26665	1912.5	4.4974	4.5002	4.5070	4.851	4.844	4.858
Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26090	1855.0	8.9738	8.9771	8.9800	9.560	9.524	9.538
26365	1882.5	8.9681	8.9736	8.9797	9.531	9.520	9.539
26640	1910.0	8.9837	8.9837	8.9820	9.530	9.515	9.529



LTE Band 25							
Channel Bandwidth: 15 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26115	1857.5	13.458	13.445	13.442	14.33	14.26	14.25
26365	1882.5	13.442	13.430	13.425	14.27	14.24	14.24
26615	1907.5	13.440	13.425	13.421	14.25	14.22	14.23

Channel Bandwidth: 20 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26140	1860.0	17.931	17.952	17.942	19.10	19.04	19.03
26365	1882.5	17.894	17.918	17.908	19.04	19.02	19.02
26590	1905.0	17.881	17.903	17.895	19.04	19.01	19.01




4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

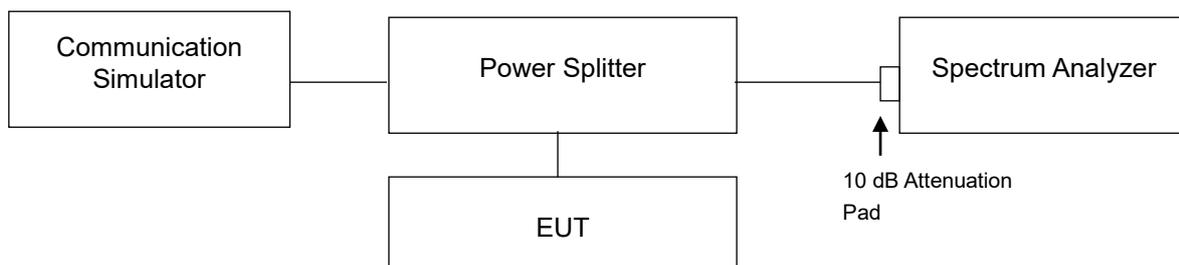



4.5.3 Test Procedures


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (WCDMA).
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- h. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- i. Record the max trace plot into the test report.

4.5.4 Test Results

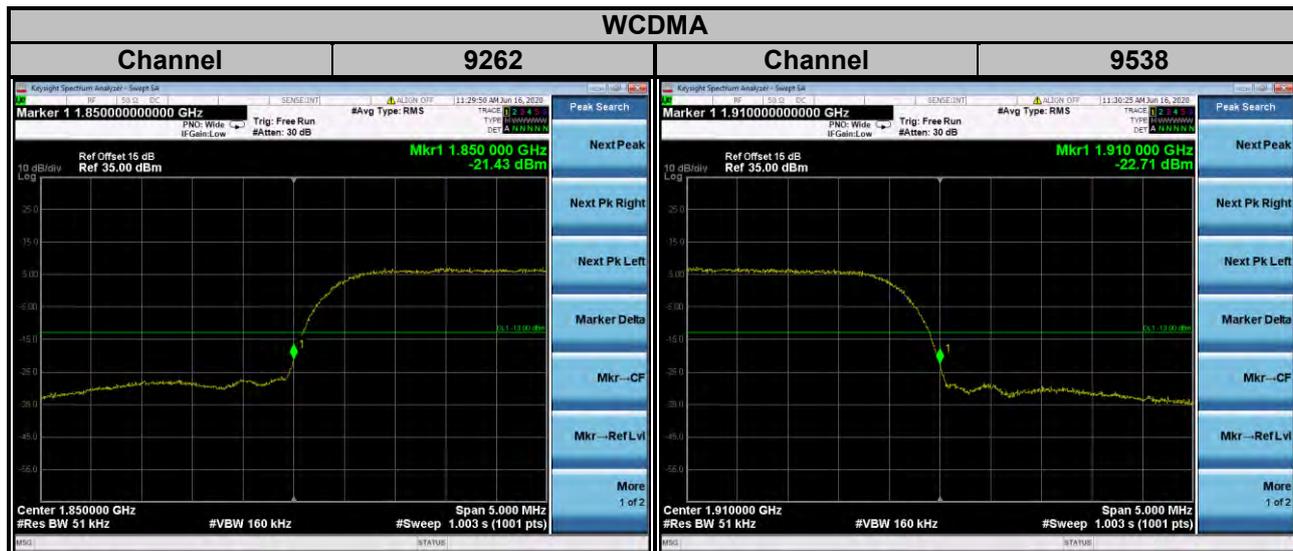



LTE Band 2
Channel Bandwidth: 1.4 MHz

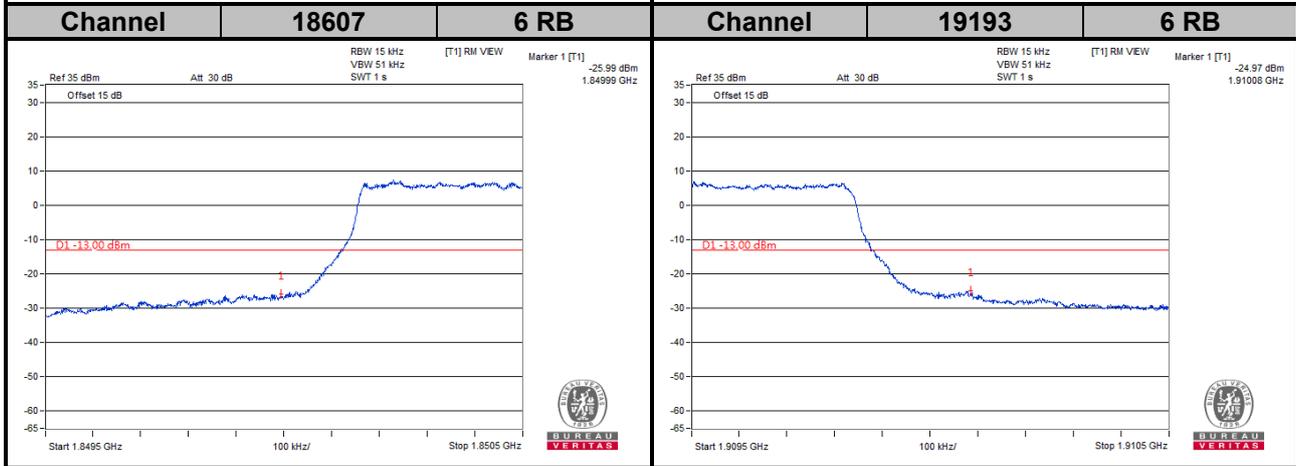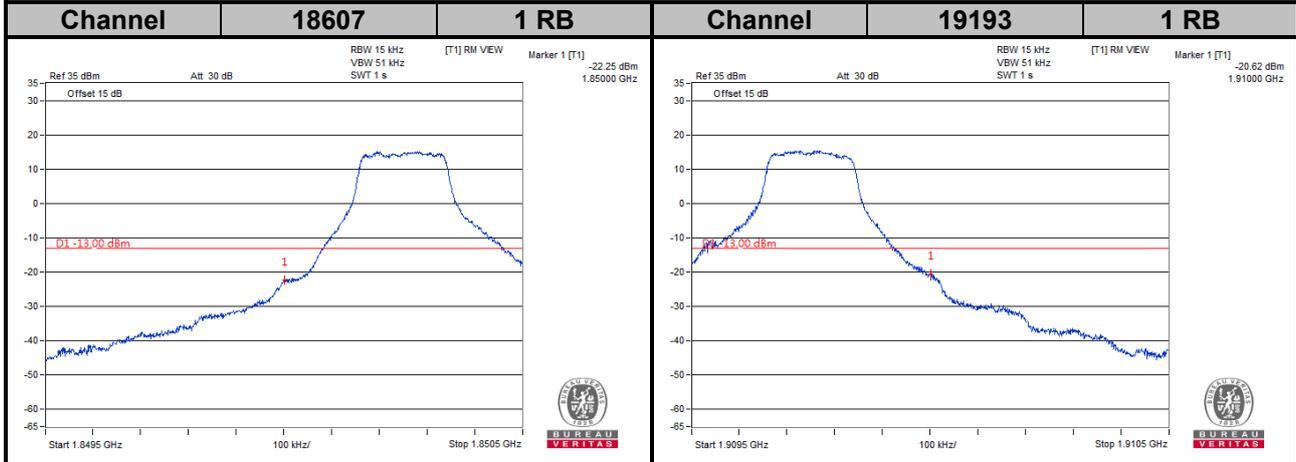

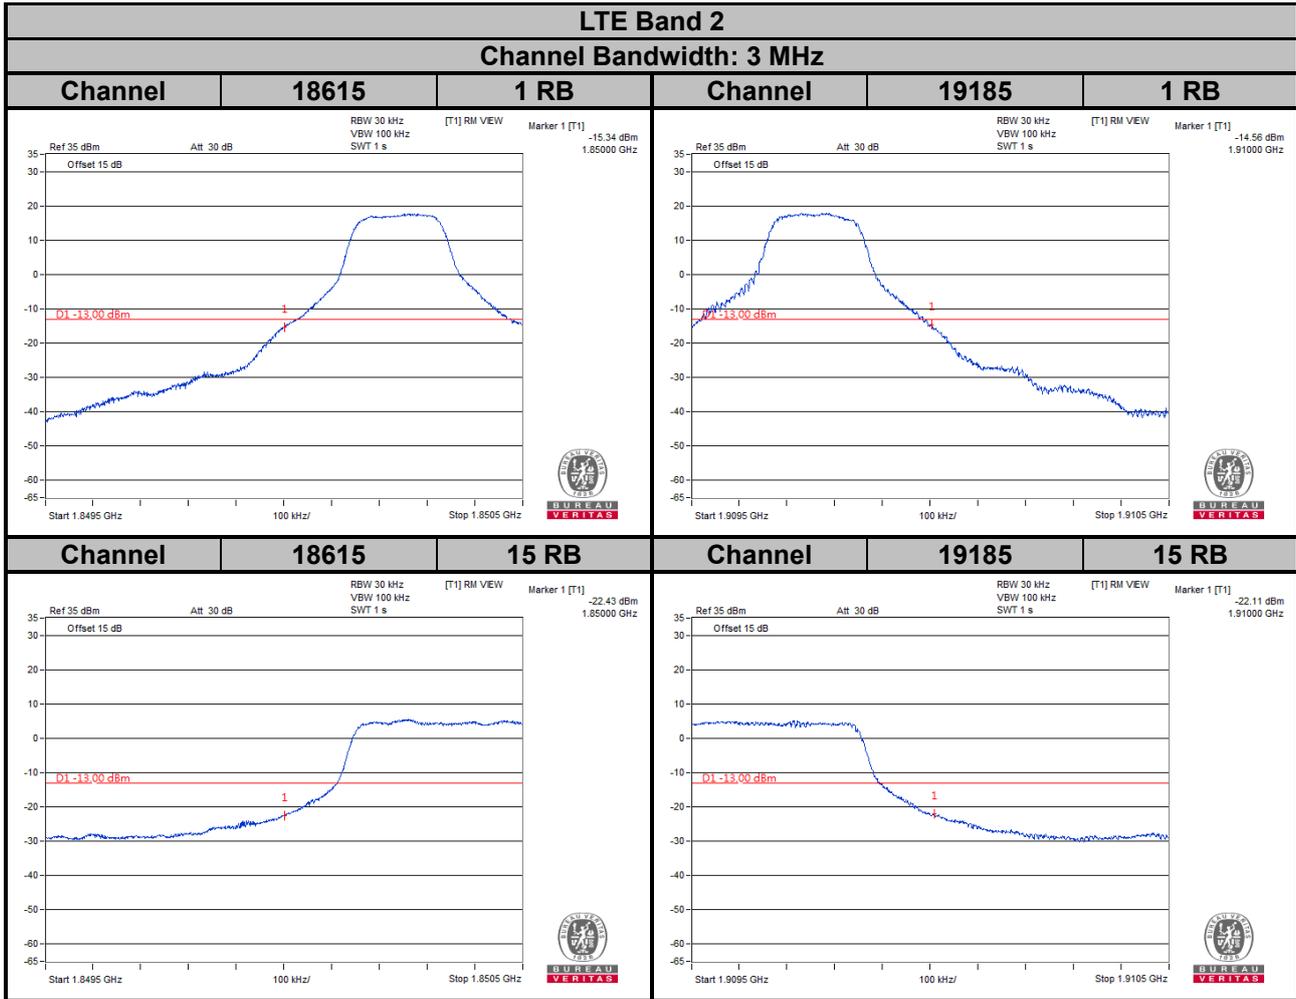


LTE Band 2

Channel Bandwidth: 5 MHz

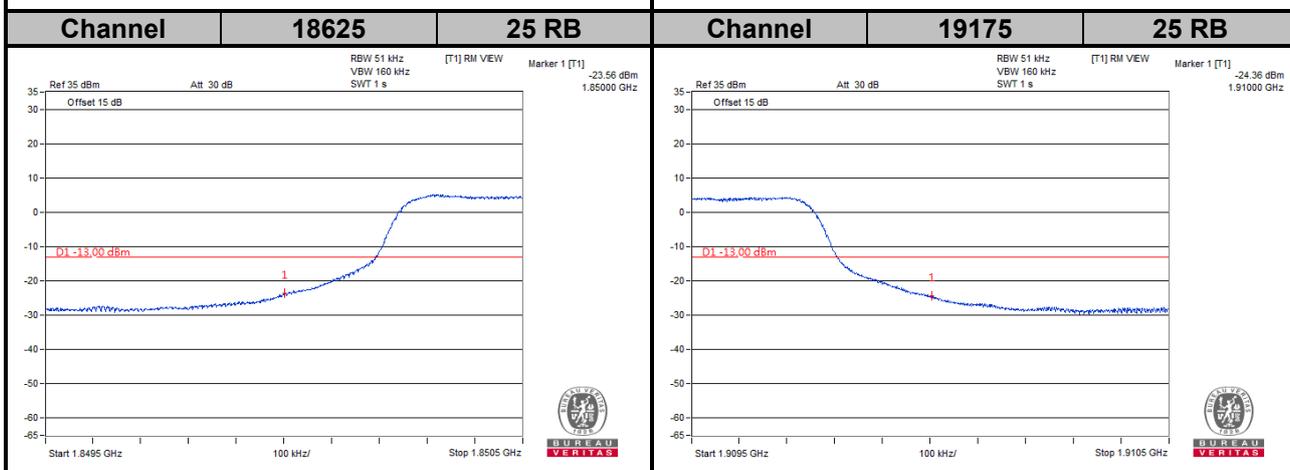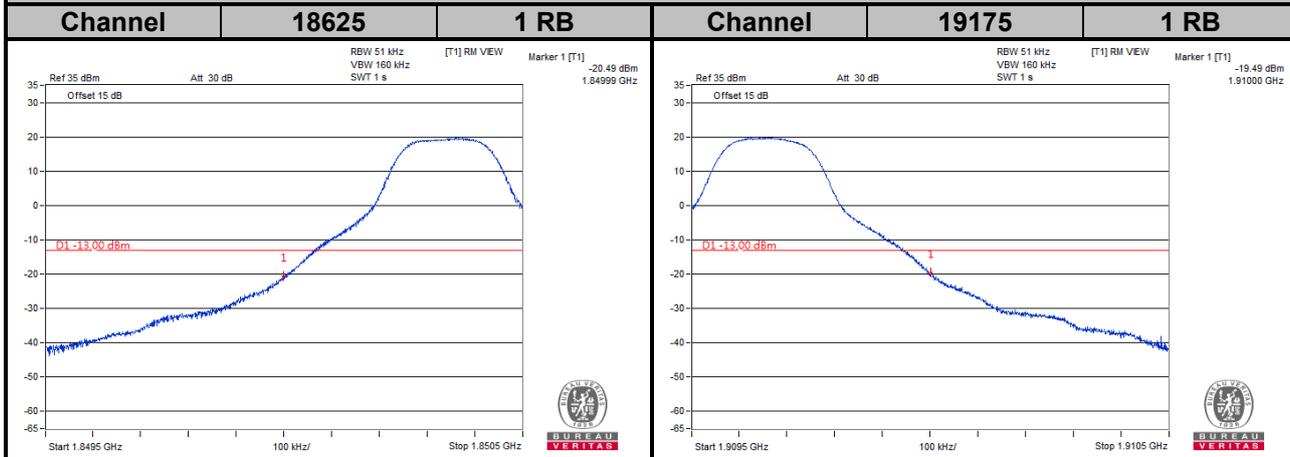


LTE Band 2

Channel Bandwidth: 10 MHz

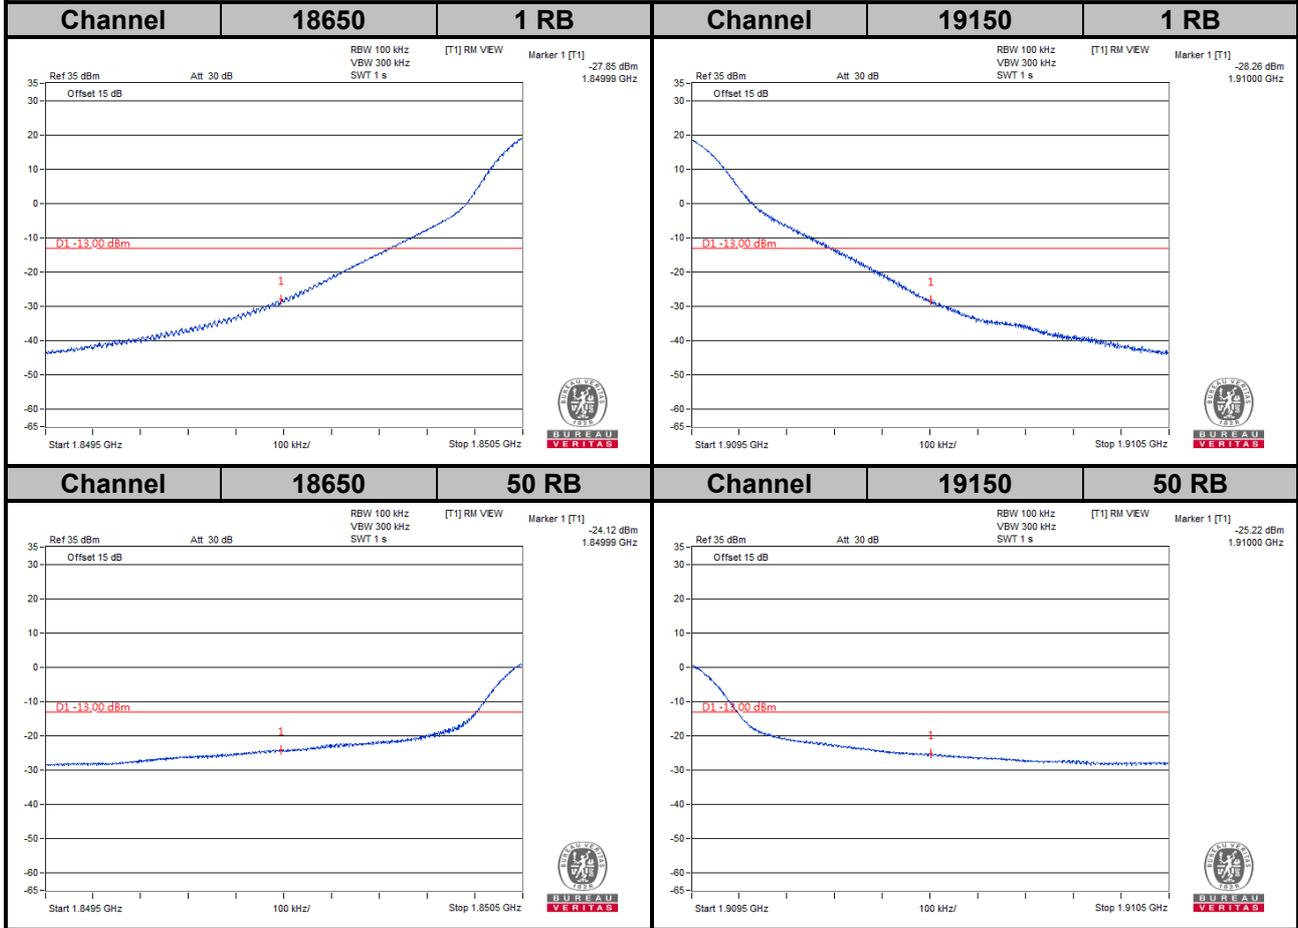



LTE Band 2

Channel Bandwidth: 15 MHz

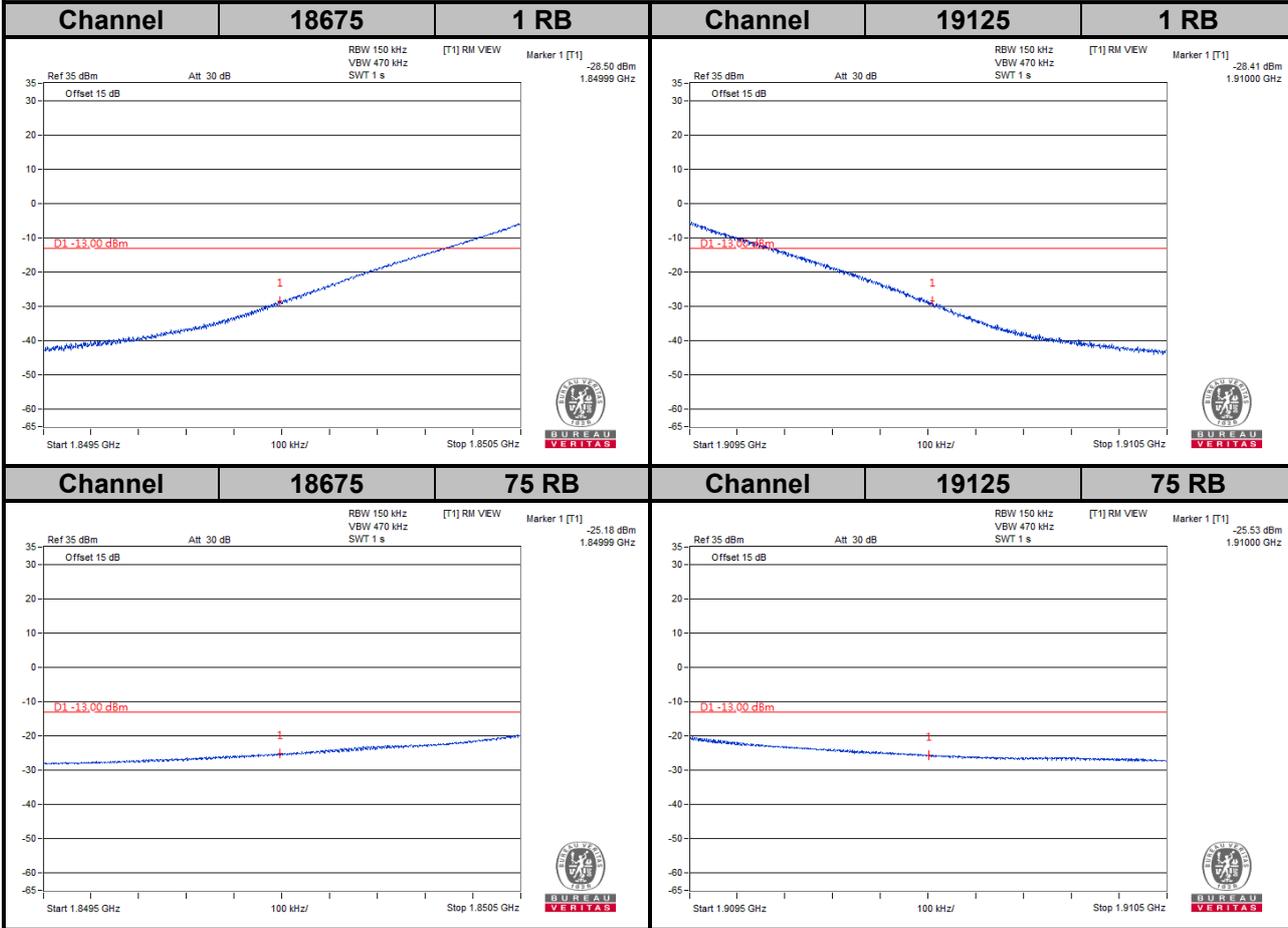



LTE Band 2

Channel Bandwidth: 20 MHz

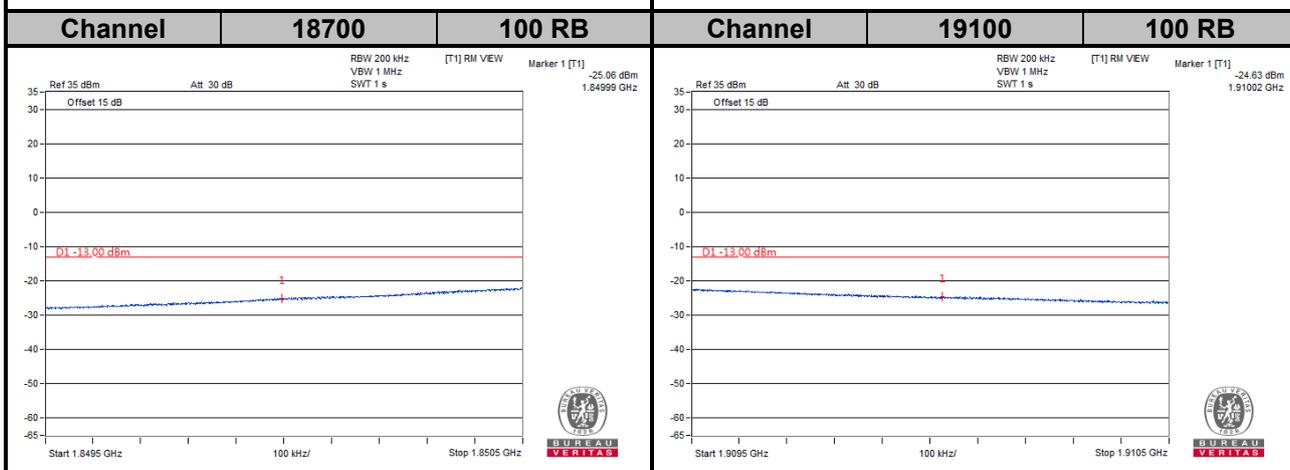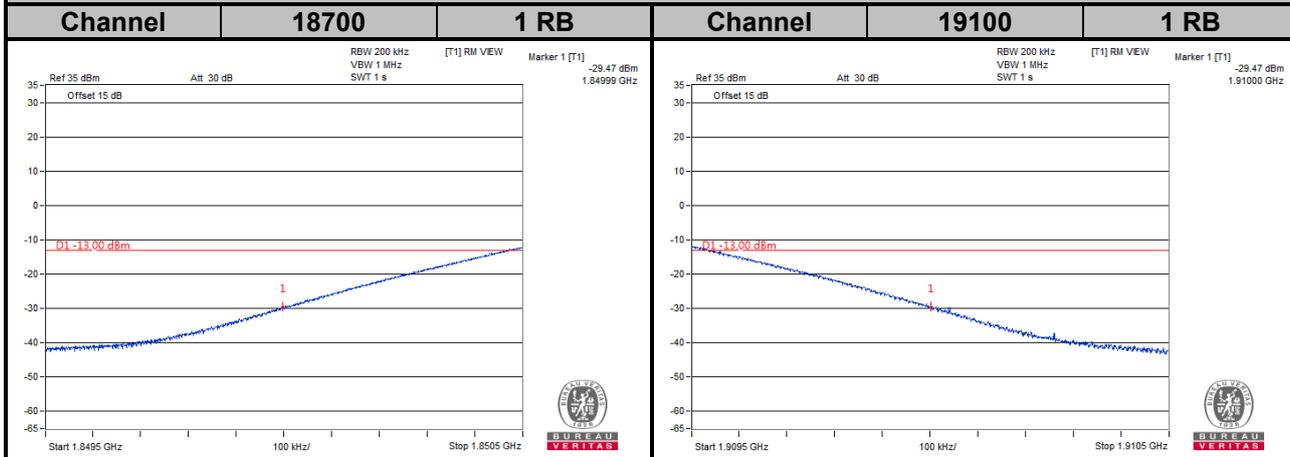


LTE Band 25

Channel Bandwidth: 1.4 MHz

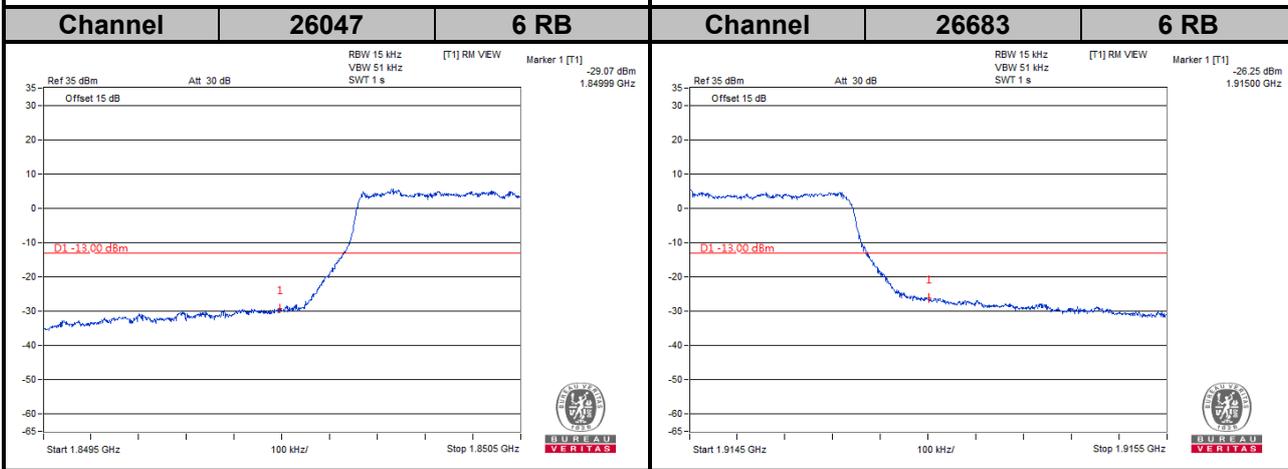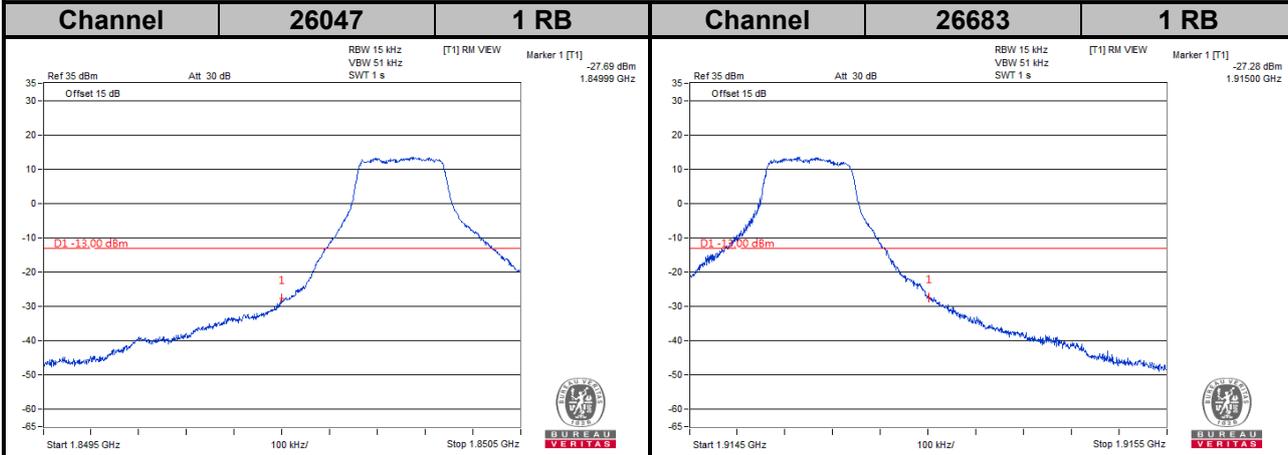



LTE Band 25

Channel Bandwidth: 3 MHz

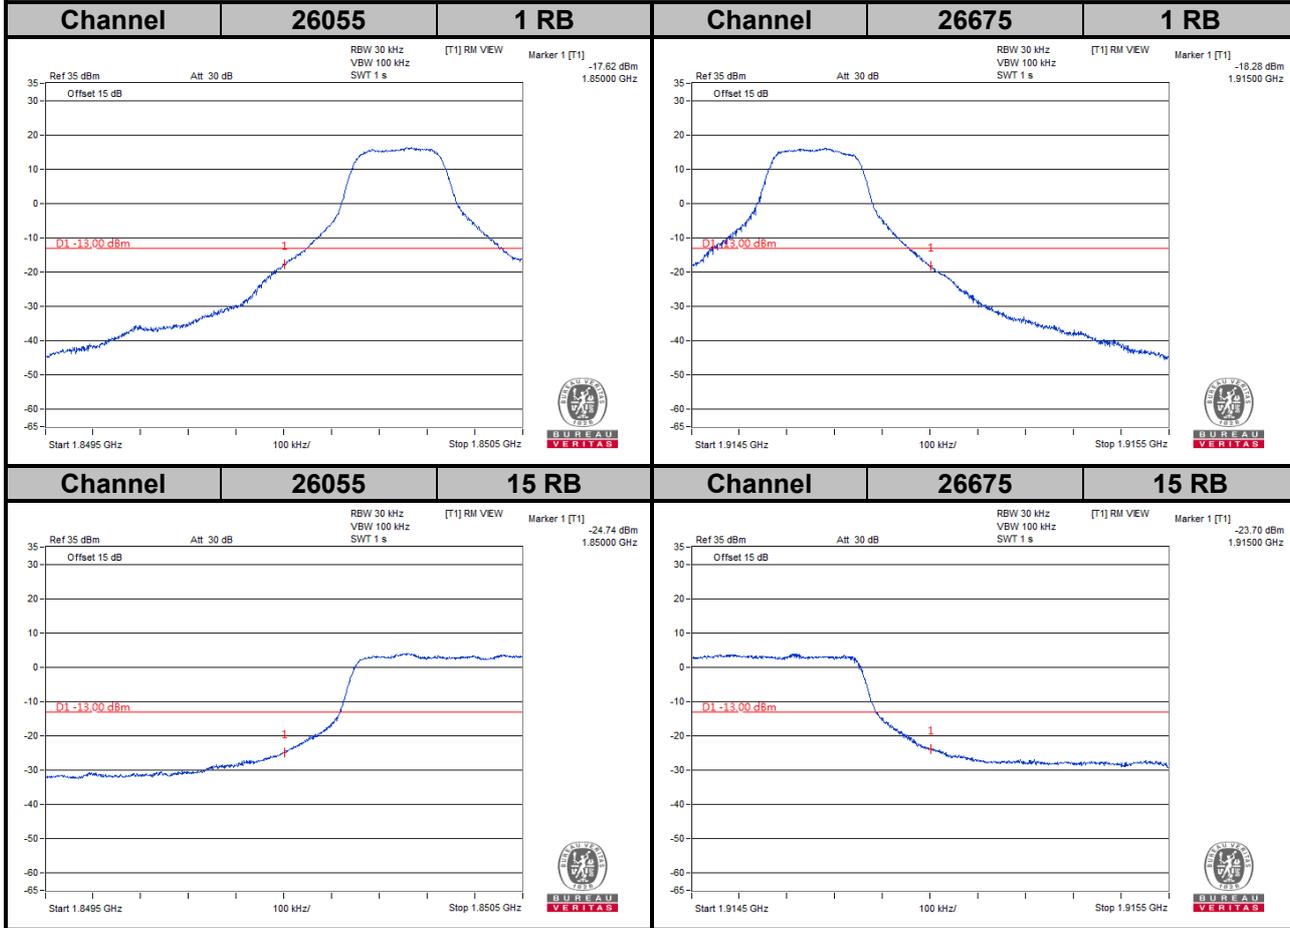


LTE Band 25


Channel Bandwidth: 5 MHz

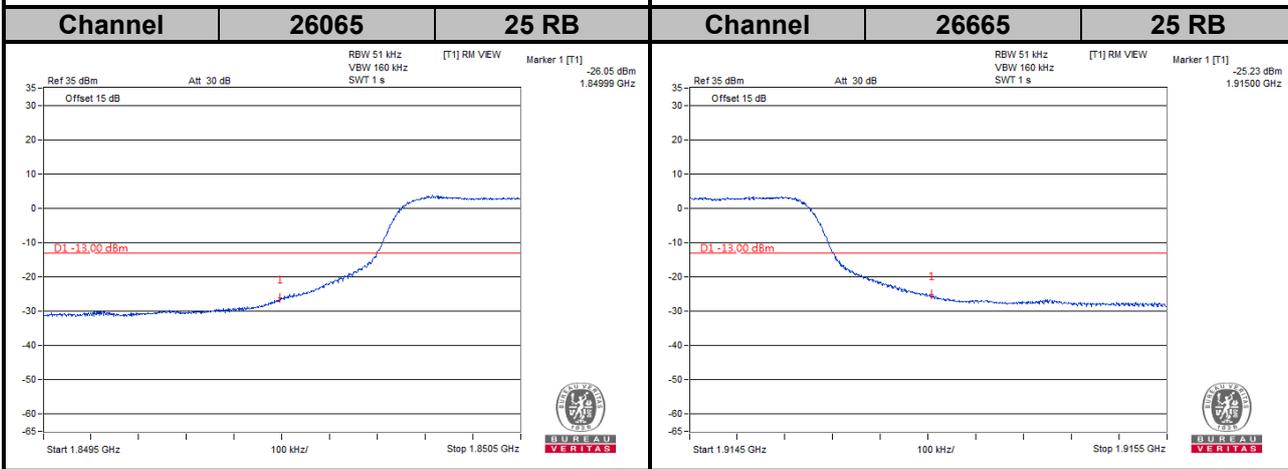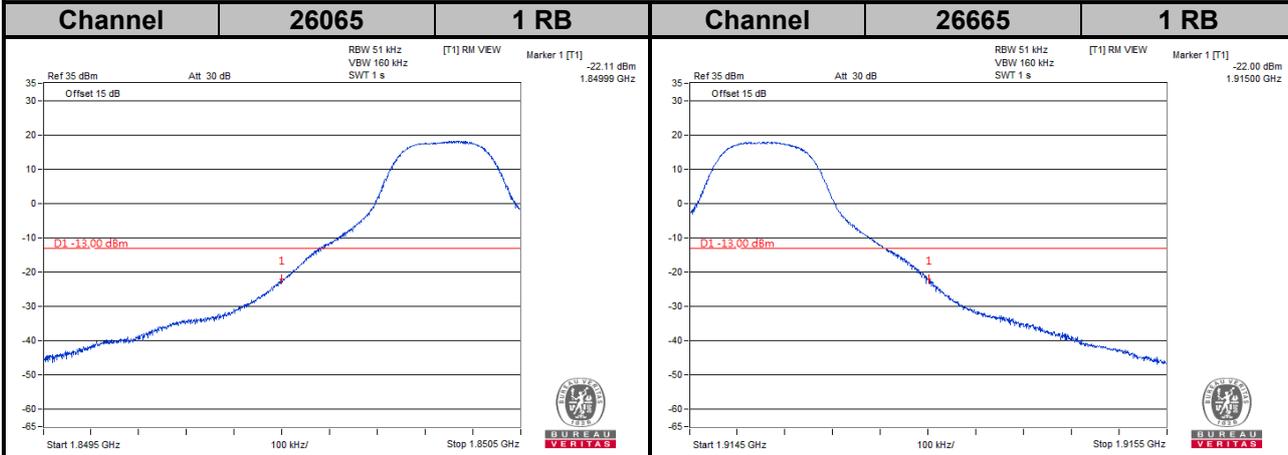


LTE Band 25

Channel Bandwidth: 10 MHz

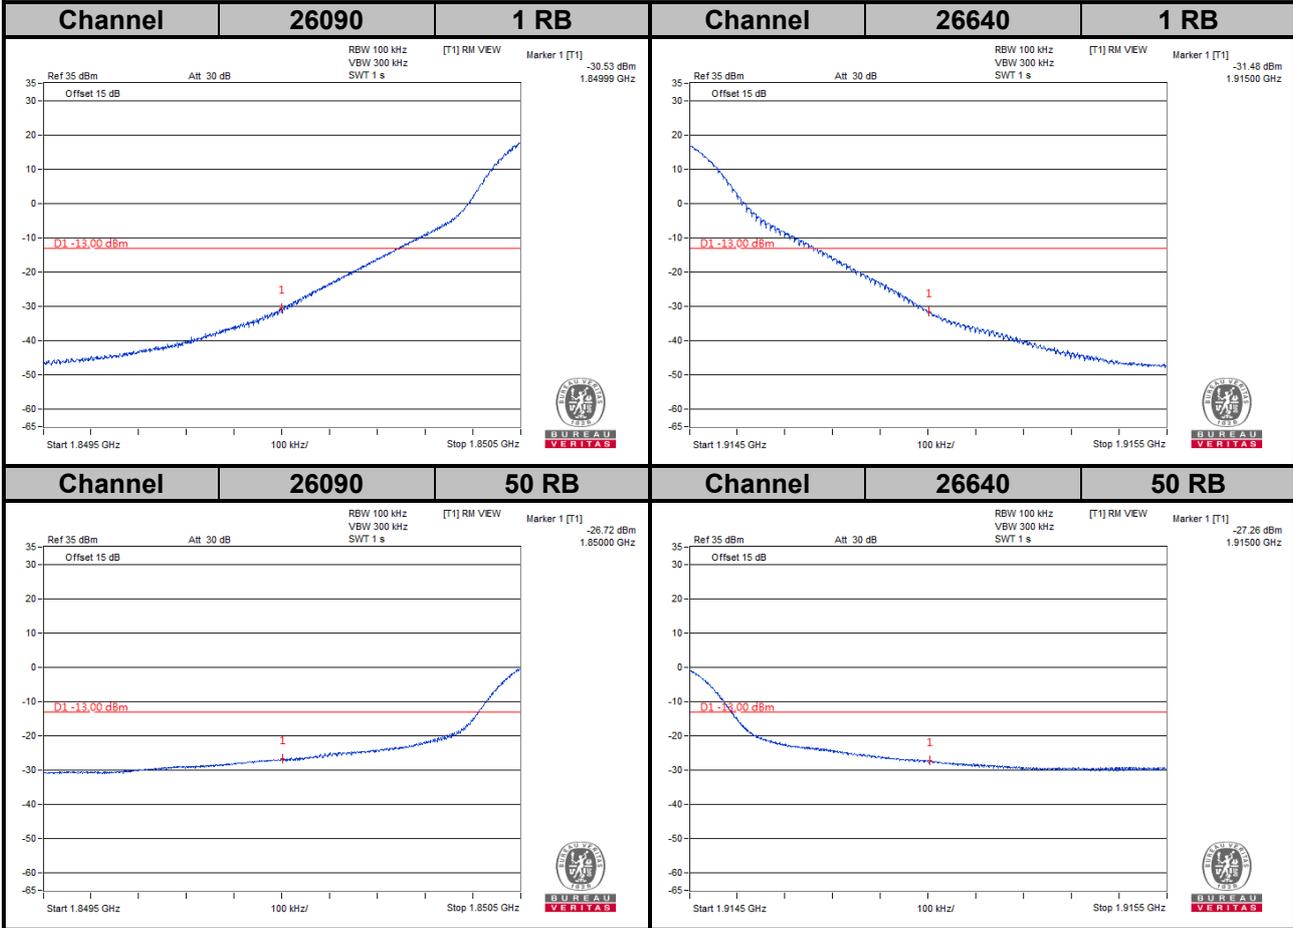

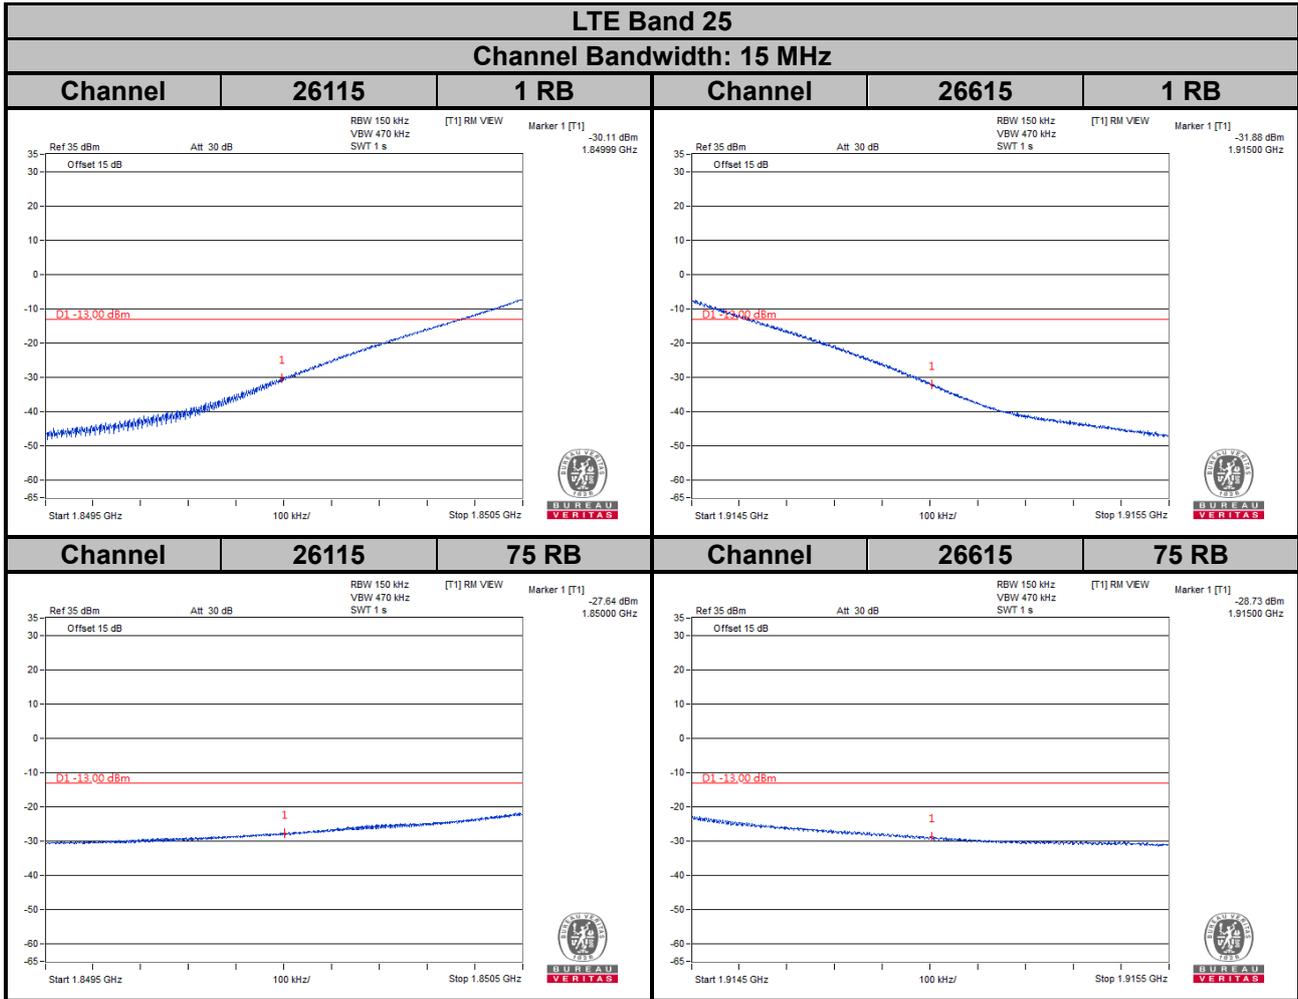

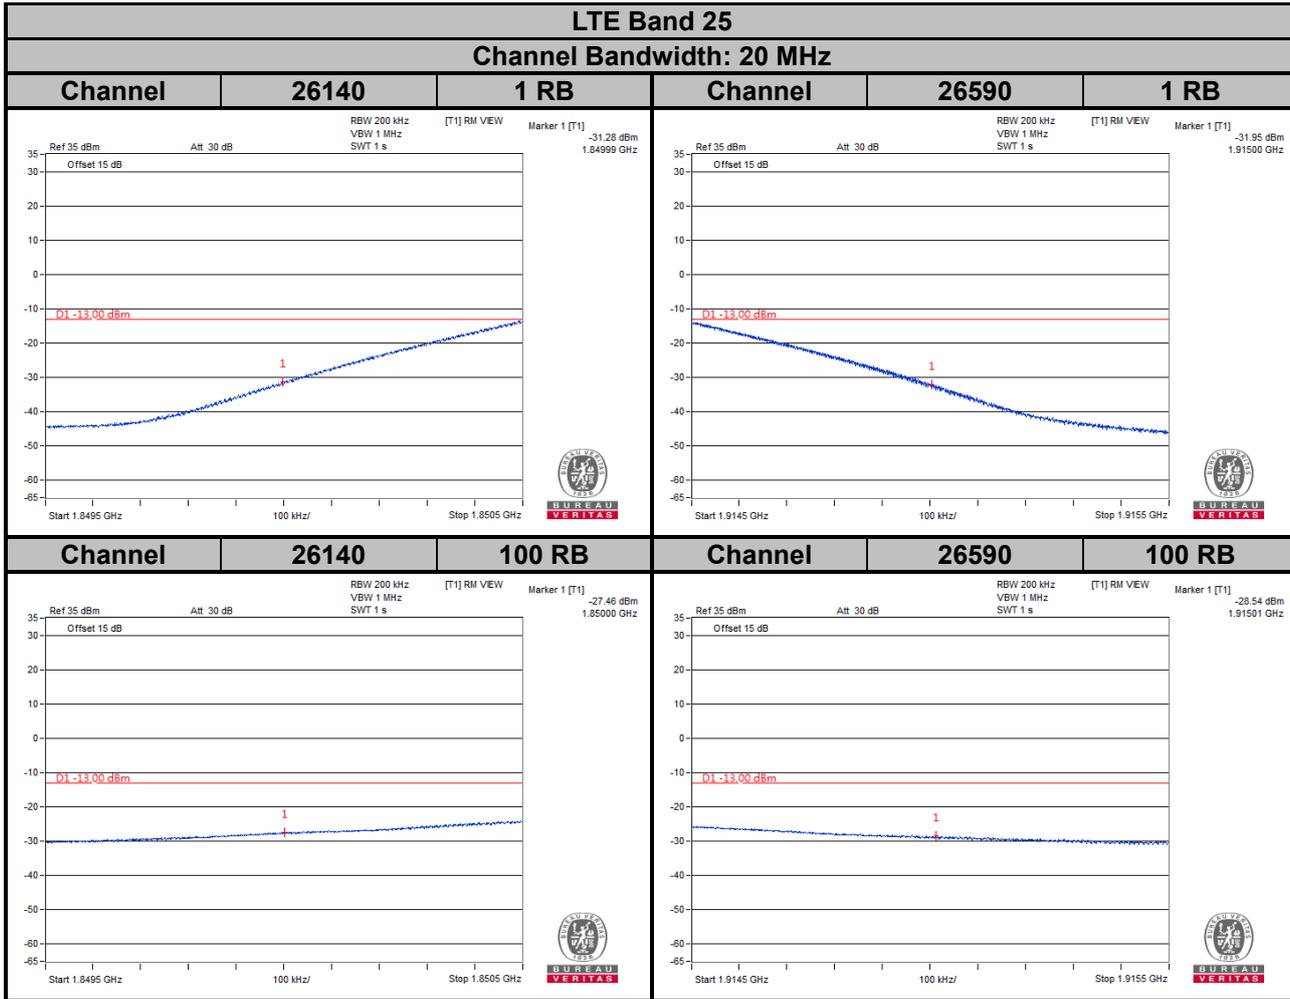


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

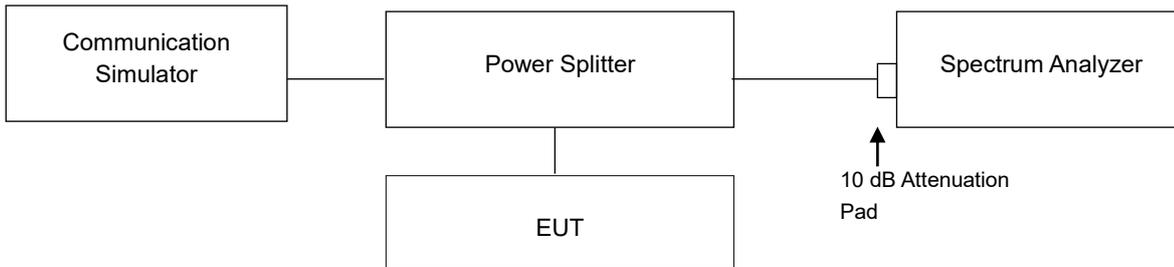


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
9262	1852.4	2.68
9400	1880.0	2.84
9538	1907.6	2.71

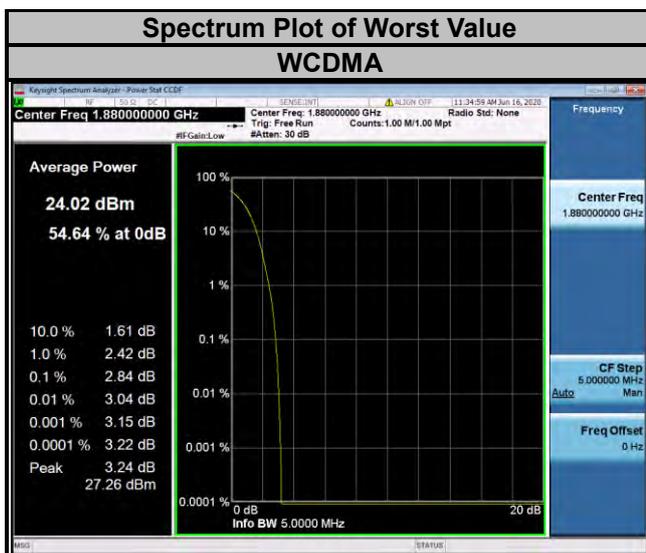

LTE Band 2									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18607	1850.7	3.18	4.33	5.42	18615	1851.5	3.05	4.25	5.42
18900	1880.0	3.47	4.67	5.80	18900	1880.0	3.34	4.62	5.82
19193	1909.3	2.89	3.91	4.96	19185	1908.5	2.98	4.06	5.23

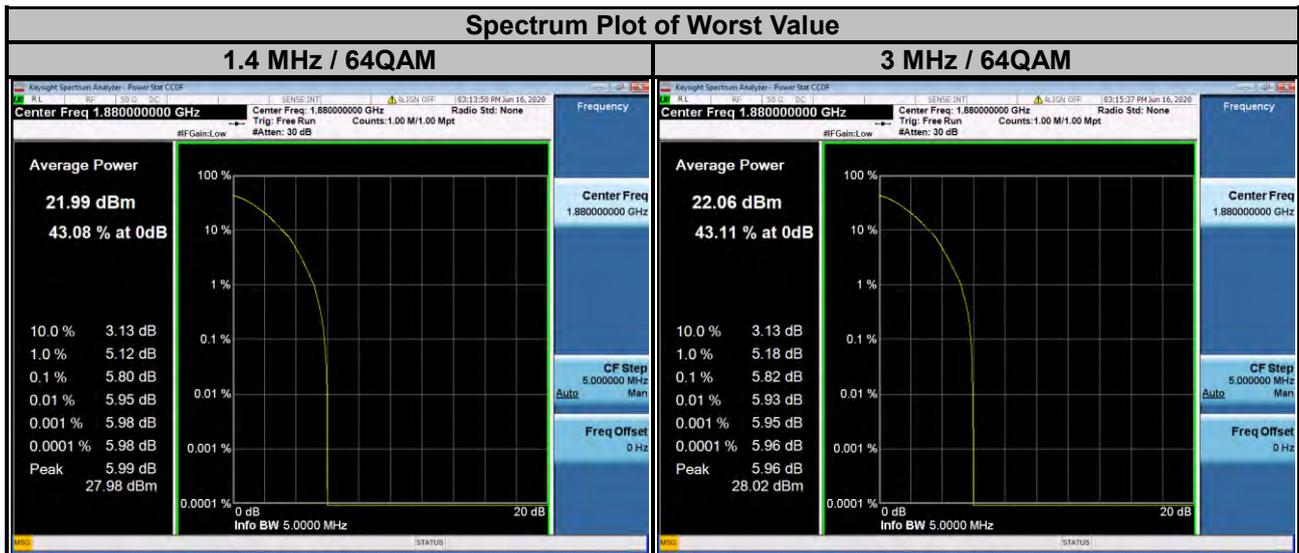


LTE Band 2									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18625	1852.5	3.06	4.25	5.39	18650	1855.0	3.03	4.15	5.27
18900	1880.0	3.36	4.60	5.83	18900	1880.0	3.25	4.46	5.66
19175	1907.5	3.19	4.36	5.54	19150	1905.0	3.27	4.48	5.69

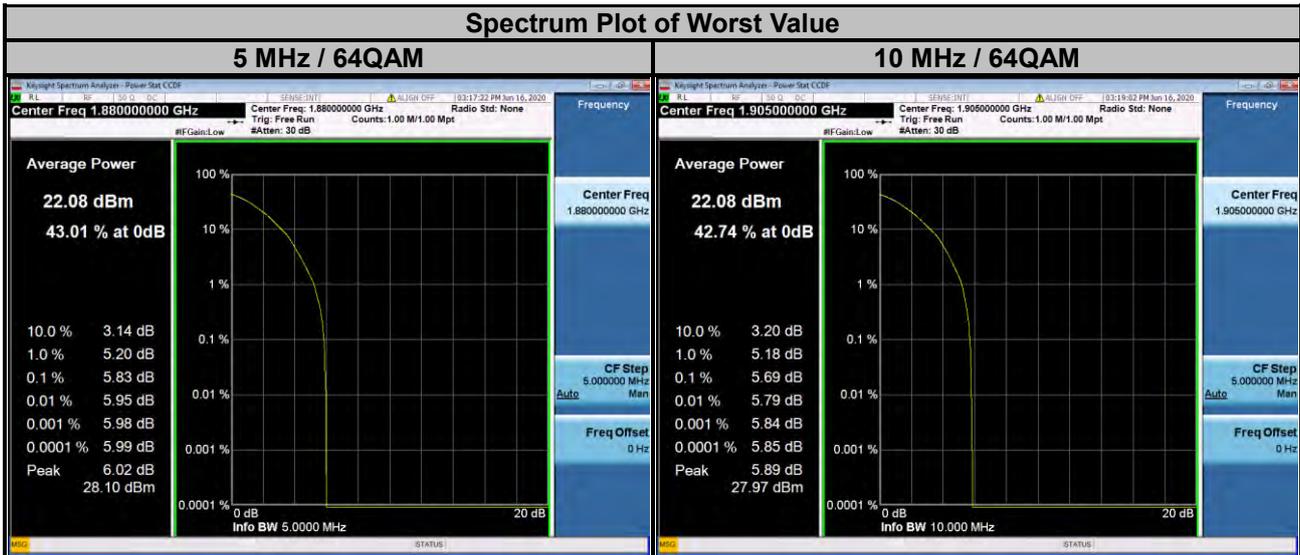

LTE Band 2

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
18675	1857.5	3.09	4.25	5.46	18700	1860.0	2.99	4.25	5.37
18900	1880.0	3.19	4.41	5.56	18900	1880.0	3.12	4.30	5.56
19125	1902.5	2.98	4.07	5.25	19100	1900.0	2.99	4.03	5.20


Spectrum Plot of Worst Value

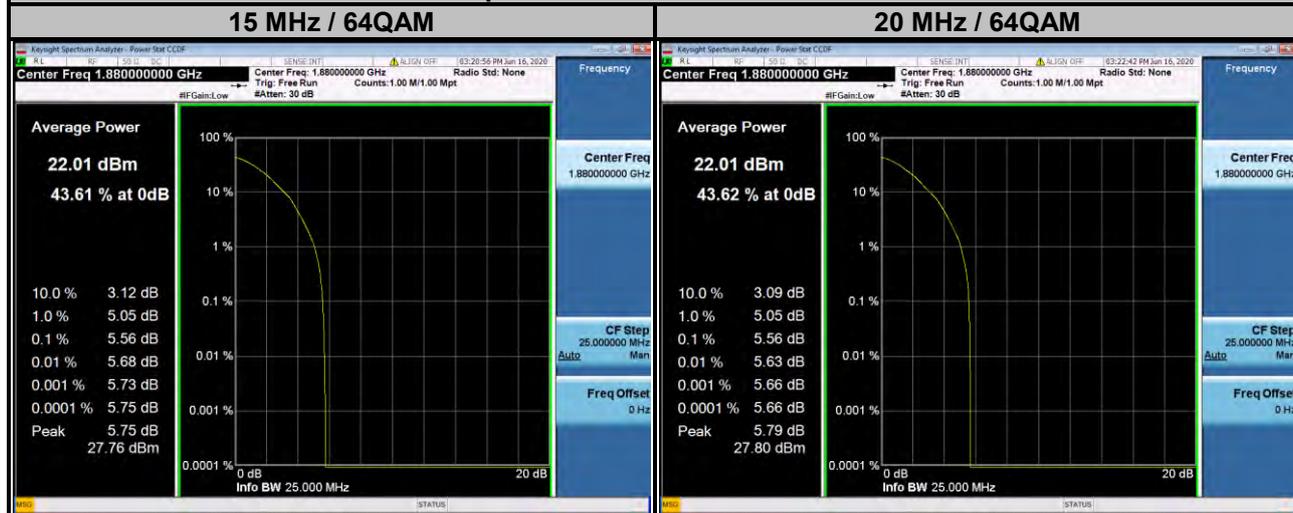

LTE Band 25

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26047	1850.7	3.48	4.89	6.06	26055	1851.5	3.30	4.75	6.04
26365	1882.5	3.67	5.20	6.37	26365	1882.5	3.50	5.07	6.46
26683	1914.3	3.67	4.96	6.07	26675	1913.5	3.39	4.68	5.87


Spectrum Plot of Worst Value

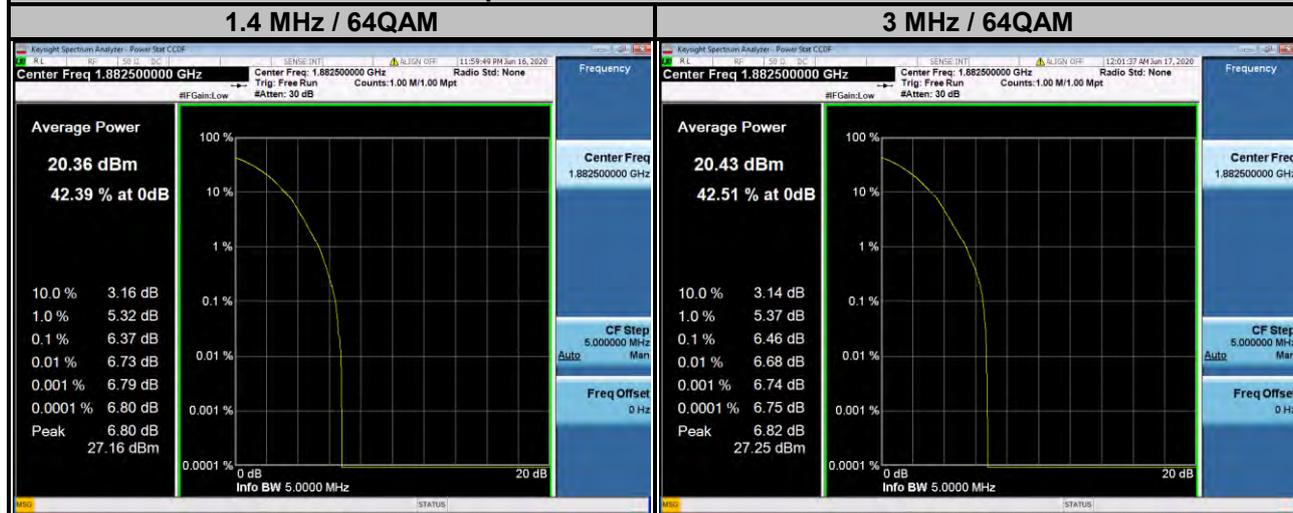

LTE Band 25

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26065	1852.5	3.31	4.78	6.02	26090	1855.0	3.24	4.71	6.02
26365	1882.5	3.50	5.08	6.45	26365	1882.5	3.48	5.10	6.44
26665	1912.5	3.27	4.55	5.70	26640	1910.0	3.42	5.00	6.35


Spectrum Plot of Worst Value

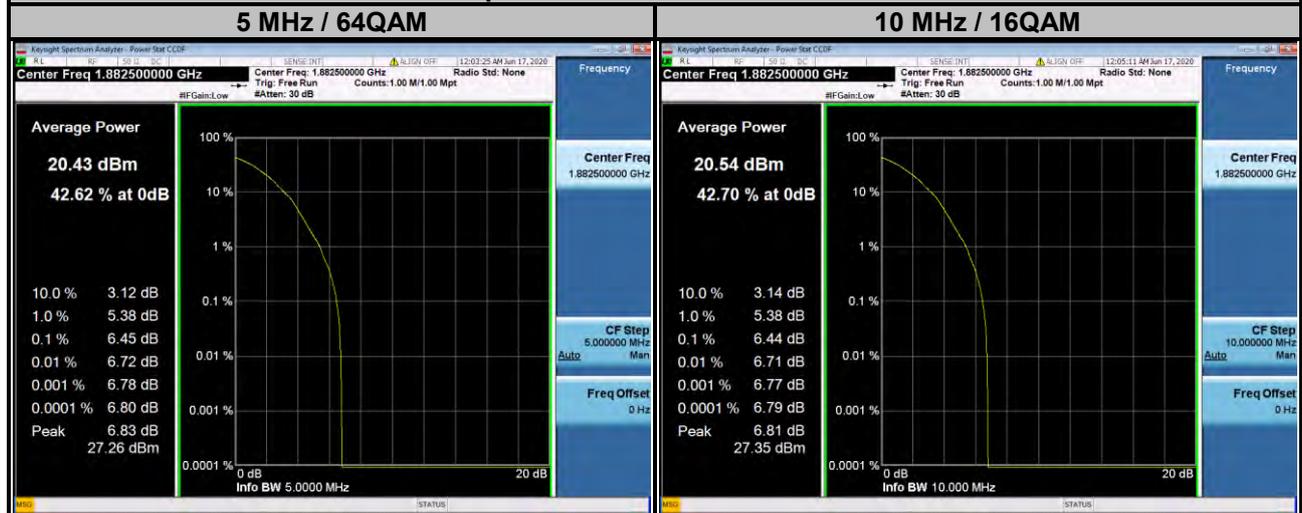

LTE Band 25

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26115	1857.5	3.23	4.70	6.01	26140	1860.0	3.20	4.66	5.90
26365	1882.5	3.48	5.02	6.46	26365	1882.5	3.42	4.91	6.29
26615	1907.5	3.54	5.14	6.50	26590	1905.0	3.41	4.90	6.14

Spectrum Plot of Worst Value

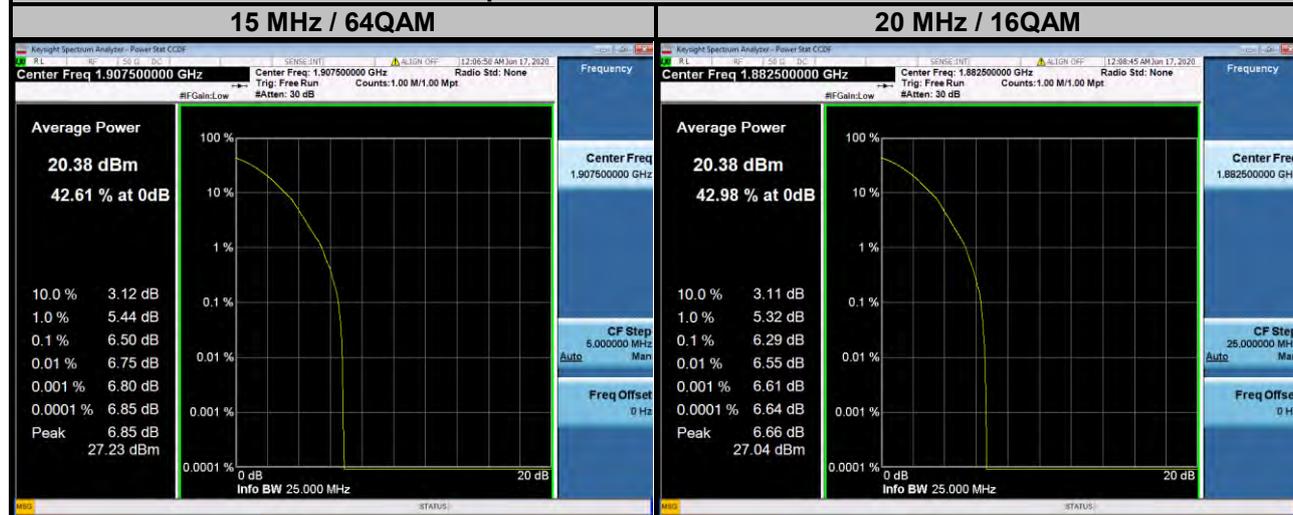


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

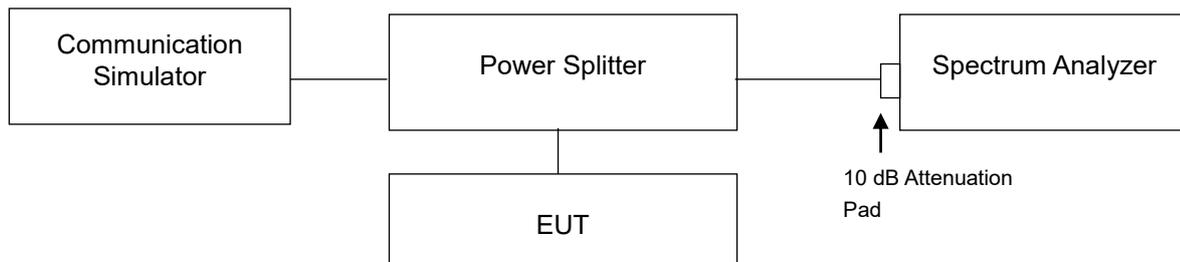


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 20 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

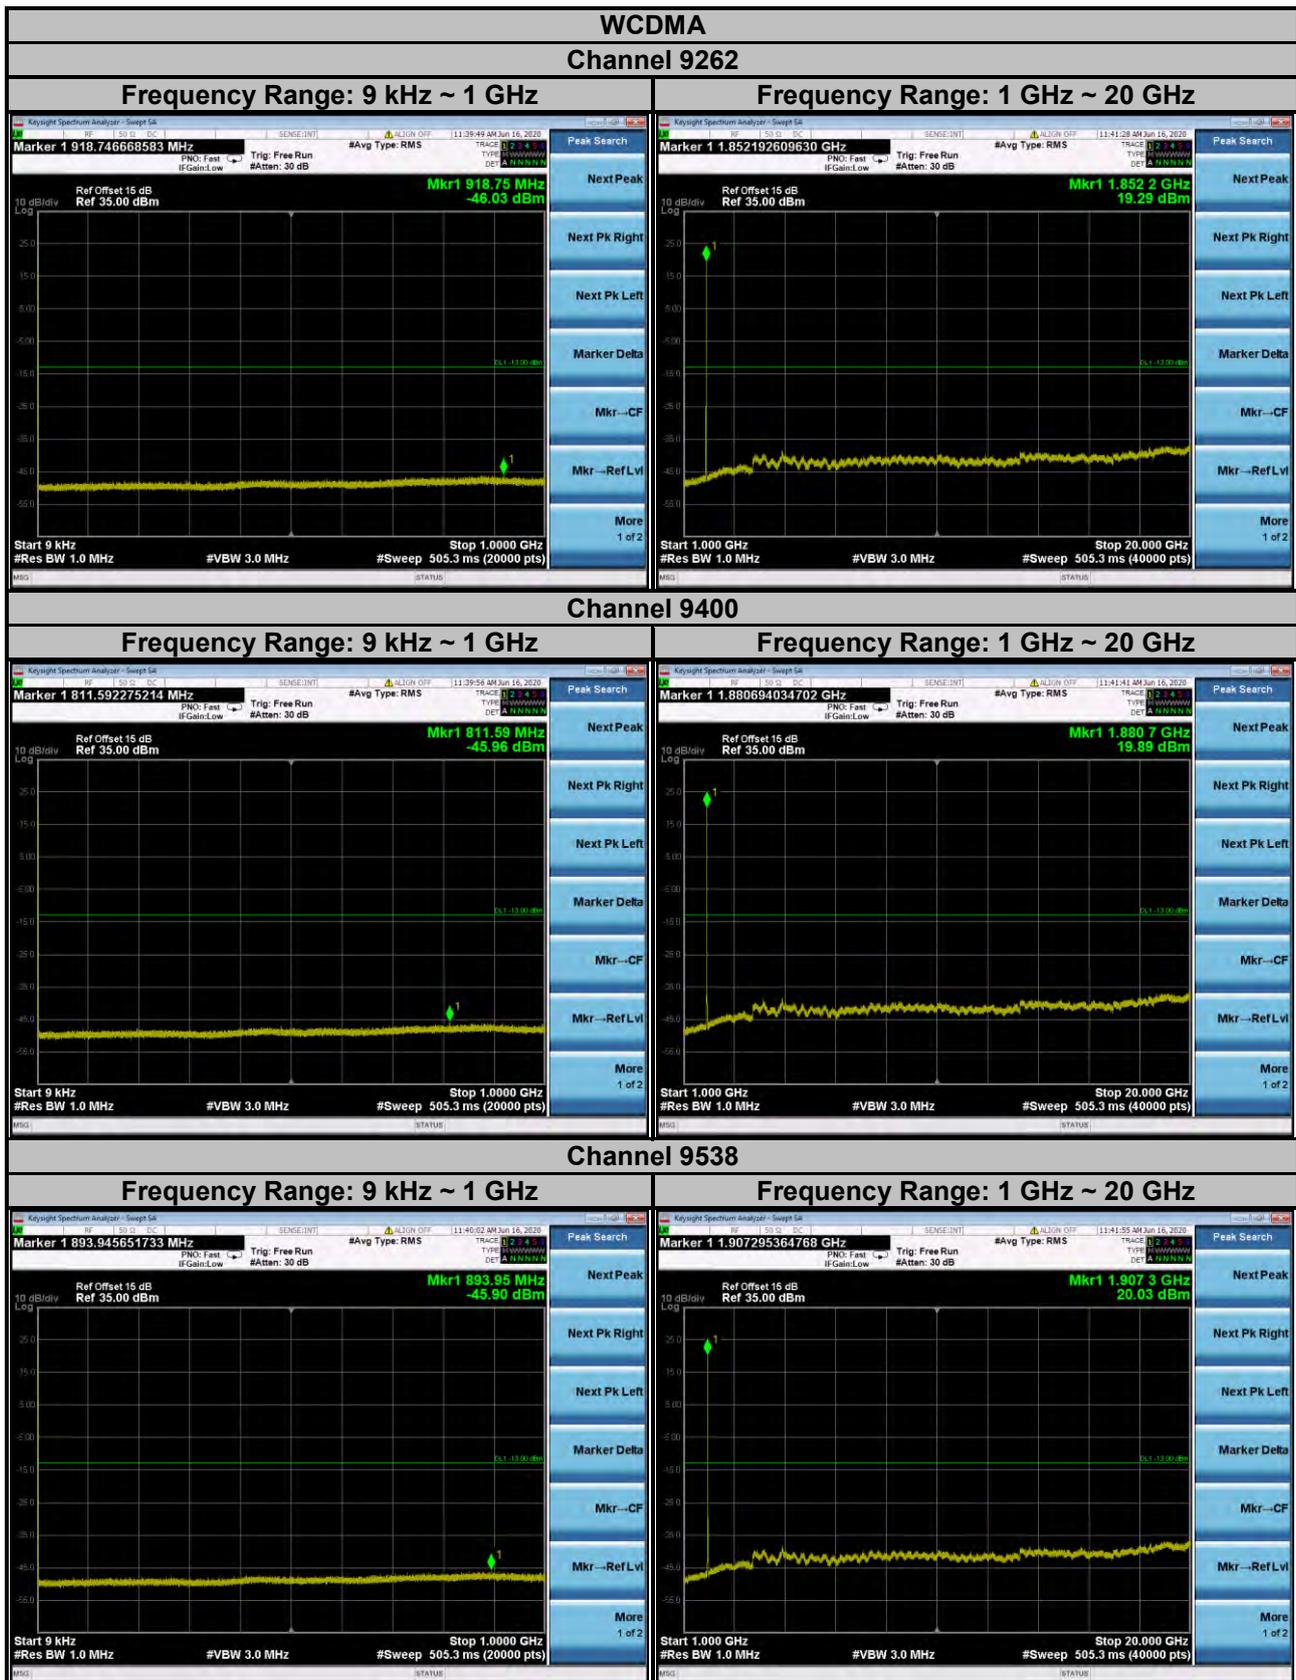


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

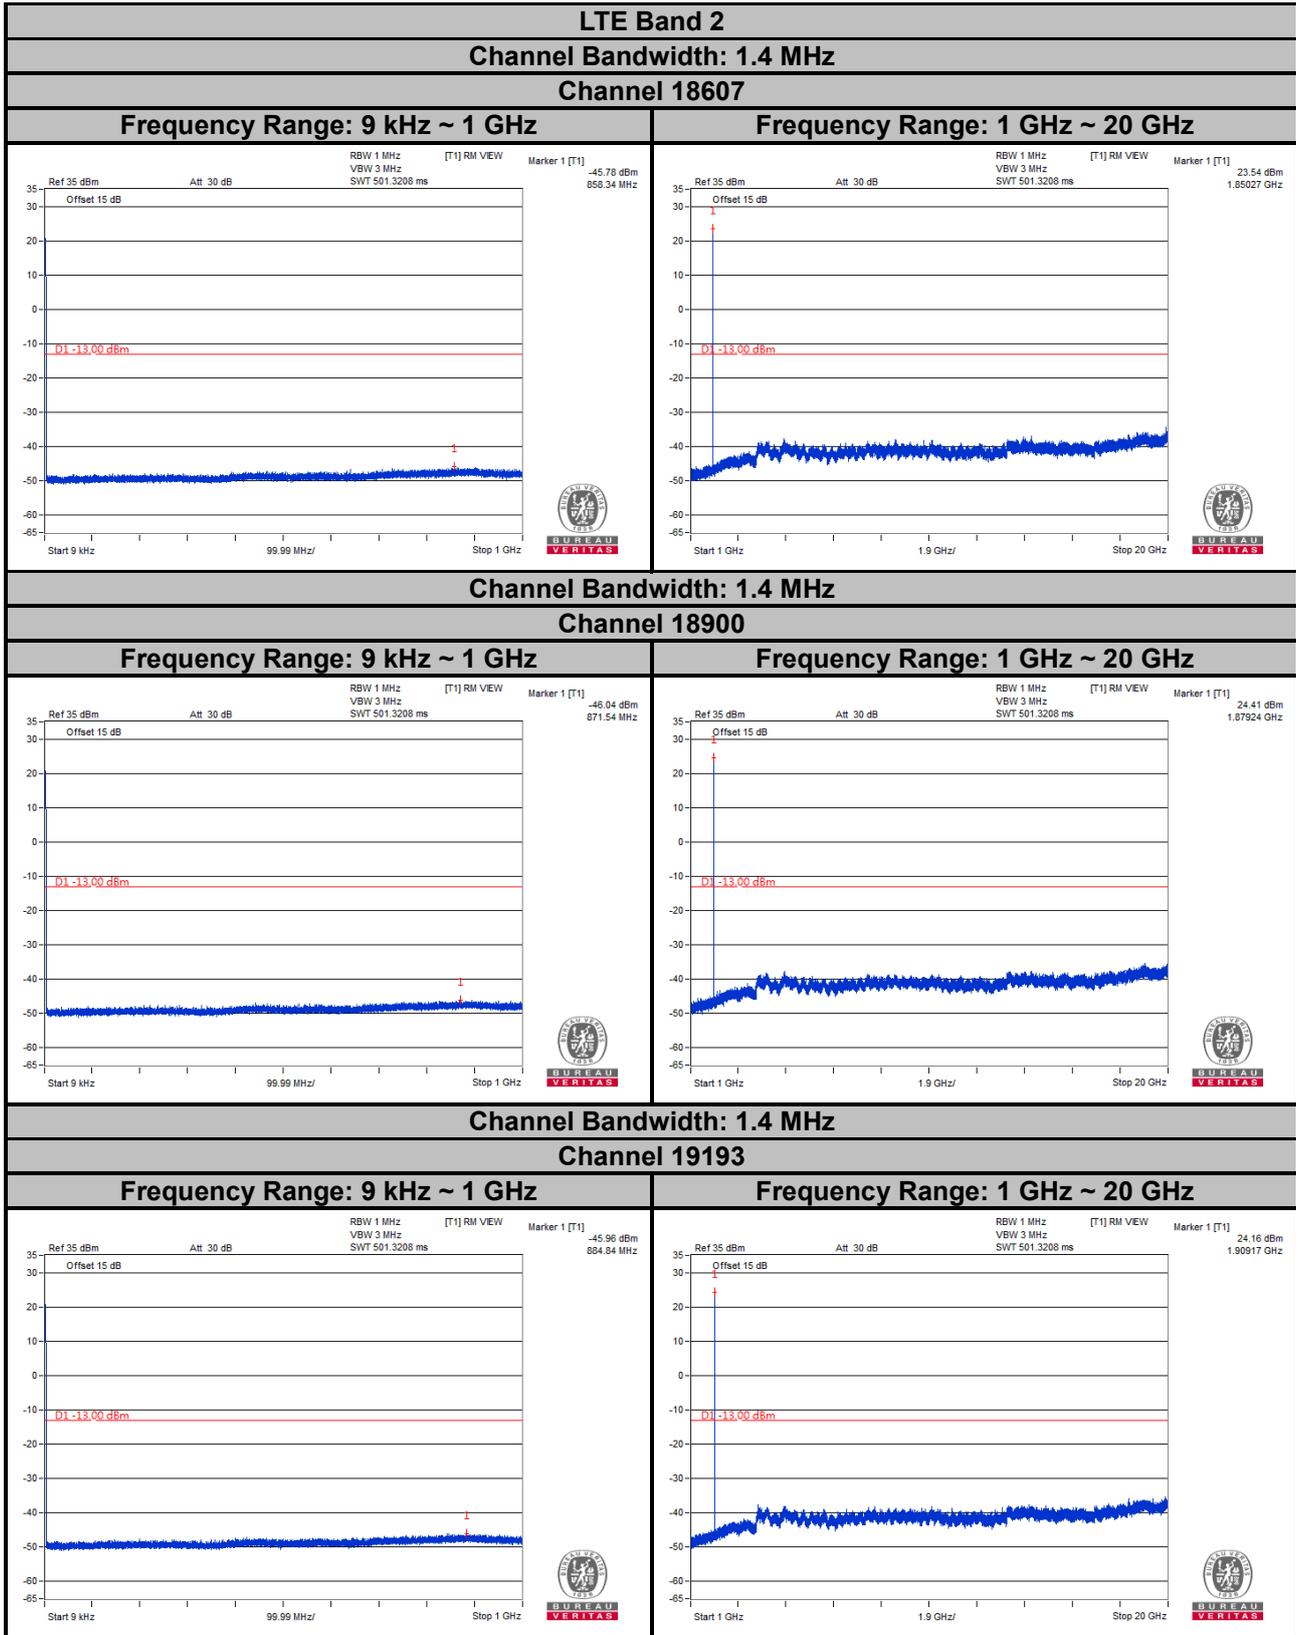

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

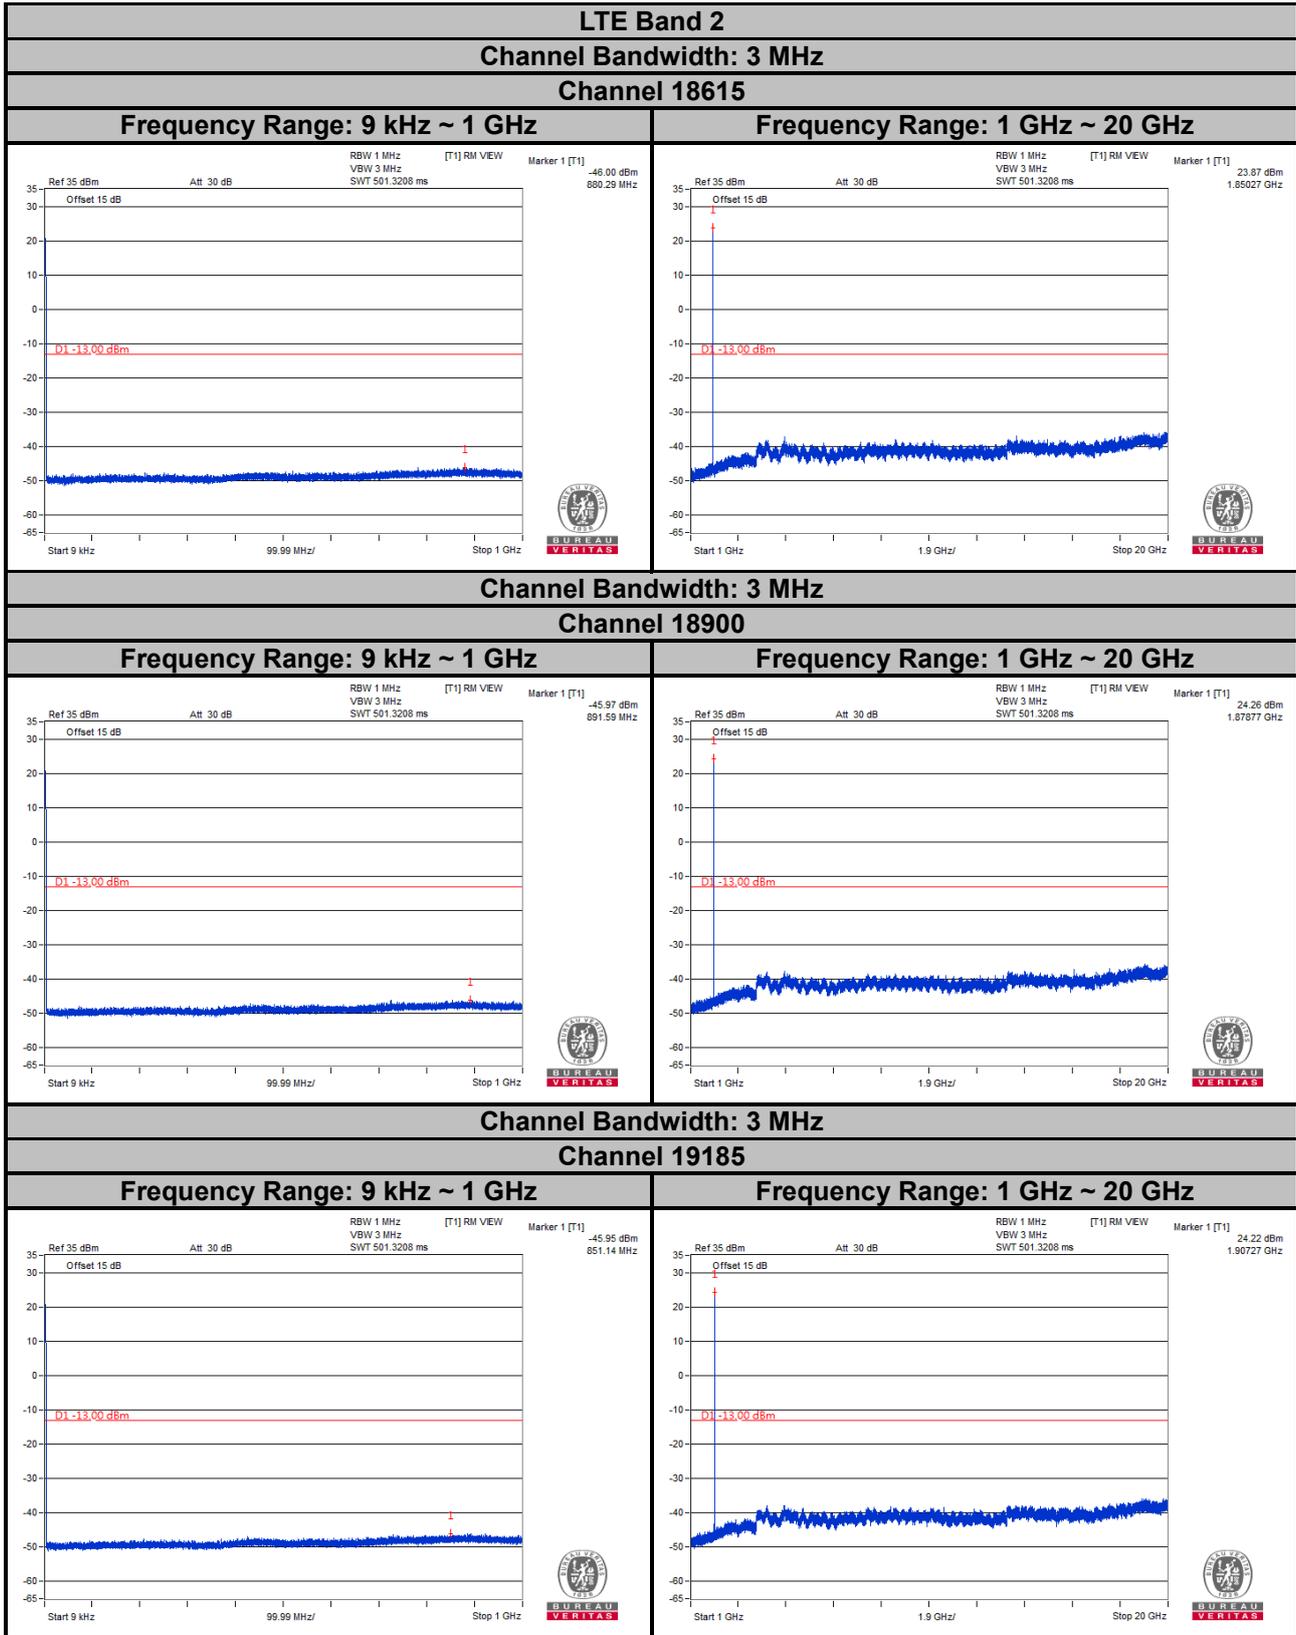


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

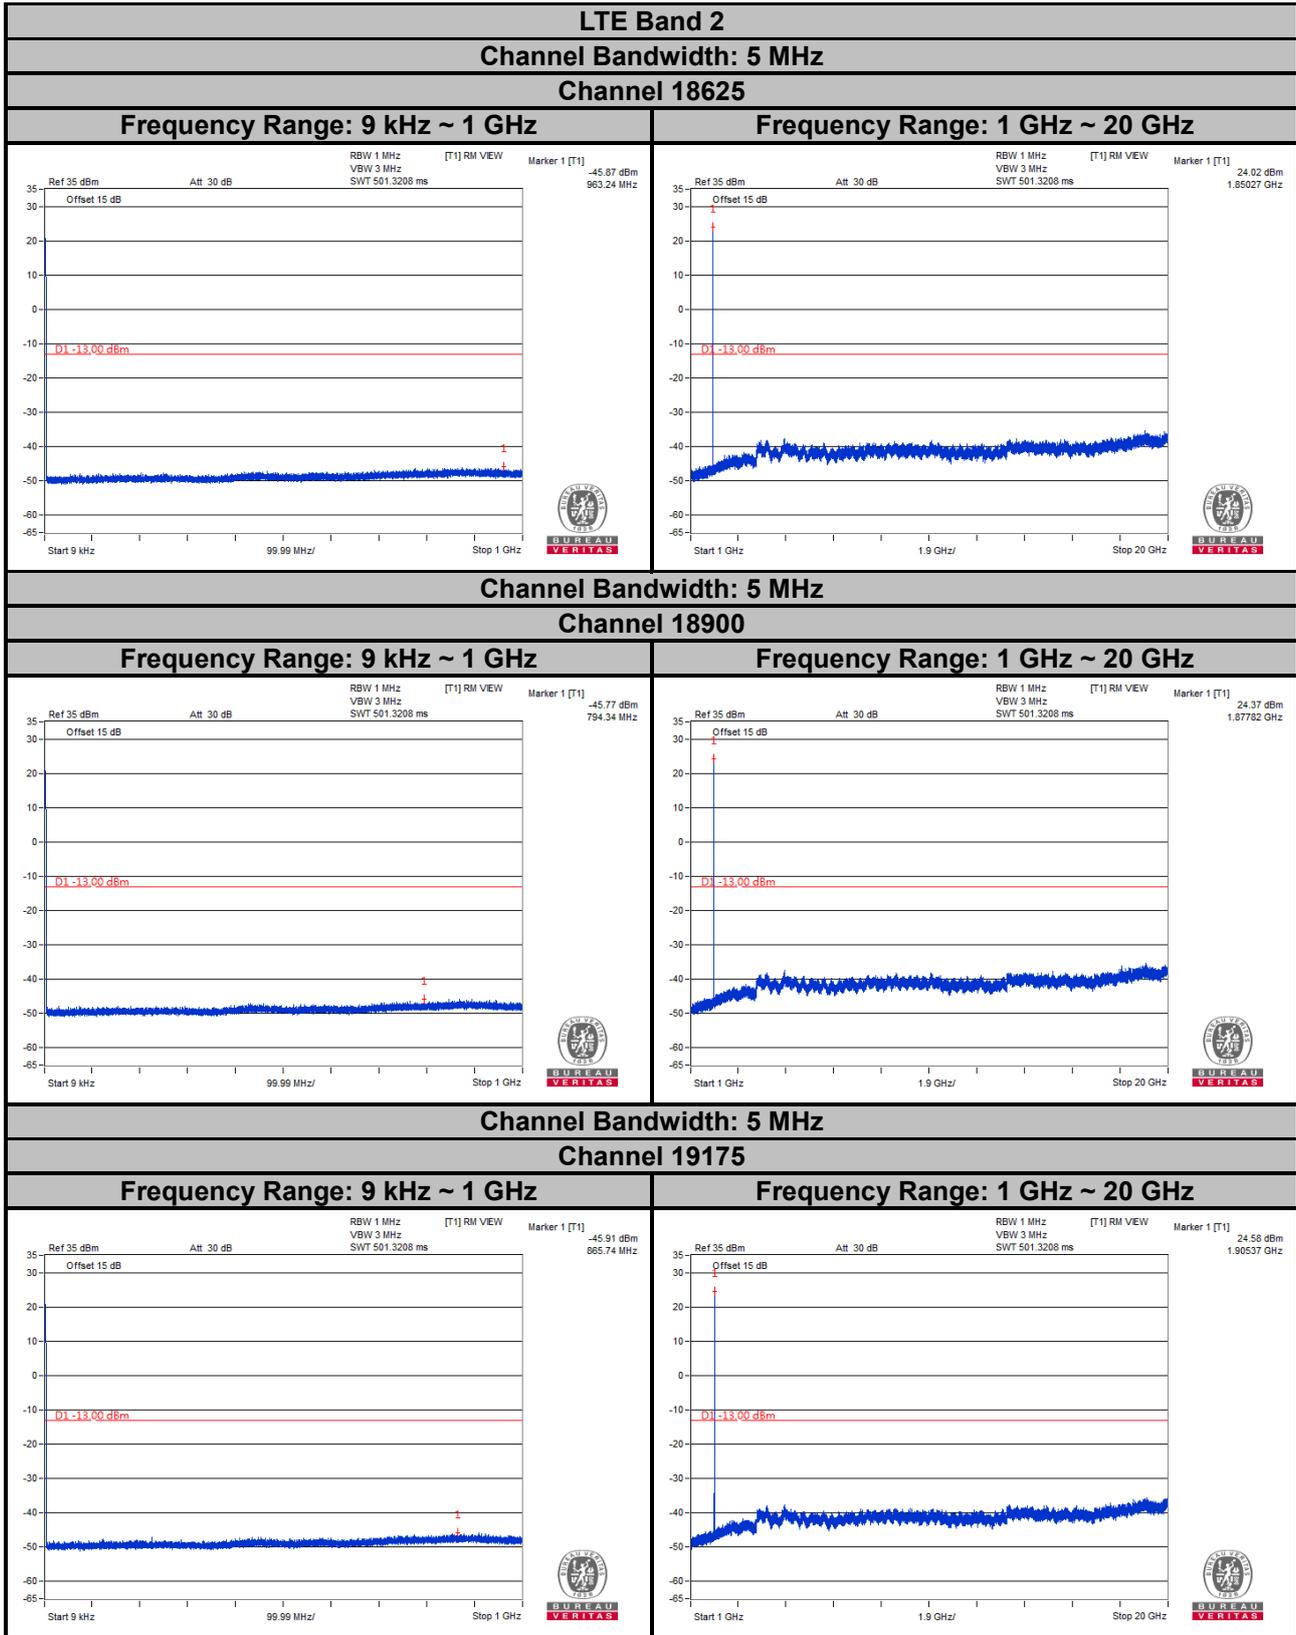


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 10 MHz
Channel 18650

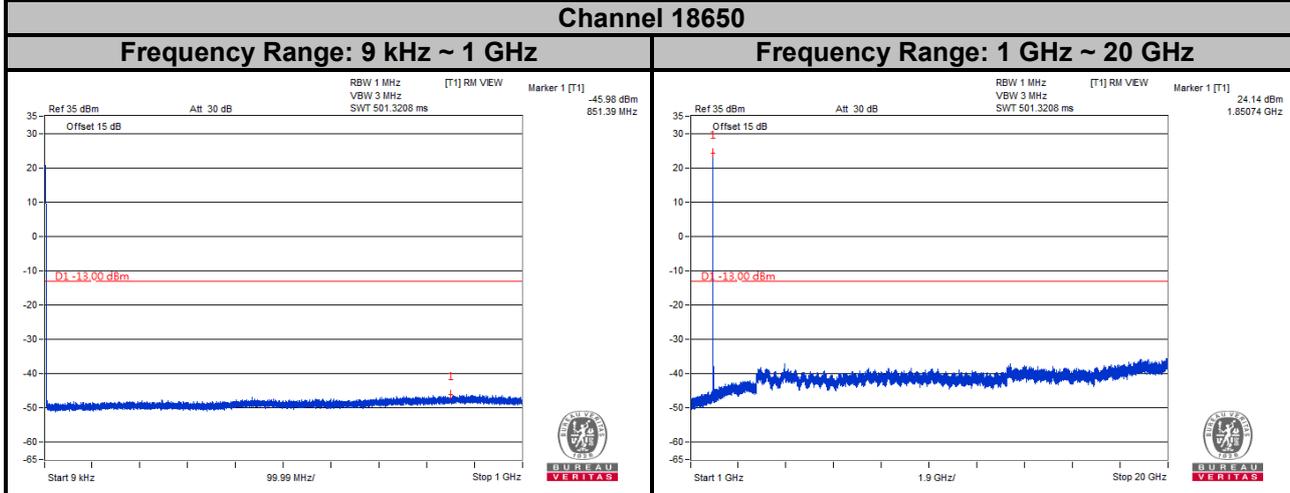


Channel Bandwidth: 10 MHz
Channel 18900

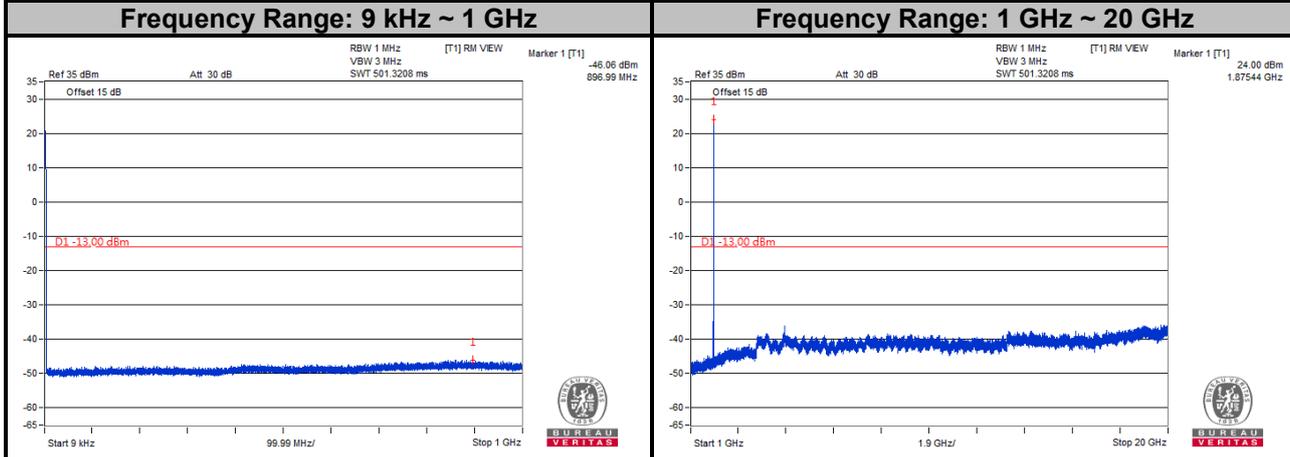

Channel Bandwidth: 10 MHz
Channel 19150

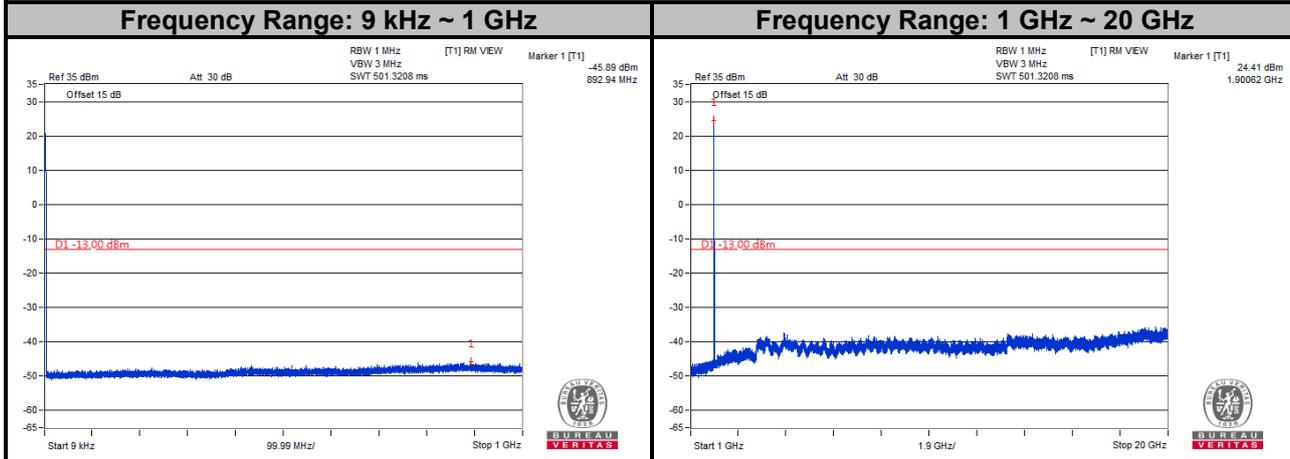


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

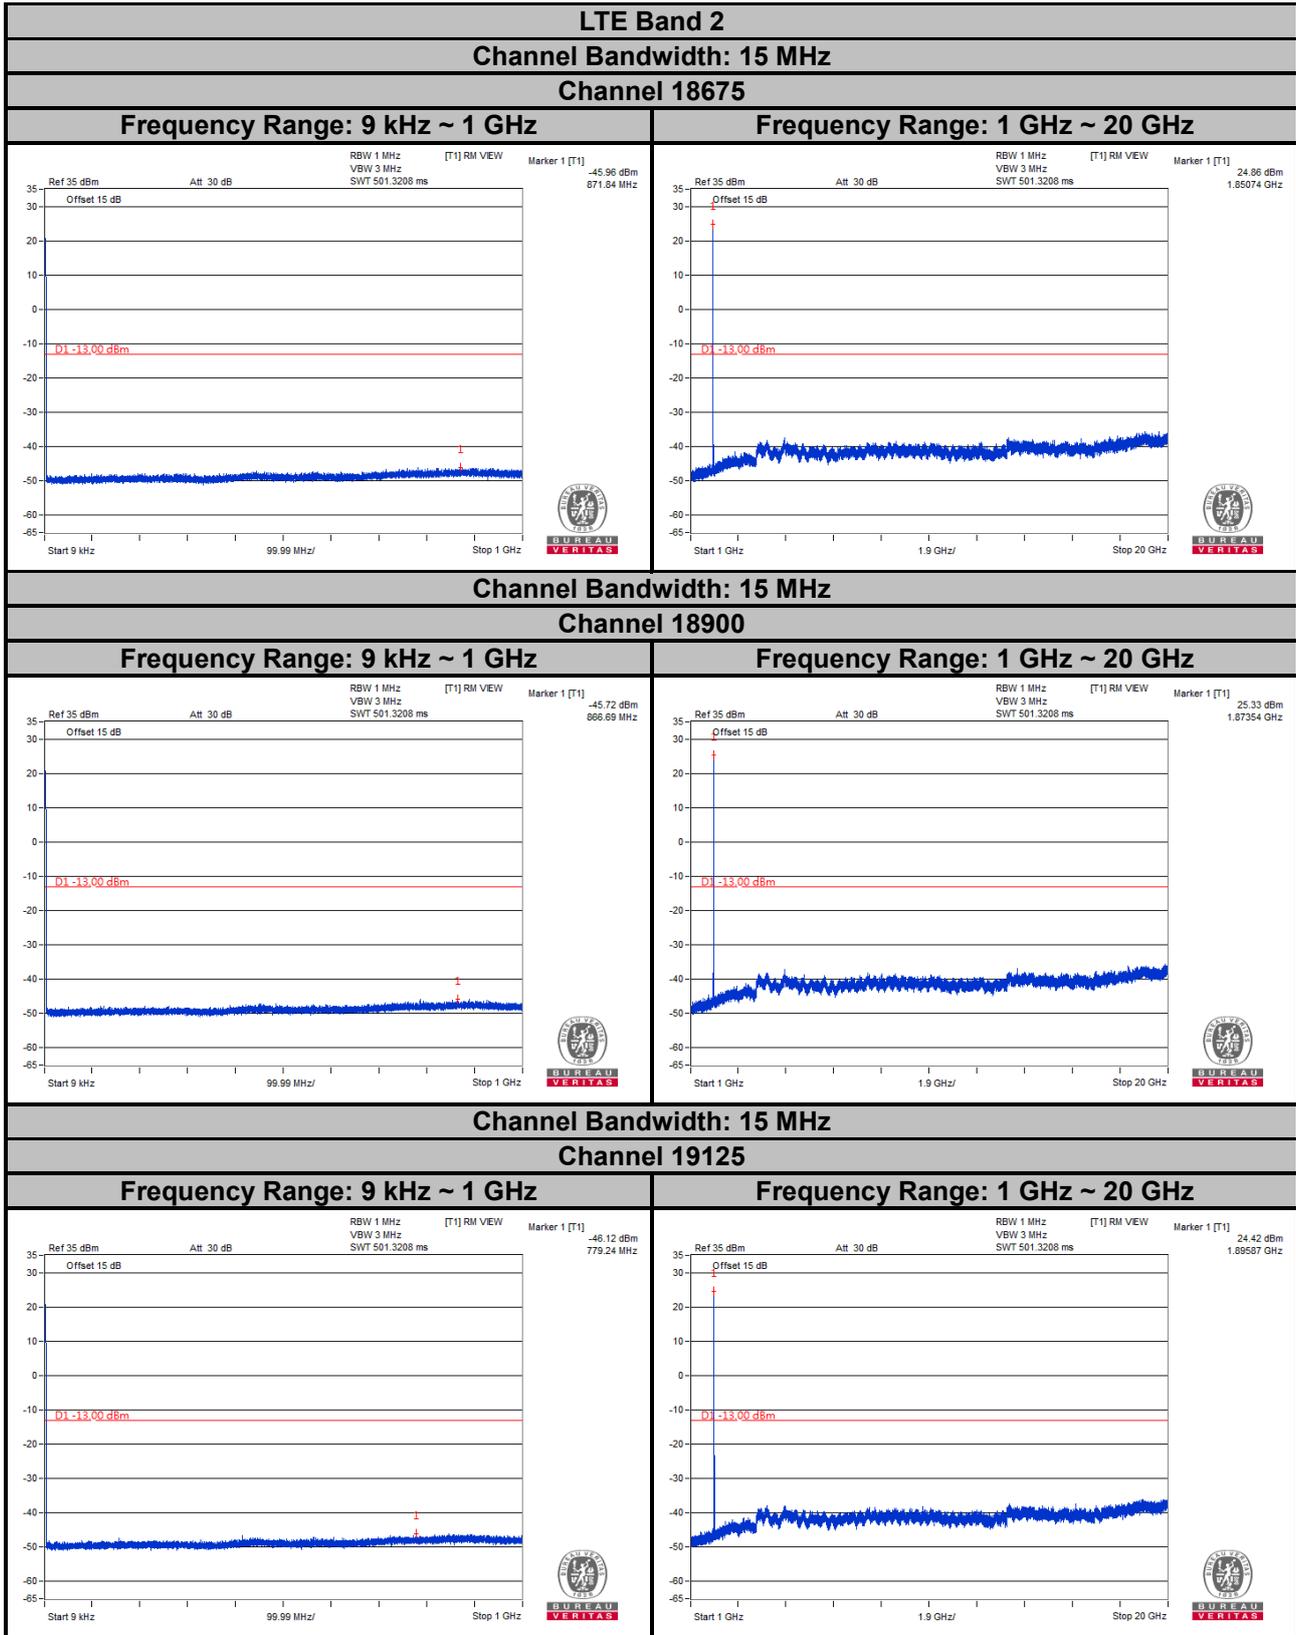


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 2
Channel Bandwidth: 20 MHz
Channel 18700

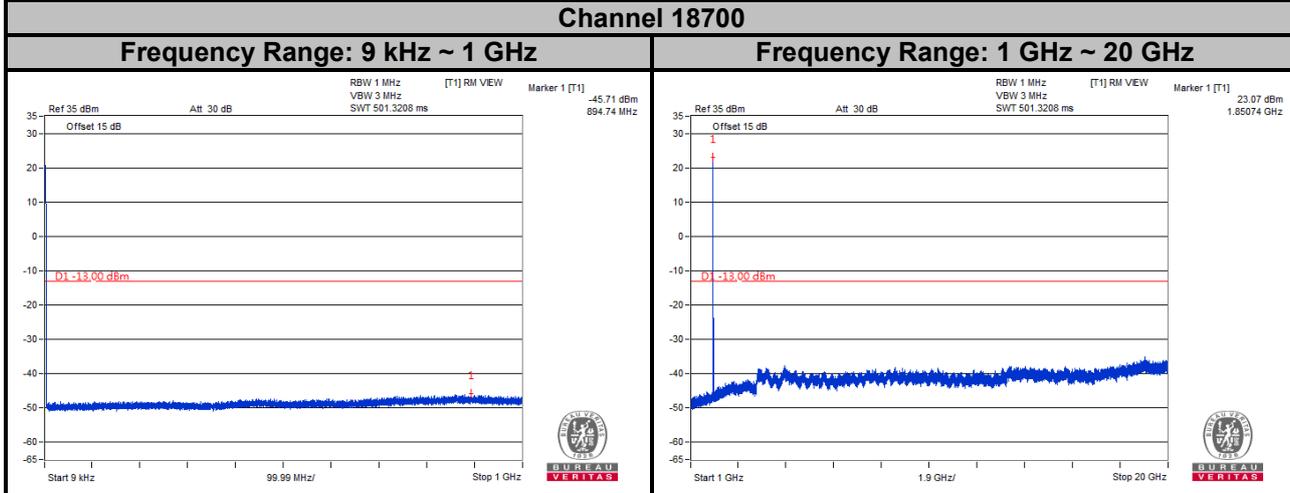


Channel Bandwidth: 20 MHz
Channel 18900

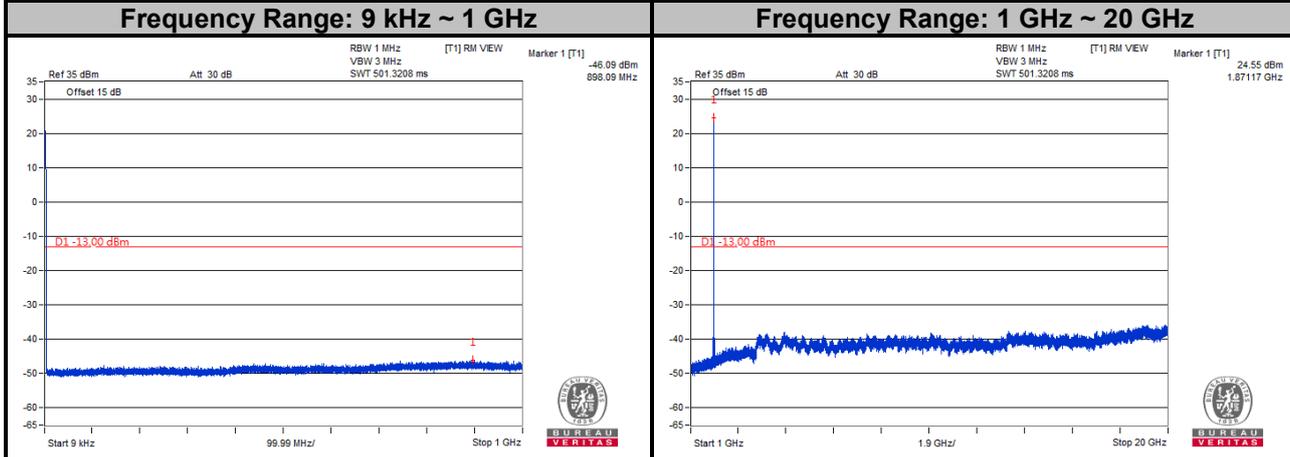


Channel Bandwidth: 20 MHz
Channel 19100

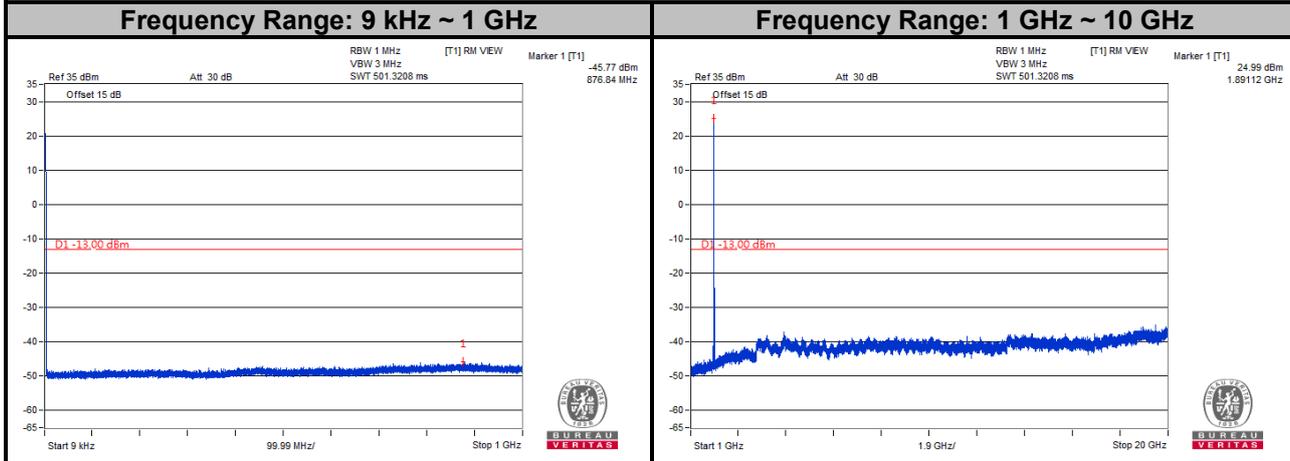


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

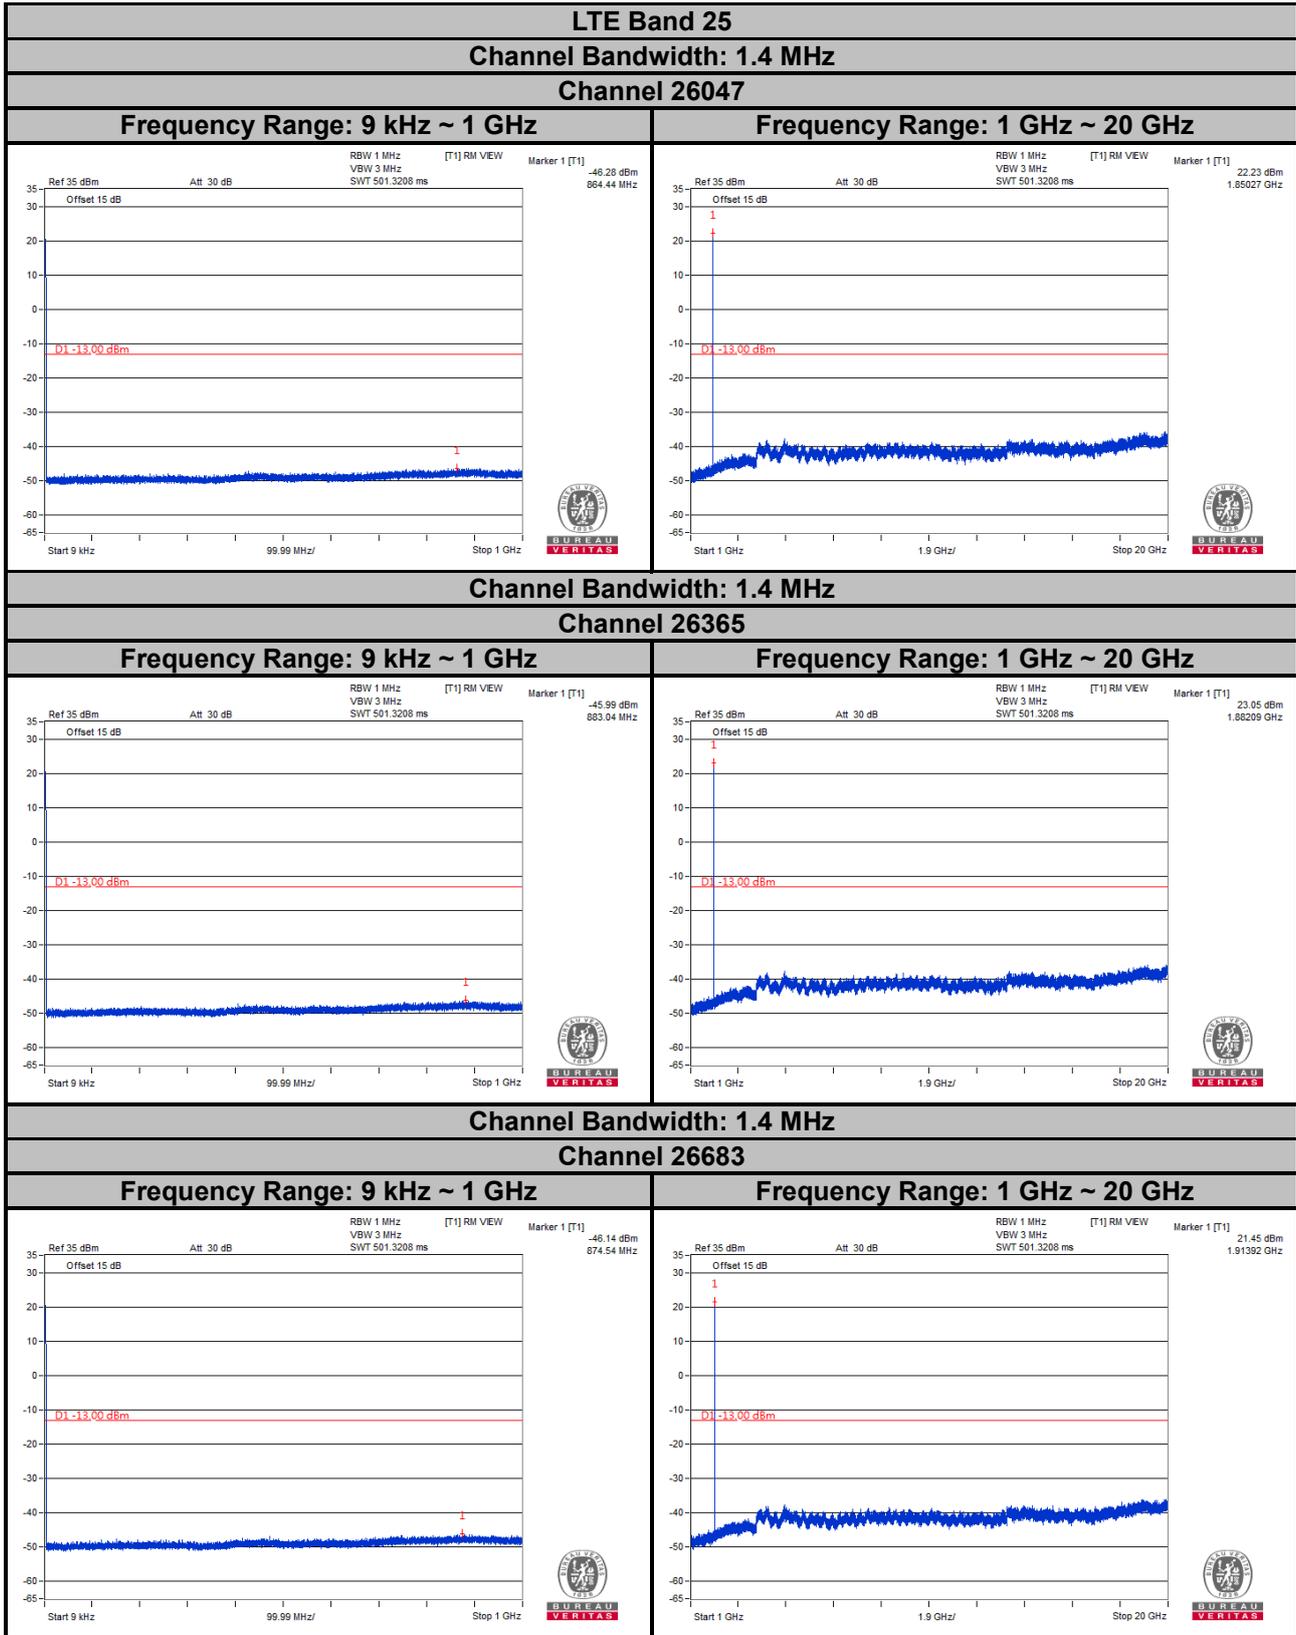


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

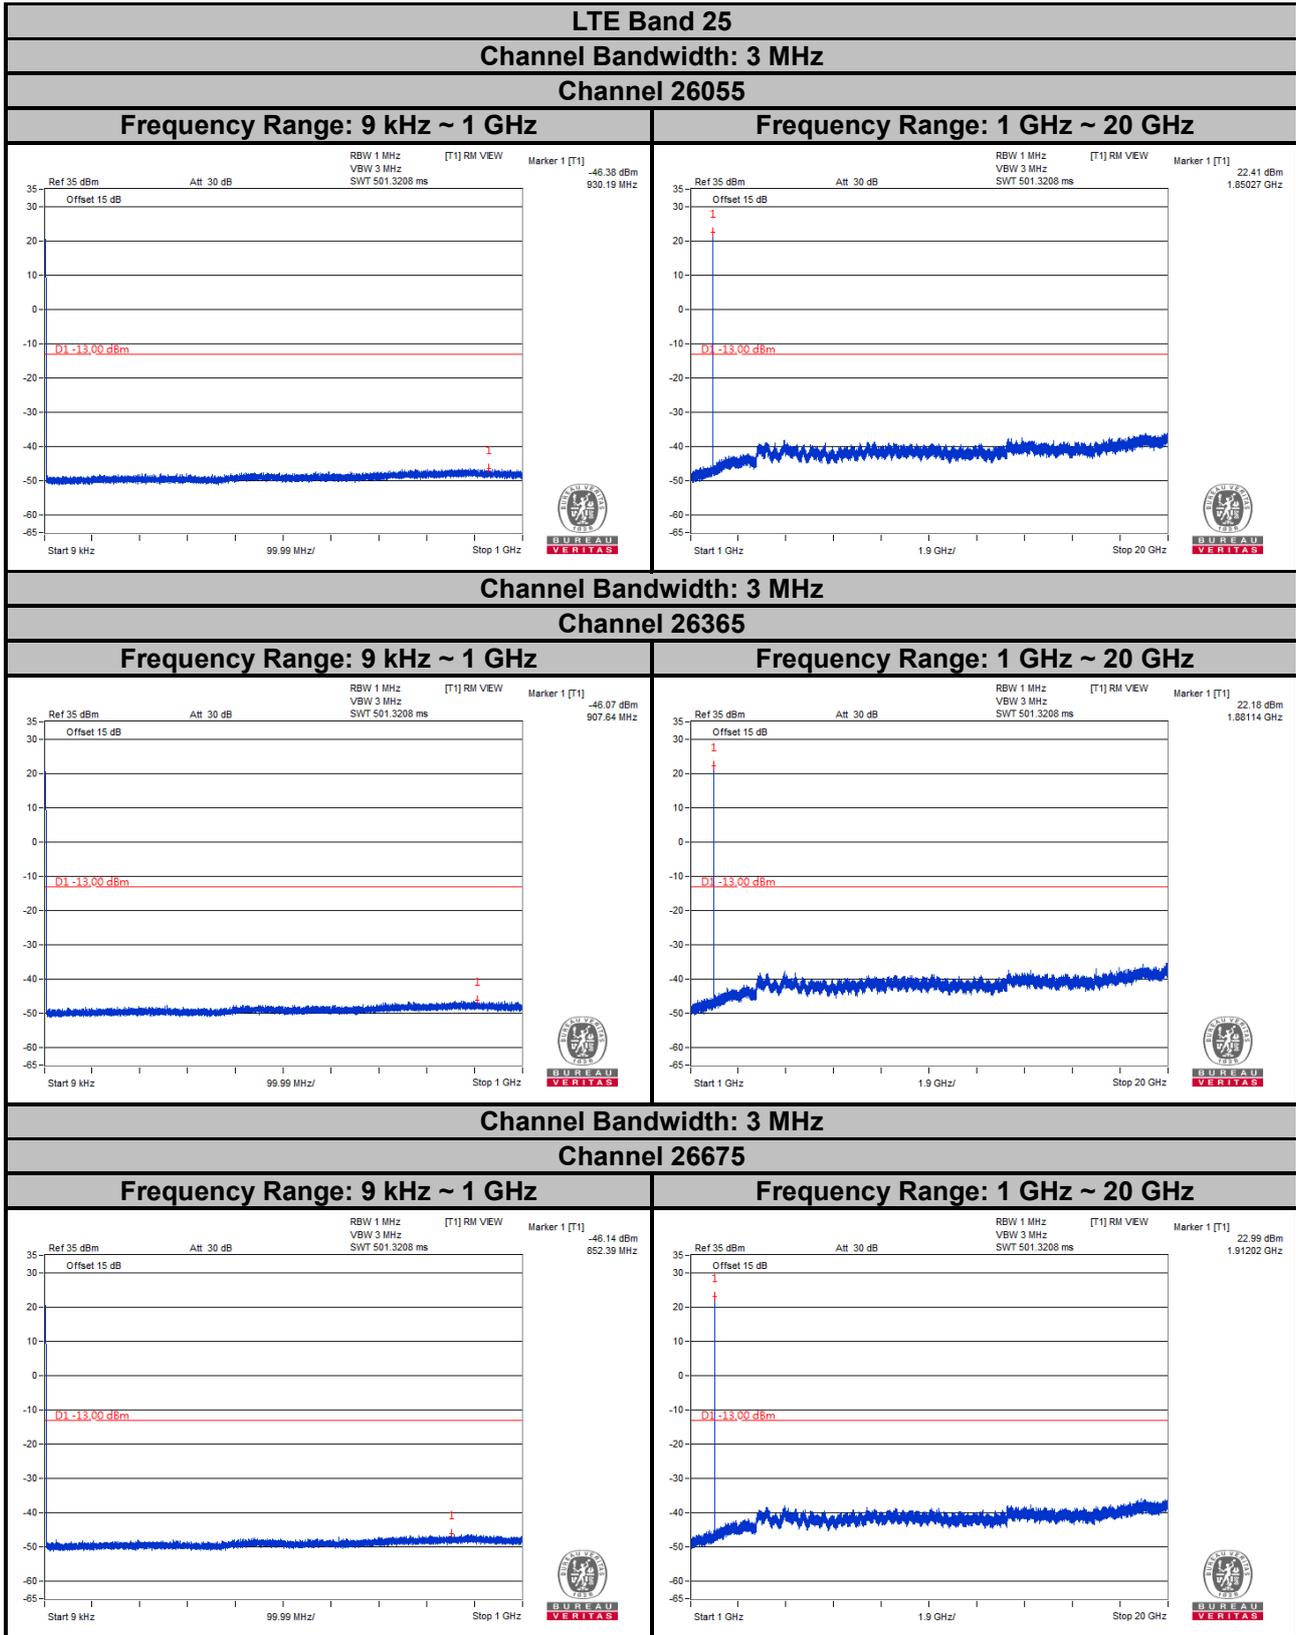

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

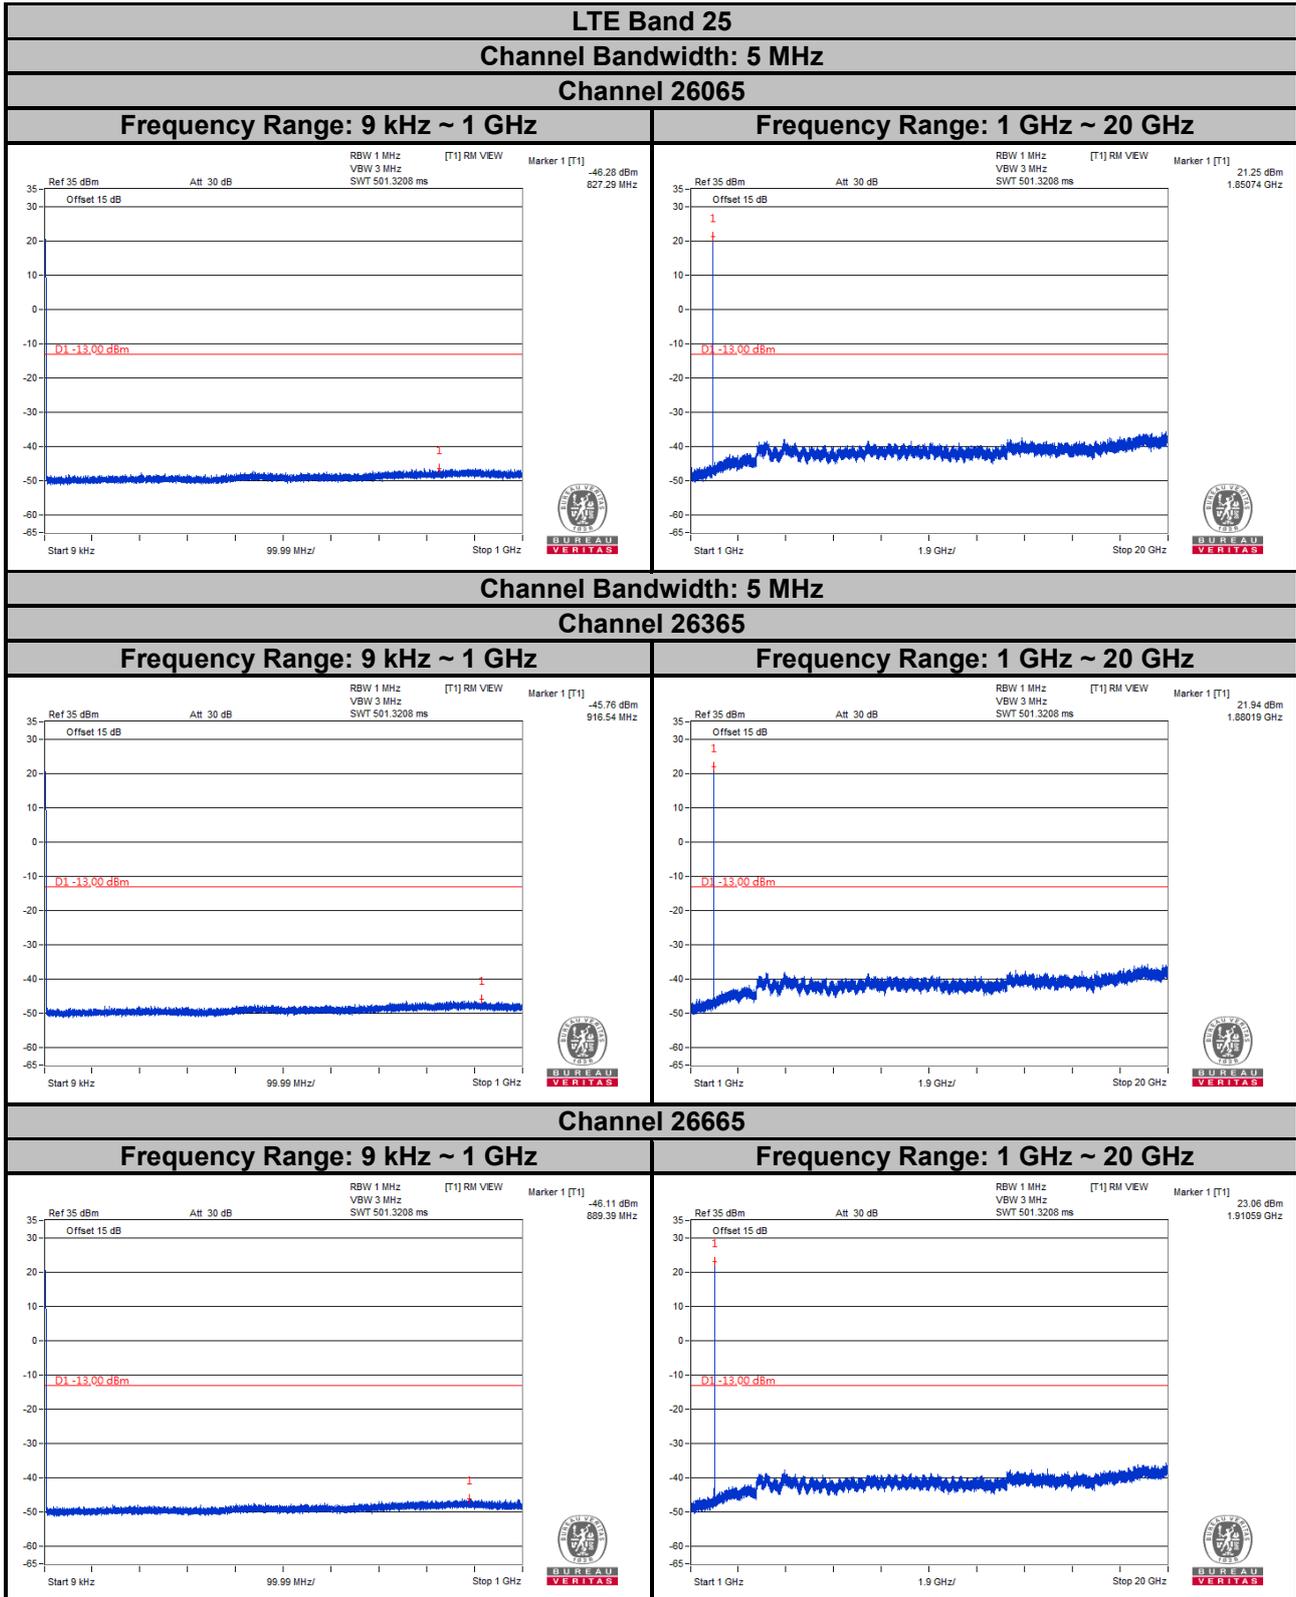


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

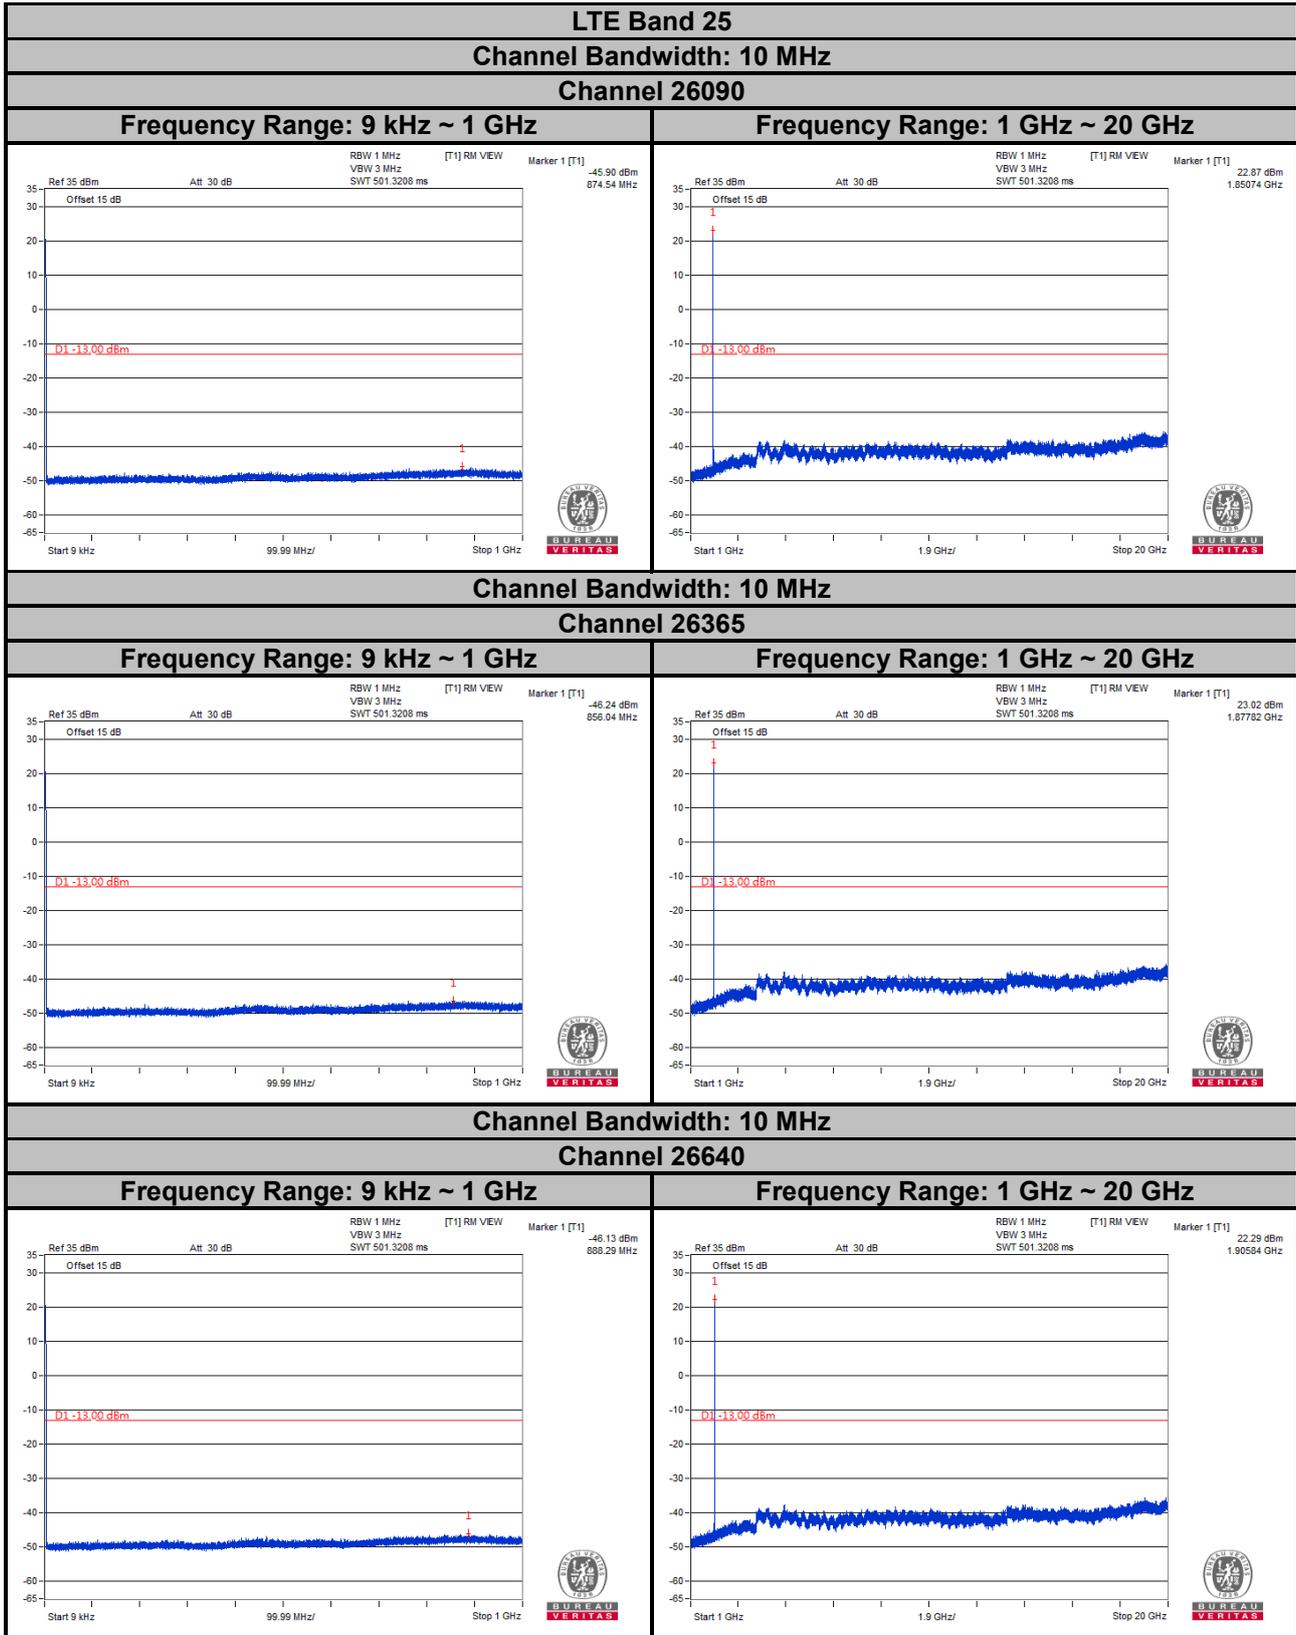


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 25
Channel Bandwidth: 15 MHz
Channel 26115

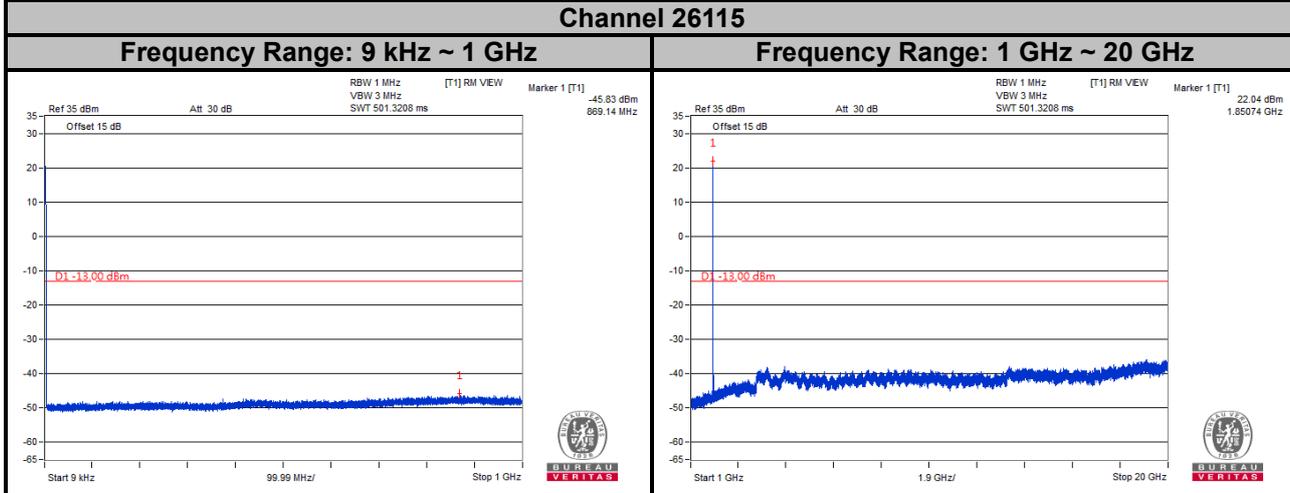


LTE Band 25
Channel Bandwidth: 15 MHz
Channel 26365

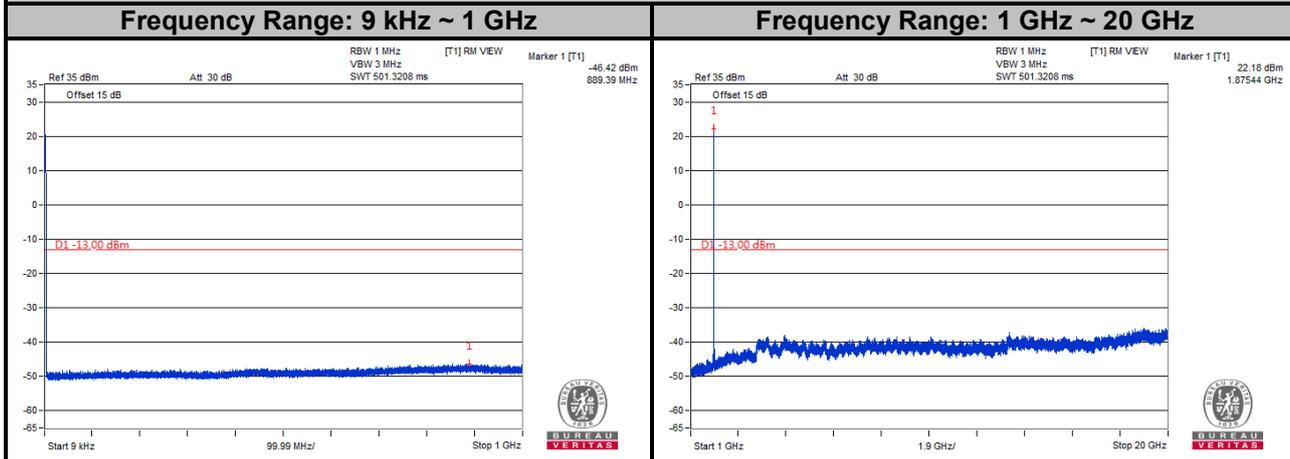

LTE Band 25
Channel Bandwidth: 15 MHz
Channel 26615

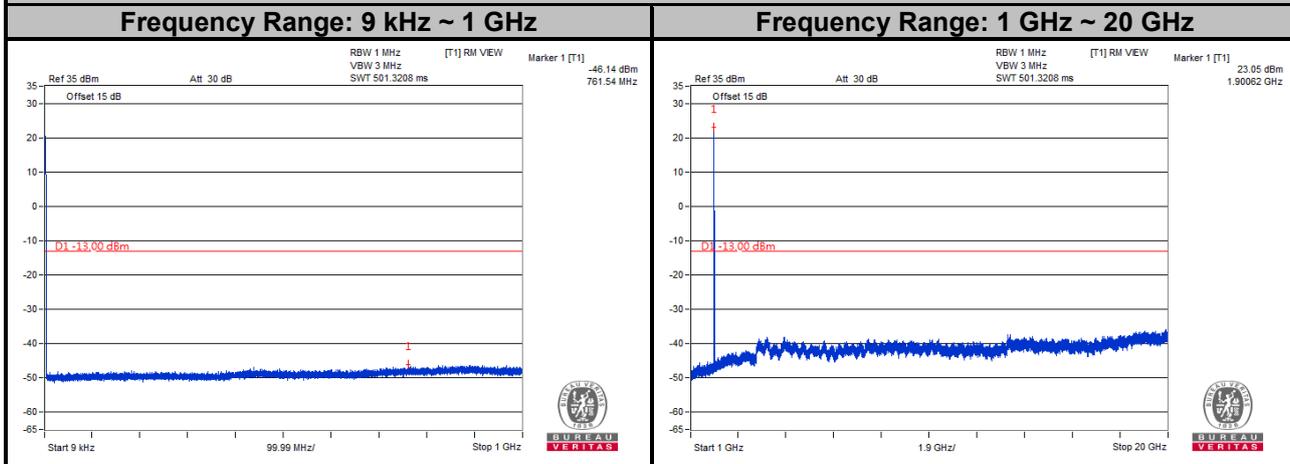

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

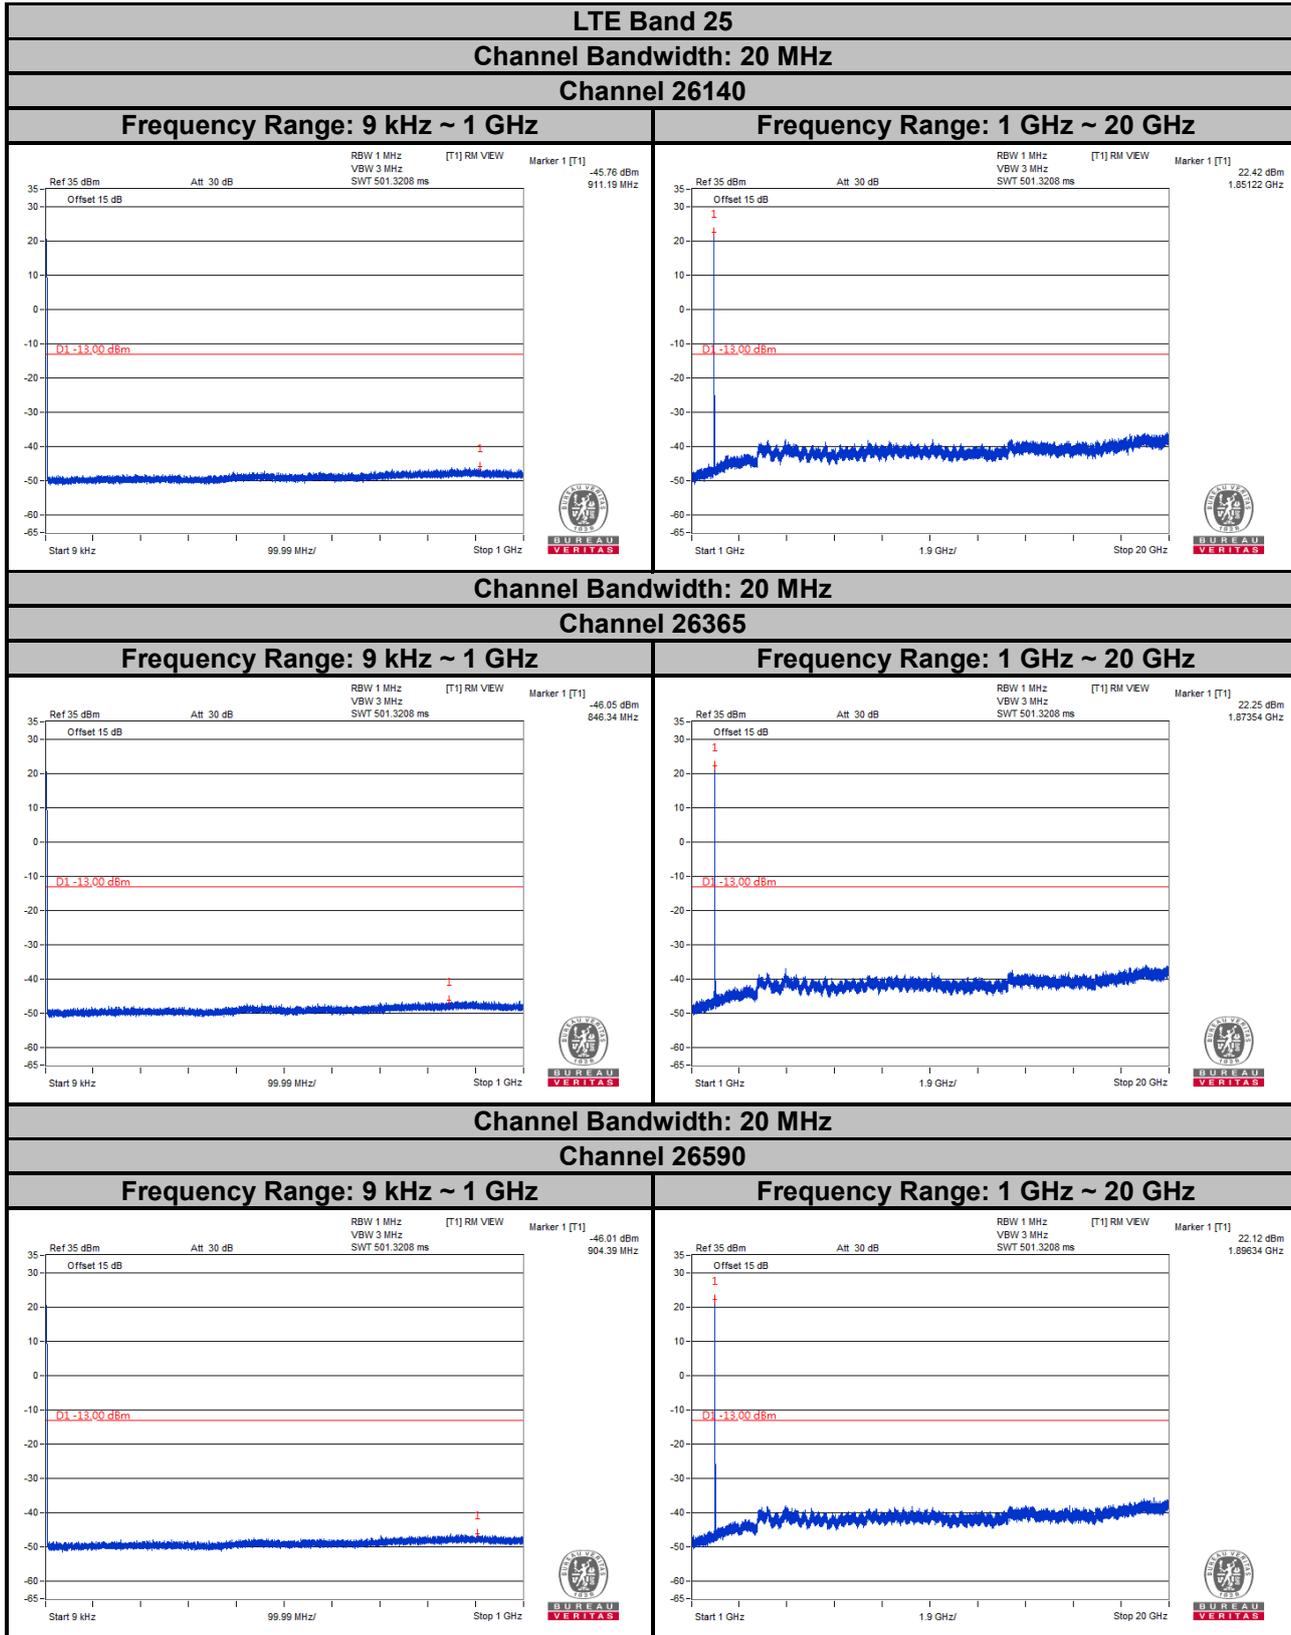

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

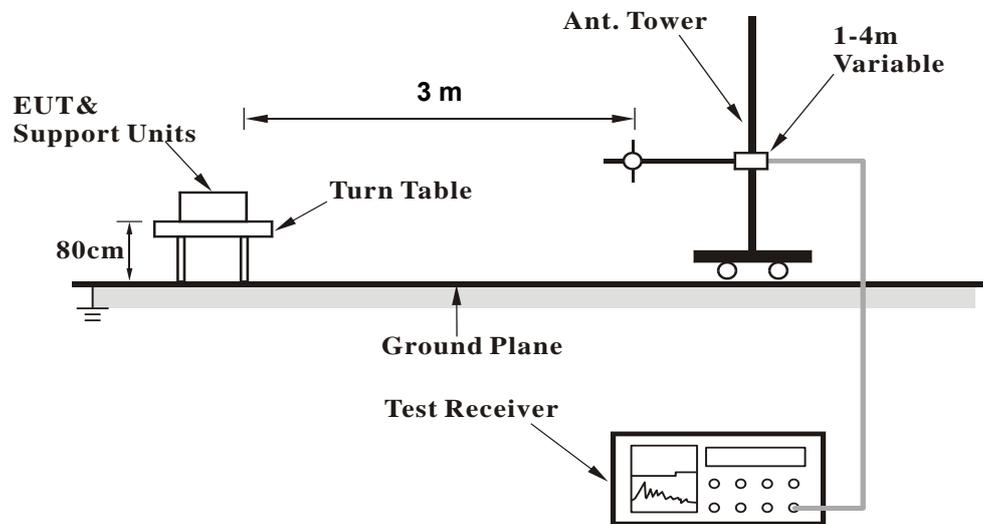

<Radiated Emission above 1 GHz>

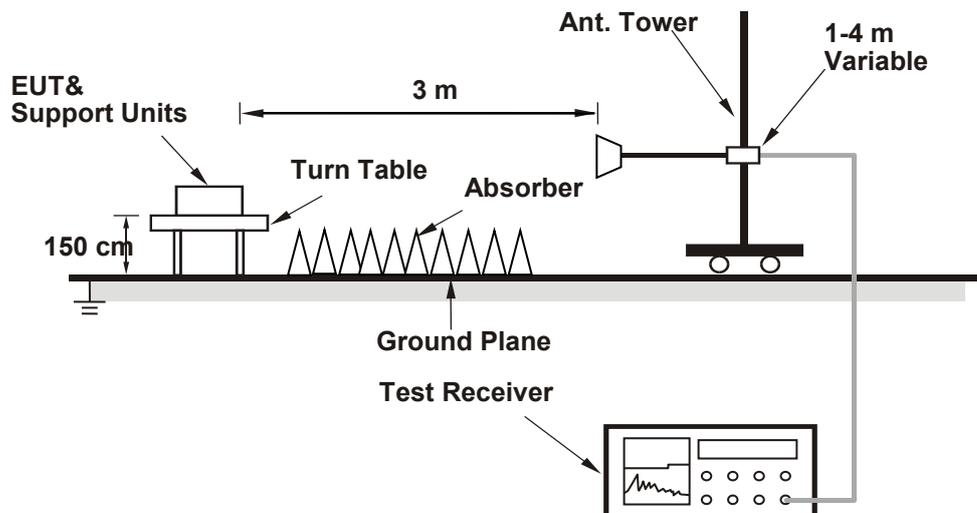

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results
Below 1GHz


WCDMA Band 2

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	45.52	-54.80	-43.40	-10.00	-53.40	-13.00	-40.40
2	76.56	-36.90	-40.20	-2.80	-43.00	-13.00	-30.00
3	113.42	-39.20	-47.10	0.30	-46.80	-13.00	-33.80
4	297.72	-44.40	-53.00	5.10	-47.90	-13.00	-34.90
5	730.34	-57.20	-58.80	4.90	-53.90	-13.00	-40.90
6	786.60	-62.10	-61.00	4.20	-56.80	-13.00	-43.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

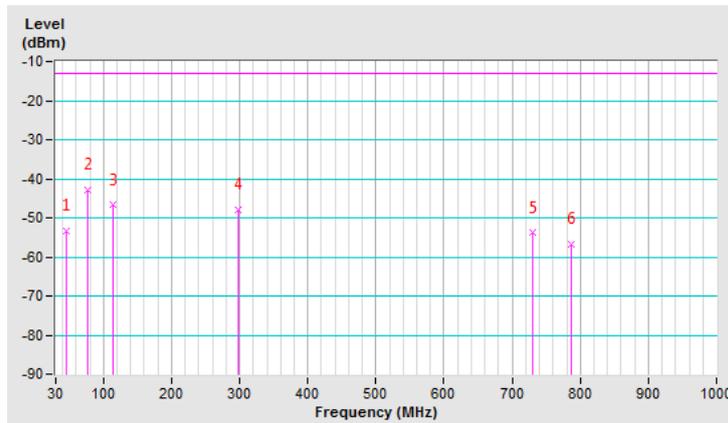


Mode	TX channel 9262 (1852.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-40.50	-38.10	-11.90	-50.00	-13.00	-37.00
2	68.80	-46.80	-47.60	-5.30	-52.90	-13.00	-39.90
3	142.52	-52.70	-55.50	-0.30	-55.80	-13.00	-42.80
4	175.50	-55.00	-57.80	2.30	-55.50	-13.00	-42.50
5	220.12	-54.20	-60.00	5.40	-54.60	-13.00	-41.60
6	935.98	-52.40	-47.60	3.90	-43.70	-13.00	-30.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

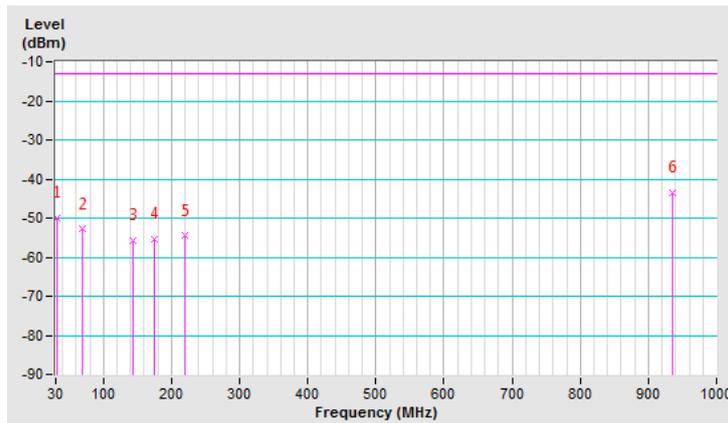

LTE Band 2, Channel Bandwidth: 20MHz


Mode	TX channel 19100 (1900.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	53.28	-51.90	-45.00	-8.50	-53.50	-13.00	-40.50
2	86.26	-47.90	-54.70	0.10	-54.60	-13.00	-41.60
3	148.34	-51.90	-55.90	-0.20	-56.10	-13.00	-43.10
4	218.18	-50.40	-63.80	5.40	-58.40	-13.00	-45.40
5	288.02	-42.60	-51.10	5.20	-45.90	-13.00	-32.90
6	937.92	-54.70	-51.50	3.90	-47.60	-13.00	-34.60

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

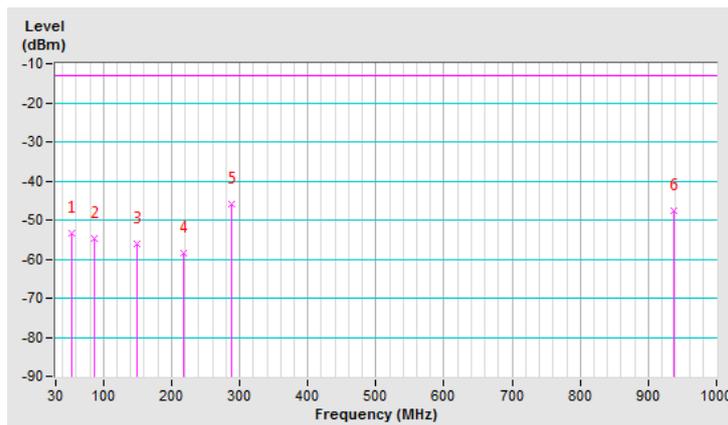


Mode	TX channel 19100 (1900.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	51.34	-38.60	-36.40	-8.90	-45.30	-13.00	-32.30
2	74.62	-36.70	-37.80	-3.40	-41.20	-13.00	-28.20
3	119.24	-43.80	-50.30	0.10	-50.20	-13.00	-37.20
4	165.80	-48.20	-49.60	1.20	-48.40	-13.00	-35.40
5	227.88	-53.80	-60.20	5.40	-54.80	-13.00	-41.80
6	935.98	-52.50	-47.70	3.90	-43.80	-13.00	-30.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

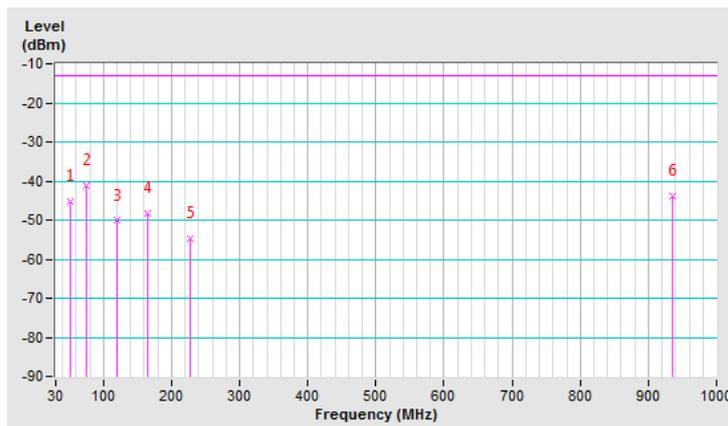


LTE Band 25, Channel Bandwidth: 5MHz

Mode	TX channel 26665 (1912.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	41.64	-55.00	-41.40	-10.60	-52.00	-13.00	-39.00
2	97.90	-46.60	-55.10	1.00	-54.10	-13.00	-41.10
3	150.28	-50.30	-54.90	-0.10	-55.00	-13.00	-42.00
4	222.06	-49.70	-63.30	5.40	-57.90	-13.00	-44.90
5	730.34	-58.10	-59.70	4.90	-54.80	-13.00	-41.80
6	932.10	-52.80	-49.60	3.90	-45.70	-13.00	-32.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

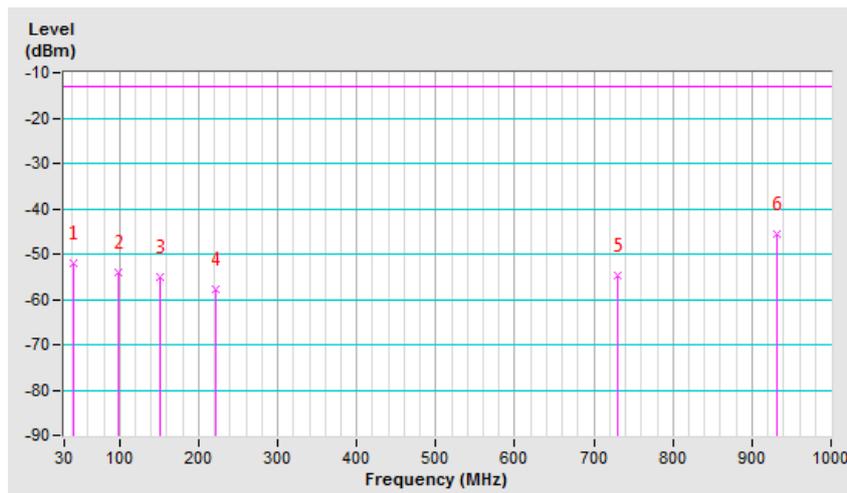


Mode	TX channel 26665 (1912.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-43.70	-41.00	-11.20	-52.20	-13.00	-39.20
2	55.22	-47.80	-45.70	-8.70	-54.40	-13.00	-41.40
3	220.12	-53.30	-59.10	5.40	-53.70	-13.00	-40.70
4	730.34	-56.40	-55.60	4.90	-50.70	-13.00	-37.70
5	901.06	-52.90	-49.60	3.90	-45.70	-13.00	-32.70
6	932.10	-54.70	-50.10	3.90	-46.20	-13.00	-33.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

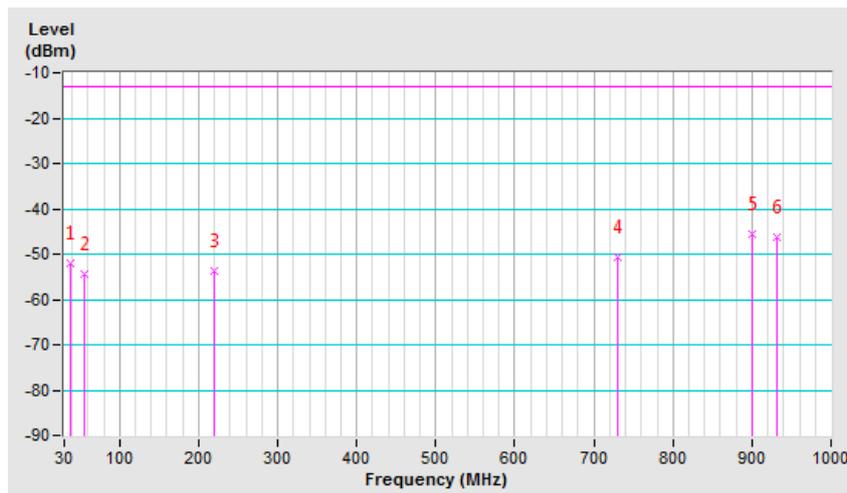

Above 1GHz
WCDMA Band 2

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-63.20	-57.10	7.10	-50.00	-13.00	-37.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-65.20	-59.10	7.10	-52.00	-13.00	-39.00

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-63.30	-57.50	7.10	-50.40	-13.00	-37.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-65.10	-59.20	7.10	-52.10	-13.00	-39.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 9538 (1907.6MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-63.20	-57.40	7.10	-50.30	-13.00	-37.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-64.80	-58.90	7.10	-51.80	-13.00	-38.80

Remarks:

1. $EIRP (dBm) = S.G \text{ Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor (dB)} = \text{Substitution Antenna Gain (dB)} - \text{Cable Loss (dB)}$.

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-65.70	-59.70	7.10	-52.60	-13.00	-39.60

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-67.30	-60.30	7.10	-53.20	-13.00	-40.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-65.10	-58.60	7.10	-51.50	-13.00	-38.50

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-67.10	-59.70	7.10	-52.60	-13.00	-39.60

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 19193 (1909.30MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-65.90	-59.20	7.10	-52.10	-13.00	-39.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-67.00	-59.30	7.10	-52.20	-13.00	-39.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-65.60	-59.60	7.10	-52.50	-13.00	-39.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-67.50	-60.40	7.10	-53.30	-13.00	-40.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-65.90	-59.40	7.10	-52.30	-13.00	-39.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-67.50	-60.10	7.10	-53.00	-13.00	-40.00

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 19175 (1907.50MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-65.10	-58.30	7.10	-51.20	-13.00	-38.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-67.10	-59.40	7.10	-52.30	-13.00	-39.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-65.60	-59.40	7.10	-52.30	-13.00	-39.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-67.40	-60.20	7.10	-53.10	-13.00	-40.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-65.60	-59.10	7.10	-52.00	-13.00	-39.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-67.00	-59.60	7.10	-52.50	-13.00	-39.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 19100 (1900.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-65.10	-58.20	7.10	-51.10	-13.00	-38.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-67.70	-60.00	7.10	-52.90	-13.00	-39.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 25, Channel Bandwidth 1.4MHz

Mode	TX channel 26047 (1850.7MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-75.30	-69.20	7.10	-62.10	-13.00	-49.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-73.90	-67.80	7.10	-60.70	-13.00	-47.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26365 (1882.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-76.30	-70.50	7.10	-63.40	-13.00	-50.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-75.50	-69.60	7.10	-62.50	-13.00	-49.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26683 (1914.3MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3828.60	-76.10	-70.20	7.10	-63.10	-13.00	-50.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3828.60	-76.60	-70.60	7.10	-63.50	-13.00	-50.50

Remarks:

1. $EIRP (dBm) = S.G \text{ Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor (dB)} = \text{Substitution Antenna Gain (dB)} - \text{Cable Loss (dB)}$.

LTE Band 25, Channel Bandwidth 5MHz

Mode	TX channel 26065 (1852.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-73.70	-67.60	7.10	-60.50	-13.00	-47.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-74.30	-68.20	7.10	-61.10	-13.00	-48.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26365 (1882.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-75.30	-69.50	7.10	-62.40	-13.00	-49.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-75.50	-69.60	7.10	-62.50	-13.00	-49.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26665 (1912.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3825.00	-73.30	-67.40	7.10	-60.30	-13.00	-47.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3825.00	-75.70	-69.70	7.10	-62.60	-13.00	-49.60

Remarks:

1. $EIRP (dBm) = S.G \text{ Value (dBm)} + \text{Correction Factor (dB)}$.
2. $\text{Correction Factor (dB)} = \text{Substitution Antenna Gain (dB)} - \text{Cable Loss (dB)}$.

LTE Band 25, Channel Bandwidth 20MHz

Mode	TX channel 26140 (1860.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-74.50	-68.50	7.10	-61.40	-13.00	-48.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-75.50	-69.40	7.10	-62.30	-13.00	-49.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26365 (1882.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-76.30	-70.50	7.10	-63.40	-13.00	-50.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-75.40	-69.50	7.10	-62.40	-13.00	-49.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 26590 (1905.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-74.10	-68.40	7.10	-61.30	-13.00	-48.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3810.00	-76.60	-70.80	7.10	-63.70	-13.00	-50.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---