

FCC Test Report

(PART 27)

Report No.: RF200518C05-8

FCC ID: B94HHF135P

Test Model: TPC-F135P

Marketing Name: HP Bridge

Received Date: May 18, 2020

Test Date: Jun. 16 ~ Sep. 09, 2020

Issued Date: Oct. 08, 2020

Applicant: HP Inc.

Address: 3390 East Harmony Road Fort Collins, Colorado 80528 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	13
3.1 General Description of Applied Standards and references	13
4 Test Types and Results	14
4.1 Output Power Measurement	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures	14
4.1.3 Test Setup	15
4.1.4 Test Results	16
4.2 Modulation Characteristics Measurement	30
4.2.1 Limits of Modulation Characteristics	30
4.2.2 Test Setup	30
4.2.3 Test Procedure	30
4.2.4 Test Results	31
4.3 Frequency Stability Measurement	33
4.3.1 Limits of Frequency Stability Measurement	33
4.3.2 Test Procedure	33
4.3.3 Test Setup	33
4.3.4 Test Results	34
4.4 Occupied Bandwidth Measurement	42
4.4.1 Limits of Occupied Bandwidth Measurement	42
4.4.2 Test Procedure	42
4.4.3 Test Setup	42
4.4.4 Test Results	43
4.5 Out-of-Band Emissions Measurement	47
4.5.1 Limits of Out-of-Band Emissions Measurement	47
4.5.2 Test Setup	47
4.5.3 Test Procedures	47
4.5.4 Test Results	48
4.6 Peak to Average Ratio	72
4.6.1 Limits of Peak to Average Ratio Measurement	72
4.6.2 Test Setup	72
4.6.3 Test Procedures	72
4.6.4 Test Results	73
4.7 Conducted Spurious Emissions	77
4.7.1 Limits of Conducted Spurious Emissions Measurement	77
4.7.2 Test Setup	77
4.7.3 Test Procedure	77
4.7.4 Test Results	78
4.8 Radiated Emission Measurement	102
4.8.1 Limits of Radiated Emission Measurement	102
4.8.2 Test Procedure	102
4.8.3 Deviation from Test Standard	102
4.8.4 Test Setup	103

4.8.5 Test Results	104
5 Pictures of Test Arrangements.....	116
Appendix – Information of the Testing Laboratories	117

Release Control Record

Issue No.	Description	Date Issued
RF200518C05-8	Original Release	Oct. 08, 2020

1 Certificate of Conformity

Product: HP tablet

Brand: HP

Test Model: TPC-F135P

Marketing Name: HP Bridge

Sample Status: Engineering Sample

Applicant: HP Inc.

Test Date: Jun. 16 ~ Sep. 09, 2020

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Oct. 08, 2020
Gina Liu / Specialist

Approved by : , **Date:** Oct. 08, 2020
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(m)(6)	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(m)(4)(6)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -18.10 dB at 115.36 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	3.86 dB
	200 MHz ~ 1000 MHz	3.87 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jun. 27, 2019	Jun. 26, 2020
			Jul. 07, 2020	Jul. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Mar. 31, 2020	Mar. 30, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
			Jul. 06, 2020	Jul. 05, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 11, 2019	Nov. 10, 2020
HORN Antenna SCHWARZBECK	9120D	209	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna ETS	3117	00034130	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 23, 2020	Mar. 22, 2021
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-SM- 8000	Cable-CH3-03 (309224+170907)	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Standard Temperature And Humidity Chamber GIANT FORCE	GTH-120-40-CP-AR	MAA1306-019	Sep. 10, 2019	Sep. 09, 2020
			Sep. 09, 2020	Sep. 08, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun 06, 2020	Jun 05, 2021
DC power supply Keysight	U8002A	MY56330015	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 25, 2019	Dec. 24, 2020
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 18, 2020	Jan. 17, 2021
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2019	Nov. 24, 2020

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 3.

3 General Information

3.1 General Description of EUT

Product	HP tablet	
Brand	HP	
Test Model	TPC-F135P	
Marketing Name	HP Bridge	
Status of EUT	Engineering Sample	
Power Supply Rating	3.8 Vdc (Li-ion battery) 5.0 / 9.0 / 12.0 Vdc (adapter)	
Modulation Type	QPSK, 16QAM, 64QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	218.776 mW (23.40 dBm)
	LTE Band 7 (Channel Bandwidth: 10 MHz)	229.087 mW (23.60 dBm)
	LTE Band 7 (Channel Bandwidth: 15 MHz)	223.872 mW (23.50 dBm)
	LTE Band 7 (Channel Bandwidth: 20 MHz)	223.872 mW (23.50 dBm)
	LTE Band 38 (Channel Bandwidth: 5 MHz)	204.174 mW (23.10 dBm)
	LTE Band 38 (Channel Bandwidth: 10 MHz)	223.872 mW (23.50 dBm)
	LTE Band 38 (Channel Bandwidth: 15 MHz)	218.776 mW (23.40 dBm)
	LTE Band 38 (Channel Bandwidth: 20 MHz)	218.776 mW (23.40 dBm)
Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M99D7W
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	18M0D7W
	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M98D7W
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 38 (Channel Bandwidth: 20 MHz)	18M0D7W
Antenna Type	PIFA Antenna with -2.15 dBi gain (for LTE Band 7) PIFA Antenna with -1.06 dBi gain (for LTE Band 38)	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	


Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	HP	DSA-18QFE FUS A	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 5.0 Vdc, 3 A, 15.0 W; +9.0 Vdc, 2.0 A, 18.0 W; 12.0 Vdc, 1.5A, 18 W
Battery	HP	HSP 1CP5/34/77	3.8 Vdc, 1500 mAh, 5.7 Wh
BT/WLAN Module	Qualcomm	SDM660-3	--
USB Cable	HP	WU-0093-00	1.47 m shielded cable w/o core
Holster	HP	HP Bridge Holster	HP holster Marketing Name: HP Bridge Holster

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

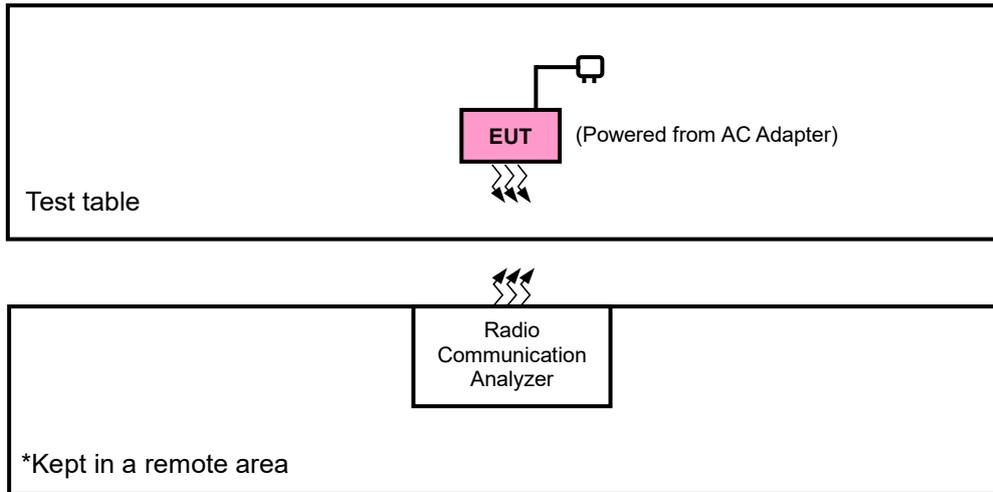

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	X-plane	X-plane
LTE Band 38	X-plane	X-plane

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20800 to 21400	21100	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth, out-of-band emissions and peak to average ratio items had been tested under QPSK, 16QAM, 64QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	37850 to 38150	38000	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Frequency Stability	37775 to 38225	37775, 38225	5 MHz	QPSK	25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK	50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 74 RB Offset 75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset 100 RB / 0 RB Offset
-	Conducted Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth, out-of-band emissions and peak to average ratio items had been tested under QPSK, 16QAM, 64QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	120 Vac, 60 Hz	Adair Peng
Modulation Characteristics	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu, Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	3.8Vdc	Gavin Wu, Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu, Getaz Yang
Out-of-Band Emissions	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu, Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu, Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu, Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Luis Lee, Noah Chang, Titan Hsu

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.1 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

3GPP TS 36.521-1 V16.3.0 (2019-12)

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2 watts transmitter output power” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 5 MHz ∙ 10 MHz ∙ 15 MHz ∙ 20 MHz for LTE mode, VBW ≥ 3 x RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

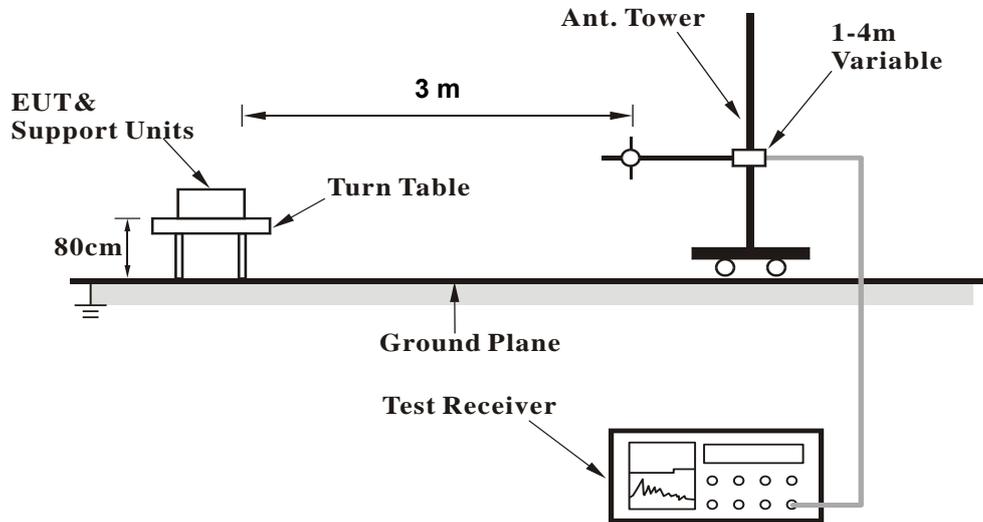

<Radiated Emission above 1 GHz>

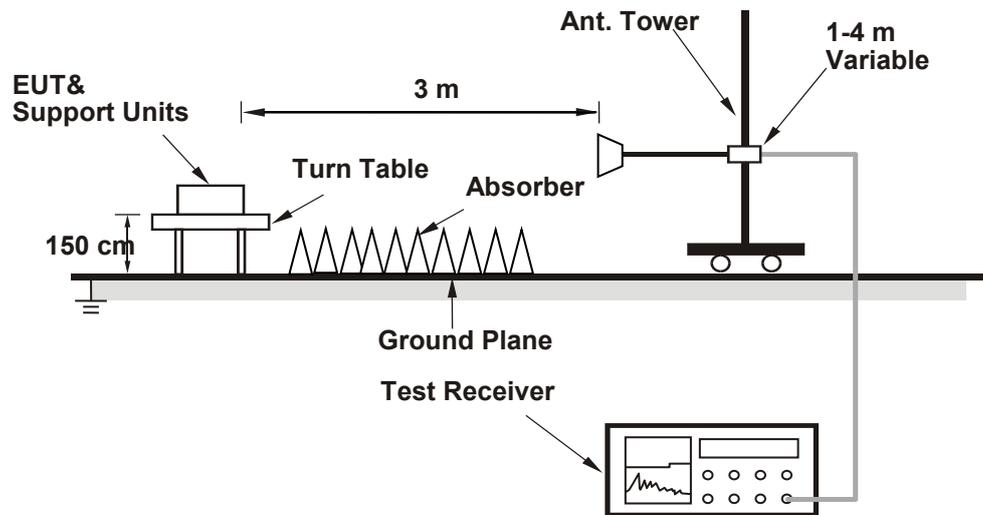

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
				20850	21100	21350						20825	21100	21375	
				Channel Frequency (MHz)								2510.0	2535.0	2560.0	
20M	QPSK	1	0	23.11	23.39	23.35	0	15M	QPSK	1	0	23.08	23.33	23.35	0
		1	50	22.81	23.08	23.05	0			1	37	22.77	23.08	23.01	0
		1	99	22.79	23.06	23.03	0			1	74	22.71	23.05	22.97	0
		50	0	22.07	22.34	22.31	1			36	0	22.00	22.31	22.30	1
		50	25	22.03	22.30	22.27	1			36	19	22.03	22.25	22.24	1
		50	50	22.01	22.28	22.25	1			36	39	22.01	22.25	22.20	1
	16QAM	100	0	22.09	22.36	22.33	1		75	0	22.08	22.32	22.31	1	
		1	0	22.35	22.62	22.59	1		16QAM	1	0	22.35	22.62	22.52	1
		1	50	22.23	22.50	22.47	1			1	37	22.18	22.43	22.42	1
		1	99	22.21	22.48	22.45	1			1	74	22.18	22.43	22.44	1
		50	0	21.28	21.55	21.52	2			36	0	21.19	21.53	21.47	2
		50	25	21.22	21.49	21.46	2			36	19	21.22	21.49	21.43	2
	50	50	21.19	21.46	21.43	2	36			39	21.17	21.38	21.39	2	
	64QAM	100	0	21.23	21.50	21.47	2		75	0	21.16	21.48	21.47	2	
		1	0	21.27	21.54	21.51	2		64QAM	1	0	21.25	21.44	21.45	2
		1	50	21.18	21.45	21.42	2			1	37	21.17	21.42	21.37	2
		1	99	21.11	21.38	21.35	2			1	74	21.10	21.37	21.26	2
		50	0	20.27	20.54	20.51	3			36	0	20.17	20.50	20.43	3
		50	25	20.17	20.44	20.41	3			36	19	20.08	20.35	20.35	3
	50	50	20.17	20.44	20.41	3	36			39	20.07	20.41	20.36	3	
	10M	QPSK	100	0	20.18	20.45	20.42		3	75	0	20.17	20.36	20.42	3
1			0	23.01	23.36	23.19	0	5M	QPSK	1	0	23.00	23.26	23.04	0
1			24	22.75	22.84	22.86	0			1	12	22.78	22.91	22.84	0
1			49	22.59	22.98	22.93	0			1	24	22.69	22.85	22.82	0
25			0	21.89	22.24	22.19	1			12	0	21.94	22.32	22.12	1
25			12	21.81	22.21	22.25	1			12	6	21.97	22.26	22.13	1
25		25	21.90	22.12	22.17	1	12			13	21.84	22.18	22.01	1	
16QAM		50	0	21.95	22.19	22.31	1		25	0	21.95	22.35	22.19	1	
		1	0	22.18	22.40	22.41	1		16QAM	1	0	22.20	22.57	22.52	1
		1	24	22.11	22.41	22.31	1			1	12	22.06	22.48	22.41	1
		1	49	22.09	22.46	22.27	1			1	24	22.04	22.41	22.35	1
		25	0	21.19	21.44	21.36	2			12	0	21.21	21.46	21.46	2
		25	12	21.00	21.44	21.32	2			12	6	21.20	21.38	21.35	2
25		25	21.00	21.22	21.33	2	12			13	21.06	21.35	21.25	2	
64QAM		50	0	21.13	21.45	21.34	2		25	0	21.12	21.25	21.34	2	
		1	0	21.14	21.37	21.45	2		64QAM	1	0	21.19	21.41	21.31	2
		1	24	21.12	21.32	21.36	2			1	12	21.07	21.30	21.21	2
		1	49	21.07	21.29	21.32	2			1	24	21.03	21.30	21.28	2
		25	0	20.07	20.40	20.46	3			12	0	20.17	20.45	20.46	3
		25	12	20.00	20.28	20.22	3			12	6	20.08	20.29	20.22	3
25		25	19.93	20.34	20.35	3	12			13	20.10	20.35	20.32	3	
		50	0	20.04	20.29	20.20	3		25	0	20.04	20.33	20.30	3	

LTE Band 38																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
				37850	38000	38150						37825	38000	38175			
				Channel Frequency (MHz)	2580.0	2595.0						2610.0	2577.5	2595.0		2612.5	
20M	QPSK	1	0	22.69	22.98	23.00	0	15M	QPSK	1	0	22.60	22.96	22.98	0		
		1	50	22.62	22.91	22.92	0			1	37	22.59	22.85	22.89	0		
		1	99	22.58	22.87	22.88	0			1	74	22.51	22.83	22.81	0		
		50	0	21.83	22.12	22.13	1			36	0	21.81	22.09	22.04	1		
		50	25	21.76	22.05	22.06	1			36	19	21.73	22.01	22.06	1		
		50	50	21.69	21.98	21.99	1			36	39	21.61	21.89	21.99	1		
		100	0	21.73	22.02	22.03	1			75	0	21.64	21.98	21.94	1		
	16QAM	1	0	21.88	22.17	22.18	1		16QAM	1	0	21.82	22.14	22.08	1		
		1	50	21.85	22.14	22.15	1			1	37	21.76	22.04	22.13	1		
		1	99	21.83	22.12	22.13	1			1	74	21.82	22.02	22.08	1		
		50	0	20.96	21.25	21.26	2			36	0	20.88	21.15	21.16	2		
		50	25	20.89	21.18	21.19	2			36	19	20.80	21.14	21.15	2		
		50	50	20.82	21.11	21.12	2			36	39	20.78	21.06	21.12	2		
		100	0	20.88	21.17	21.18	2			75	0	20.84	21.15	21.17	2		
	64QAM	1	0	20.79	21.13	21.10	2		64QAM	1	0	20.77	21.10	21.13	2		
		1	50	20.75	21.14	21.09	2			1	37	20.63	21.07	21.04	2		
		1	99	20.79	21.12	21.08	2			1	74	20.71	21.00	21.09	2		
		50	0	19.90	20.22	20.19	3			36	0	19.74	20.13	20.17	3		
		50	25	19.89	20.09	20.14	3			36	19	19.68	20.00	20.08	3		
		50	50	19.72	20.08	20.09	3			36	39	19.70	19.98	20.00	3		
		100	0	19.81	20.15	20.12	3			75	0	19.70	19.98	20.04	3		
	10M	QPSK	1	0	22.46	22.78	22.90		0	5M	QPSK	1	0	22.57	22.86	22.81	0
			1	24	22.50	22.84	22.84		0			1	12	22.51	22.78	22.69	0
			1	49	22.50	22.75	22.75		0			1	24	22.41	22.70	22.64	0
25			0	21.70	22.10	22.11	1	12	0			21.62	21.99	22.03	1		
25			12	21.65	21.93	21.93	1	12	6			21.66	21.98	21.80	1		
25			25	21.47	21.80	21.81	1	12	13			21.50	21.80	21.67	1		
50			0	21.64	21.85	21.82	1	25	0			21.62	21.98	21.75	1		
16QAM		1	0	21.81	22.02	22.07	1	16QAM	1		0	21.73	22.04	22.04	1		
		1	24	21.67	22.05	22.09	1		1		12	21.72	21.90	21.97	1		
		1	49	21.59	21.92	22.00	1		1		24	21.71	21.95	22.07	1		
		25	0	20.82	21.08	21.21	2		12		0	20.73	21.14	21.15	2		
		25	12	20.77	21.09	21.14	2		12		6	20.81	21.16	21.11	2		
		25	25	20.74	20.93	21.03	2		12		13	20.73	21.00	21.07	2		
		50	0	20.72	21.02	21.13	2		25		0	20.67	21.01	21.13	2		
64QAM		1	0	20.76	20.92	21.05	2	64QAM	1		0	20.84	21.01	21.00	2		
		1	24	20.62	20.95	20.92	2		1		12	20.68	21.07	21.02	2		
		1	49	20.66	20.99	21.06	2		1		24	20.73	21.02	20.88	2		
		25	0	19.76	20.15	20.14	3		12		0	19.82	20.02	20.23	3		
		25	12	19.78	20.10	20.08	3		12		6	19.73	20.11	19.98	3		
		25	25	19.74	19.96	20.03	3		12		13	19.64	19.98	19.96	3		
		50	0	19.69	19.99	20.08	3		25		0	19.79	20.00	20.00	3		

EIRP Power (dBm)

Modulation Type: QPSK

LTE Band 7, Channel Bandwidth: 5MHz

MODE		TX channel 20775, 21100, 21425					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-18.70	22.50	0.70	23.20	33.00	-9.80
2	2535.0	-18.50	22.70	0.70	23.40	33.00	-9.60
3	2567.5	-18.90	22.30	0.80	23.10	33.00	-9.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-23.60	18.00	0.70	18.70	33.00	-14.30
2	2535.0	-24.00	18.10	0.70	18.80	33.00	-14.20
3	2567.5	-24.20	18.30	0.80	19.10	33.00	-13.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 10MHz

MODE		TX channel 20800, 21100, 21400					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-18.30	22.90	0.70	23.60	33.00	-9.40
2	2535.0	-18.80	22.40	0.70	23.10	33.00	-9.90
3	2565.0	-19.00	22.20	0.80	23.00	33.00	-10.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-23.00	18.60	0.70	19.30	33.00	-13.70
2	2535.0	-23.60	18.50	0.70	19.20	33.00	-13.80
3	2565.0	-24.70	17.80	0.80	18.60	33.00	-14.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 15MHz

MODE		TX channel 20825, 21100, 21375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-18.90	22.30	0.70	23.00	33.00	-10.00
2	2535.0	-18.80	22.40	0.70	23.10	33.00	-9.90
3	2562.5	-18.50	22.70	0.80	23.50	33.00	-9.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-23.60	18.10	0.70	18.80	33.00	-14.20
2	2535.0	-23.70	18.40	0.70	19.10	33.00	-13.90
3	2562.5	-23.90	18.50	0.80	19.30	33.00	-13.70

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 20MHz

MODE		TX channel 20850, 21100, 21350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-18.40	22.80	0.70	23.50	33.00	-9.50
2	2535.0	-18.70	22.50	0.70	23.20	33.00	-9.80
3	2560.0	-18.90	22.30	0.80	23.10	33.00	-9.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-23.00	18.70	0.70	19.40	33.00	-13.60
2	2535.0	-23.60	18.50	0.70	19.20	33.00	-13.80
3	2560.0	-23.80	18.60	0.80	19.40	33.00	-13.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 5MHz

MODE		TX channel 37775, 38000, 38225					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-18.90	22.30	0.80	23.10	33.00	-9.90
2	2595.0	-19.00	22.10	0.90	23.00	33.00	-10.00
3	2617.5	-19.30	21.80	0.90	22.70	33.00	-10.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-25.00	17.60	0.80	18.40	33.00	-14.60
2	2595.0	-25.30	17.50	0.90	18.40	33.00	-14.60
3	2617.5	-25.40	17.30	0.90	18.20	33.00	-14.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 10MHz

MODE		TX channel 37800, 38000, 38200					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-18.50	22.70	0.80	23.50	33.00	-9.50
2	2595.0	-18.60	22.50	0.90	23.40	33.00	-9.60
3	2615.0	-18.70	22.40	0.90	23.30	33.00	-9.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-25.80	16.80	0.80	17.60	33.00	-15.40
2	2595.0	-25.60	17.20	0.90	18.10	33.00	-14.90
3	2615.0	-25.30	17.50	0.90	18.40	33.00	-14.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 15MHz

MODE		TX channel 37825, 38000, 38175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-19.00	22.20	0.80	23.00	33.00	-10.00
2	2595.0	-18.60	22.50	0.90	23.40	33.00	-9.60
3	2612.5	-18.70	22.40	0.90	23.30	33.00	-9.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-25.80	16.90	0.80	17.70	33.00	-15.30
2	2595.0	-25.60	17.20	0.90	18.10	33.00	-14.90
3	2612.5	-26.10	16.70	0.90	17.60	33.00	-15.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 20MHz

MODE		TX channel 37850, 38000, 38150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-19.00	22.20	0.80	23.00	33.00	-10.00
2	2595.0	-18.90	22.20	0.90	23.10	33.00	-9.90
3	2610.0	-18.60	22.50	0.90	23.40	33.00	-9.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-25.60	17.10	0.80	17.90	33.00	-15.10
2	2595.0	-26.00	16.80	0.90	17.70	33.00	-15.30
3	2610.0	-25.60	17.20	0.90	18.10	33.00	-14.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 16QAM

LTE Band 7, Channel Bandwidth: 5MHz

MODE		TX channel 20775, 21100, 21425					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-19.80	21.40	0.70	22.10	33.00	-10.90
2	2535.0	-19.70	21.50	0.70	22.20	33.00	-10.80
3	2567.5	-20.00	21.20	0.80	22.00	33.00	-11.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-24.40	17.20	0.70	17.90	33.00	-15.10
2	2535.0	-24.80	17.30	0.70	18.00	33.00	-15.00
3	2567.5	-25.20	17.30	0.80	18.10	33.00	-14.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 10MHz

MODE		TX channel 20800, 21100, 21400					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-19.30	21.90	0.70	22.60	33.00	-10.40
2	2535.0	-19.80	21.40	0.70	22.10	33.00	-10.90
3	2565.0	-20.00	21.20	0.80	22.00	33.00	-11.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-24.20	17.40	0.70	18.10	33.00	-14.90
2	2535.0	-24.60	17.50	0.70	18.20	33.00	-14.80
3	2565.0	-25.40	17.10	0.80	17.90	33.00	-15.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 15MHz

MODE		TX channel 20825, 21100, 21375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-19.70	21.50	0.70	22.20	33.00	-10.80
2	2535.0	-19.90	21.30	0.70	22.00	33.00	-11.00
3	2562.5	-19.70	21.50	0.80	22.30	33.00	-10.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-24.60	17.10	0.70	17.80	33.00	-15.20
2	2535.0	-24.70	17.40	0.70	18.10	33.00	-14.90
3	2562.5	-25.10	17.30	0.80	18.10	33.00	-14.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 20MHz

MODE		TX channel 20850, 21100, 21350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-19.40	21.80	0.70	22.50	33.00	-10.50
2	2535.0	-19.80	21.40	0.70	22.10	33.00	-10.90
3	2560.0	-20.00	21.20	0.80	22.00	33.00	-11.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-24.20	17.50	0.70	18.20	33.00	-14.80
2	2535.0	-24.70	17.40	0.70	18.10	33.00	-14.90
3	2560.0	-24.60	17.80	0.80	18.60	33.00	-14.40

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 5MHz

MODE		TX channel 37775, 38000, 38225					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-20.50	20.70	0.80	21.50	33.00	-11.50
2	2595.0	-19.60	21.50	0.90	22.40	33.00	-10.60
3	2617.5	-20.40	20.70	0.90	21.60	33.00	-11.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-26.20	16.40	0.80	17.20	33.00	-15.80
2	2595.0	-26.10	16.70	0.90	17.60	33.00	-15.40
3	2617.5	-26.30	16.40	0.90	17.30	33.00	-15.70

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 10MHz

MODE		TX channel 37800, 38000, 38200					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-19.30	21.90	0.80	22.70	33.00	-10.30
2	2595.0	-19.60	21.50	0.90	22.40	33.00	-10.60
3	2615.0	-19.70	21.40	0.90	22.30	33.00	-10.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-26.60	16.00	0.80	16.80	33.00	-16.20
2	2595.0	-26.80	16.00	0.90	16.90	33.00	-16.10
3	2615.0	-26.50	16.30	0.90	17.20	33.00	-15.80

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 15MHz

MODE		TX channel 37825, 38000, 38175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-19.80	21.40	0.80	22.20	33.00	-10.80
2	2595.0	-19.70	21.40	0.90	22.30	33.00	-10.70
3	2612.5	-19.80	21.30	0.90	22.20	33.00	-10.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-26.90	15.80	0.80	16.60	33.00	-16.40
2	2595.0	-26.50	16.30	0.90	17.20	33.00	-15.80
3	2612.5	-27.20	15.60	0.90	16.50	33.00	-16.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 20MHz

MODE		TX channel 37850, 38000, 38150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-20.00	21.20	0.80	22.00	33.00	-11.00
2	2595.0	-19.70	21.40	0.90	22.30	33.00	-10.70
3	2610.0	-19.50	21.60	0.90	22.50	33.00	-10.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-27.00	15.70	0.80	16.50	33.00	-16.50
2	2595.0	-27.10	15.70	0.90	16.60	33.00	-16.40
3	2610.0	-26.20	16.60	0.90	17.50	33.00	-15.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 64QAM

LTE Band 7, Channel Bandwidth: 5MHz

MODE		TX channel 20775, 21100, 21425					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-20.20	21.00	0.70	21.70	33.00	-11.30
2	2535.0	-20.20	21.00	0.70	21.70	33.00	-11.30
3	2567.5	-20.60	20.60	0.80	21.40	33.00	-11.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2502.5	-25.10	16.50	0.70	17.20	33.00	-15.80
2	2535.0	-25.40	16.70	0.70	17.40	33.00	-15.60
3	2567.5	-25.80	16.70	0.80	17.50	33.00	-15.50

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 10MHz

MODE		TX channel 20800, 21100, 21400					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-19.70	21.50	0.70	22.20	33.00	-10.80
2	2535.0	-20.20	21.00	0.70	21.70	33.00	-11.30
3	2565.0	-20.60	20.60	0.80	21.40	33.00	-11.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2505.0	-24.60	17.00	0.70	17.70	33.00	-15.30
2	2535.0	-25.10	17.00	0.70	17.70	33.00	-15.30
3	2565.0	-25.90	16.60	0.80	17.40	33.00	-15.60

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 15MHz

MODE		TX channel 20825, 21100, 21375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-20.10	21.10	0.70	21.80	33.00	-11.20
2	2535.0	-20.50	20.70	0.70	21.40	33.00	-11.60
3	2562.5	-20.30	20.90	0.80	21.70	33.00	-11.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2507.5	-25.20	16.50	0.70	17.20	33.00	-15.80
2	2535.0	-25.20	16.90	0.70	17.60	33.00	-15.40
3	2562.5	-25.50	16.90	0.80	17.70	33.00	-15.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 7, Channel Bandwidth: 20MHz

MODE		TX channel 20850, 21100, 21350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-19.90	21.30	0.70	22.00	33.00	-11.00
2	2535.0	-20.30	20.90	0.70	21.60	33.00	-11.40
3	2560.0	-20.60	20.60	0.80	21.40	33.00	-11.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2510.0	-24.80	16.90	0.70	17.60	33.00	-15.40
2	2535.0	-25.20	16.90	0.70	17.60	33.00	-15.40
3	2560.0	-25.20	17.20	0.80	18.00	33.00	-15.00

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 5MHz

MODE		TX channel 37775, 38000, 38225					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-21.10	20.10	0.80	20.90	33.00	-12.10
2	2595.0	-20.00	21.10	0.90	22.00	33.00	-11.00
3	2617.5	-21.00	20.10	0.90	21.00	33.00	-12.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2572.5	-26.80	15.80	0.80	16.60	33.00	-16.40
2	2595.0	-26.60	16.20	0.90	17.10	33.00	-15.90
3	2617.5	-26.70	16.00	0.90	16.90	33.00	-16.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 10MHz

MODE		TX channel 37800, 38000, 38200					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-19.70	21.50	0.80	22.30	33.00	-10.70
2	2595.0	-20.20	20.90	0.90	21.80	33.00	-11.20
3	2615.0	-20.30	20.80	0.90	21.70	33.00	-11.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2575.0	-27.10	15.50	0.80	16.30	33.00	-16.70
2	2595.0	-27.20	15.60	0.90	16.50	33.00	-16.50
3	2615.0	-26.90	15.90	0.90	16.80	33.00	-16.20

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 15MHz

MODE		TX channel 37825, 38000, 38175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-20.30	20.90	0.80	21.70	33.00	-11.30
2	2595.0	-20.20	20.90	0.90	21.80	33.00	-11.20
3	2612.5	-20.30	20.80	0.90	21.70	33.00	-11.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2577.5	-27.30	15.40	0.80	16.20	33.00	-16.80
2	2595.0	-27.00	15.80	0.90	16.70	33.00	-16.30
3	2612.5	-27.60	15.20	0.90	16.10	33.00	-16.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 38, Channel Bandwidth: 20MHz

MODE		TX channel 37850, 38000, 38150					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-20.70	20.50	0.80	21.30	33.00	-11.70
2	2595.0	-20.30	20.80	0.90	21.70	33.00	-11.30
3	2610.0	-19.90	21.20	0.90	22.10	33.00	-10.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2580.0	-27.50	15.20	0.80	16.00	33.00	-17.00
2	2595.0	-27.50	15.30	0.90	16.20	33.00	-16.80
3	2610.0	-26.80	16.00	0.90	16.90	33.00	-16.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A

4.2.2 Test Setup



4.2.3 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results




Spectrum Plot of Measurement
LTE Band 38
Channel 38000


QPSK

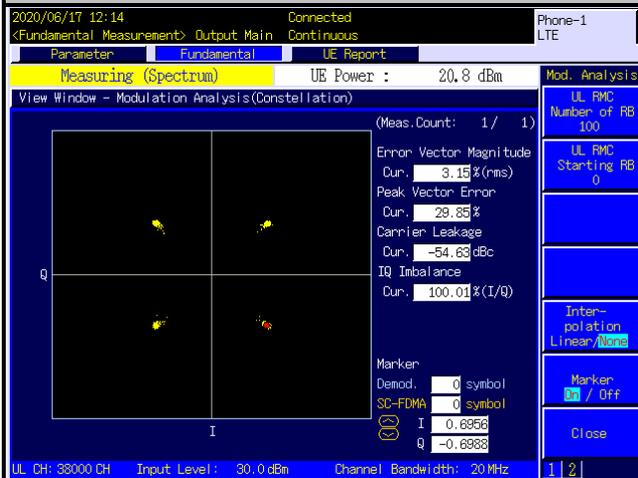

16QAM

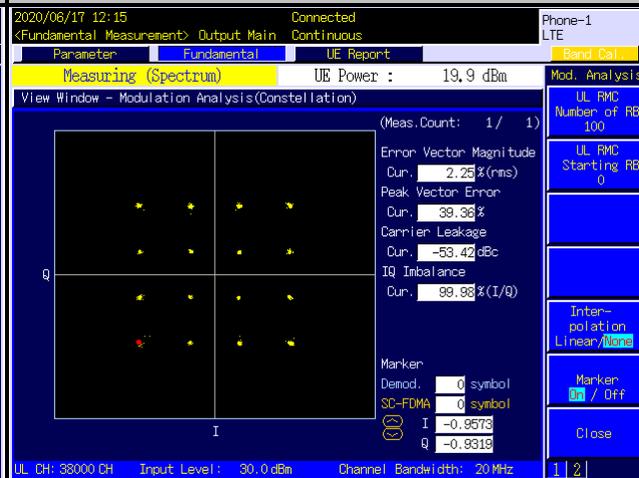

64QAM

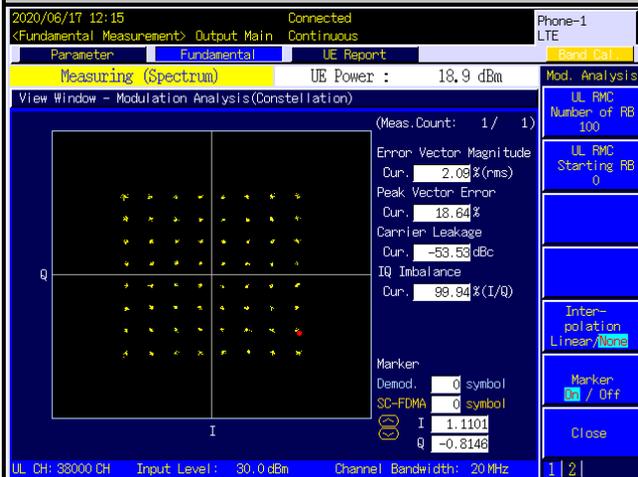

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

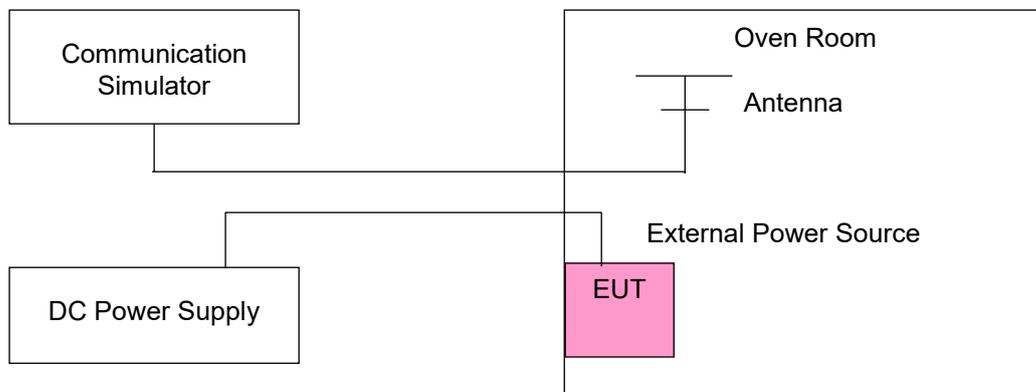

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2502.500002	0.001	2567.499997	-0.001
3.23	2502.500003	0.001	2567.499997	-0.001
4.37	2502.500002	0.001	2567.499999	0.000

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2502.500002	0.001	2567.500003	0.001
-20	2502.500001	0.000	2567.500002	0.001
-10	2502.500003	0.001	2567.500004	0.002
0	2502.500001	0.000	2567.500002	0.001
10	2502.499999	-0.001	2567.500004	0.001
20	2502.499998	-0.001	2567.500002	0.001
30	2502.499997	-0.001	2567.500001	0.000
40	2502.499998	-0.001	2567.499999	-0.001
50	2502.499997	-0.001	2567.499999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2505.000003	0.001	2564.999998	-0.001
3.23	2505.000002	0.001	2564.999999	0.000
4.37	2505.000001	0.001	2564.999998	-0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2505.000001	0.000	2565.000002	0.001
-20	2505.000004	0.001	2565.000001	0.000
-10	2505.000002	0.001	2565.000002	0.001
0	2505.000002	0.001	2565.000001	0.001
10	2504.999998	-0.001	2565.000003	0.001
20	2504.999997	-0.001	2565.000002	0.001
30	2504.999997	-0.001	2565.000003	0.001
40	2504.999996	-0.001	2564.999997	-0.001
50	2504.999998	-0.001	2564.999997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2507.500002	0.001	2562.499998	-0.001
3.23	2507.500004	0.002	2562.499999	-0.001
4.37	2507.500003	0.001	2562.499997	-0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2507.500003	0.001	2562.500003	0.001
-20	2507.500002	0.001	2562.500003	0.001
-10	2507.500001	0.000	2562.500001	0.001
0	2507.500003	0.001	2562.500001	0.001
10	2507.499998	-0.001	2562.500002	0.001
20	2507.499996	-0.001	2562.500002	0.001
30	2507.499999	0.000	2562.500003	0.001
40	2507.499997	-0.001	2562.499998	-0.001
50	2507.499998	-0.001	2562.499996	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2510.000001	0.000	2559.999996	-0.001
3.23	2510.000003	0.001	2559.999997	-0.001
4.37	2510.000004	0.001	2559.999997	-0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2510.000002	0.001	2560.000002	0.001
-20	2510.000002	0.001	2560.000002	0.001
-10	2510.000003	0.001	2560.000003	0.001
0	2510.000003	0.001	2560.000003	0.001
10	2509.999998	-0.001	2560.000003	0.001
20	2509.999998	-0.001	2560.000001	0.001
30	2509.999998	-0.001	2560.000004	0.002
40	2509.999998	-0.001	2559.999997	-0.001
50	2509.999999	-0.001	2559.999998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2572.500004	0.001	2617.500003	0.001
3.23	2572.500004	0.002	2617.500004	0.001
4.37	2572.500002	0.001	2617.500003	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2572.500003	0.001	2617.500001	0.000
-20	2572.500003	0.001	2617.500002	0.001
-10	2572.500004	0.002	2617.500002	0.001
0	2572.499999	0.000	2617.499999	0.000
10	2572.499996	-0.001	2617.499998	-0.001
20	2572.499997	-0.001	2617.499999	0.000
30	2572.499999	0.000	2617.499998	-0.001
40	2572.499998	-0.001	2617.499998	-0.001
50	2572.499997	-0.001	2617.499997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2575.000003	0.001	2615.000003	0.001
3.23	2575.000004	0.001	2615.000003	0.001
4.37	2575.000002	0.001	2615.000002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2575.000002	0.001	2615.000002	0.001
-20	2575.000004	0.001	2615.000003	0.001
-10	2575.000003	0.001	2615.000003	0.001
0	2574.999997	-0.001	2614.999999	-0.001
10	2574.999999	-0.001	2614.999998	-0.001
20	2574.999996	-0.002	2614.999996	-0.001
30	2574.999998	-0.001	2614.999998	-0.001
40	2574.999999	0.000	2614.999997	-0.001
50	2574.999997	-0.001	2614.999996	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2577.500002	0.001	2612.500001	0.000
3.23	2577.500002	0.001	2612.500003	0.001
4.37	2577.500003	0.001	2612.500002	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2577.500003	0.001	2612.500003	0.001
-20	2577.500003	0.001	2612.500002	0.001
-10	2577.500003	0.001	2612.500001	0.001
0	2577.499999	-0.001	2612.499997	-0.001
10	2577.499998	-0.001	2612.499998	-0.001
20	2577.499999	-0.001	2612.499998	-0.001
30	2577.499997	-0.001	2612.499998	-0.001
40	2577.499998	-0.001	2612.499999	-0.001
50	2577.499999	0.000	2612.499997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.8	2580.000003	0.001	2610.000003	0.001
3.23	2580.000002	0.001	2610.000003	0.001
4.37	2580.000003	0.001	2610.000000	0.001

Note: The applicant defined the normal working voltage is from 3.23 Vdc to 4.37 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2580.000002	0.001	2610.000003	0.001
-20	2580.000003	0.001	2610.000001	0.000
-10	2580.000002	0.001	2610.000002	0.001
0	2579.999997	-0.001	2609.999999	0.000
10	2579.999999	-0.001	2609.999998	-0.001
20	2579.999997	-0.001	2609.999998	-0.001
30	2579.999999	-0.001	2609.999997	-0.001
40	2579.999997	-0.001	2609.999997	-0.001
50	2579.999997	-0.001	2609.999999	0.000

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

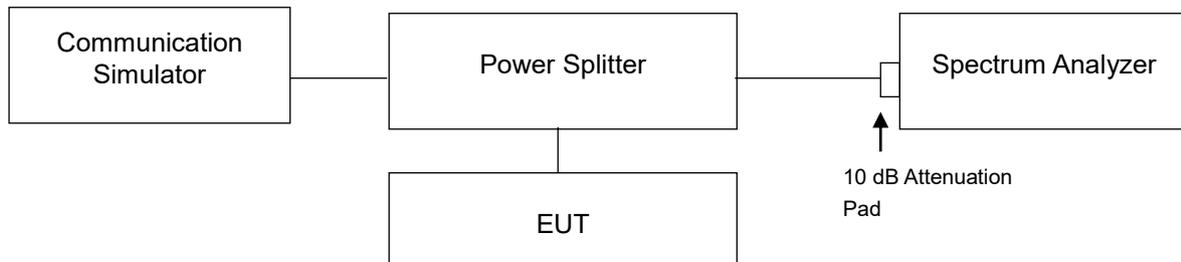

4.4.4 Test Results

LTE Band 7							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20775	2502.5	4.4940	4.4985	4.5021	4.825	4.811	4.853
21100	2535.0	4.4963	4.4987	4.4988	4.810	4.829	4.816
21425	2567.5	4.4959	4.5012	4.5024	4.819	4.849	4.847

Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20800	2505.0	8.9647	8.9681	8.9712	9.551	9.537	9.529
21100	2535.0	8.9753	8.9858	8.9802	9.525	9.532	9.521
21400	2565.0	8.9766	8.9776	8.9724	9.536	9.533	9.545



LTE Band 7

Channel Bandwidth: 15 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20825	2507.5	13.455	13.438	13.420	14.51	14.28	14.25
21100	2535.0	13.458	13.450	13.450	14.27	14.26	14.27
21375	2562.5	13.450	13.440	13.430	14.27	14.25	14.25

Channel Bandwidth: 20 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20850	2510.0	17.934	17.928	17.912	19.73	19.11	19.01
21100	2535.0	17.930	17.955	17.950	19.08	19.04	19.04
21350	2560.0	17.920	17.925	17.910	19.10	19.04	19.03

Spectrum Plot of Worst Value

99 % Occupied Bandwidth 15 MHz / QPSK



26 dB Bandwidth 15 MHz / QPSK



20 MHz / 16QAM



20 MHz / QPSK



LTE Band 38							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
37775	2572.5	4.4971	4.4950	4.5021	4.857	4.801	4.799
38000	2595.0	4.4972	4.4938	4.5013	4.796	4.806	4.798
38225	2617.5	4.4963	4.4961	4.5047	4.805	4.792	4.819

Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
37800	2575.0	8.9557	8.9685	8.9637	9.536	9.508	9.515
38000	2595.0	8.9593	8.9680	8.9720	9.490	9.506	9.512
38200	2615.0	8.9630	8.9785	8.9711	9.502	9.509	9.508



LTE Band 38							
Channel Bandwidth: 15 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
37825	2577.5	13.438	13.432	13.433	14.30	14.24	14.21
38000	2595.0	13.448	13.439	13.442	14.26	14.23	14.24
38175	2612.5	13.453	13.451	13.447	14.25	14.25	14.27

Channel Bandwidth: 20 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
37850	2580.0	17.900	17.890	17.909	19.03	18.99	19.00
38000	2595.0	17.918	17.918	17.934	19.05	19.00	19.03
38150	2610.0	17.942	17.935	17.958	19.03	19.03	19.06




4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53(m)(4)&(6) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.5.2 Test Setup

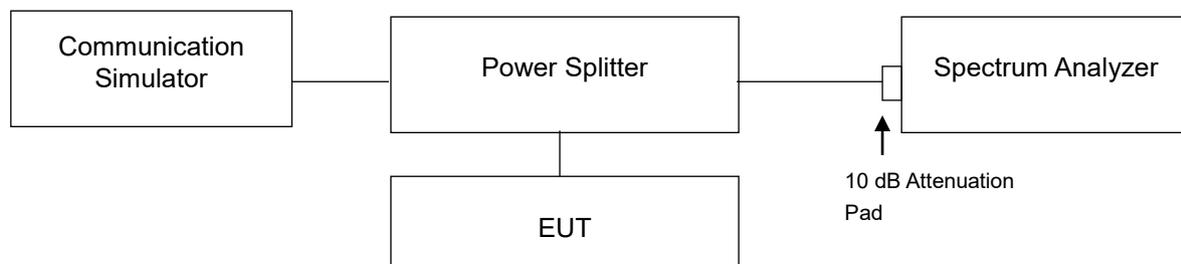

4.5.3 Test Procedures


- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. Record the max. trace plot into the test report.

4.5.4 Test Results

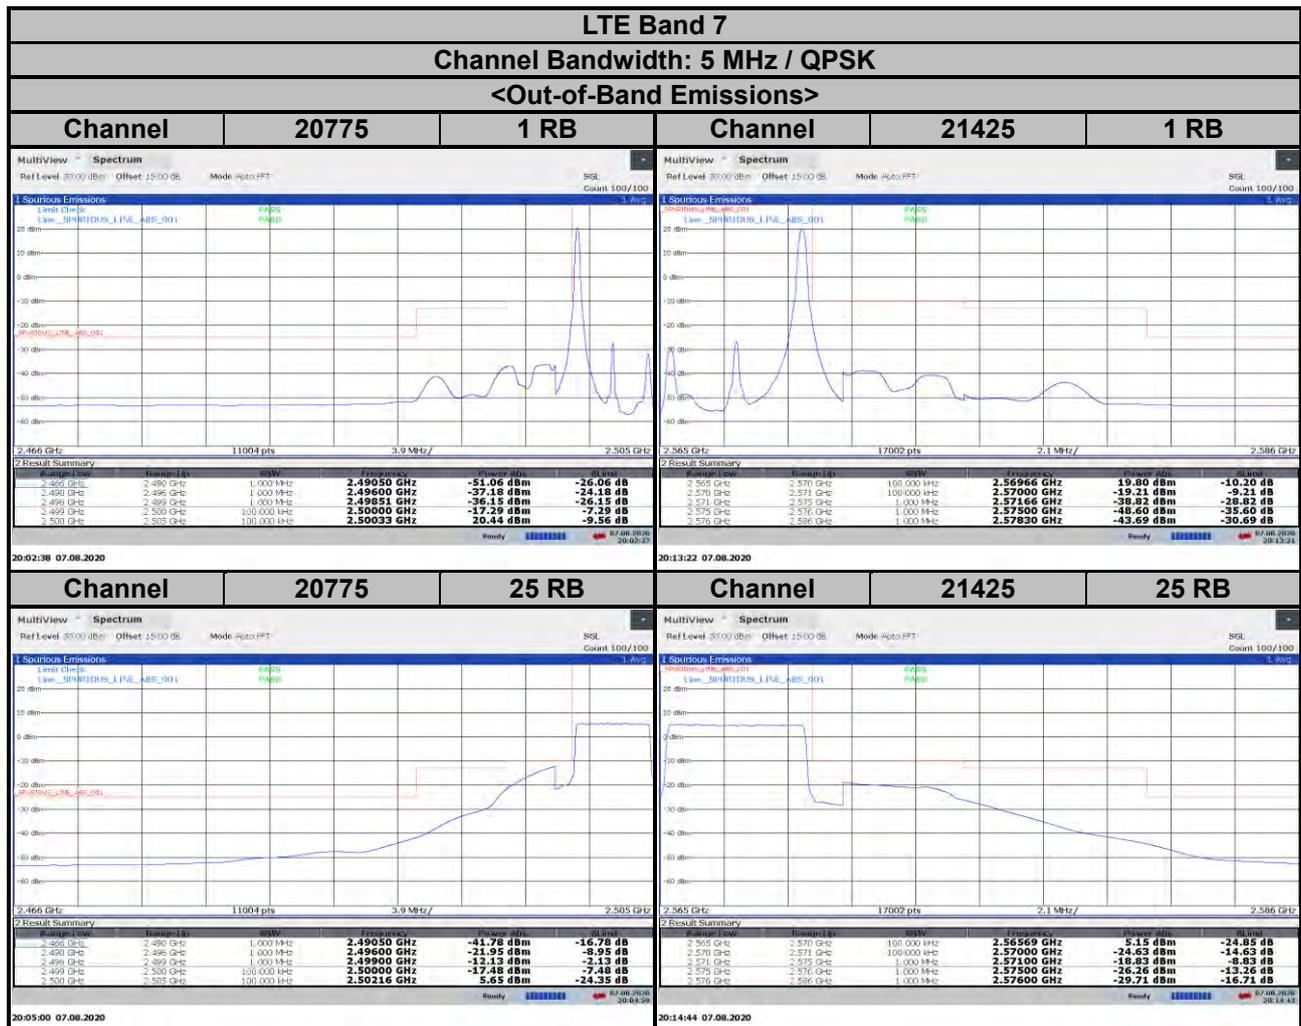

LTE Band 7
Channel Bandwidth: 5 MHz / 16QAM


<Out-of-Band Emissions>

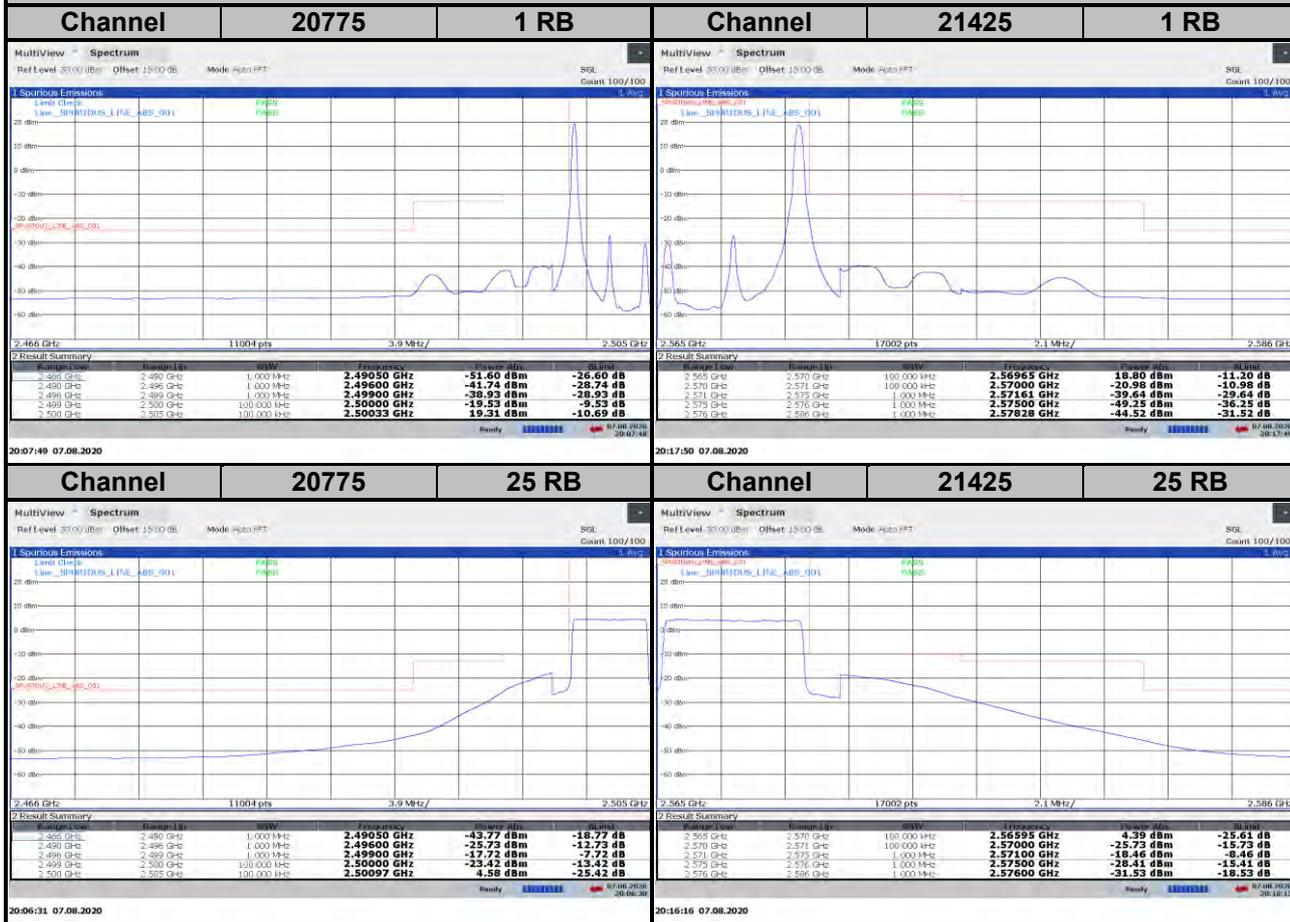

LTE Band 7

Channel Bandwidth: 5 MHz / 64QAM


<Out-of-Band Emissions>

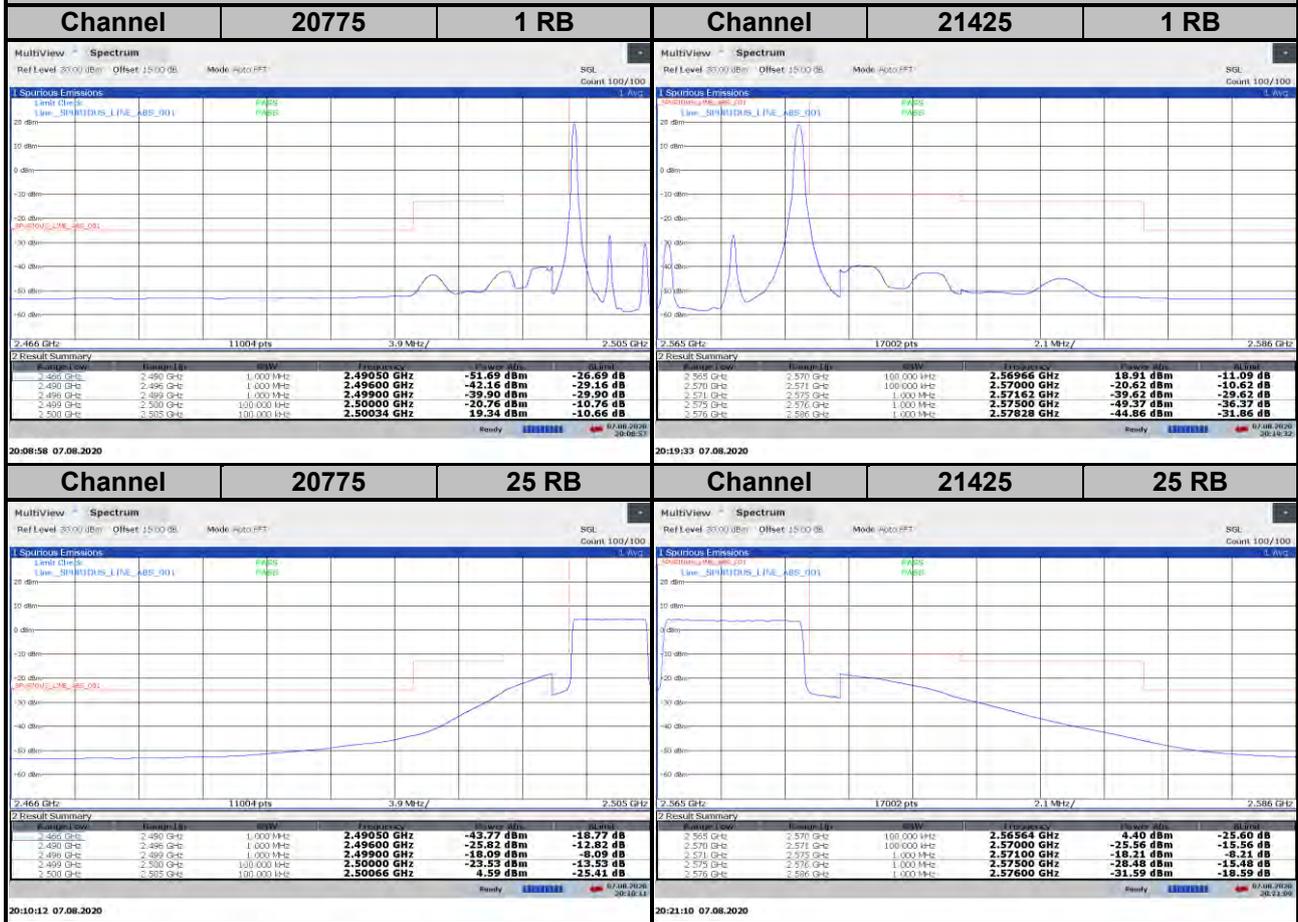

LTE Band 7


Channel Bandwidth: 10 MHz / QPSK

<Out-of-Band Emissions>


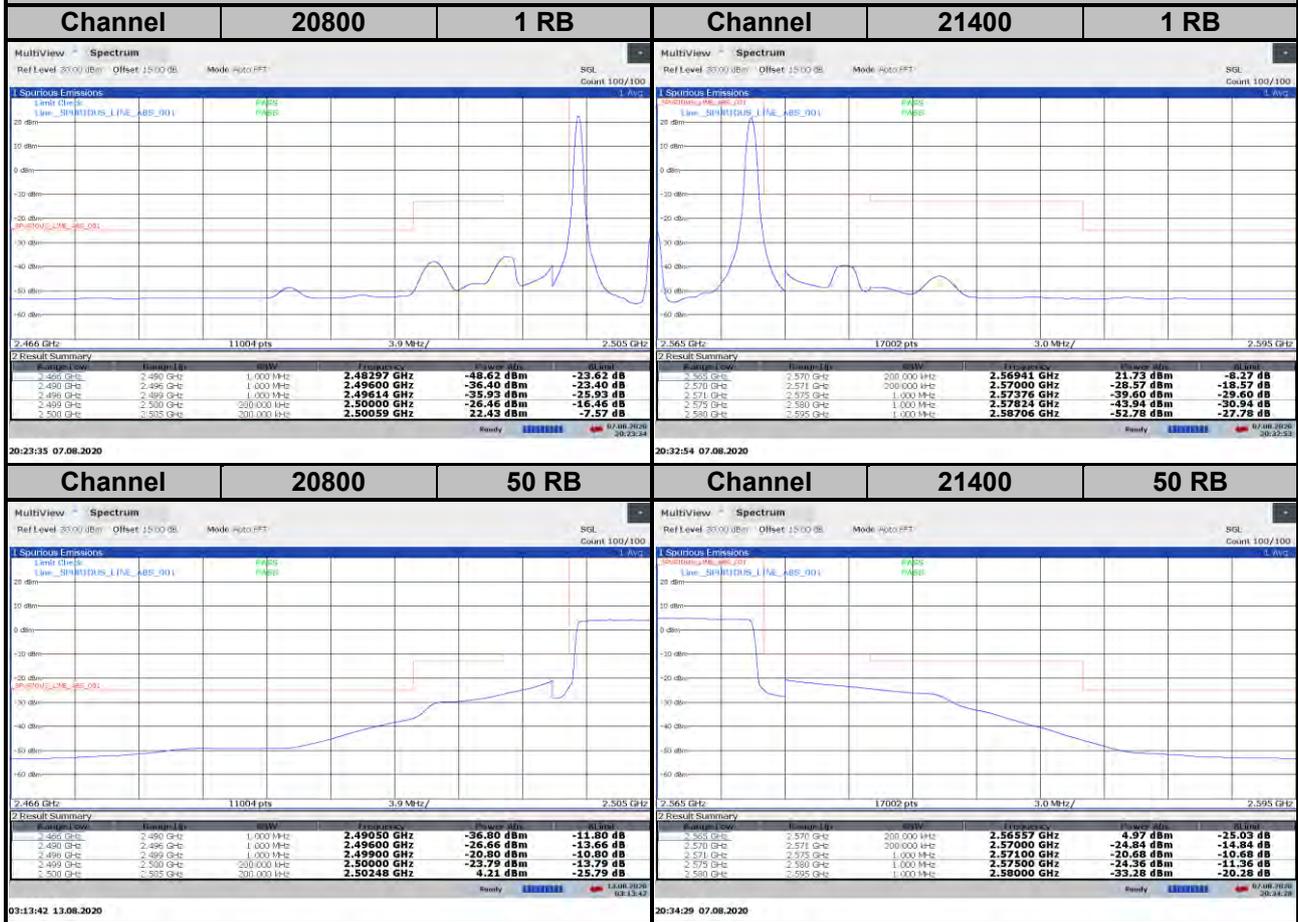


LTE Band 7
Channel Bandwidth: 10 MHz / 16QAM



<Out-of-Band Emissions>

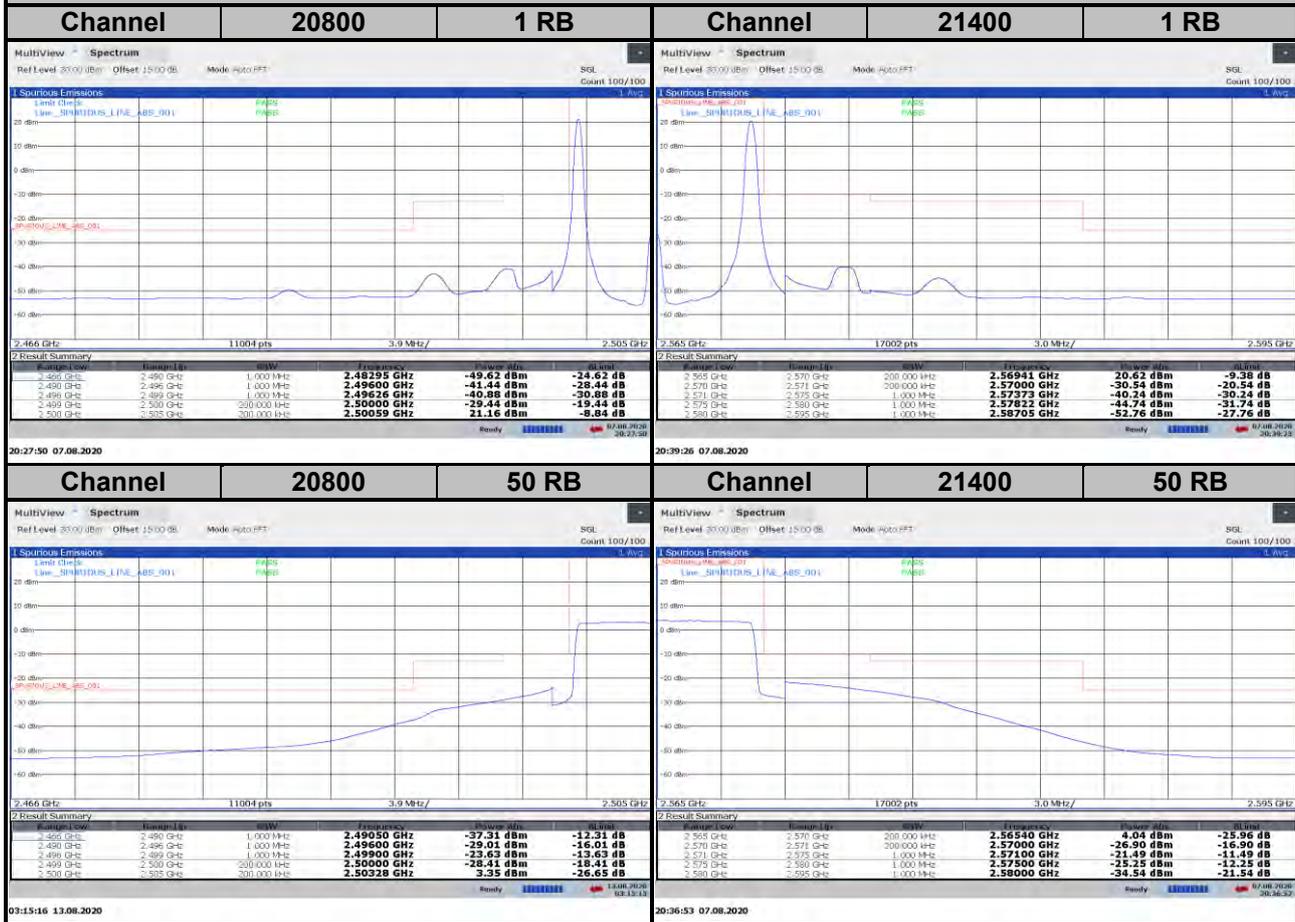

LTE Band 7
Channel Bandwidth: 10 MHz / 64QAM
<Out-of-Band Emissions>

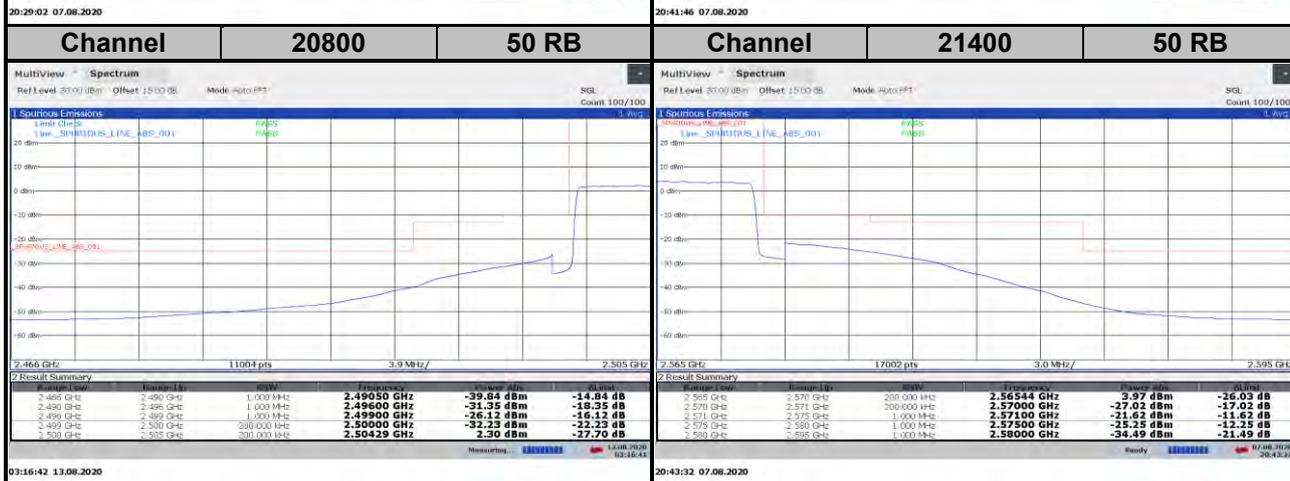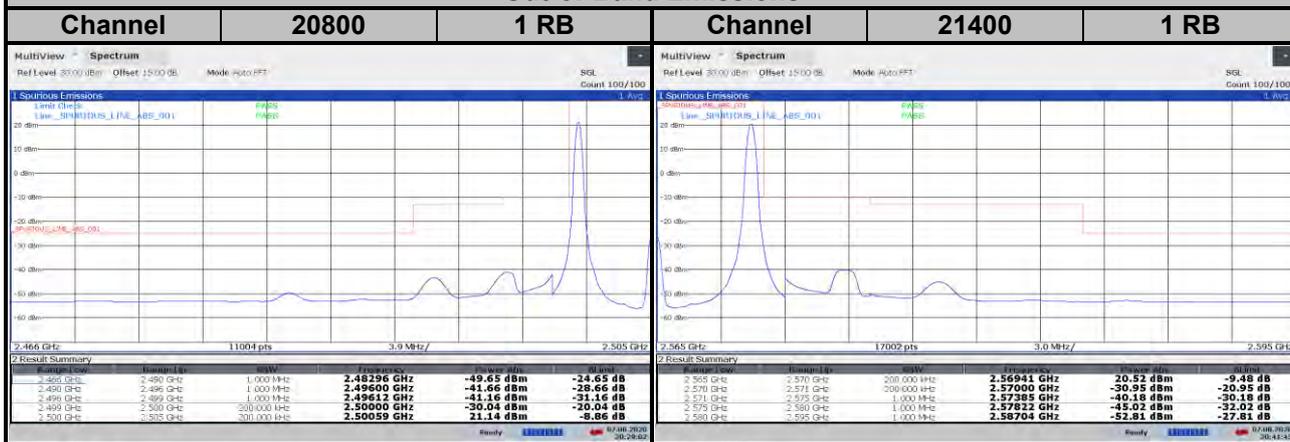


LTE Band 7
Channel Bandwidth: 15 MHz / QPSK
<Out-of-Band Emissions>

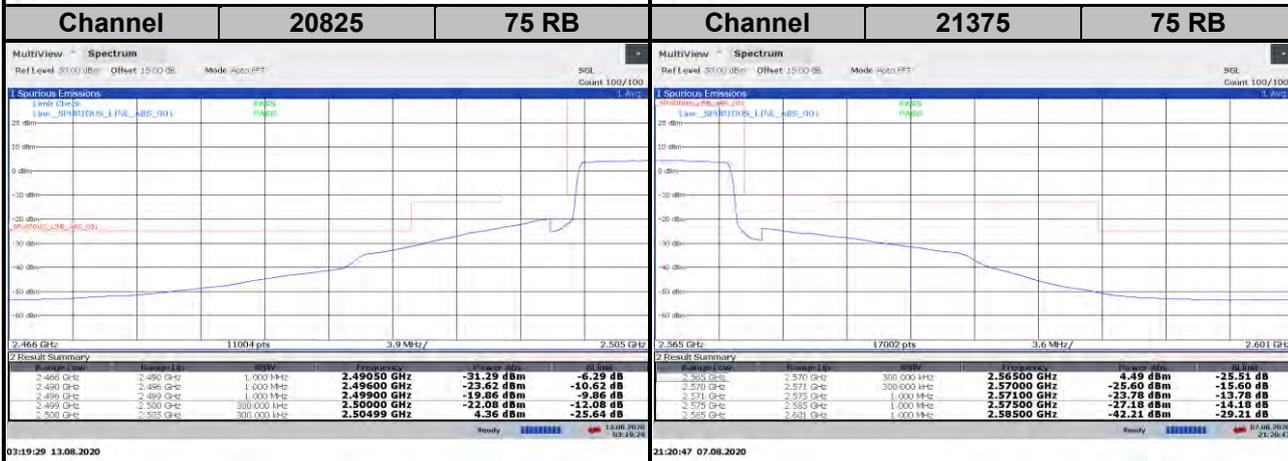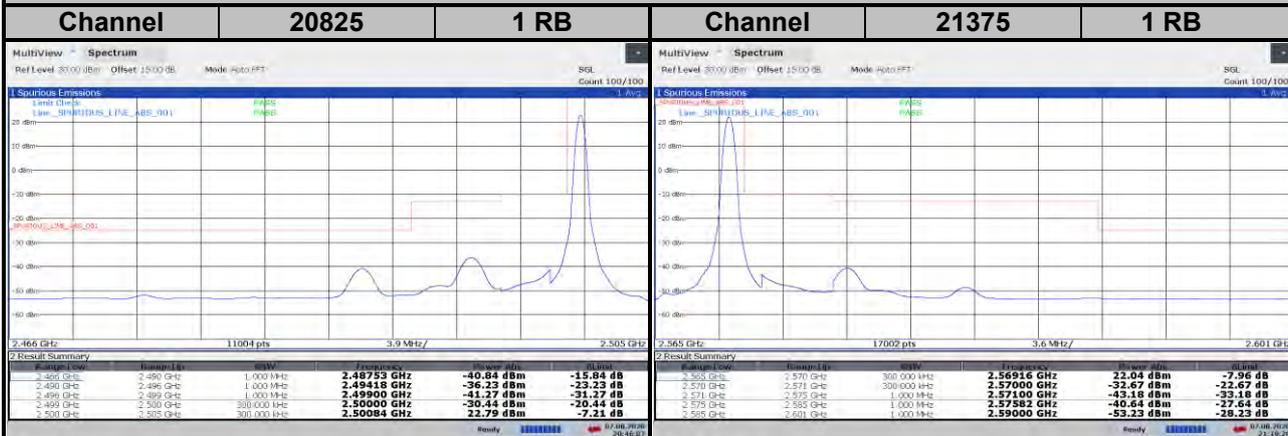



LTE Band 7

Channel Bandwidth: 15 MHz / 16QAM

<Out-of-Band Emissions>

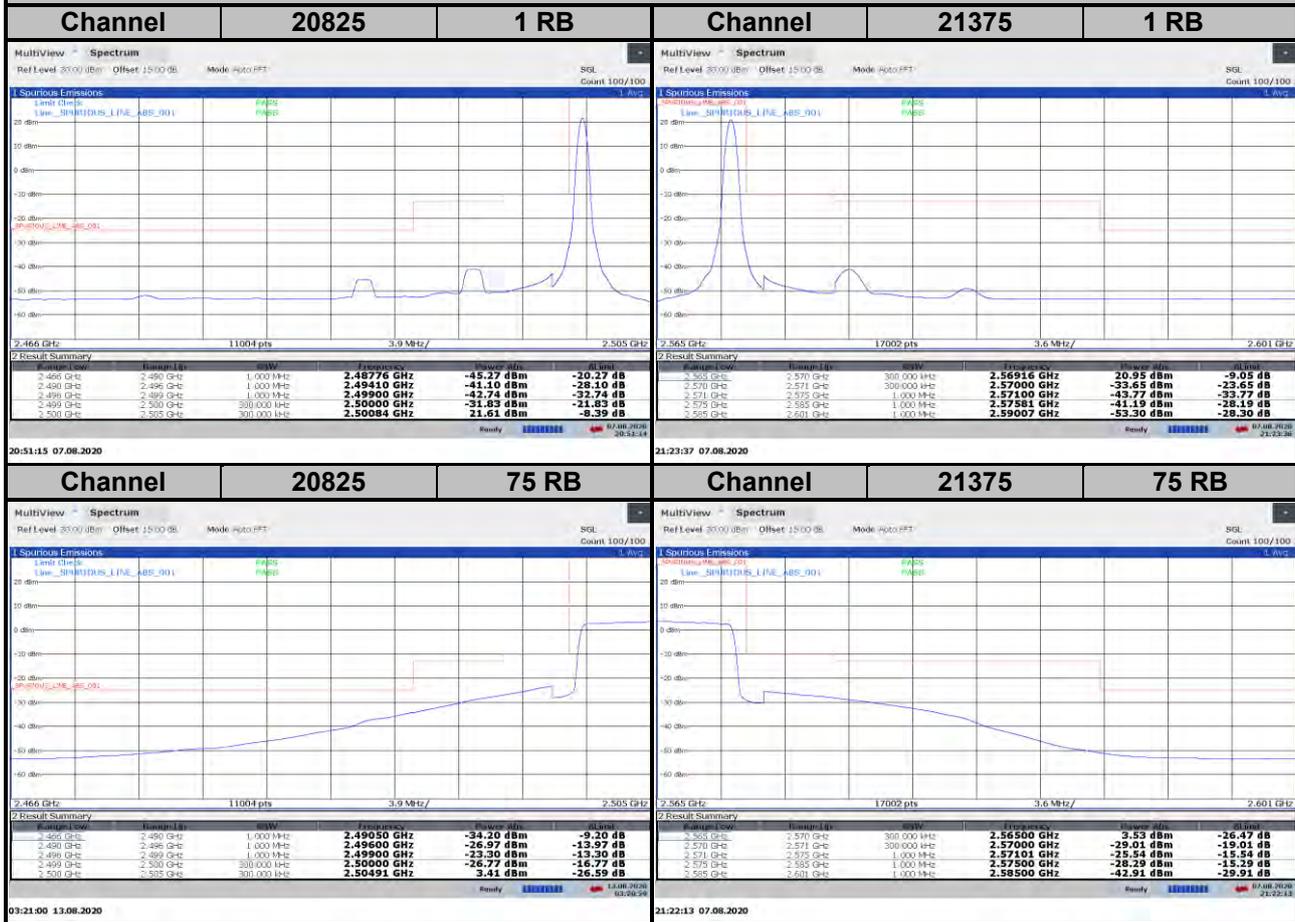


LTE Band 7
Channel Bandwidth: 15 MHz / 64QAM
<Out-of-Band Emissions>

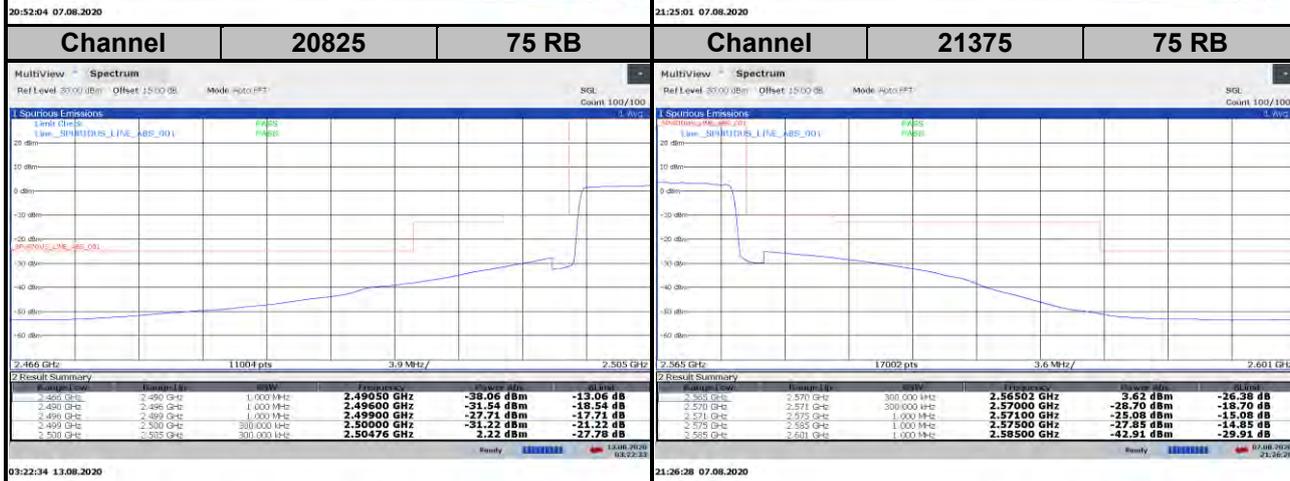
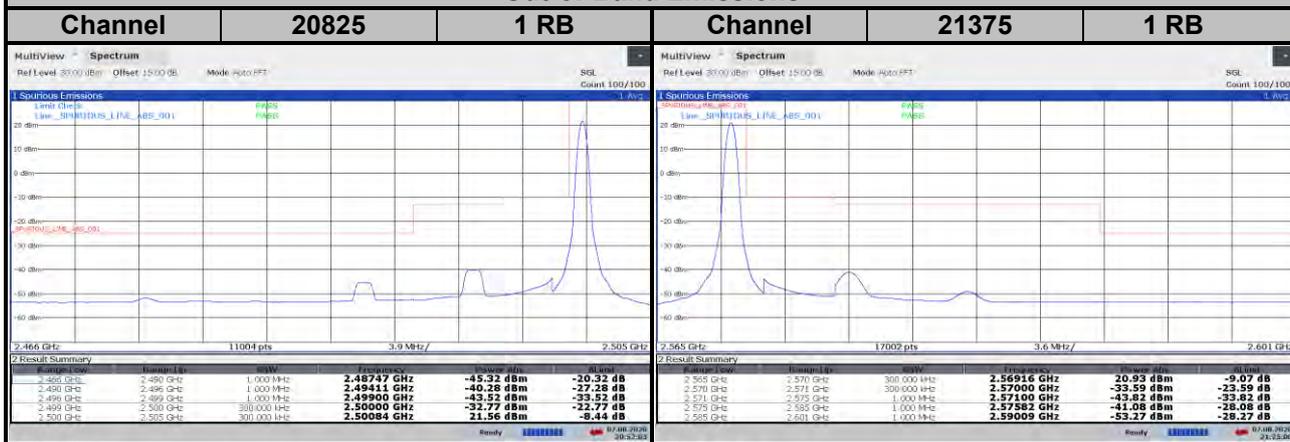


LTE Band 7
Channel Bandwidth: 20 MHz / QPSK

<Out-of-Band Emissions>


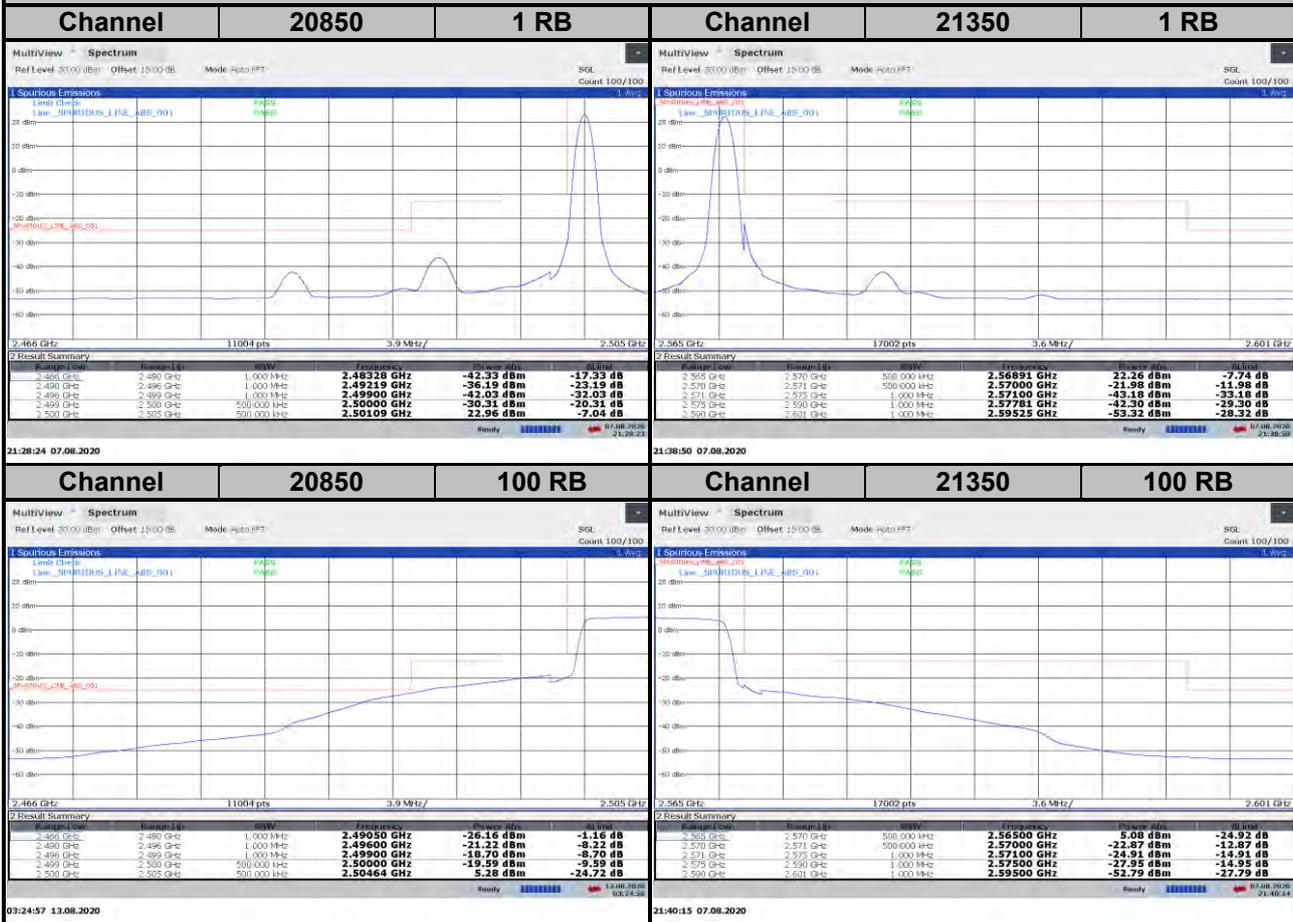


LTE Band 7
Channel Bandwidth: 20 MHz / 16QAM
<Out-of-Band Emissions>

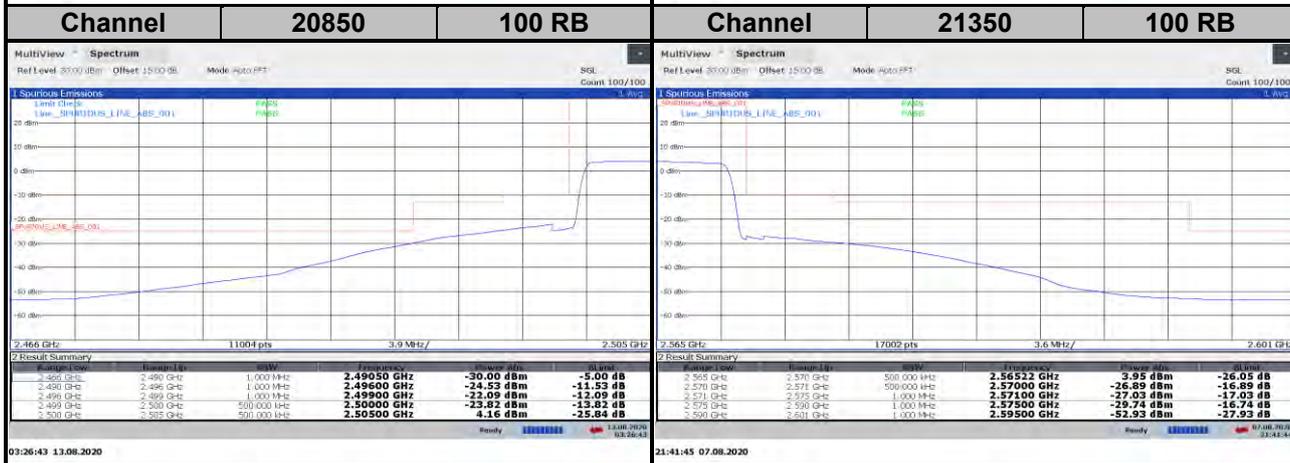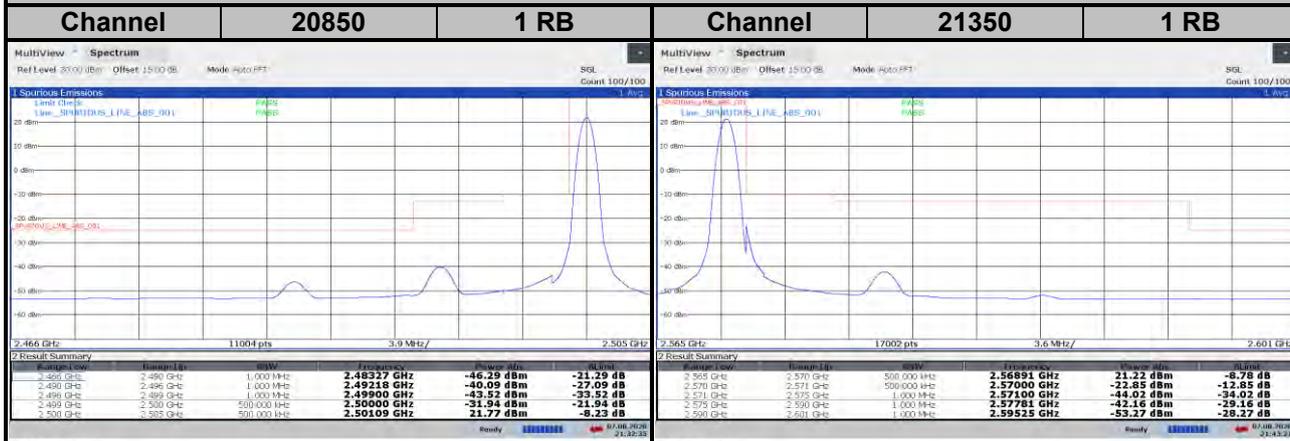

LTE Band 7
Channel Bandwidth: 20 MHz / 64QAM


<Out-of-Band Emissions>

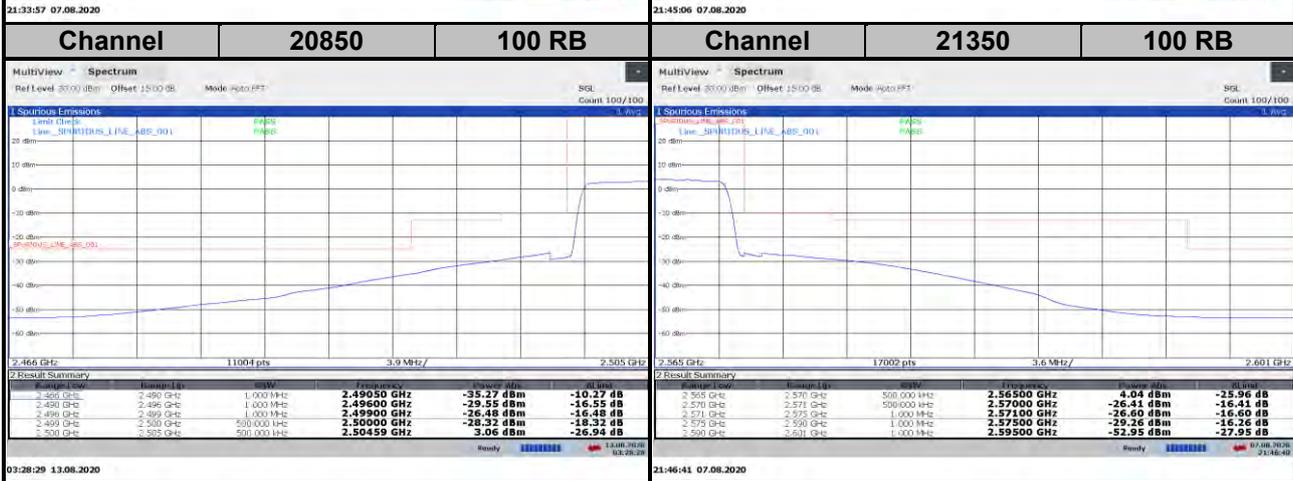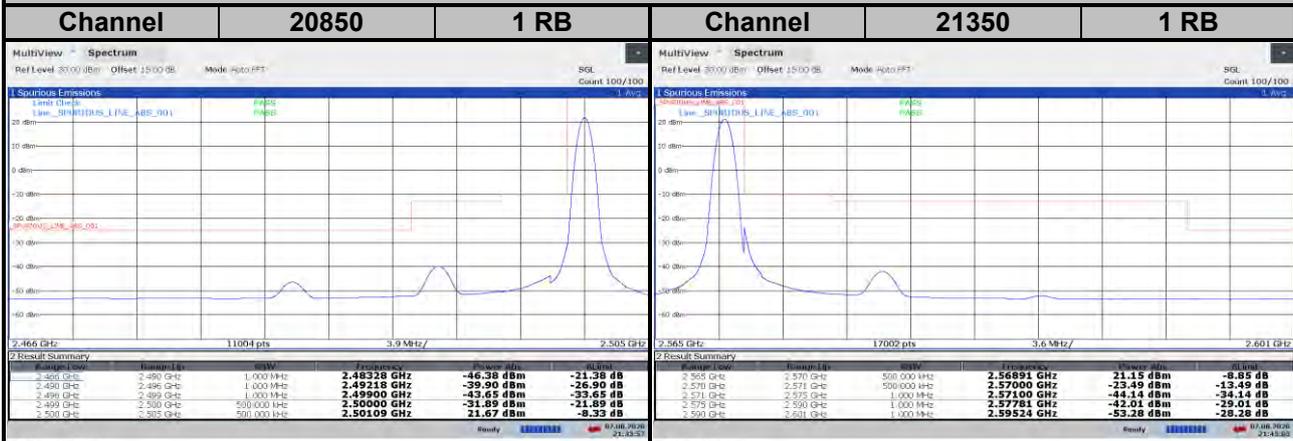

LTE Band 38


Channel Bandwidth: 5 MHz / QPSK

<Out-of-Band Emissions>

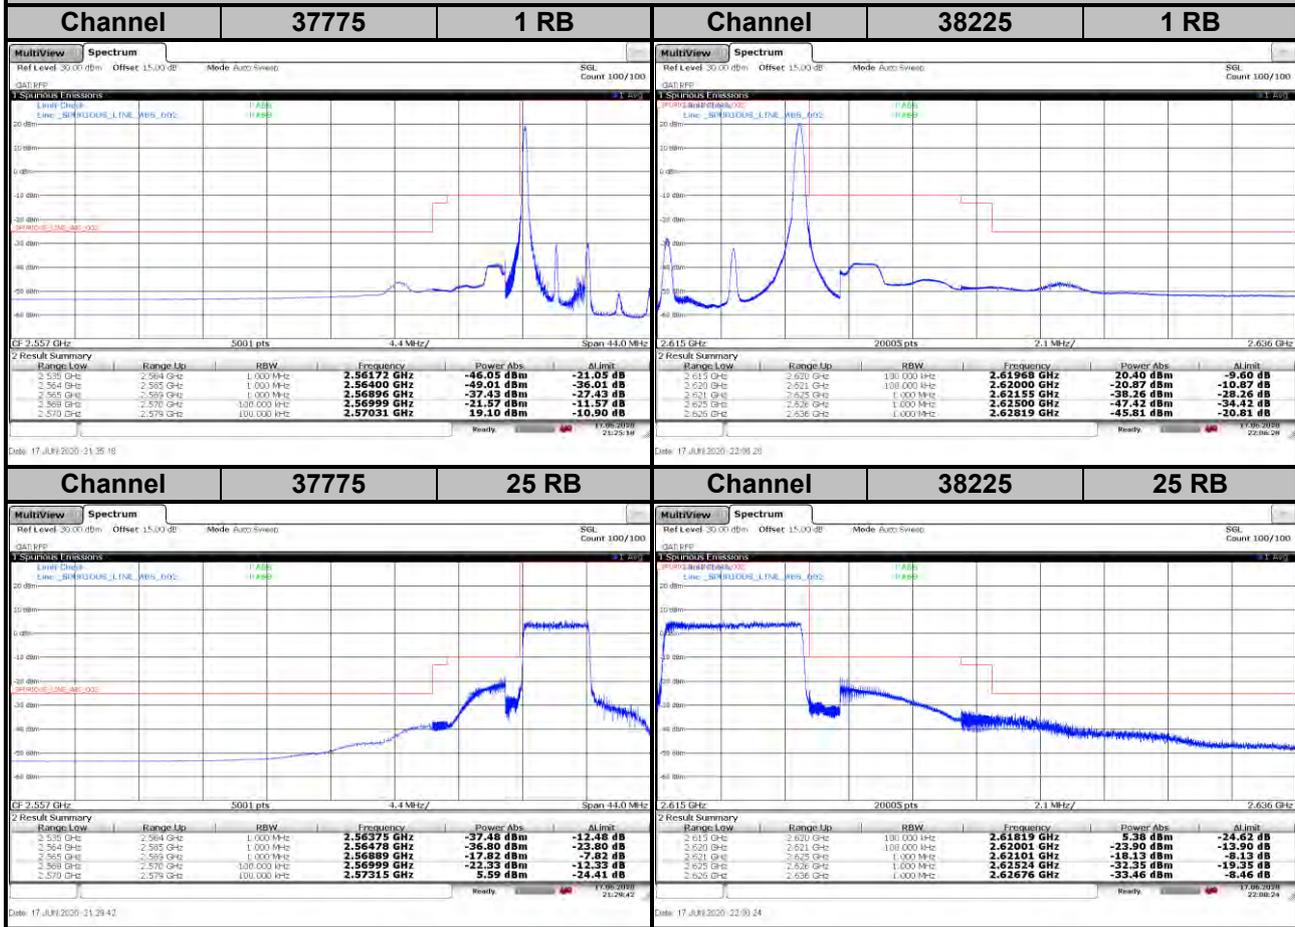


LTE Band 38
Channel Bandwidth: 5 MHz / 16QAM

<Out-of-Band Emissions>

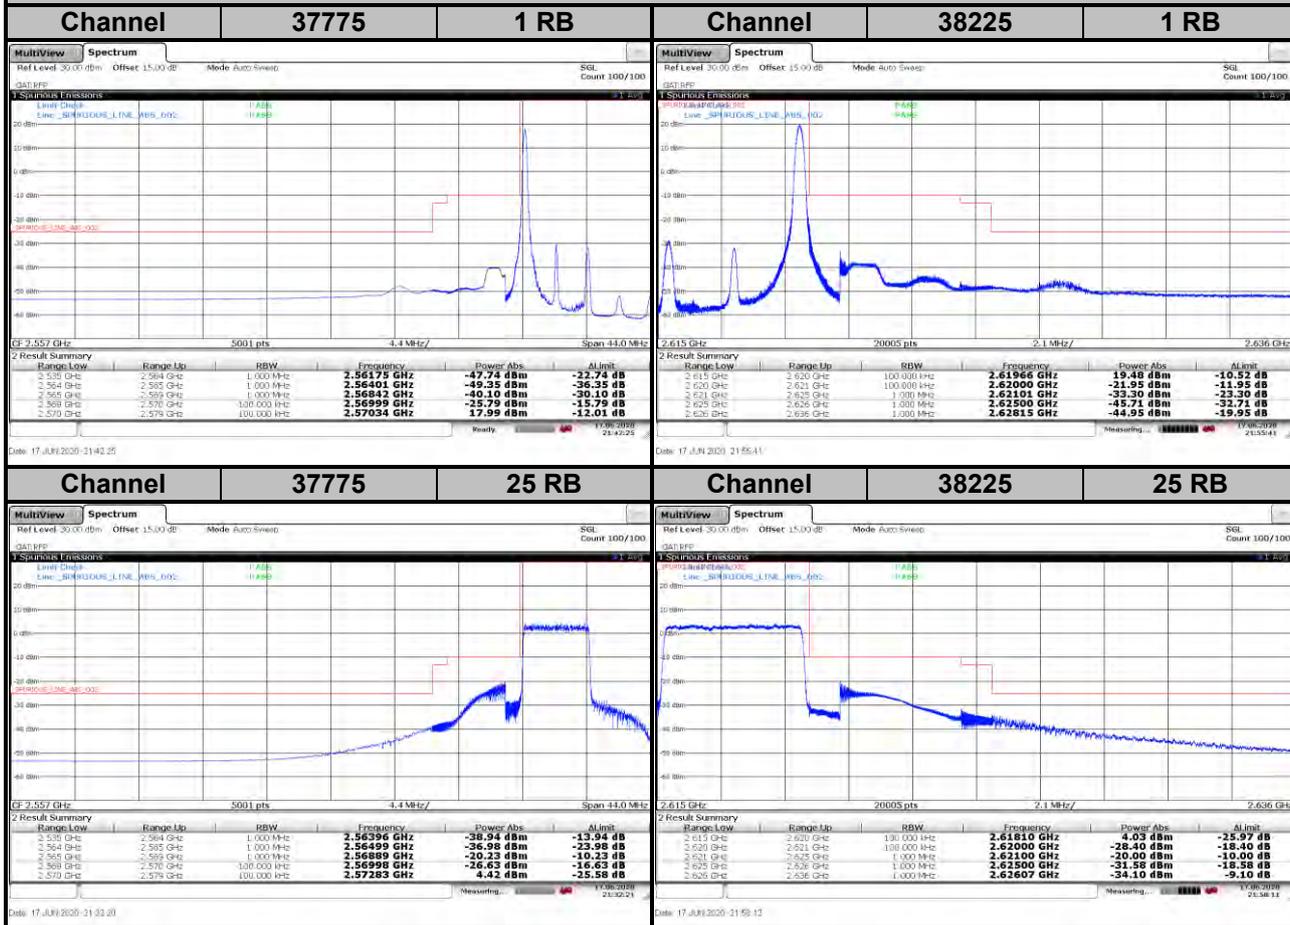

LTE Band 38
Channel Bandwidth: 5 MHz / 64QAM


<Out-of-Band Emissions>

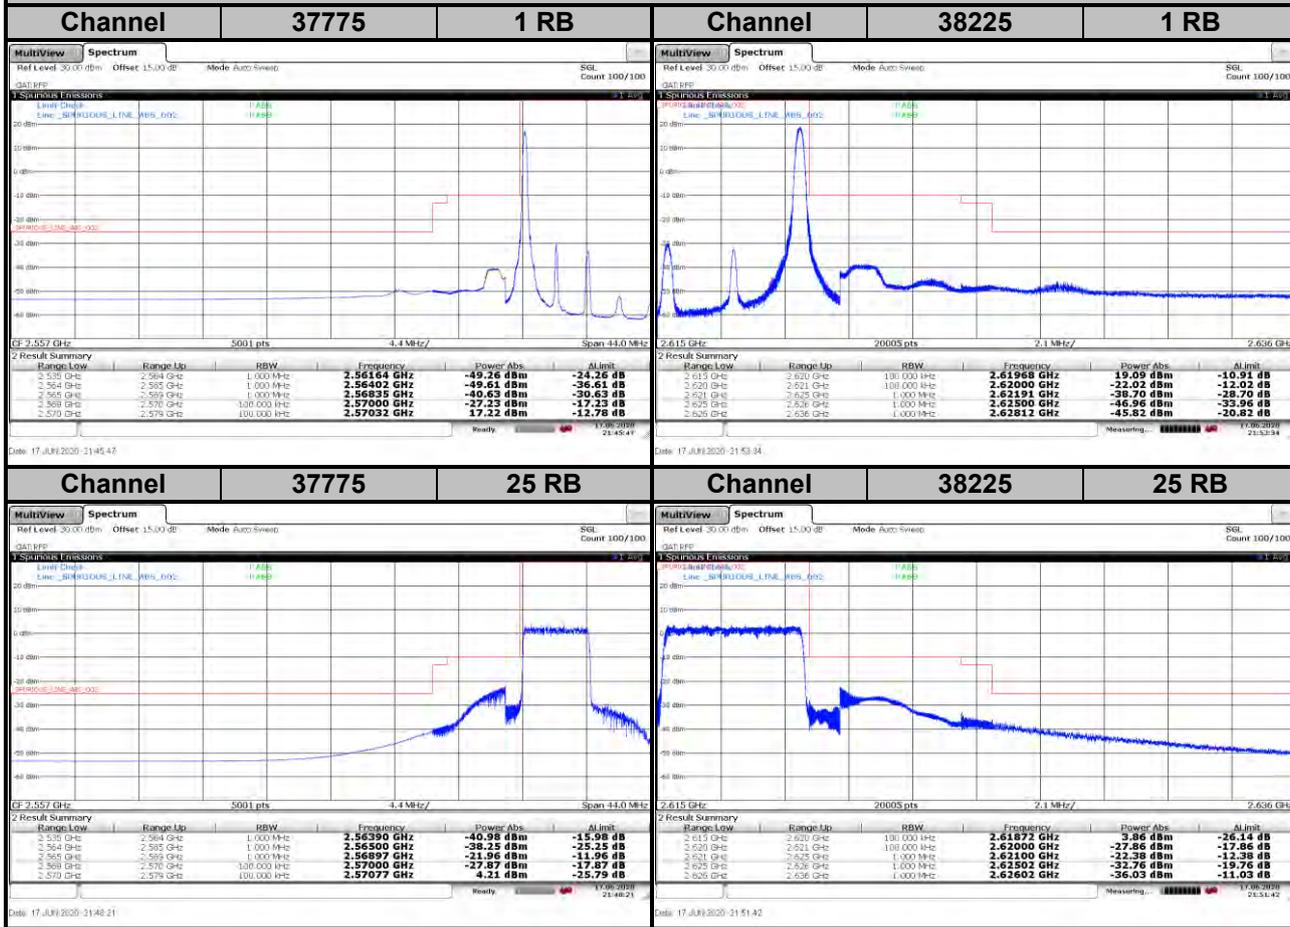

LTE Band 38


Channel Bandwidth: 10 MHz / QPSK

<Out-of-Band Emissions>

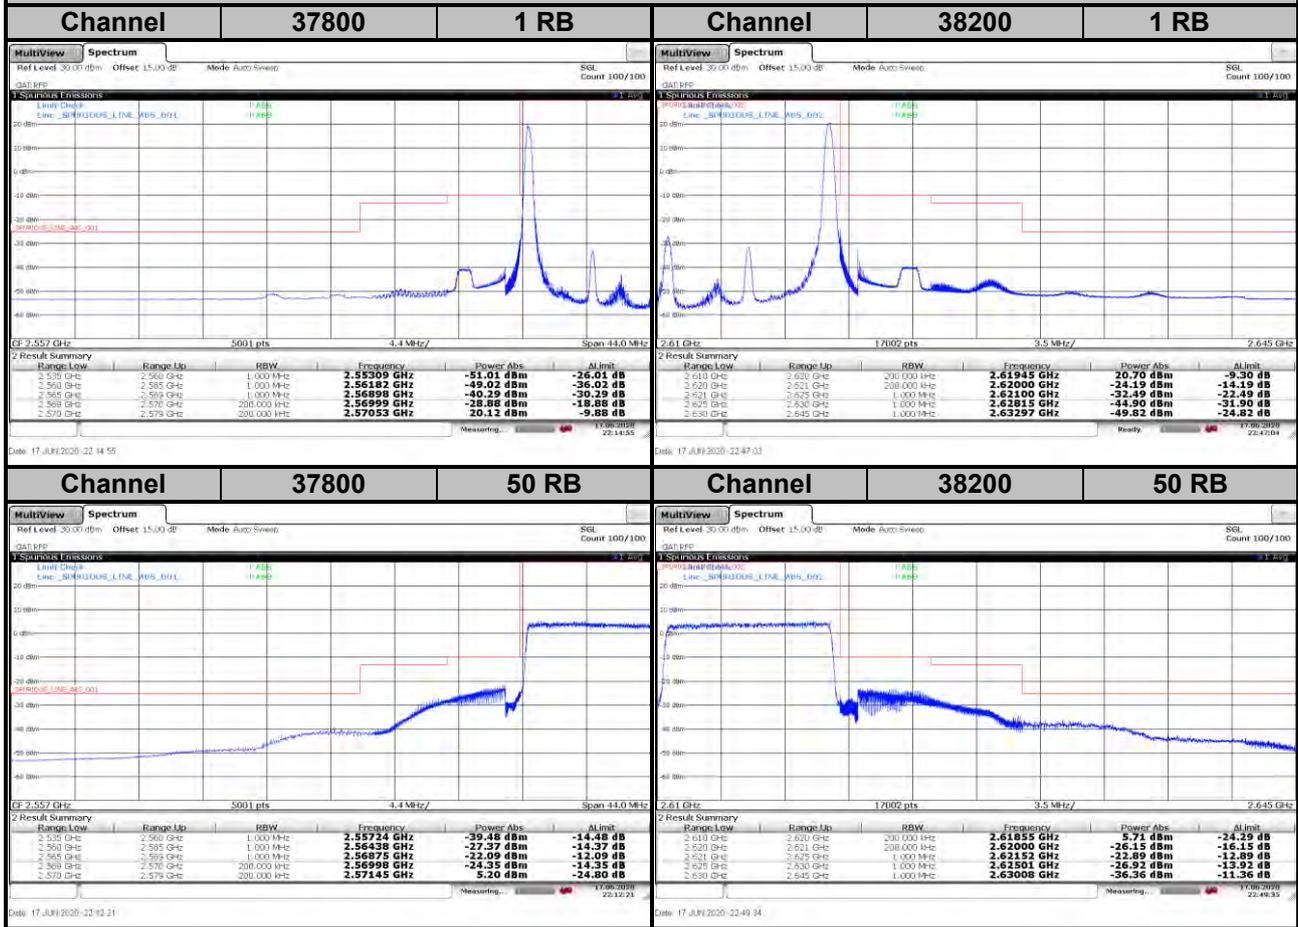

LTE Band 38
Channel Bandwidth: 10 MHz / 16QAM


<Out-of-Band Emissions>

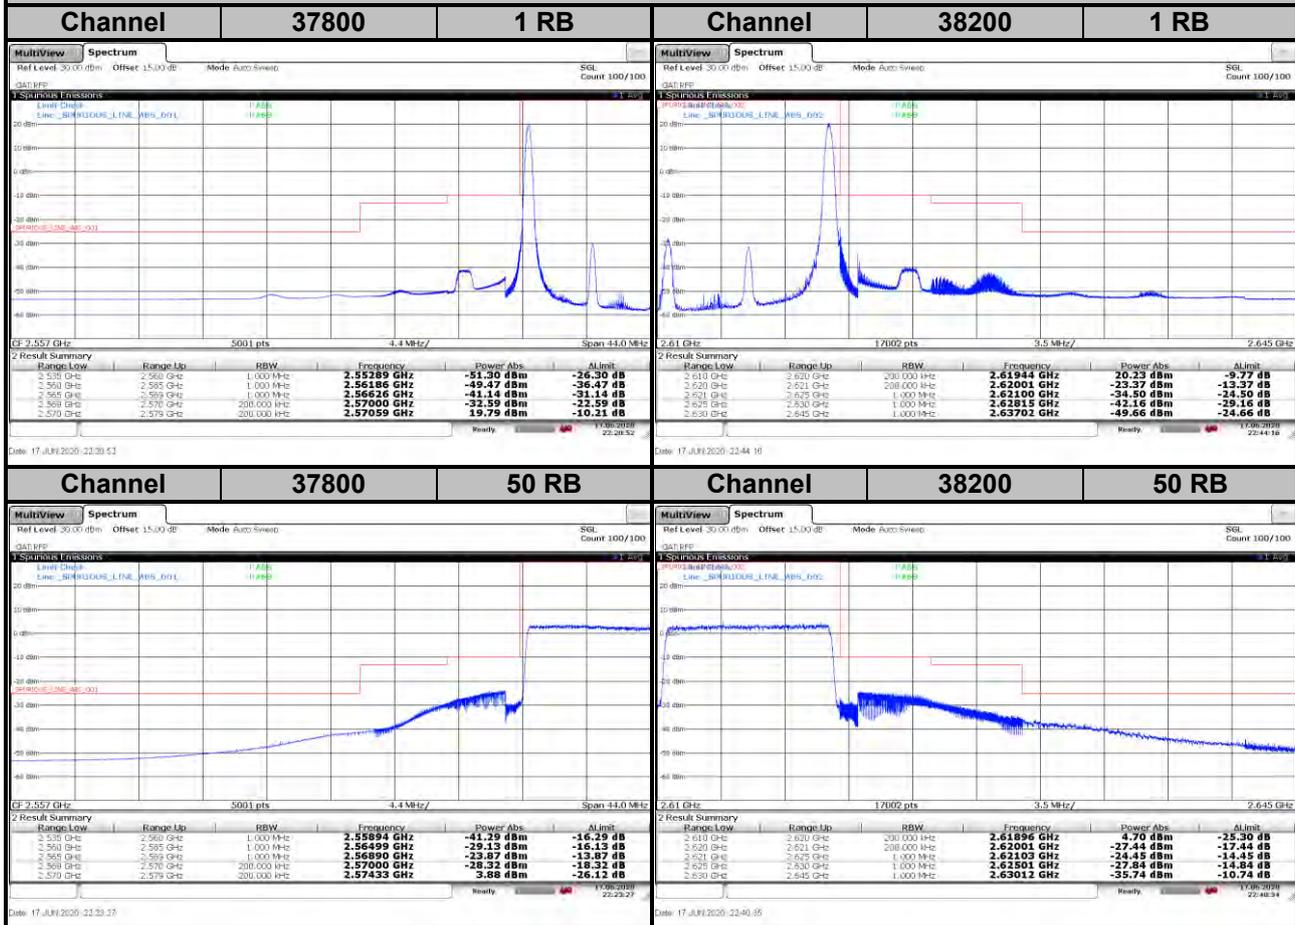

LTE Band 38


Channel Bandwidth: 10 MHz / 64QAM

<Out-of-Band Emissions>

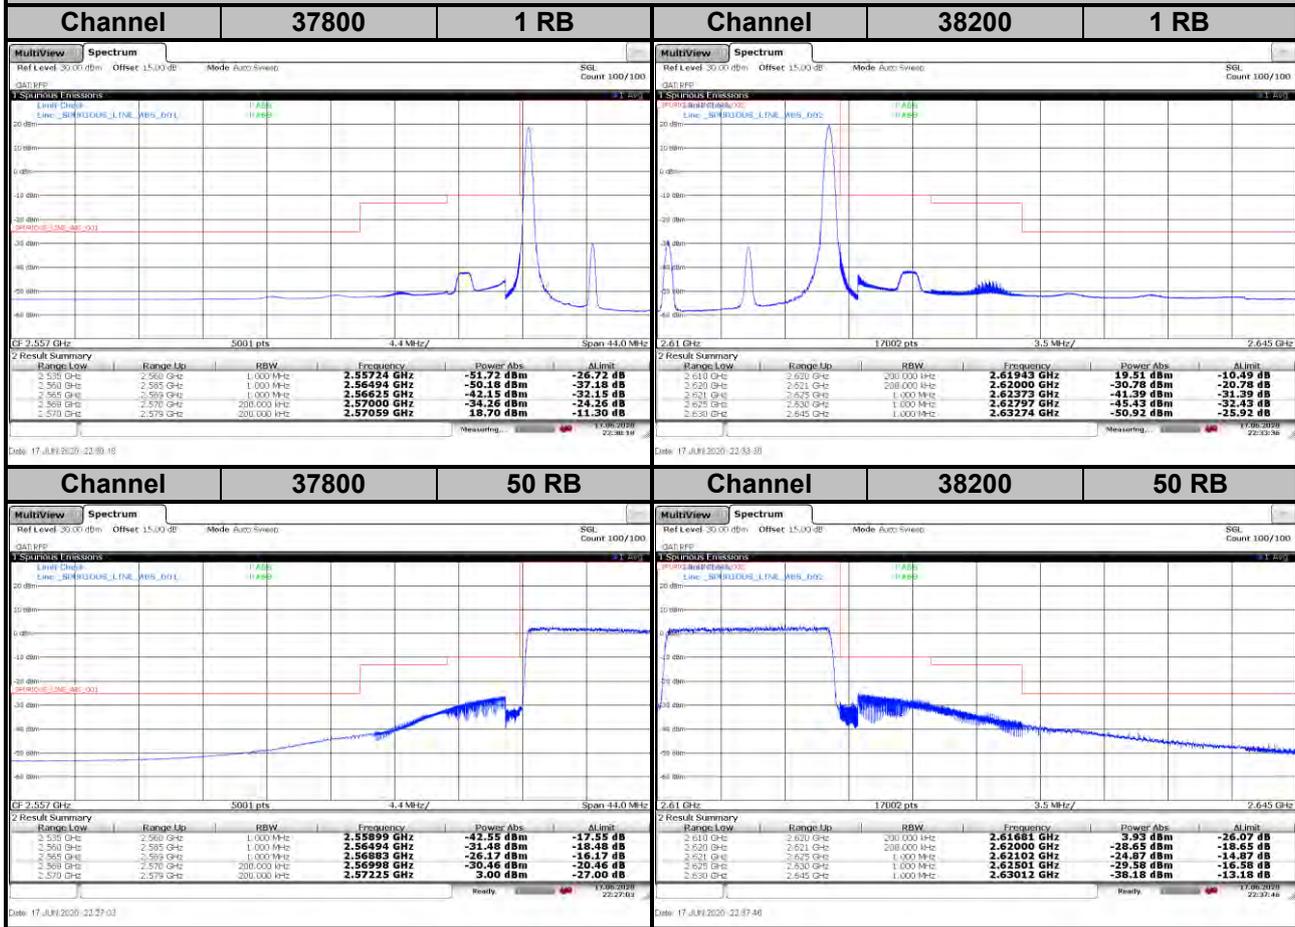

LTE Band 38
Channel Bandwidth: 15 MHz / QPSK


<Out-of-Band Emissions>

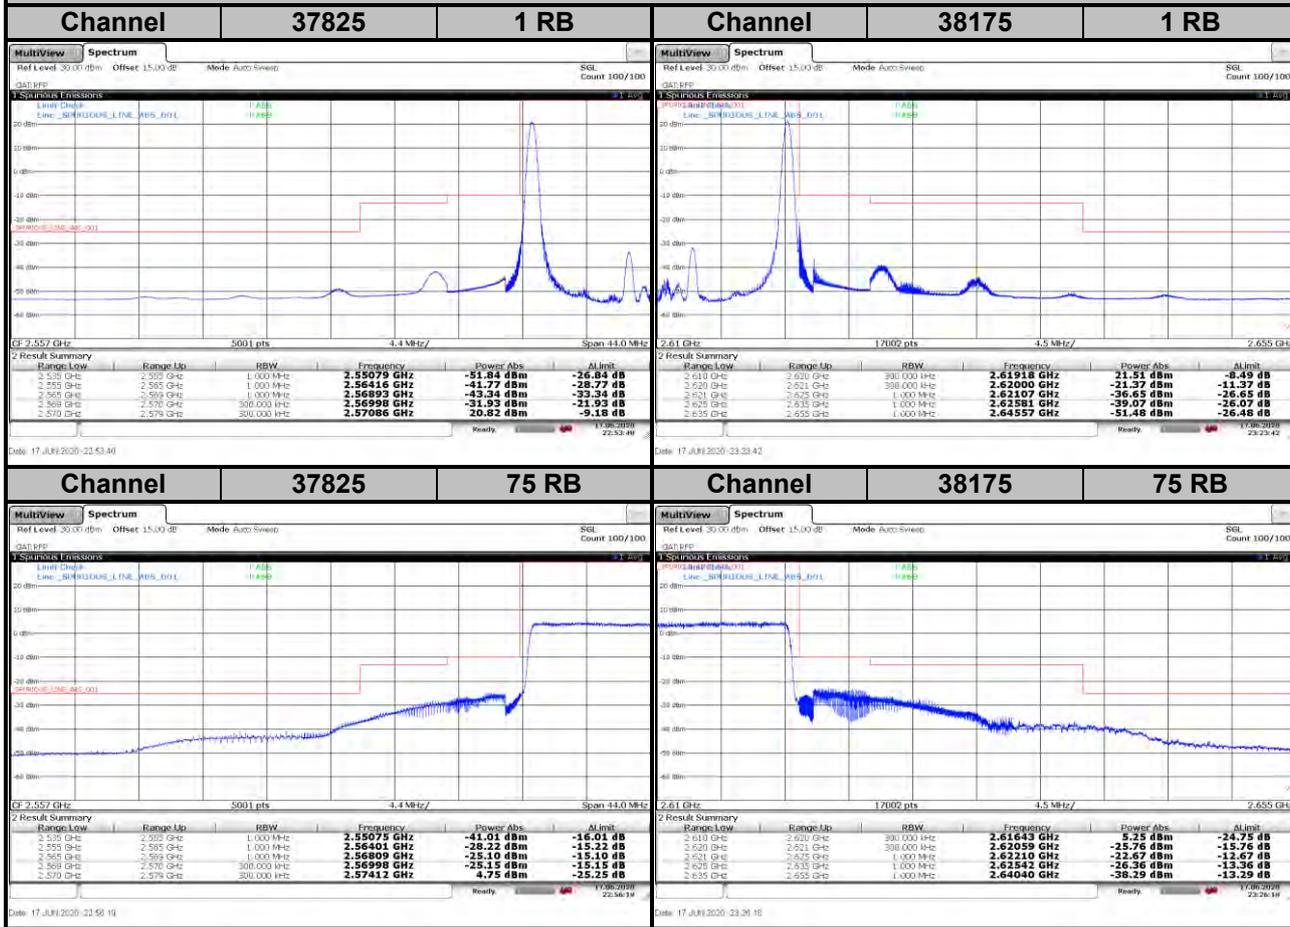

LTE Band 38

Channel Bandwidth: 15 MHz / 16QAM


<Out-of-Band Emissions>

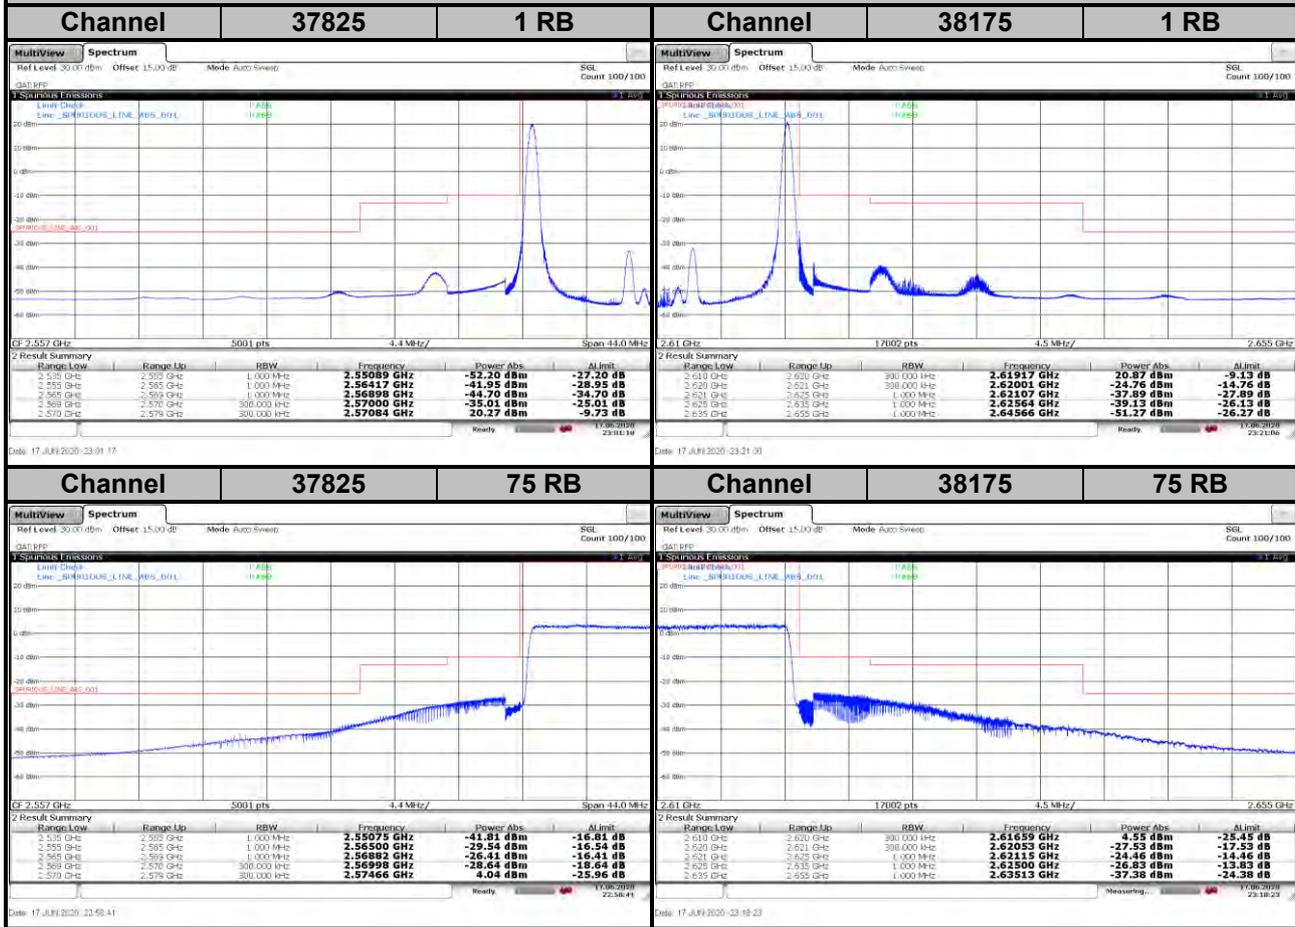

LTE Band 38

Channel Bandwidth: 15 MHz / 64QAM


<Out-of-Band Emissions>

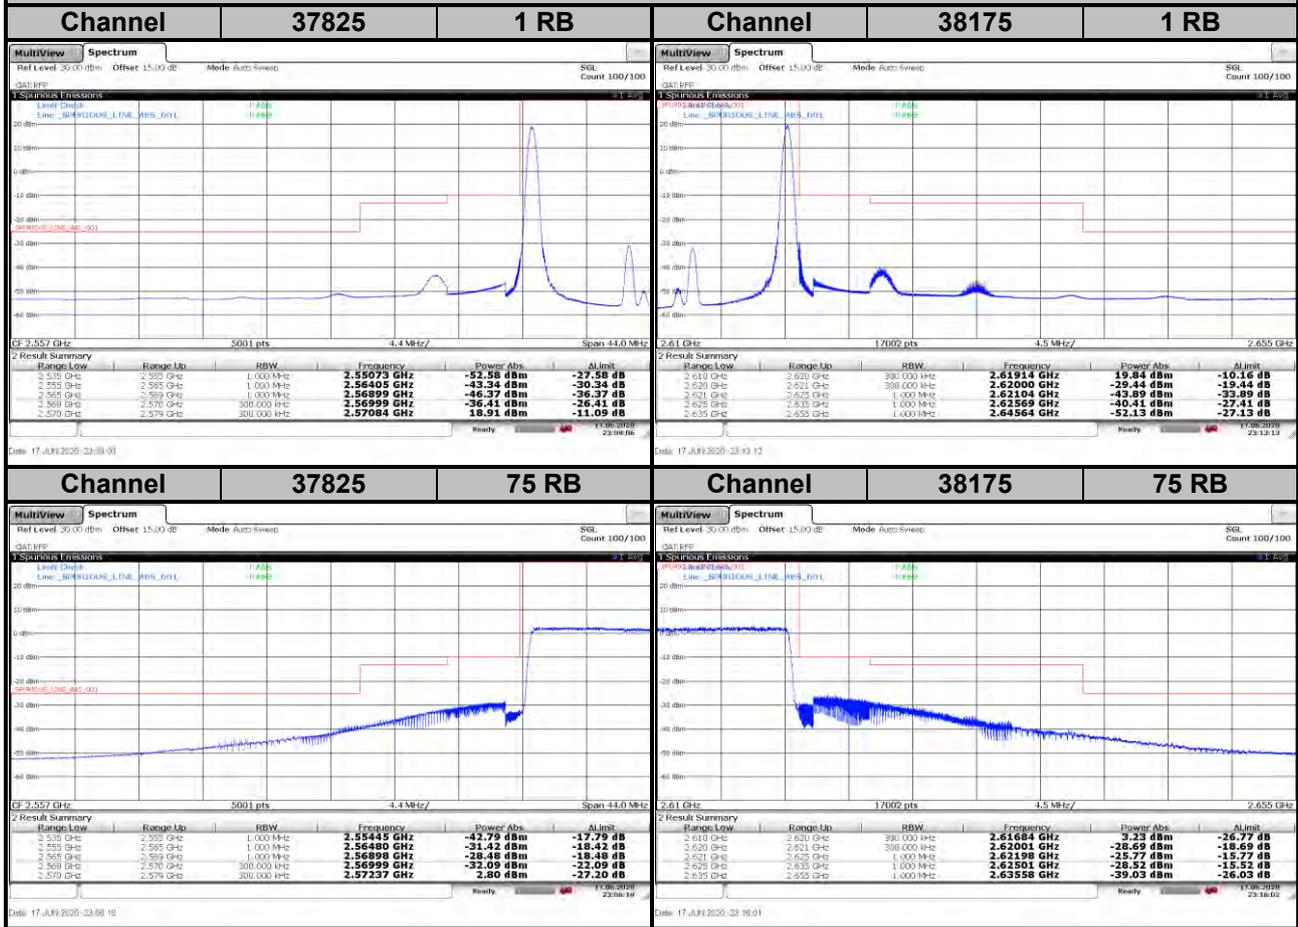

LTE Band 38


Channel Bandwidth: 20 MHz / QPSK

<Out-of-Band Emissions>

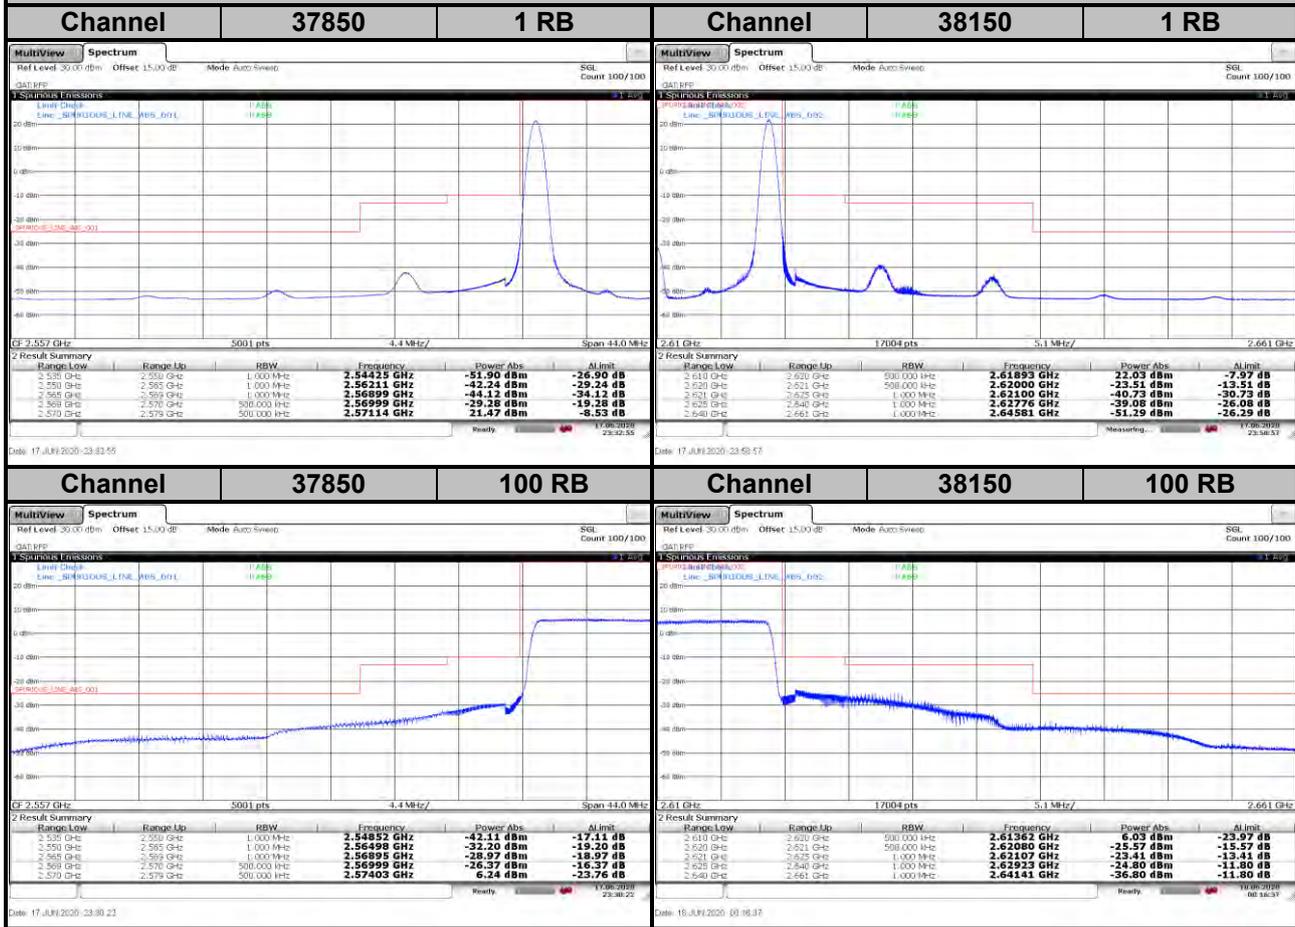


LTE Band 38
Channel Bandwidth: 20 MHz / 16QAM

<Out-of-Band Emissions>

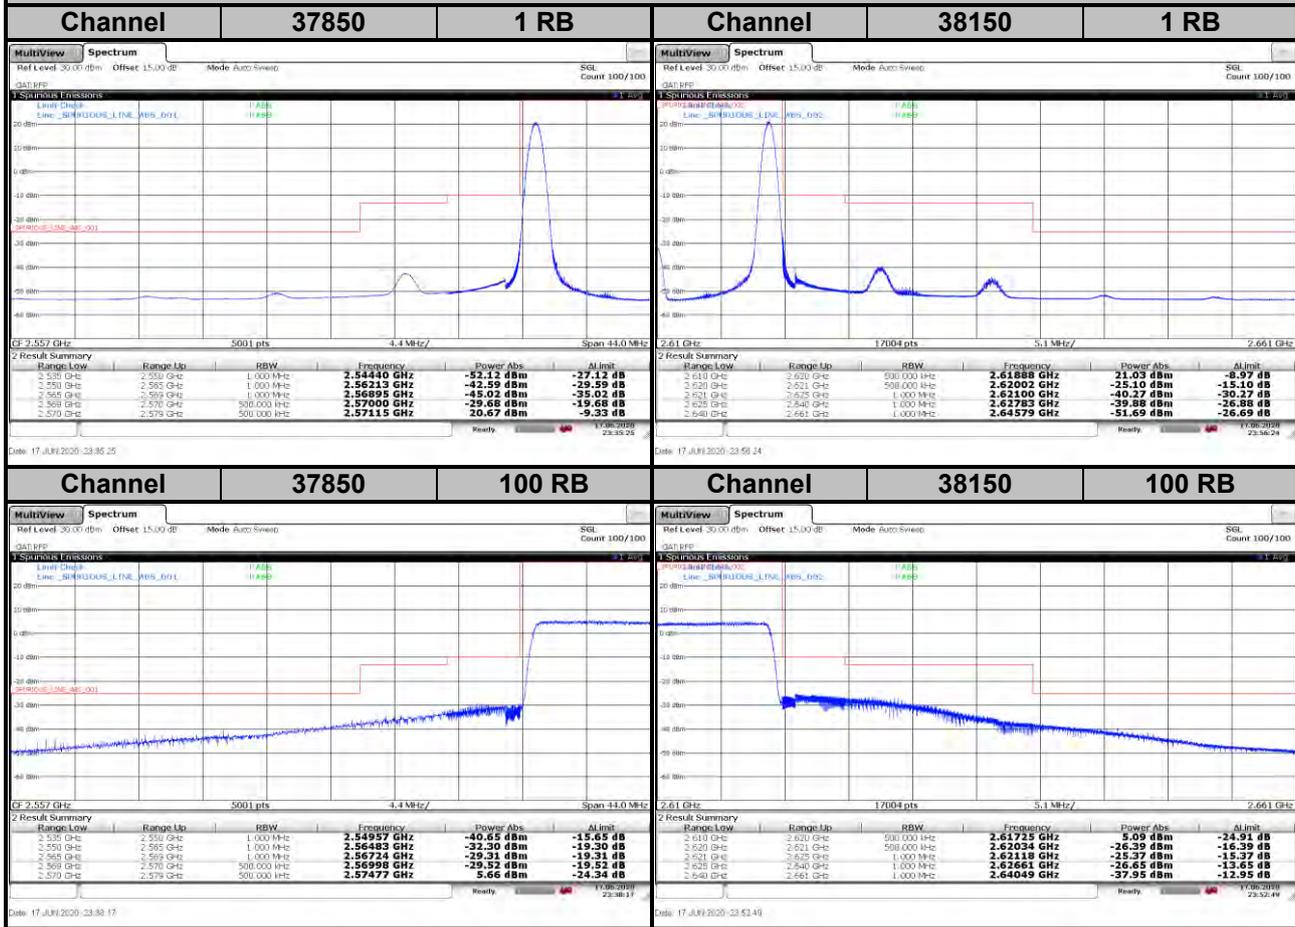

LTE Band 38
Channel Bandwidth: 20 MHz / 64QAM

<Out-of-Band Emissions>

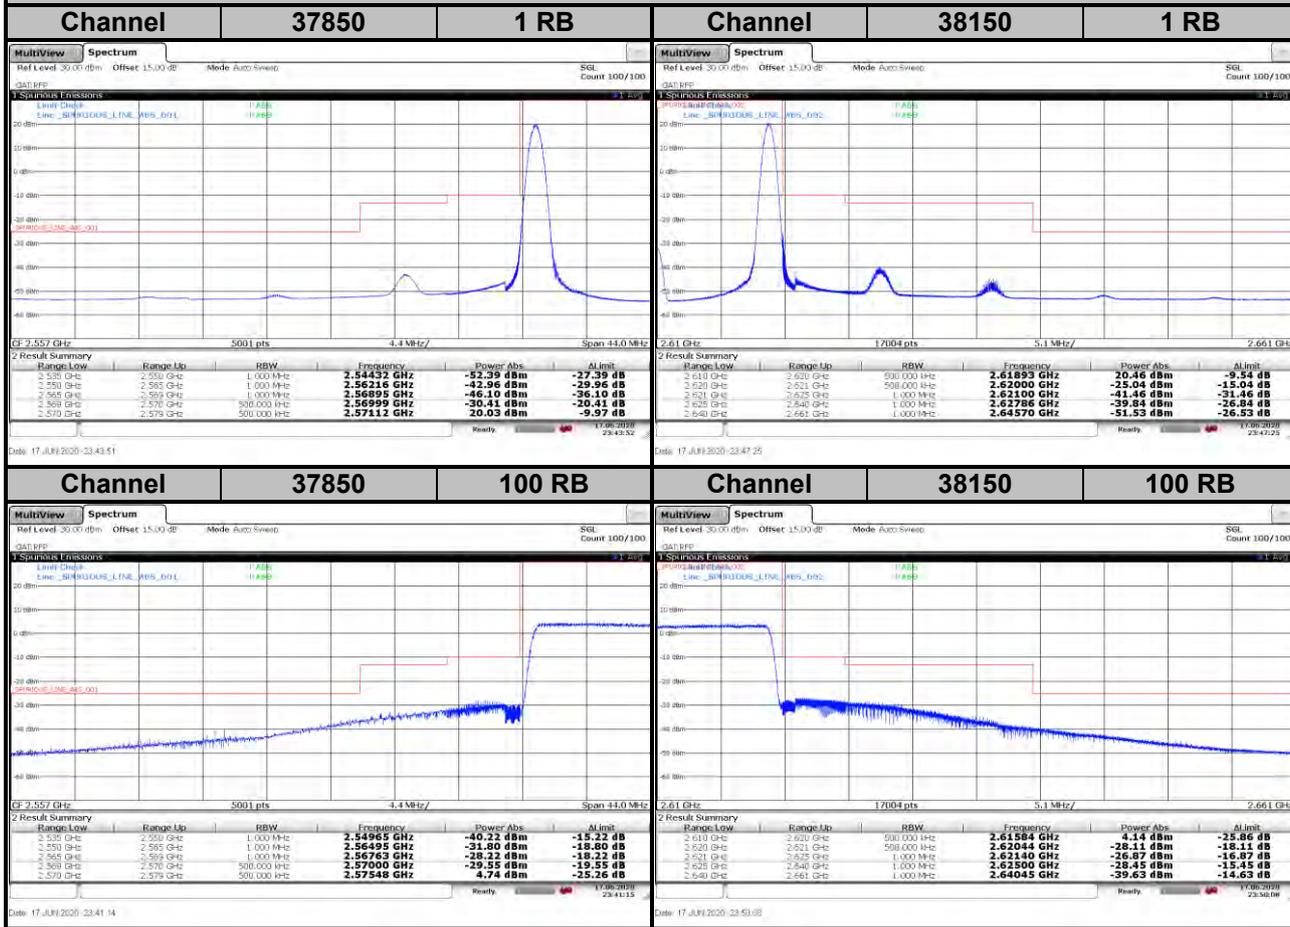


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

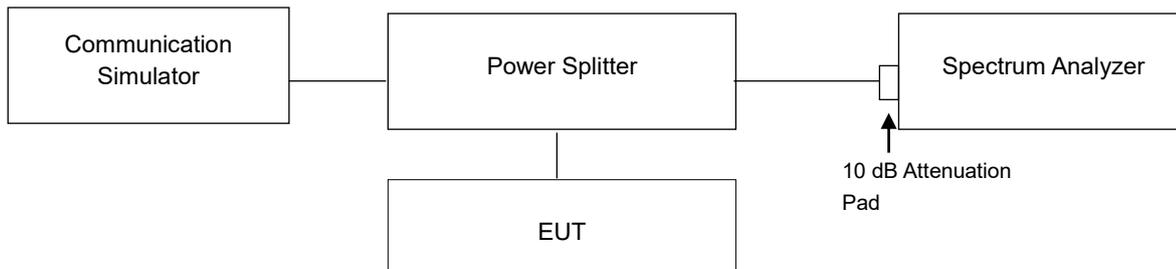


4.6.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	3.55	3.07	5.88	20800	2505.0	3.47	4.61	5.89
21100	2535.0	3.39	4.59	4.70	21100	2535.0	3.14	4.43	4.62
21425	2567.5	3.03	4.25	4.53	21400	2565.0	2.96	4.09	4.21

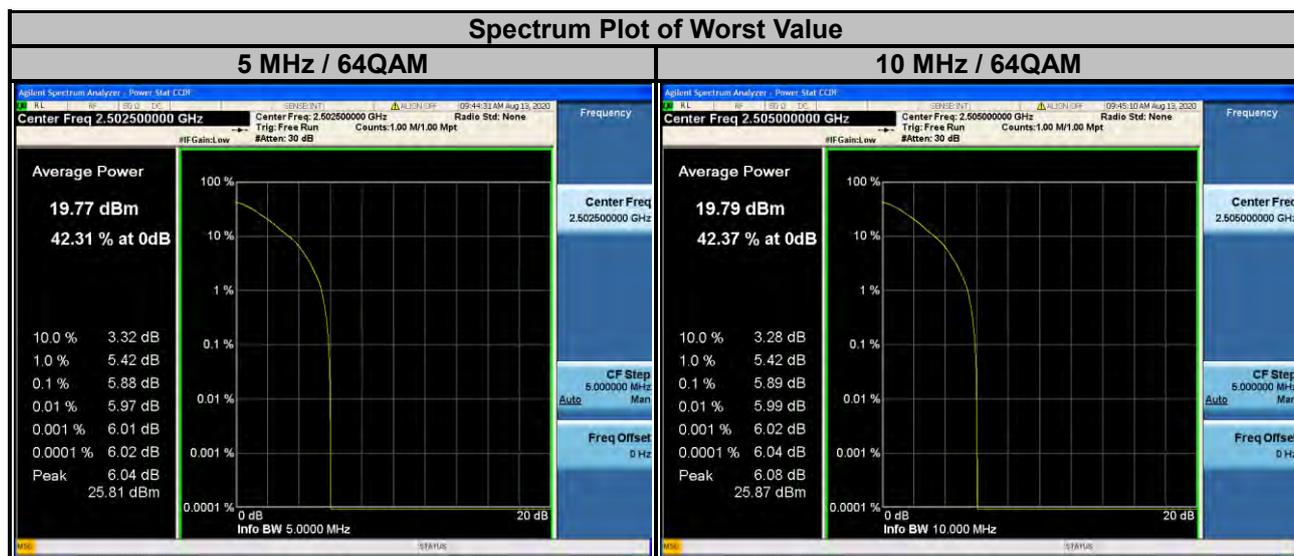

LTE Band 7

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	3.38	4.64	5.75	20850	2510.0	3.34	4.57	5.73
21100	2535.0	3.12	4.28	4.41	21100	2535.0	2.89	3.98	4.03
21375	2562.5	2.65	3.68	3.77	21350	2560.0	2.71	3.68	3.80


Spectrum Plot of Worst Value

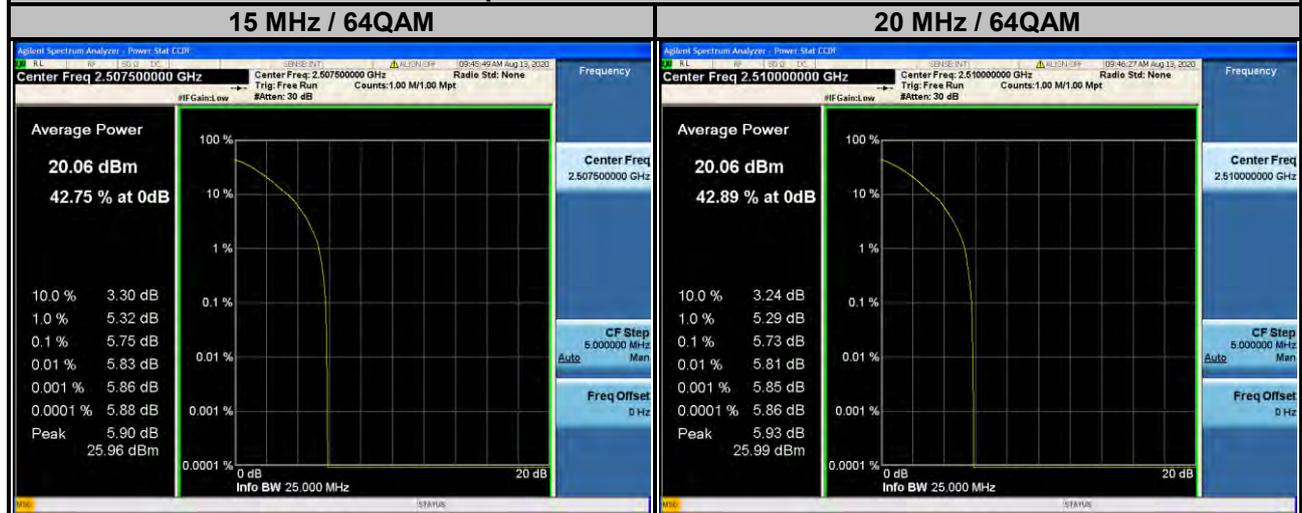

LTE Band 38

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	3.31	4.80	6.03	37800	2575.0	3.38	5.19	6.23
38000	2595.0	3.82	5.79	6.81	38000	2595.0	3.70	5.80	6.67
38225	2617.5	3.71	5.27	6.51	38200	2615.0	3.89	6.12	6.48


Spectrum Plot of Worst Value

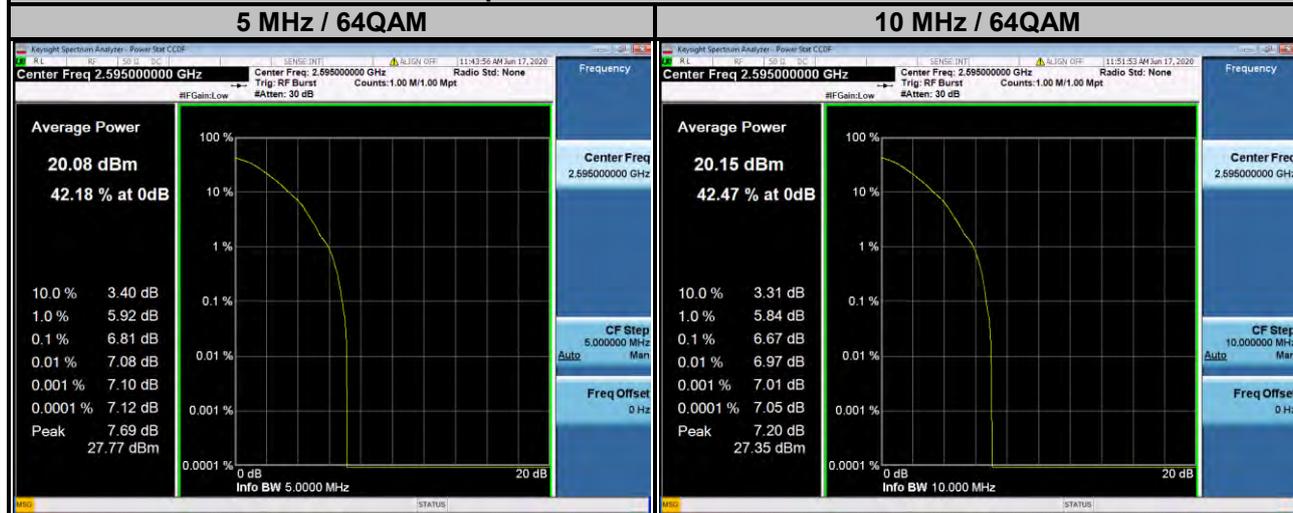

LTE Band 38

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	3.99	5.39	6.28	37850	2580.0	4.46	5.50	6.24
38000	2595.0	4.55	5.85	6.66	38000	2595.0	4.57	5.78	6.79
38175	2612.5	5.02	5.73	6.29	38150	2610.0	4.73	5.72	6.53

Spectrum Plot of Worst Value

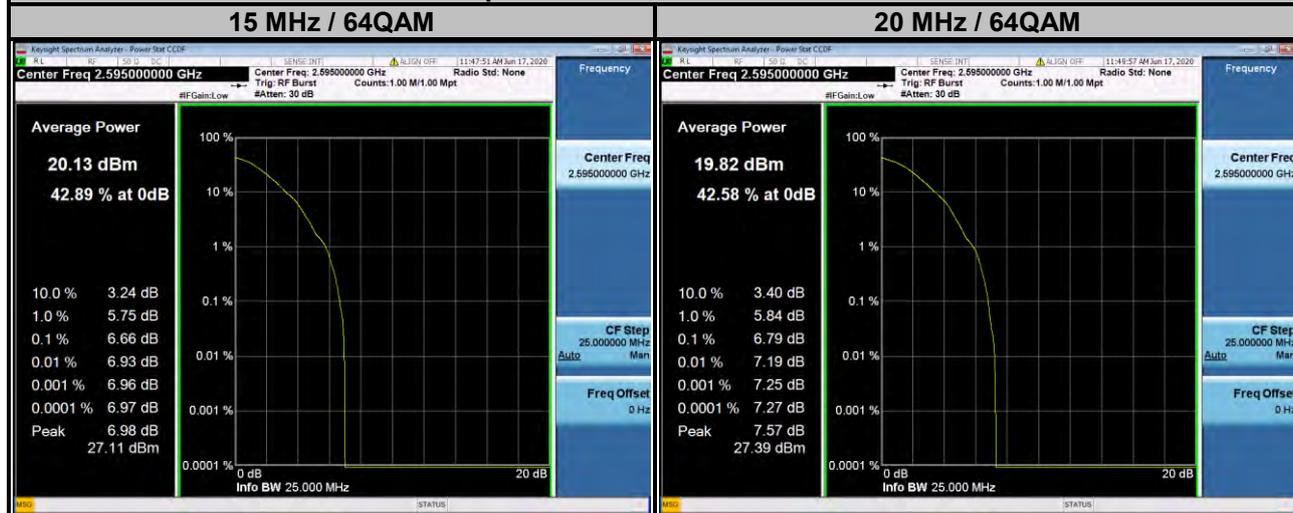


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.


4.7.2 Test Setup

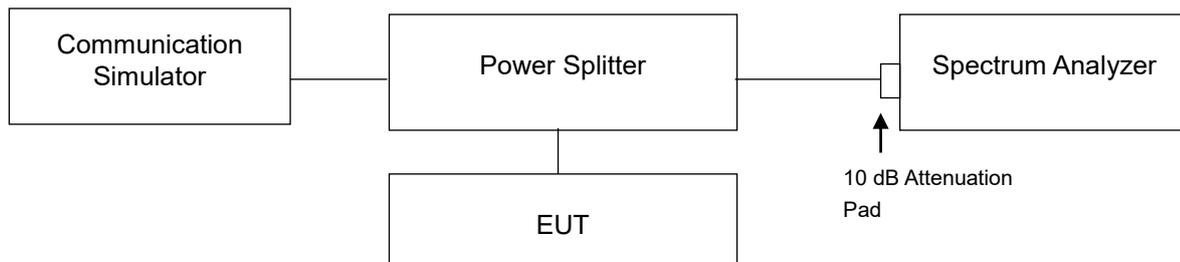

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 26 GHz / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.7.4 Test Results

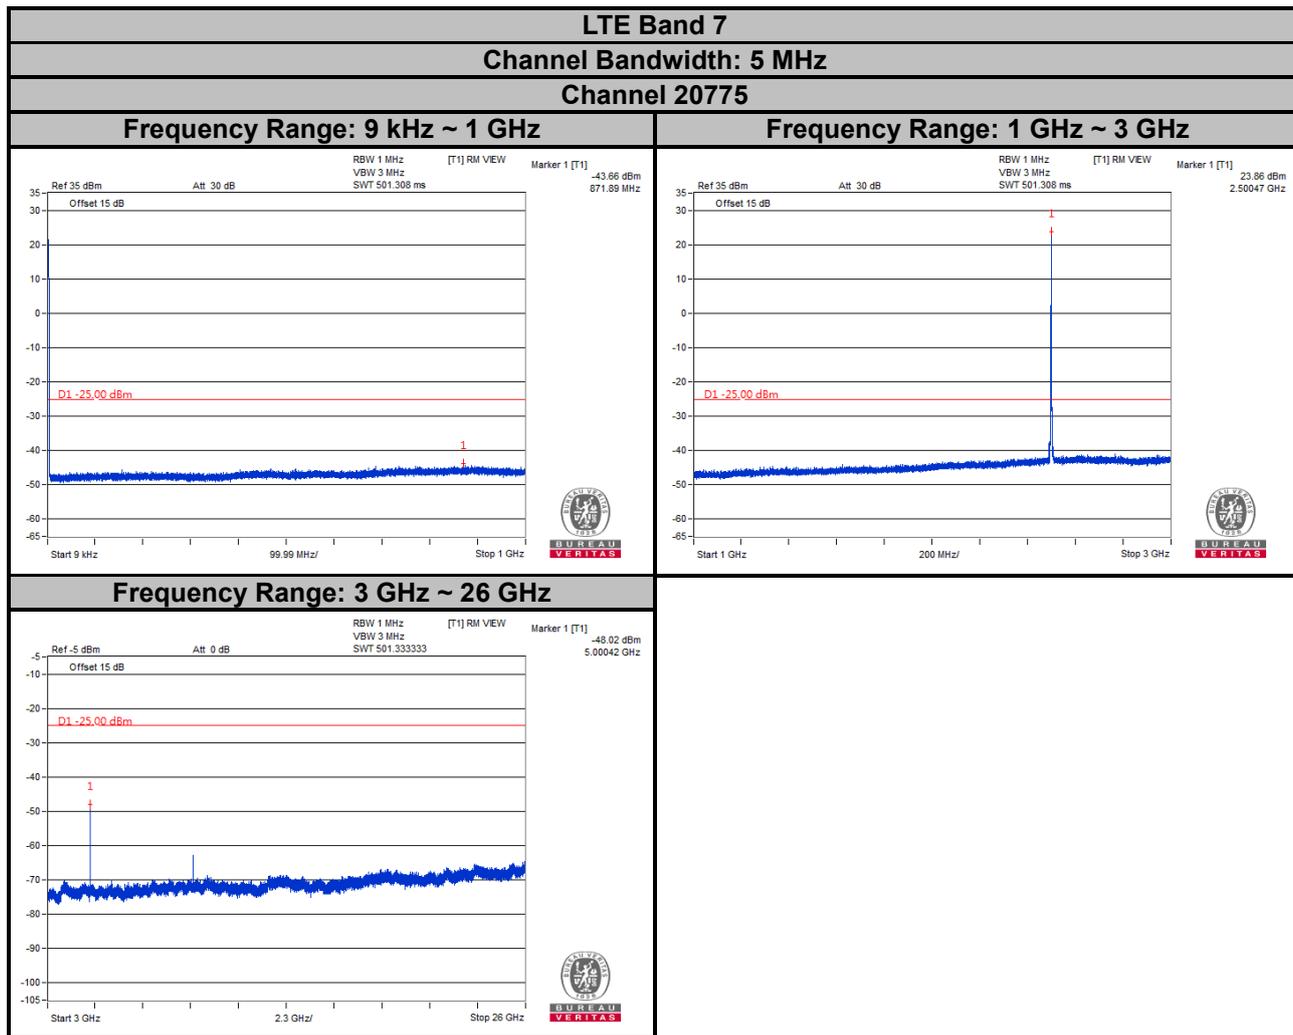


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 7


Channel Bandwidth: 5 MHz

Channel 21100


Frequency Range: 9 kHz ~ 1 GHz

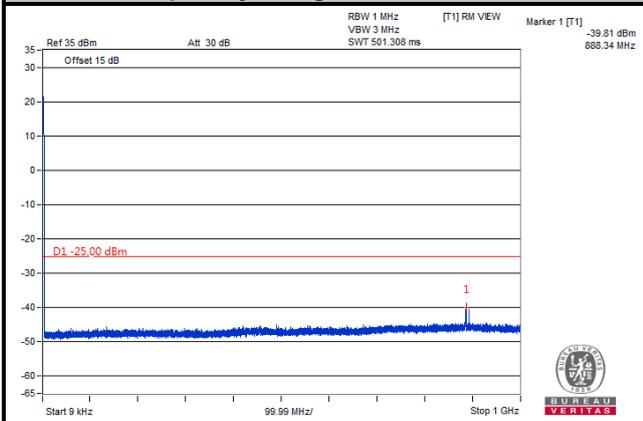

Frequency Range: 1 GHz ~ 3 GHz

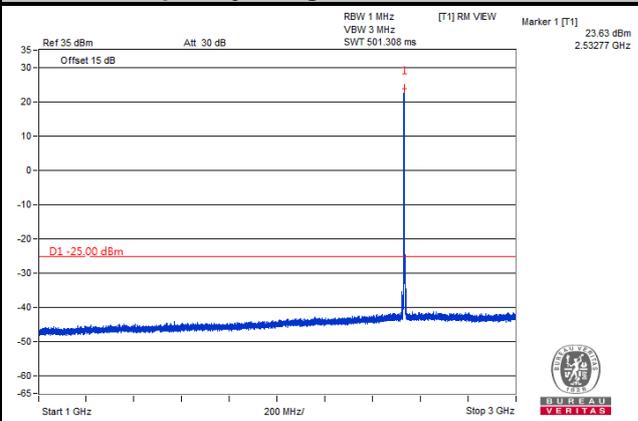

Frequency Range: 3 GHz ~ 26 GHz

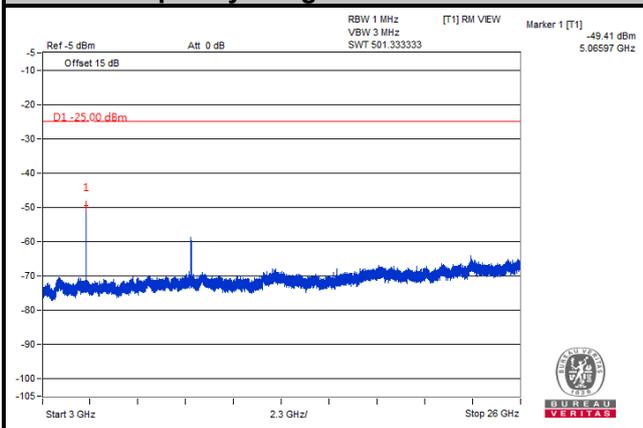


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 7


Channel Bandwidth: 5 MHz

Channel 21425


Frequency Range: 9 kHz ~ 1 GHz

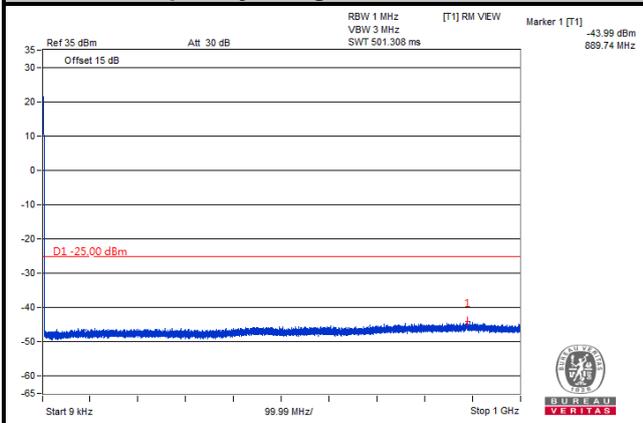


Frequency Range: 1 GHz ~ 3 GHz

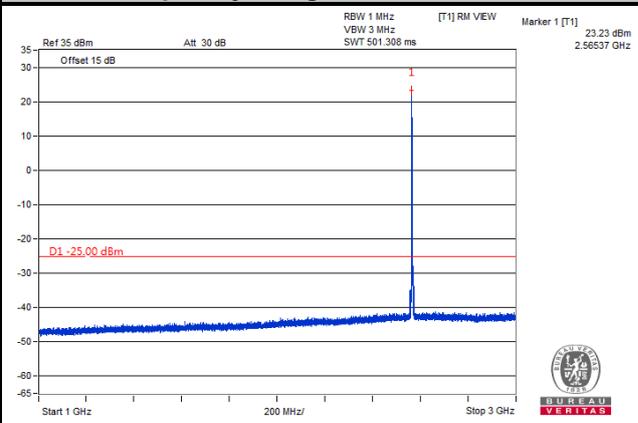


Frequency Range: 3 GHz ~ 26 GHz

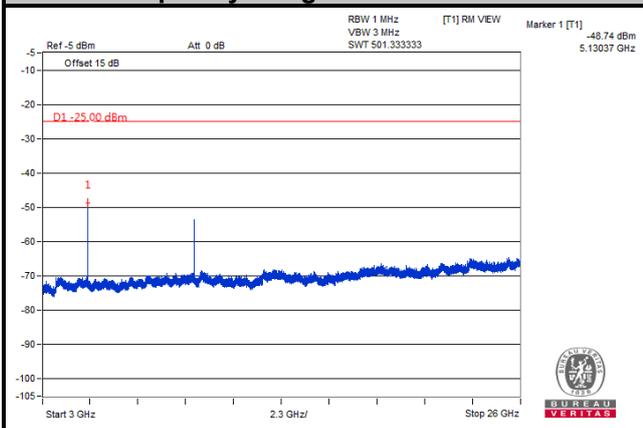


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

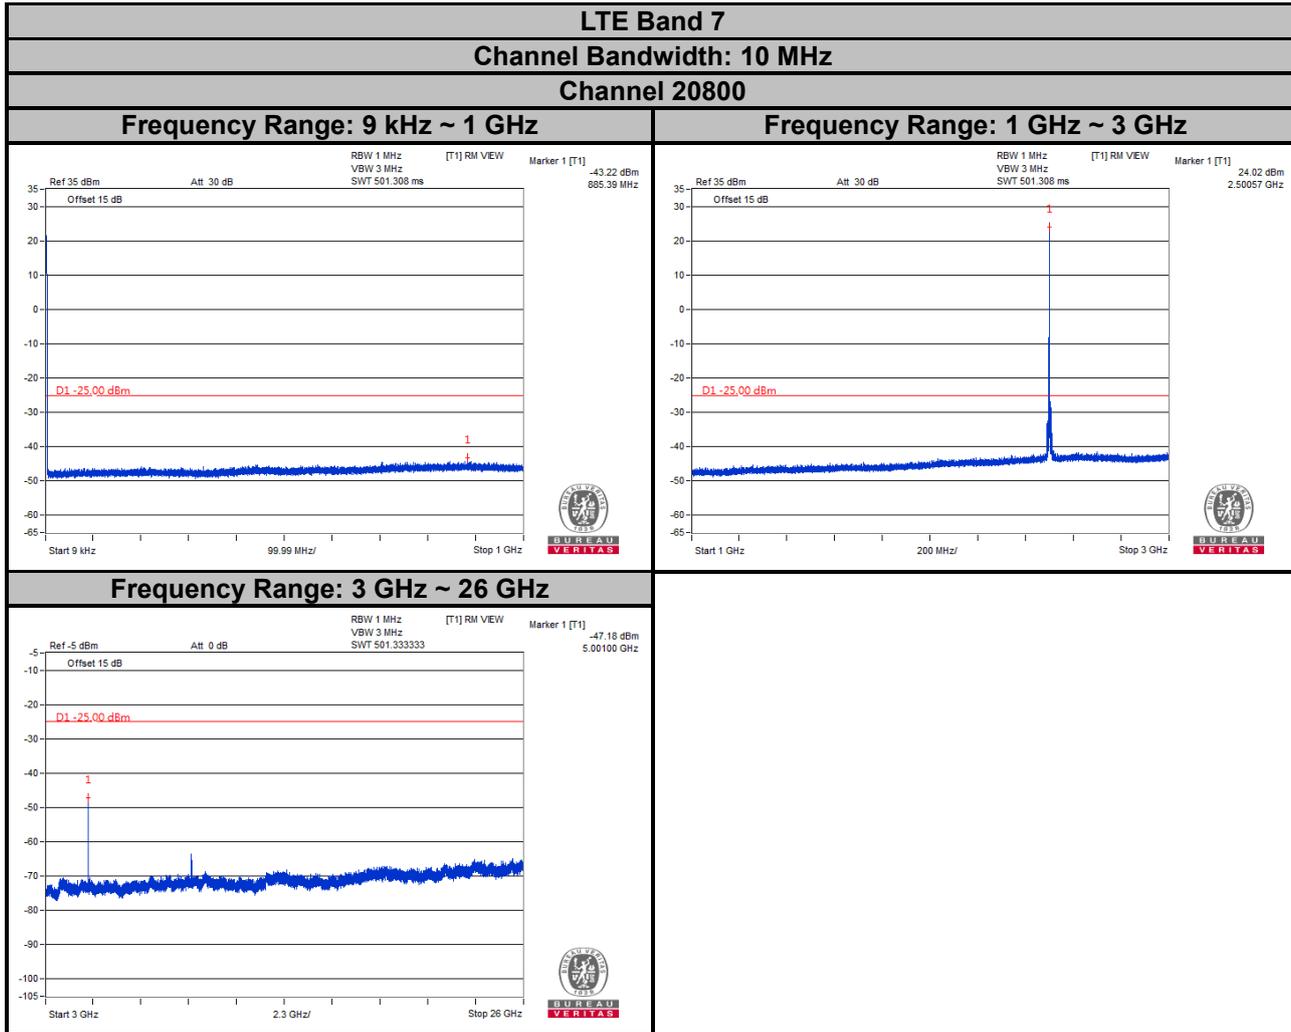

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

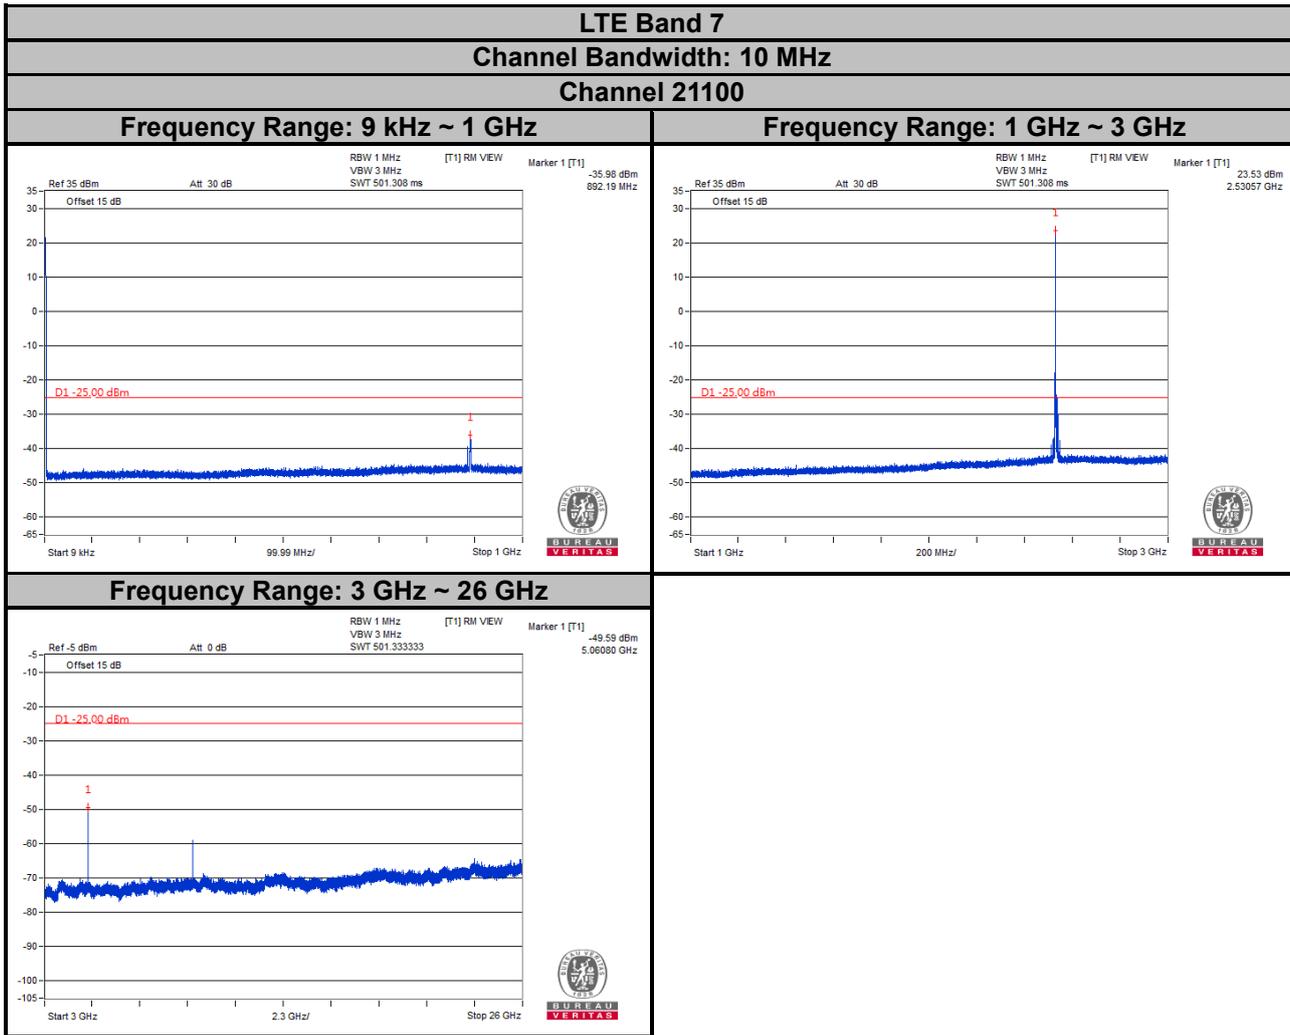

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

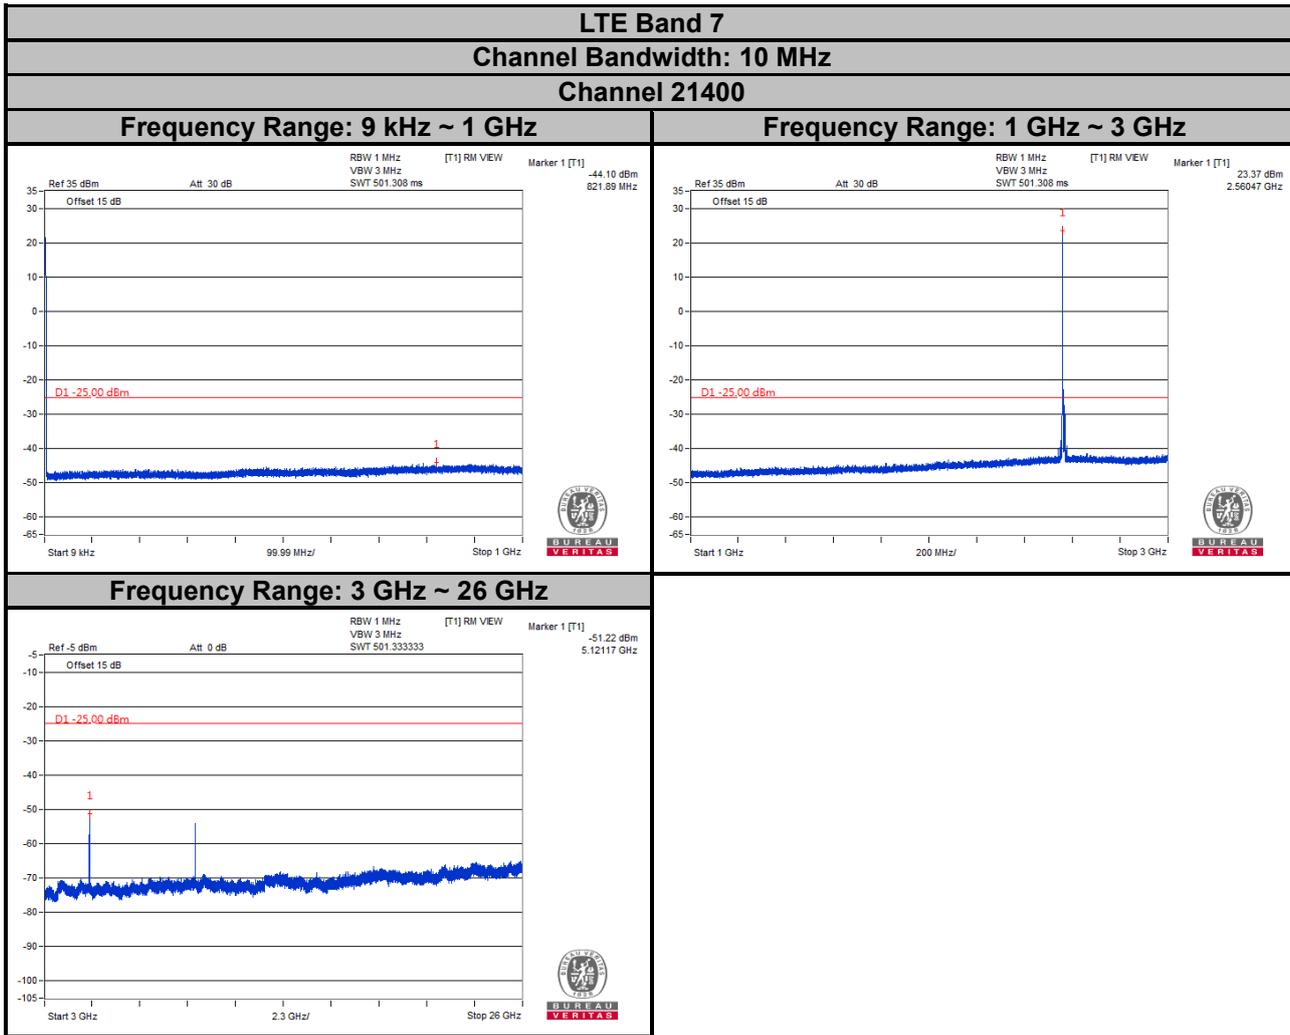

Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 7

Channel Bandwidth: 15 MHz


Channel 20825

Frequency Range: 9 kHz ~ 1 GHz


Frequency Range: 1 GHz ~ 3 GHz

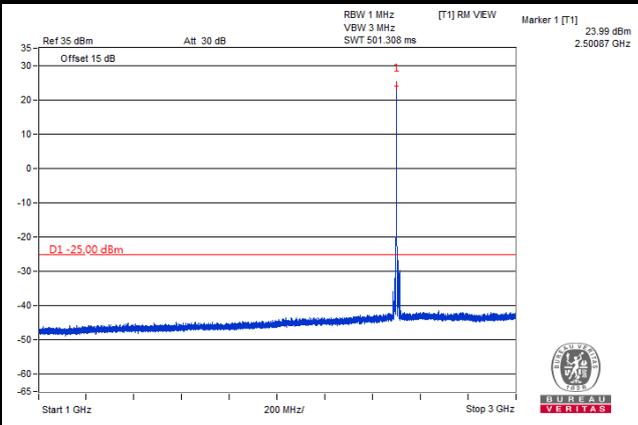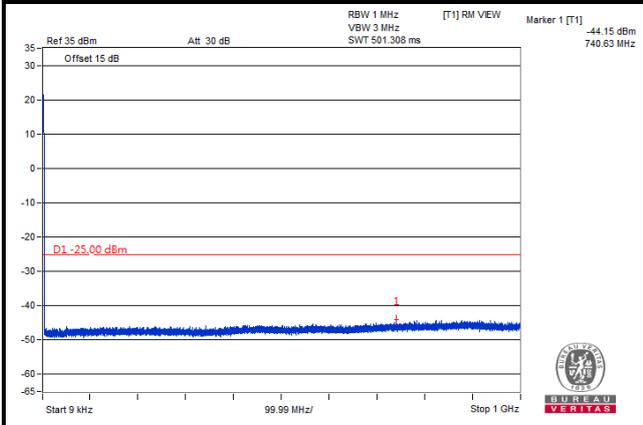


Frequency Range: 3 GHz ~ 26 GHz

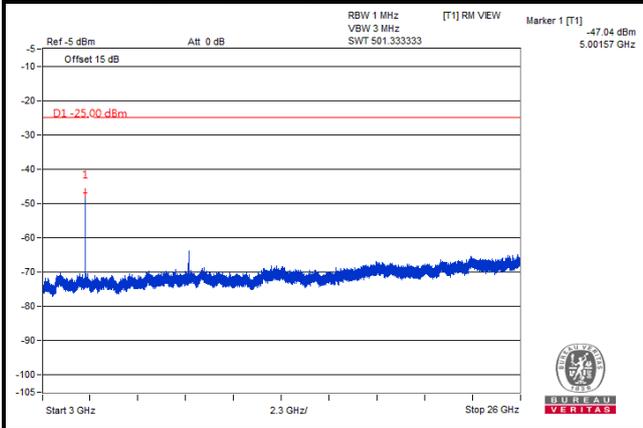

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

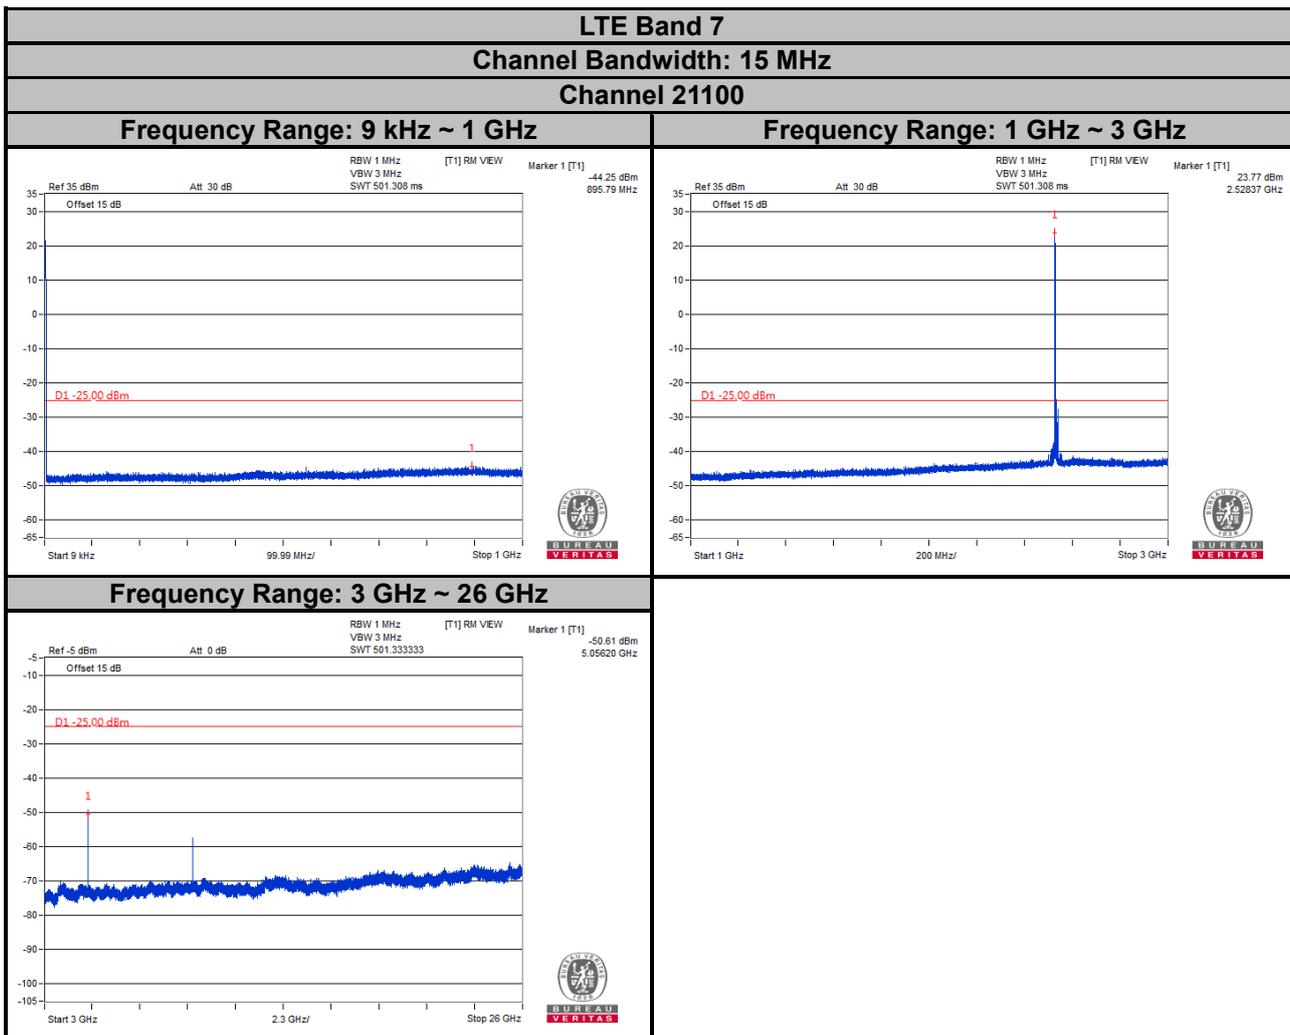

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

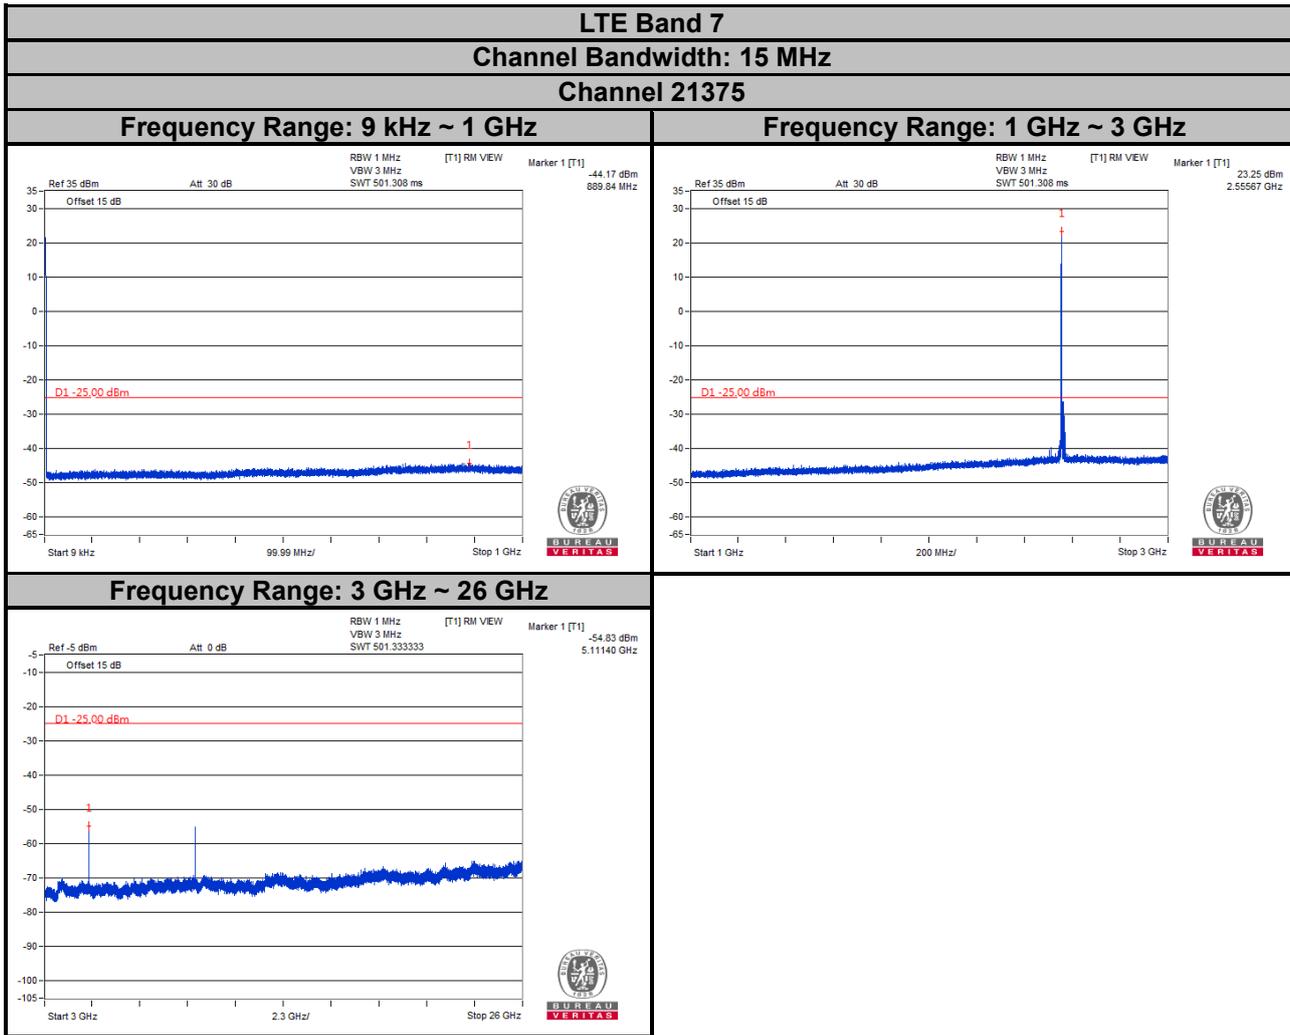

Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 7

Channel Bandwidth: 20 MHz


Channel 20850

Frequency Range: 9 kHz ~ 1 GHz


Frequency Range: 1 GHz ~ 3 GHz

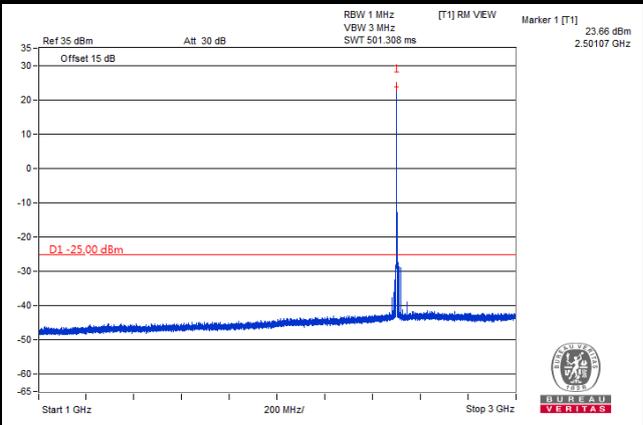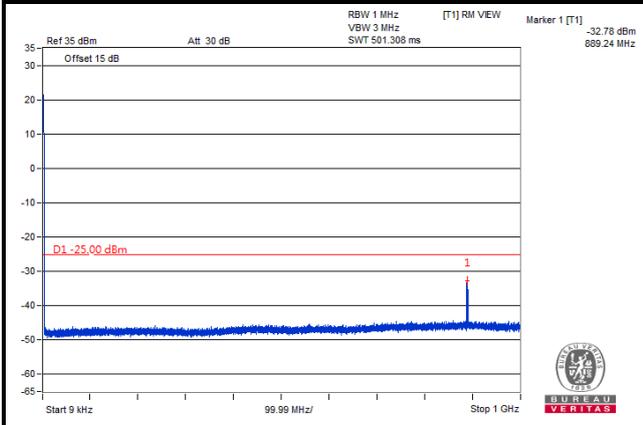


Frequency Range: 3 GHz ~ 26 GHz

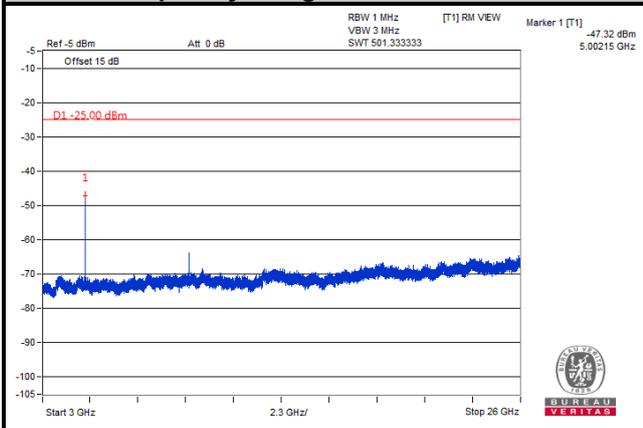


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

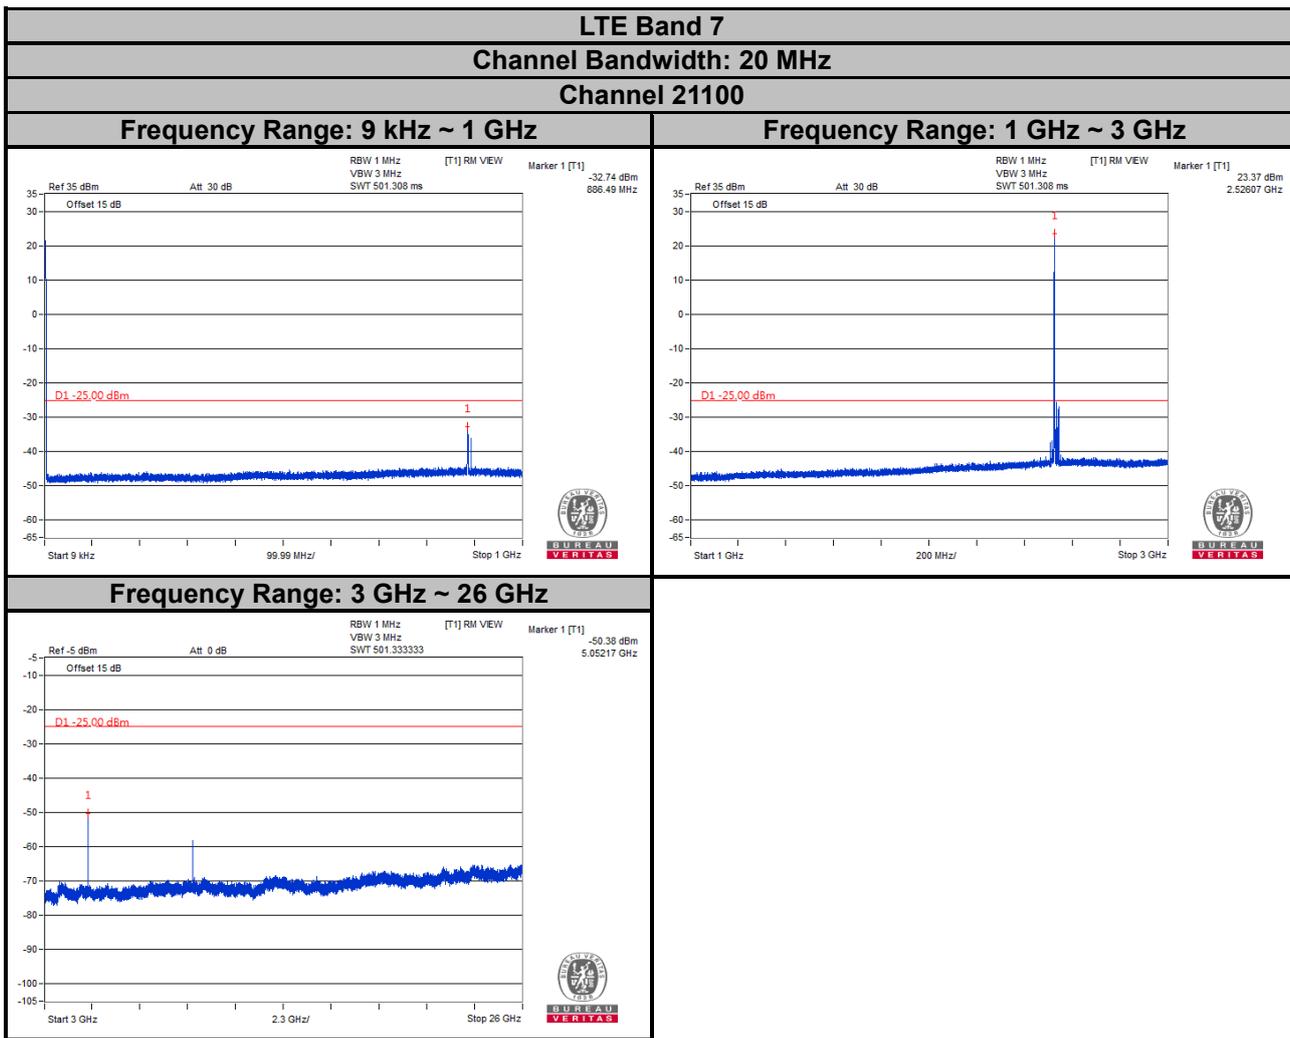


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

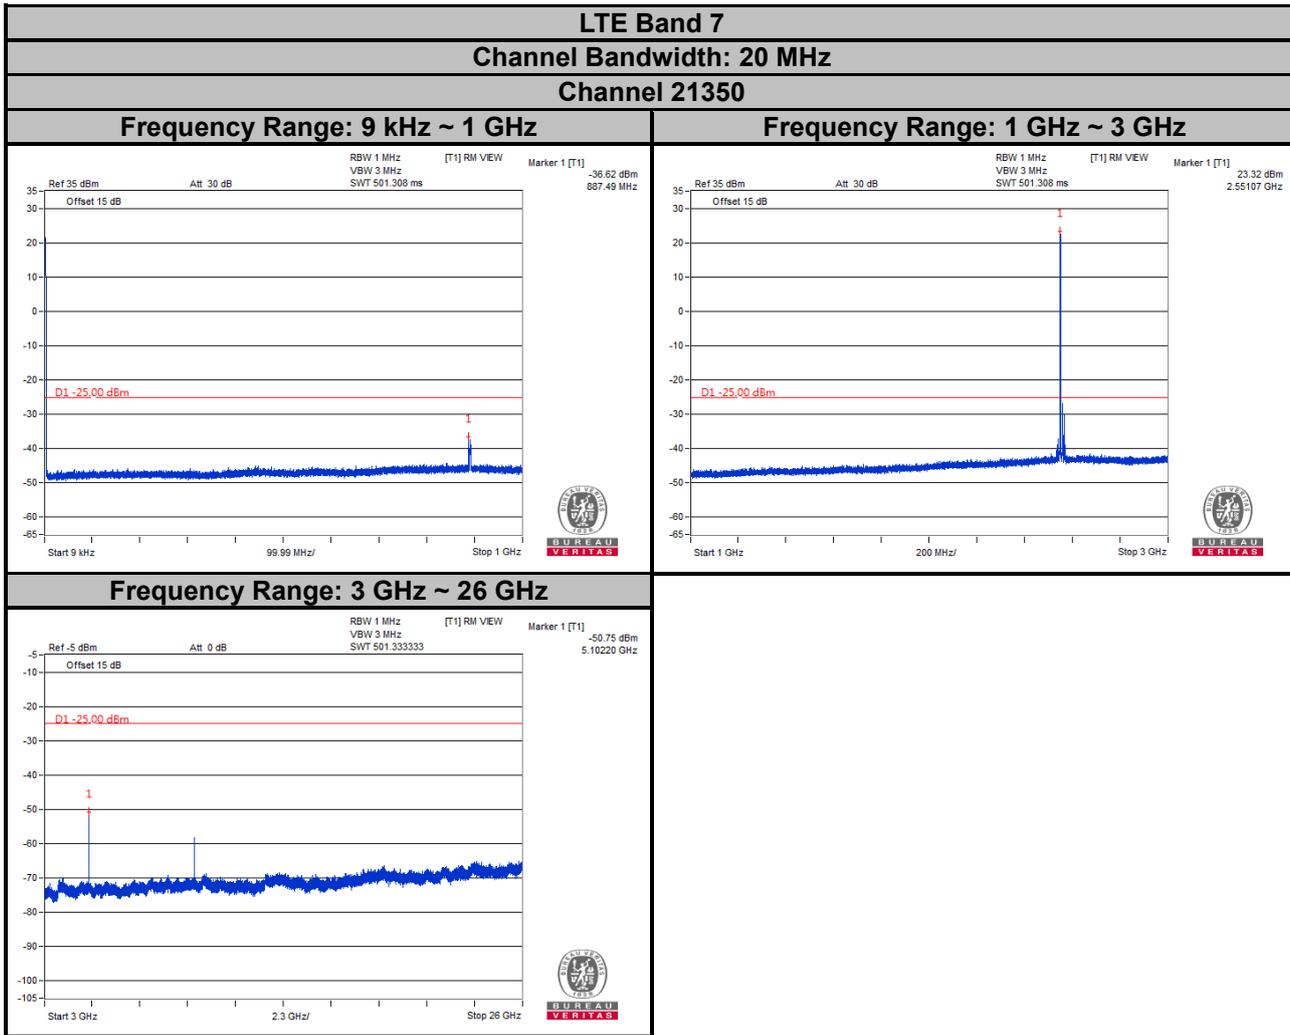


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

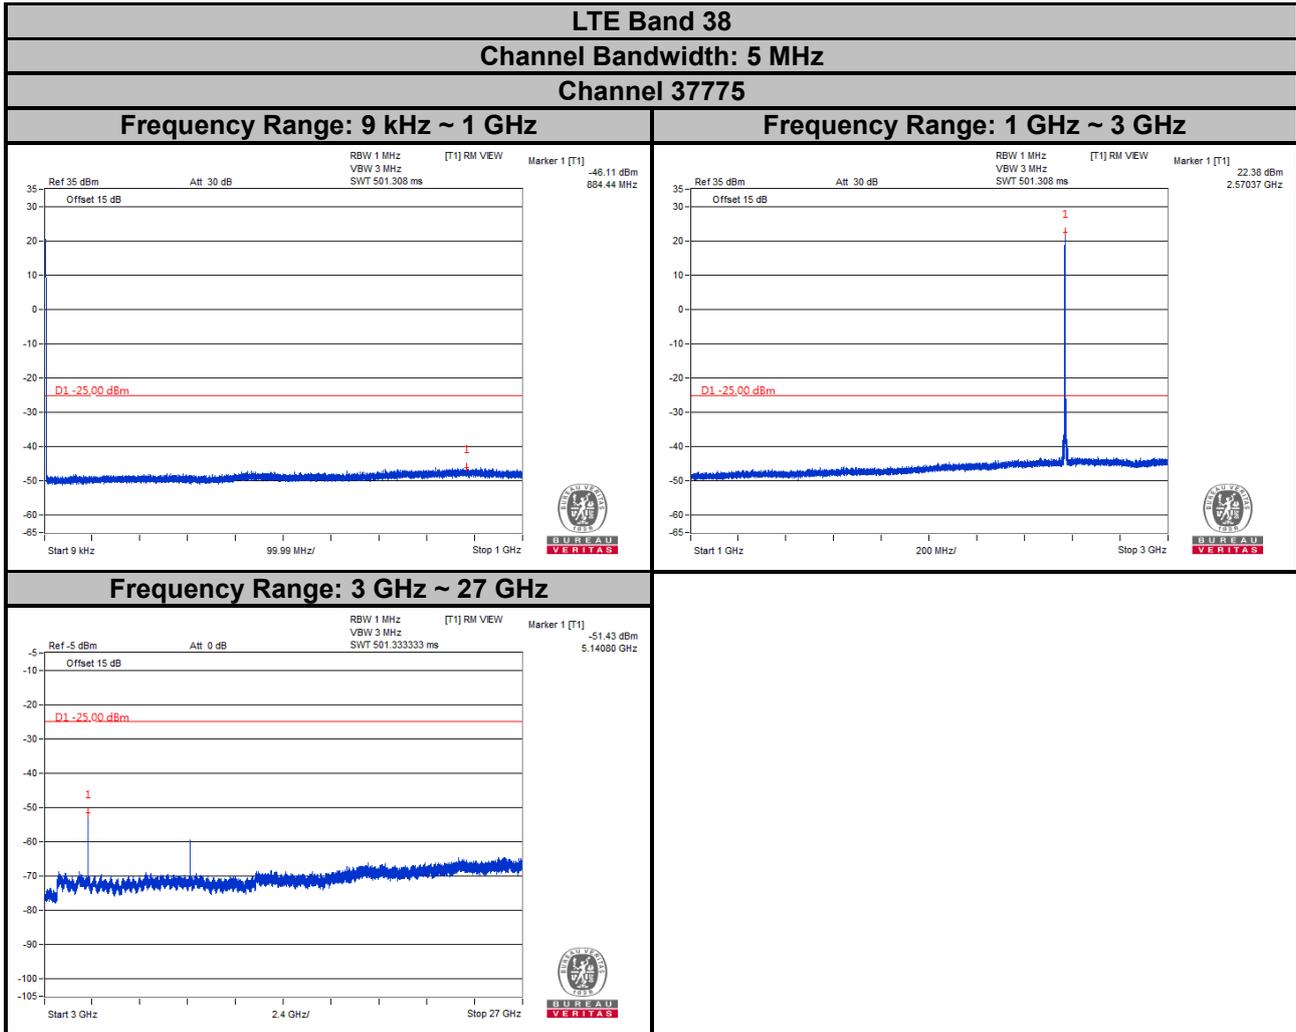


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

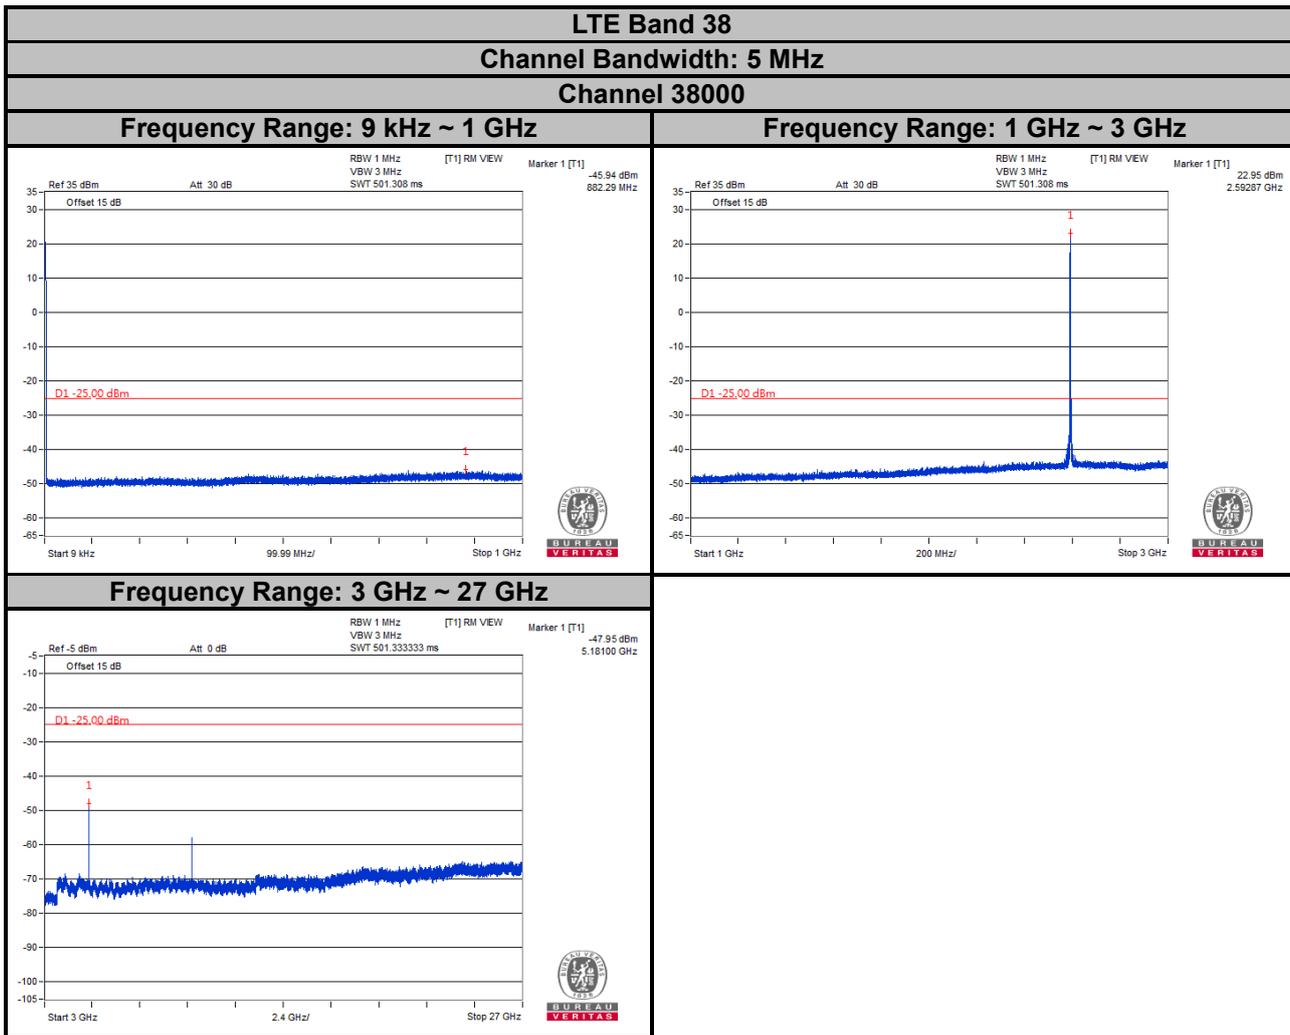


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

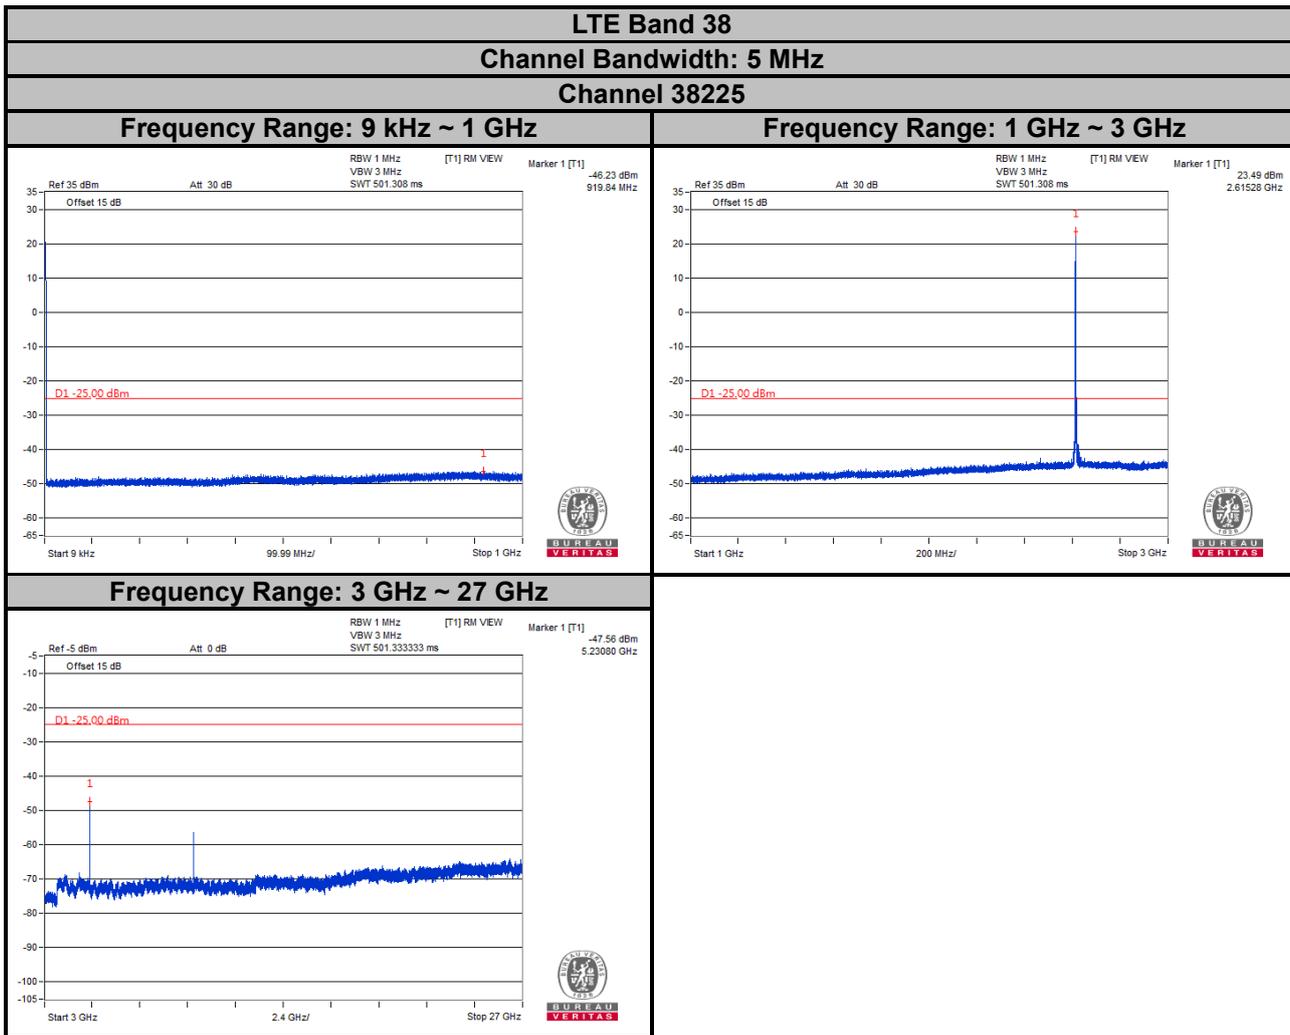


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

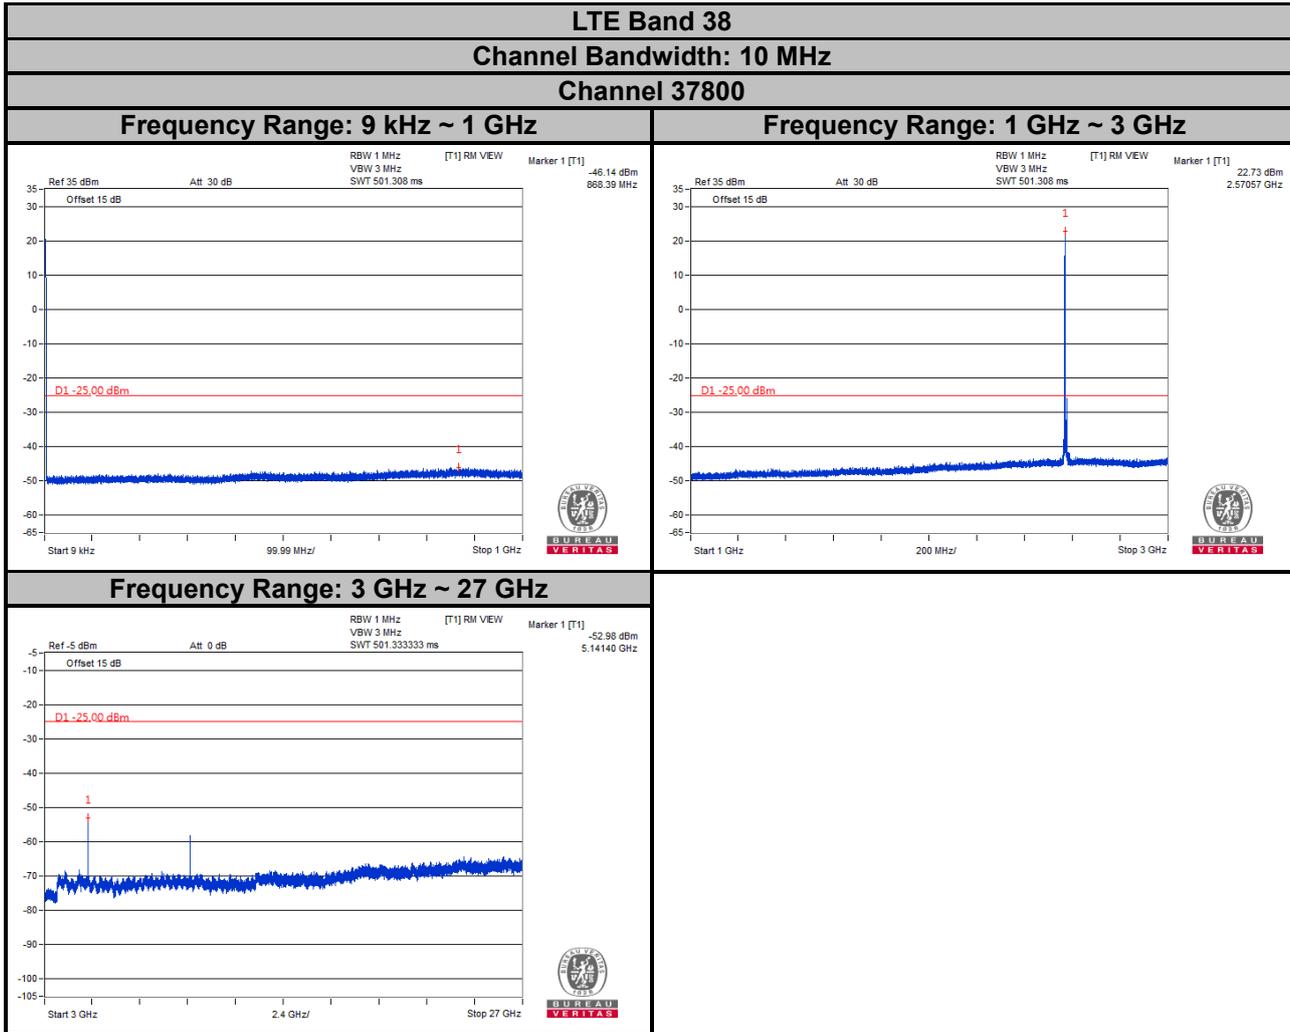


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

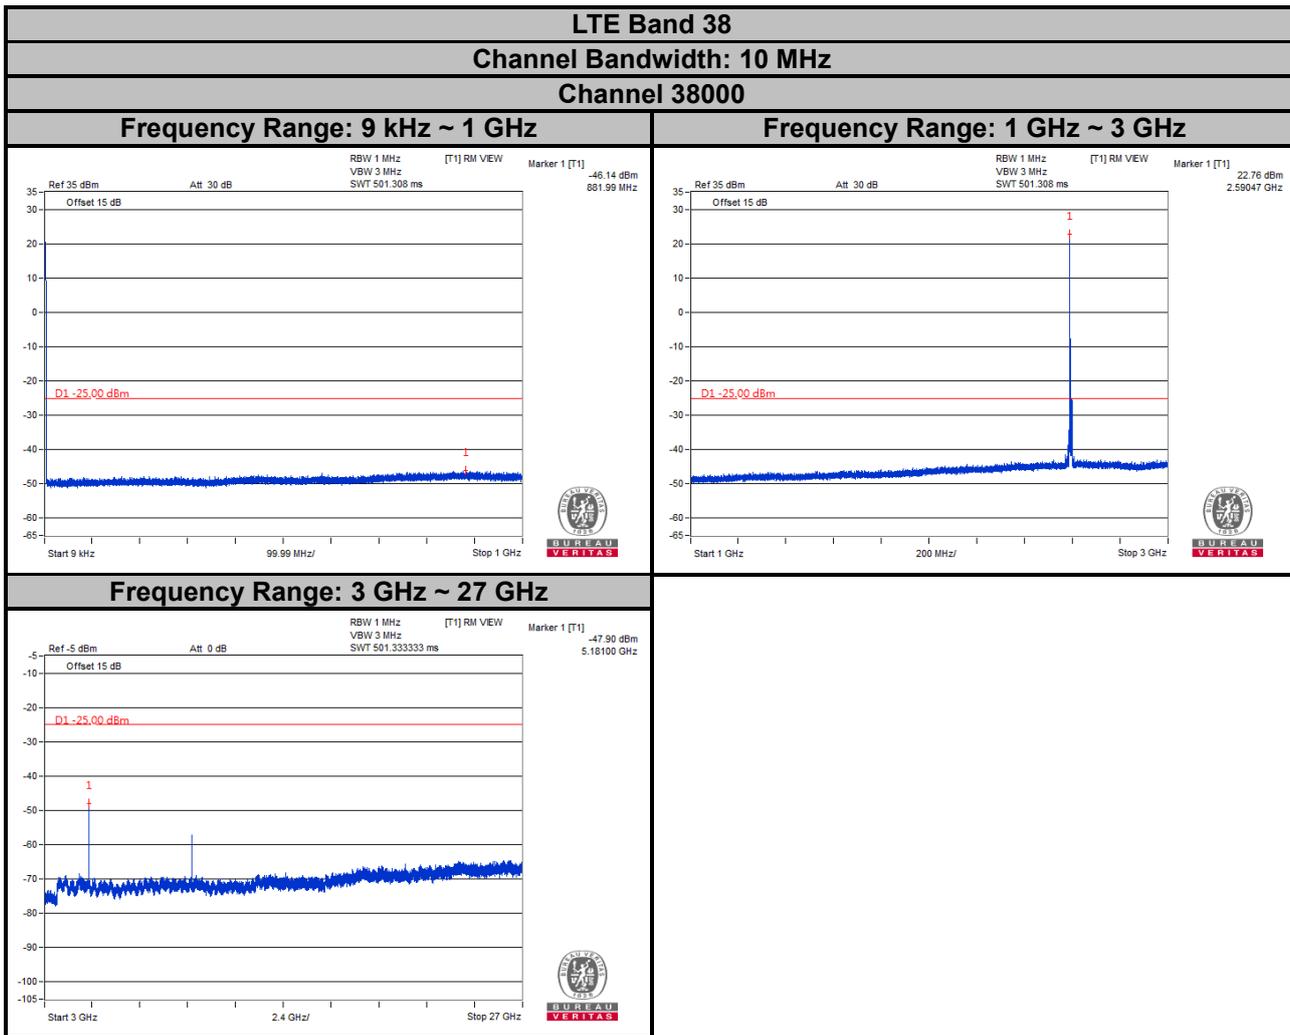


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

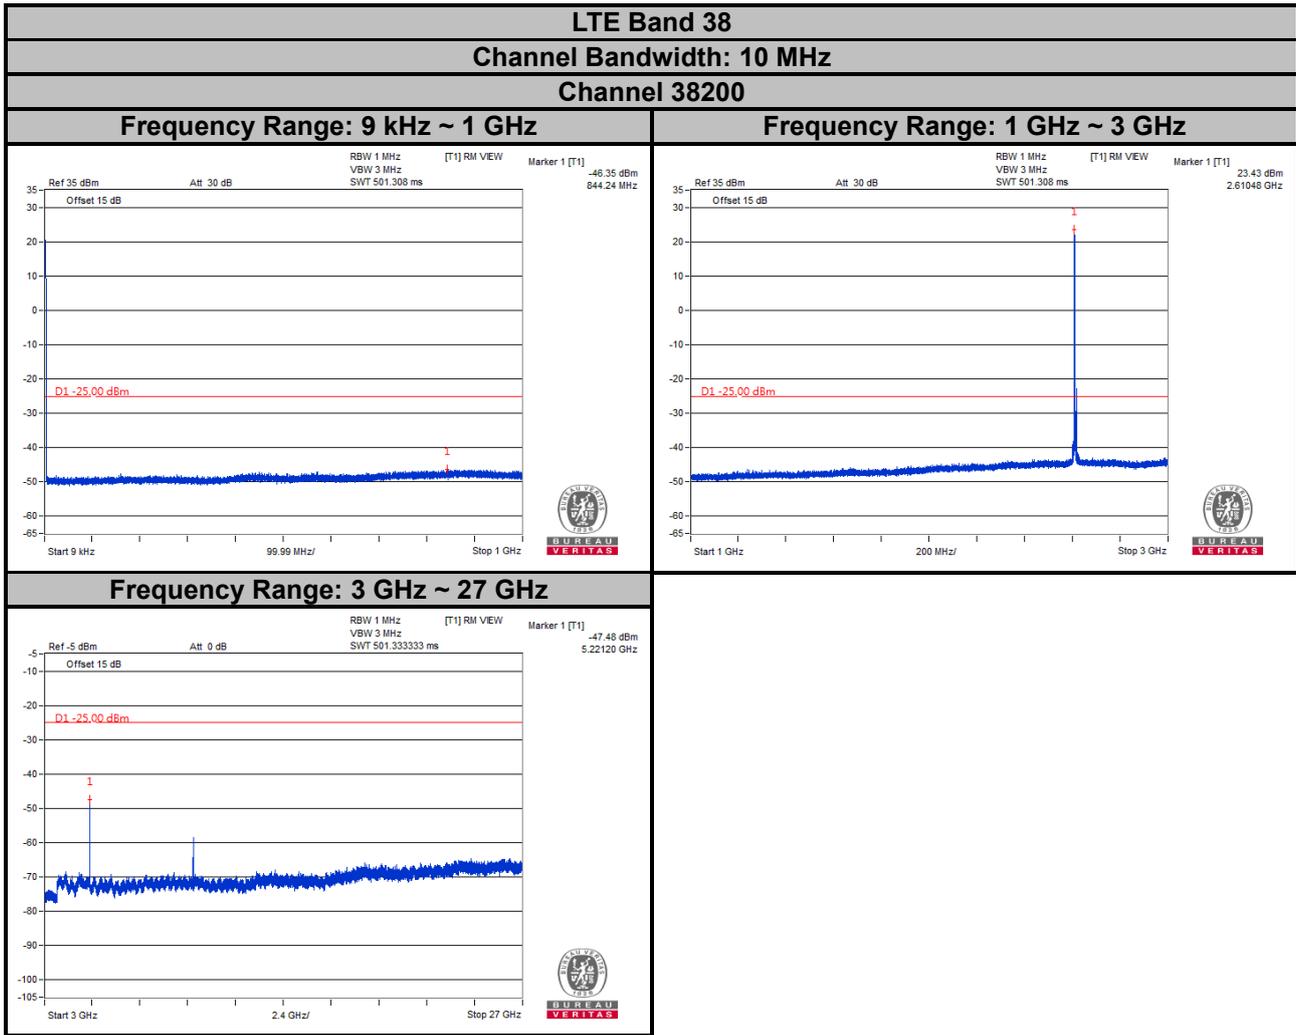


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

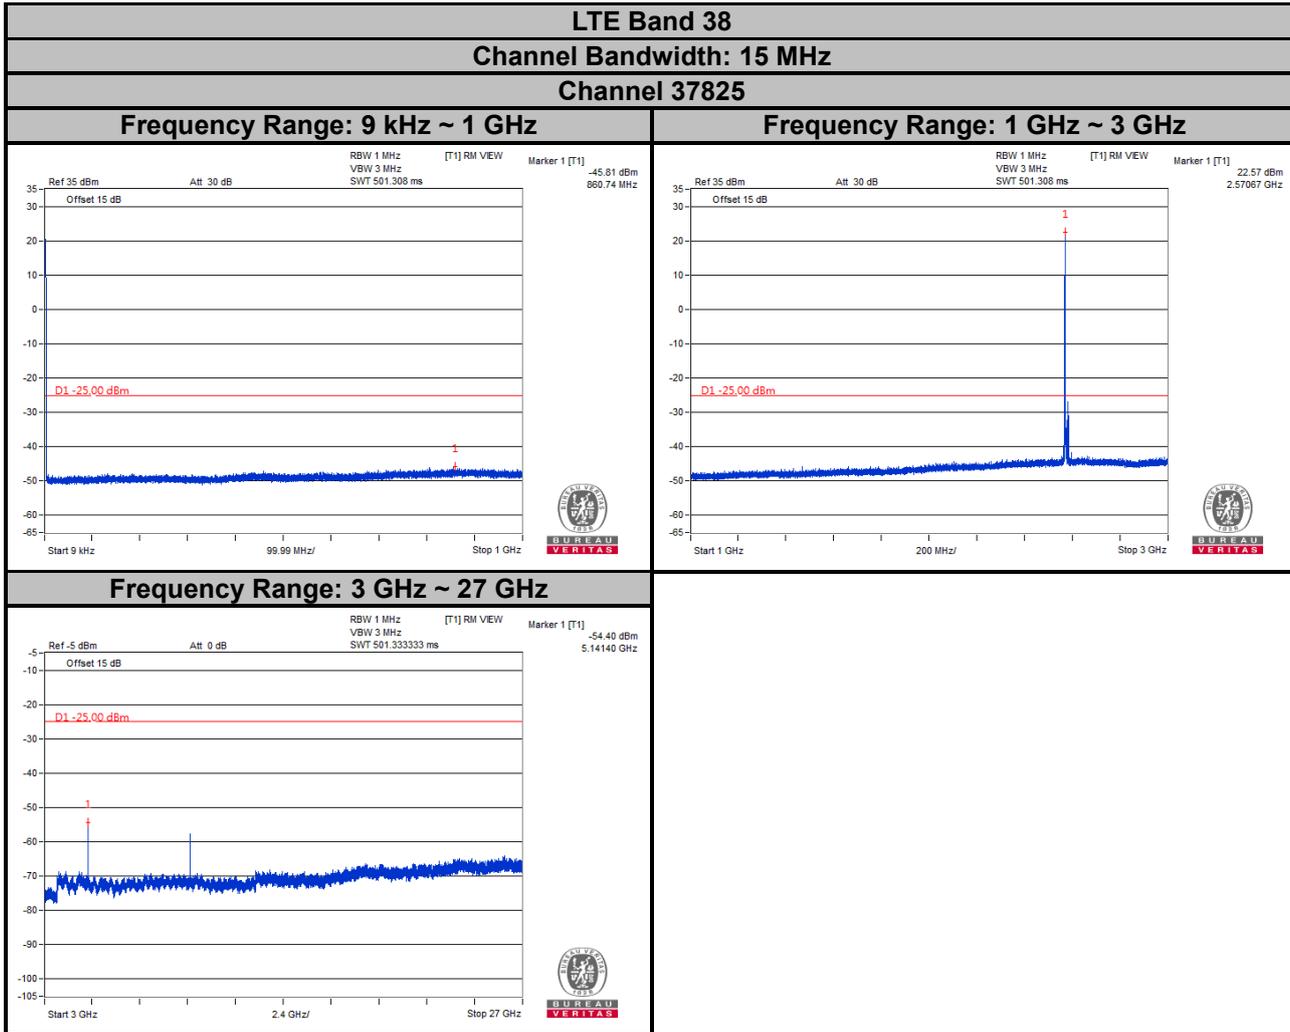

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

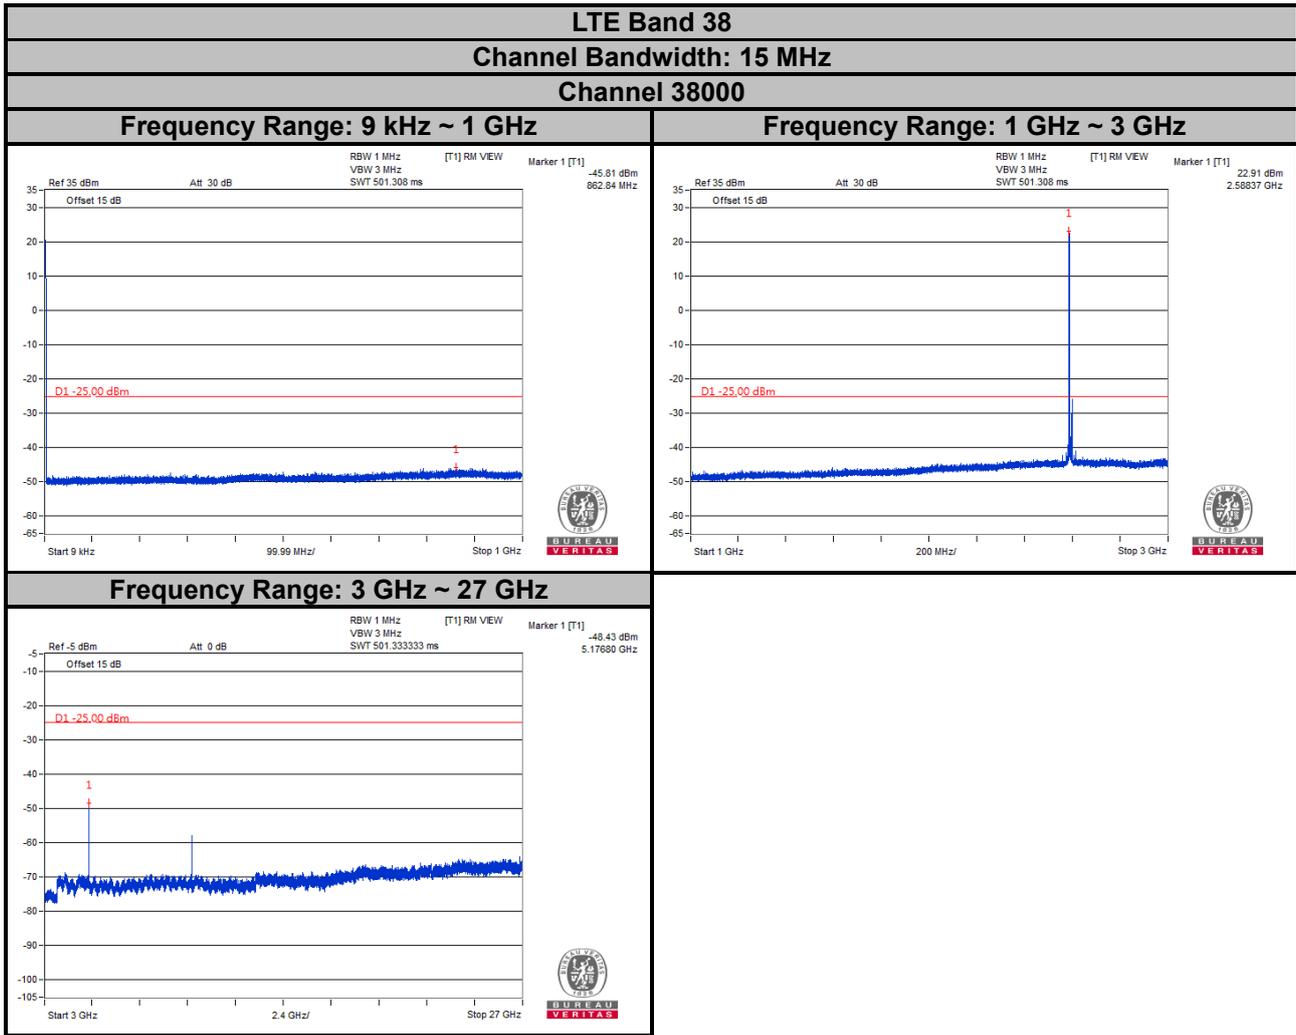

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

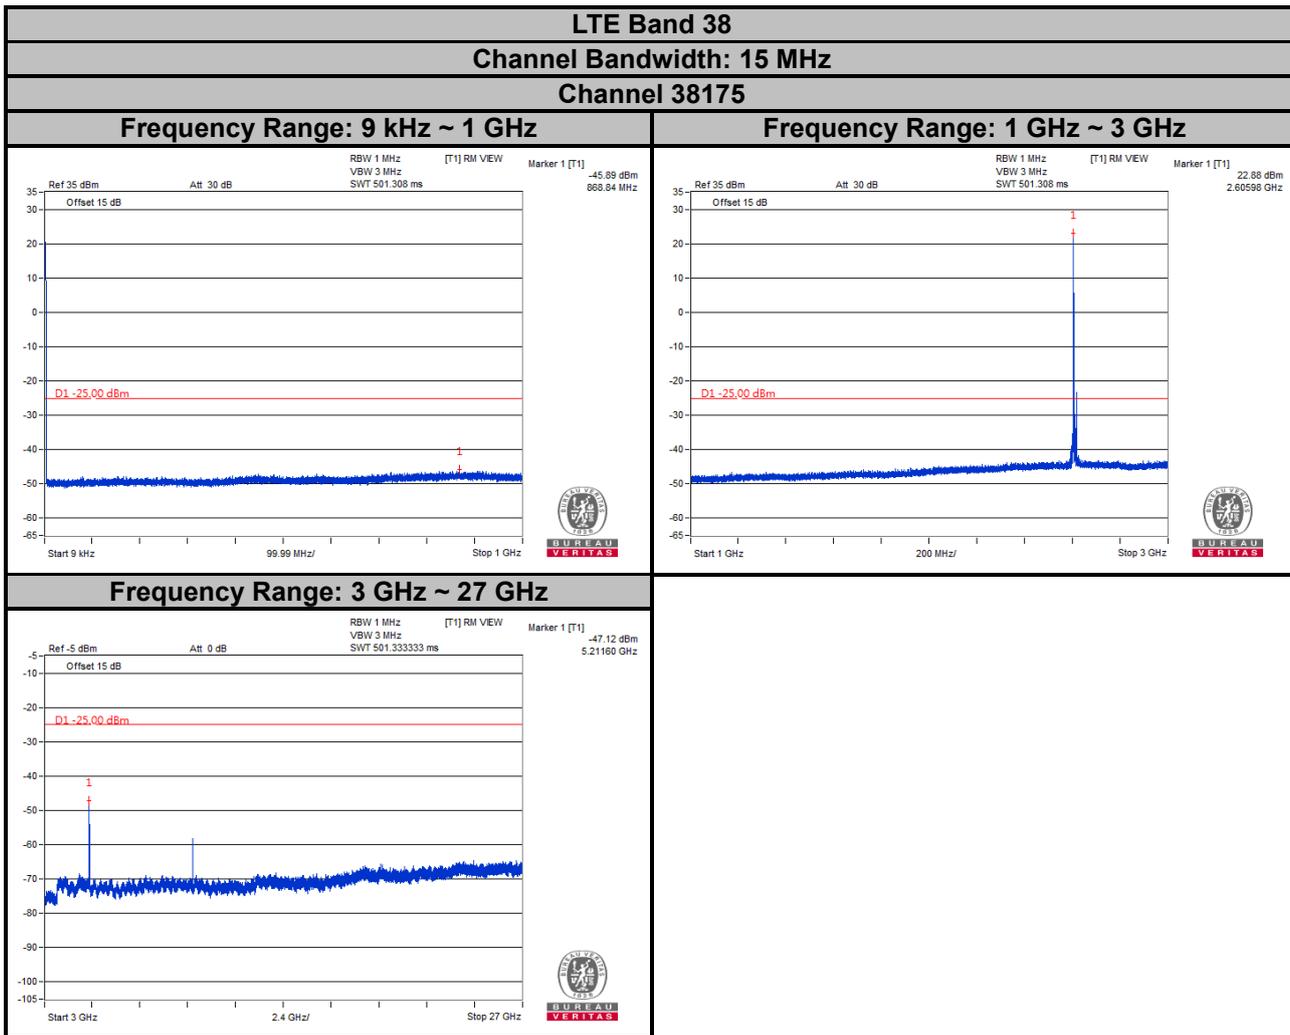


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 20 MHz

Channel 37850


Frequency Range: 9 kHz ~ 1 GHz

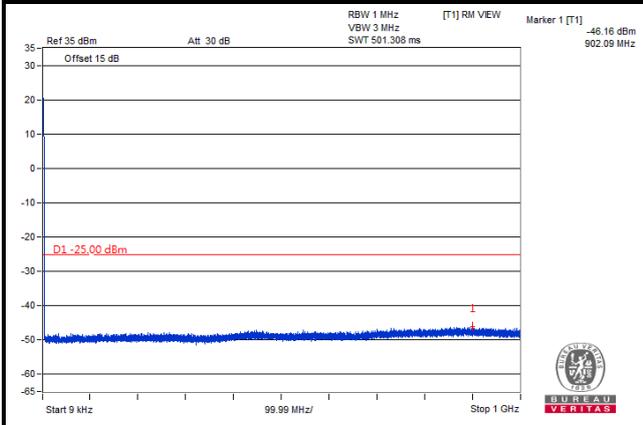


Frequency Range: 1 GHz ~ 3 GHz

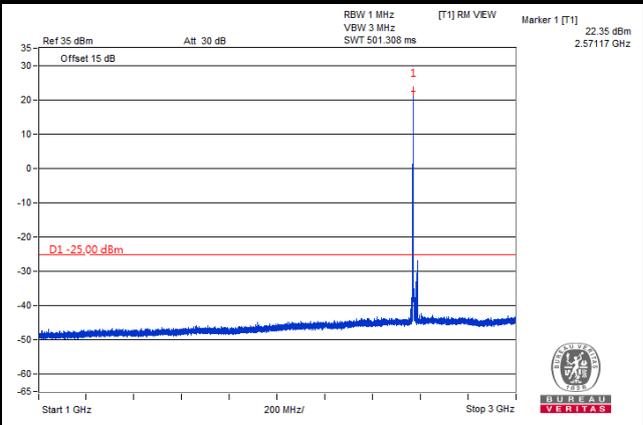


Frequency Range: 3 GHz ~ 27 GHz

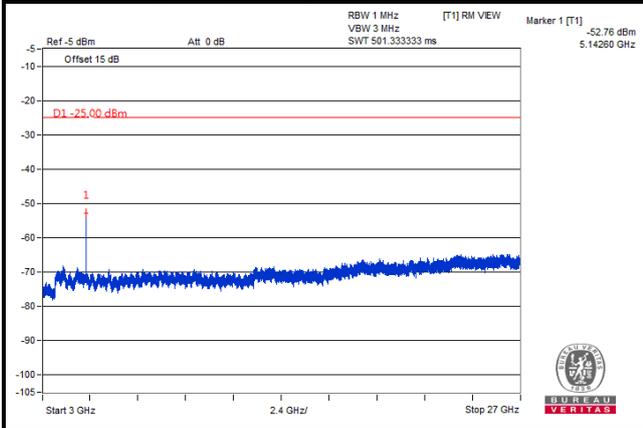

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

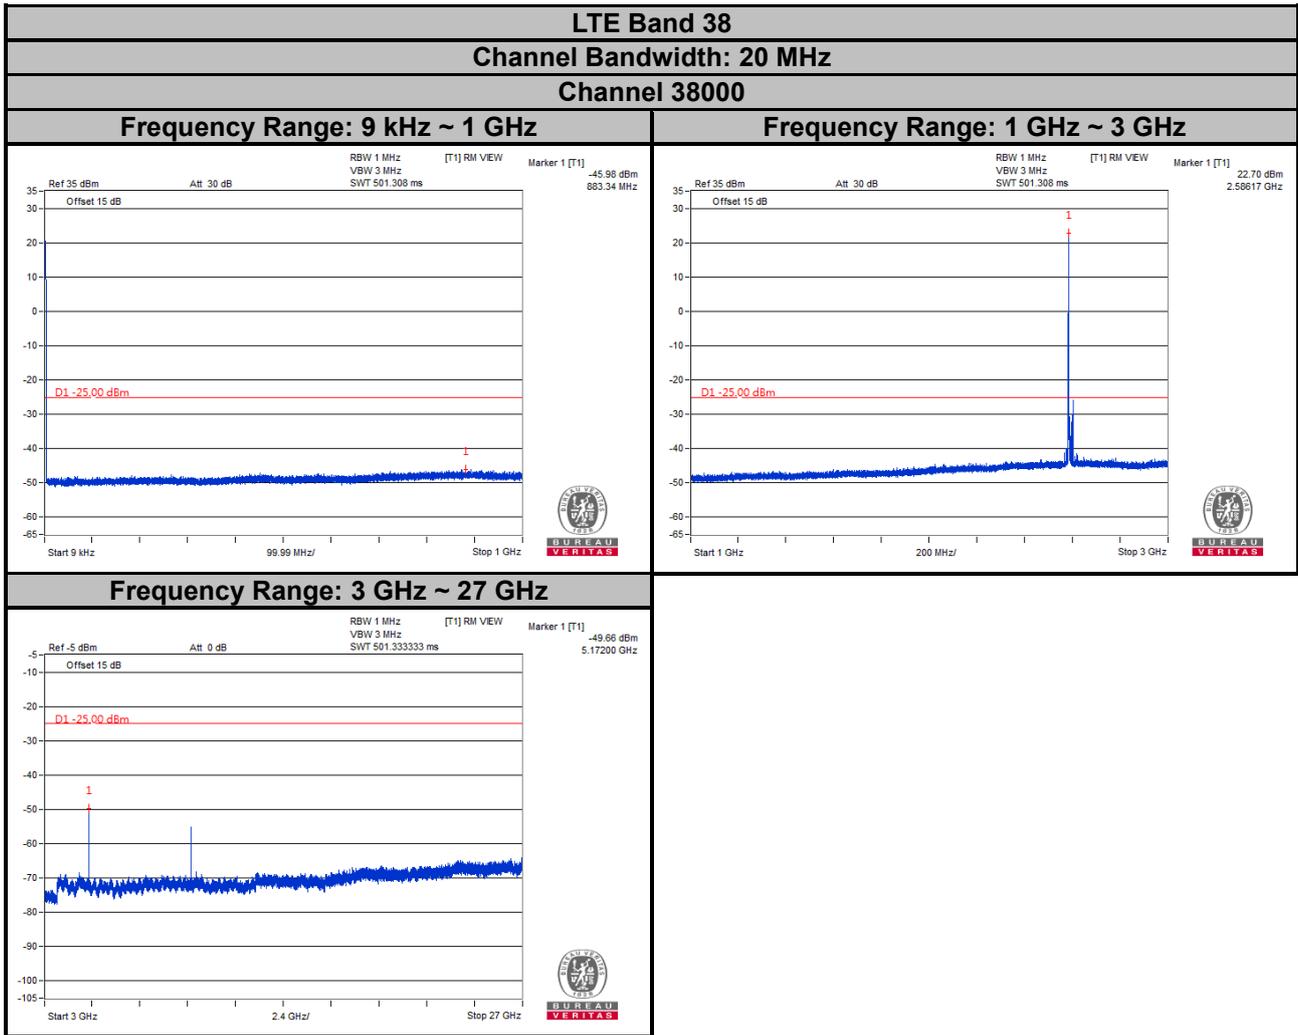

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

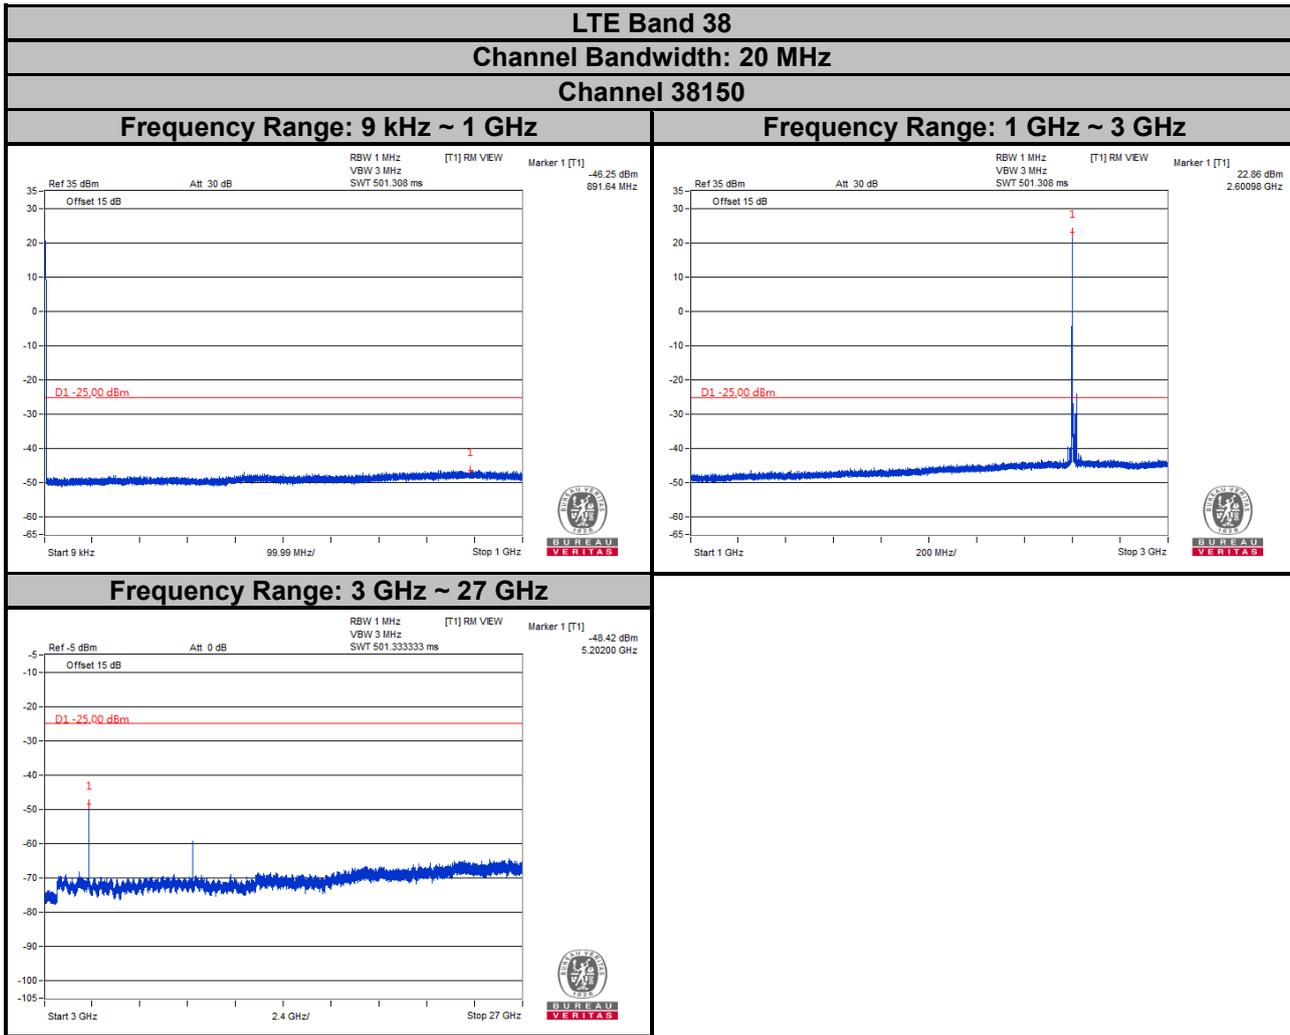

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.

NOTE:


1. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

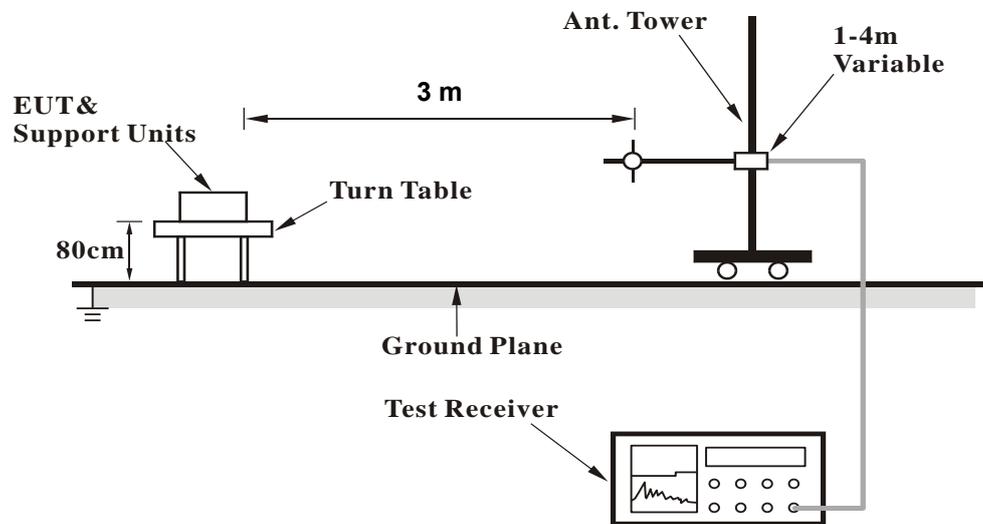

<Radiated Emission above 1 GHz>

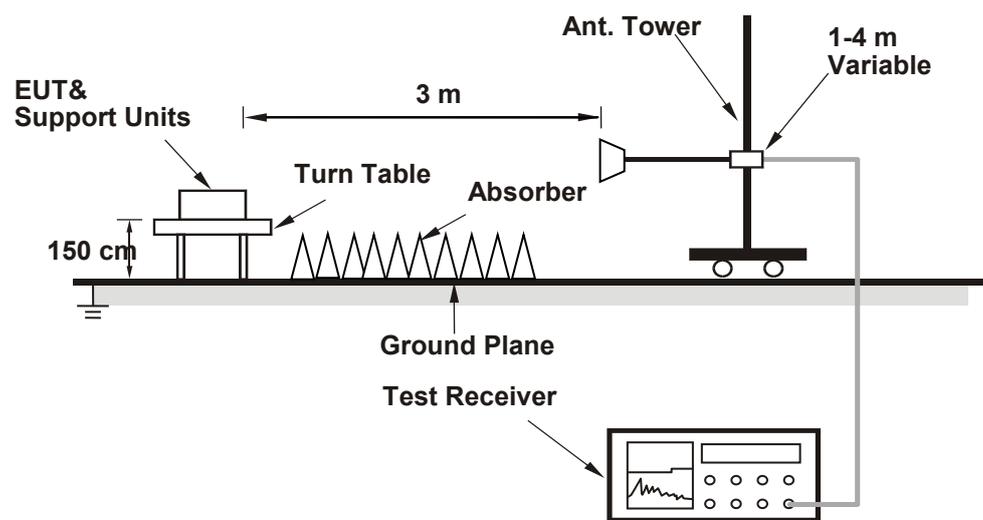

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


LTE Band 7, Channel Bandwidth: 5MHz

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	84.32	-45.30	-51.20	-0.50	-51.70	-25.00	-26.70
2	148.34	-51.20	-55.20	-0.20	-55.40	-25.00	-30.40
3	315.18	-49.00	-58.60	5.20	-53.40	-25.00	-28.40
4	745.86	-48.10	-49.20	4.70	-44.50	-25.00	-19.50
5	893.30	-54.00	-51.40	3.90	-47.50	-25.00	-22.50
6	937.92	-55.40	-52.20	3.90	-48.30	-25.00	-23.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

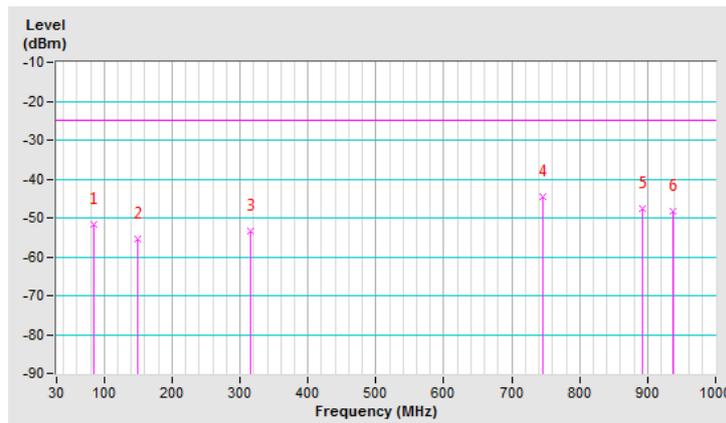


Mode	TX channel 21425 (2567.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	59.10	-37.60	-37.00	-7.80	-44.80	-25.00	-19.80
2	90.14	-46.30	-52.20	1.10	-51.10	-25.00	-26.10
3	171.62	-50.10	-51.50	1.80	-49.70	-25.00	-24.70
4	745.86	-55.30	-54.40	4.70	-49.70	-25.00	-24.70
5	895.24	-53.30	-50.20	3.90	-46.30	-25.00	-21.30
6	932.10	-54.80	-50.20	3.90	-46.30	-25.00	-21.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

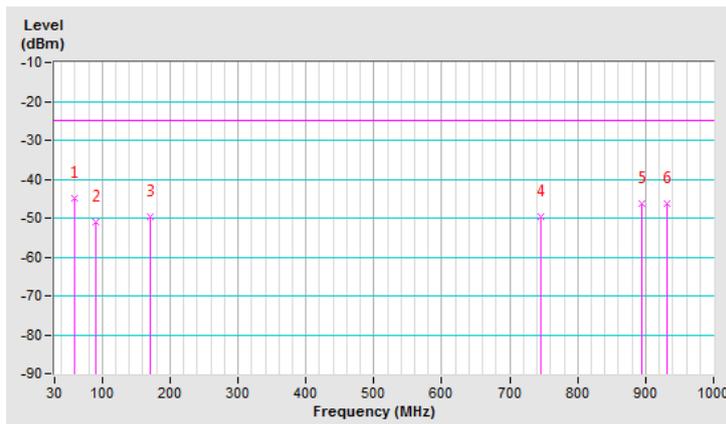


LTE Band 38, Channel Bandwidth: 5MHz

Mode	TX channel 38225 (2617.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	76.56	-42.60	-45.90	-2.80	-48.70	-25.00	-23.70
2	115.36	-35.40	-43.40	0.30	-43.10	-25.00	-18.10
3	191.02	-42.90	-56.00	4.30	-51.70	-25.00	-26.70
4	321.00	-45.30	-54.60	5.20	-49.40	-25.00	-24.40
5	336.52	-45.90	-54.70	5.20	-49.50	-25.00	-24.50
6	935.98	-54.30	-51.20	3.90	-47.30	-25.00	-22.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

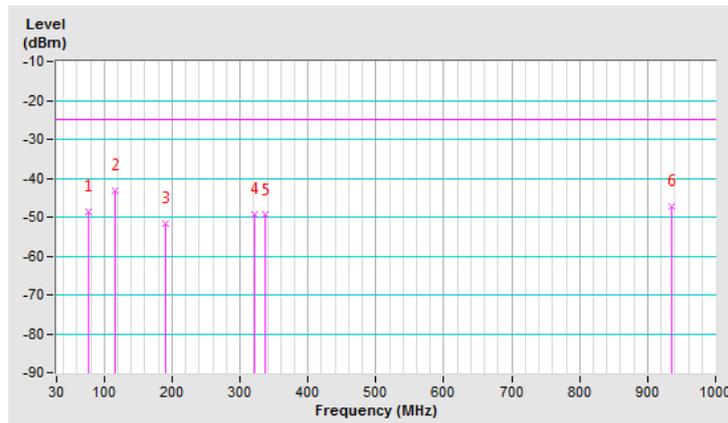


Mode	TX channel 38225 (2617.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Luis Lee		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	53.28	-41.00	-39.00	-8.50	-47.50	-25.00	-22.50
2	76.56	-50.60	-52.20	-2.80	-55.00	-25.00	-30.00
3	169.68	-55.30	-56.60	1.60	-55.00	-25.00	-30.00
4	220.12	-53.00	-58.80	5.40	-53.40	-25.00	-28.40
5	895.24	-58.90	-55.80	3.90	-51.90	-25.00	-26.90
6	932.10	-52.90	-48.30	3.90	-44.40	-25.00	-19.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

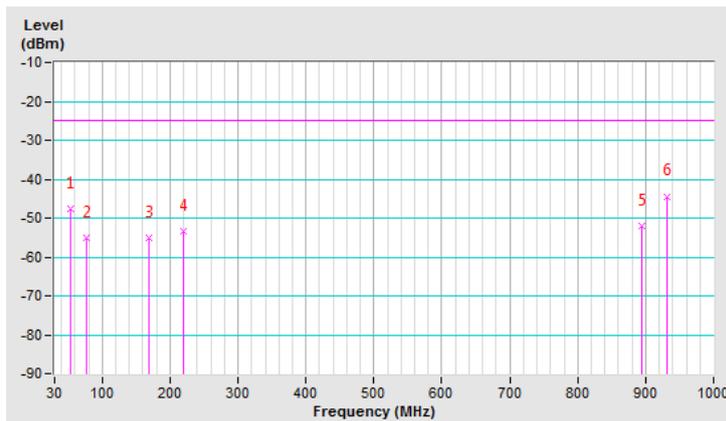

Above 1GHz

LTE Band 7, Channel Bandwidth: 5MHz

Mode	TX channel 20775 (2502.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5005.00	-70.40	-59.90	6.60	-53.30	-25.00	-28.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5005.00	-68.60	-57.90	6.60	-51.30	-25.00	-26.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-70.00	-58.70	6.60	-52.10	-25.00	-27.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-68.20	-57.40	6.60	-50.80	-25.00	-25.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5135.00	-67.90	-56.00	6.60	-49.40	-25.00	-24.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5135.00	-68.10	-57.50	6.60	-50.90	-25.00	-25.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 7, Channel Bandwidth: 20MHz

Mode	TX channel 20850 (2510.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5020.00	-68.40	-57.70	6.60	-51.10	-25.00	-26.10

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5020.00	-68.10	-57.40	6.60	-50.80	-25.00	-25.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-69.90	-58.60	6.60	-52.00	-25.00	-27.00

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-68.60	-57.80	6.60	-51.20	-25.00	-26.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5120.00	-70.40	-58.60	6.60	-52.00	-25.00	-27.00

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5120.00	-68.00	-57.30	6.60	-50.70	-25.00	-25.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 38, Channel Bandwidth: 5MHz

Mode	TX channel 37775 (2572.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5145.00	-81.30	-69.70	6.60	-63.10	-25.00	-38.10

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5145.00	-79.80	-69.90	6.60	-63.30	-25.00	-38.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 38000 (2595.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-80.10	-68.80	6.70	-62.10	-25.00	-37.10

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-80.20	-70.10	6.70	-63.40	-25.00	-38.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 38225 (2617.5MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5235.00	-78.70	-67.30	6.60	-60.70	-25.00	-35.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5235.00	-79.80	-69.40	6.60	-62.80	-25.00	-37.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

LTE Band 38, Channel Bandwidth: 20MHz

Mode	TX channel 37850 (2580.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5160.00	-81.50	-70.00	6.70	-63.30	-25.00	-38.30

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5160.00	-78.30	-68.40	6.70	-61.70	-25.00	-36.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 38000 (2595.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-81.60	-70.30	6.70	-63.60	-25.00	-38.60

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-82.60	-72.50	6.70	-65.80	-25.00	-40.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

Mode	TX channel 38150 (2610.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	25deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5220.00	-79.80	-68.50	6.70	-61.80	-25.00	-36.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5220.00	-81.40	-71.10	6.70	-64.40	-25.00	-39.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---