

FCC RF Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : SmartBook
BRAND NAME : HP
MODEL NAME : HSTNH-F23C
FCC ID : B94HHF23C
MARKETING NAME : Compaq AirLife 100
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
WCDMA Band V : 826.4 ~ 846.6 MHz /
871.4 ~ 891.6 MHz
WCDMA Band II : 1852.4 ~ 1907.6 MHz /
1932.4 ~ 1987.6 MHz
MAX. ERP/EIRP POWER : GSM850 (GPRS 8) : 1.53 W
GSM850 (EDGE 8) : 0.49 W
GSM1900 (GPRS 8) : 1.45 W
GSM1900 (EDGE 10) : 0.66 W
WCDMA Band V (RMC 12.2Kbps) : 0.25 W
WCDMA Band II (HSDPA) : 0.53 W
EMISSION DESIGNATOR : GMSK : 246KGXW
8PSK : 244KG7W
QPSK : 4M18F9W

The product was received on Nov. 12, 2009 and completely tested on Dec. 16, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	6
1.4 Testing Site.....	8
1.5 Applied Standards	8
1.6 Ancillary Equipment List.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	13
3.3 Occupied Bandwidth Measurement	19
3.4 Band Edge Measurement.....	26
3.5 Conducted Emission Measurement	33
3.6 Field Strength of Spurious Radiation Measurement	49
3.7 Frequency Stability Measurement.....	63
4 LIST OF MEASURING EQUIPMENT	67
5 UNCERTAINTY OF EVALUATION	68
6 CERTIFICATION OF TAF ACCREDITATION	69
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG9N1201-01	Rev. 01	Initial issue of report	Jan. 14, 2010
FG9N1201-01	Rev. 02	Update report for revising SW version	Jan. 15, 2010

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< $43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 11.61 dB at 3760 MHz
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Hewlett-Packard Company

10955 Tantau Ave., CupertinoCA, 95014-0770, USA

1.2 Manufacturer

FOXCONN Technology Group

4F., G5, No. 2, 2nd Donghuan Road, 10th Yousong Industrial District, Longhua, Baoan, Shenzhen City,
Guangdong Province, China 518109

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	SmartBook
Brand Name	HP
Model Name	HSTNH-F23C
Marketing Name	Compaq AirLife 100
FCC ID	B94HHF23C
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 32.92 dBm GSM1900 : 30.08 dBm WCDMA Band V : 24.32 dBm WCDMA Band II : 25.11 dBm
Maximum ERP/EIRP	GSM850 (GPRS 8) : 1.53 W (31.84 dBm) GSM850 (EDGE 8) : 0.49 W (26.87 dBm) GSM1900 (GPRS 8) : 1.45 W (31.62 dBm) GSM1900 (EDGE 10) : 0.66 W (28.18 dBm) WCDMA Band V (RMC 12.2Kbps) : 0.25 W (24.01 dBm) WCDMA Band II (HSDPA) : 0.53 W (27.26 dBm)
Antenna Type	Fixed Internal Antenna
HW Version	EVT2.1
SW Version	001.053b
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : BPSK
Type of Emission	GMSK : 246KGXW 8PSK : 244KG7W QPSK : 4M18F9W
EUT Stage	Production Unit

Remark:

1. For other wireless features of this EUT, the test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

List of Accessory:

Specification of Accessory		
AC Adapter	Brand Name	Delta
	Model Name	EADP-15ZB B
	Power Rating	I/P:100-240Vac, 50-60Hz, 600mA; O/P: 9Vdc, 1670mA
	DC Power Cord Type	2.0 meter shielded cable without ferrite core
Battery	Brand Name	Dynapack
	Model Name	HSTNH-F23C-S
	Power Rating	3.7Vdc, 28Wh
	Type	Li-ion
USB Cable	Brand Name	Nwing
	Model Name	CUNC005B-T63W-EF-G
	Signal Line Type	1.1 meter shielded cable without ferrite core
LCD Panel	Brand Name	CMO
	Model Name	N101L6-L01

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For accessories equipped with this EUT, please refer to the appendix of the external photo.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS 8 Link ■ EDGE 8 Link	■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	■ GPRS 8 Link ■ EDGE 10 Link	■ GPRS 8 Link ■ EDGE 10 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ HSDPA Link	■ HSDPA Link

Note:


1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link for GSM850 band and multi-slot class 10 for 8PSK link for GSM1900 band, RMC 12.2Kbps mode for WCDMA band V and HSDPA mode for WCDMA band II, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN and WLAN, the co-location test modes are not required.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8	32.76	32.85	32.92	30.08	29.86	29.54
GPRS 10	32.73	32.82	32.88	30.03	29.83	29.50
GPRS 12	31.22	31.35	31.40	28.44	28.22	27.90
EGPRS 8	27.33	27.50	27.55	26.58	26.42	26.18
EGPRS 10	27.35	27.48	27.50	26.59	26.41	26.15
EGPRS 12	26.26	26.39	26.47	25.55	25.33	25.04

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.32	23.65	23.77	24.61	25.09	24.88
HSDPA Subtest-1	24.21	23.59	23.70	24.69	25.11	24.81
HSDPA Subtest-2	24.01	23.56	23.56	24.74	25.04	24.77
HSDPA Subtest-3	23.60	23.07	23.11	24.28	24.72	24.39
HSDPA Subtest-4	23.59	23.10	23.13	24.60	24.91	23.69
HSUPA Subtest-1	23.45	23.28	23.34	24.60	24.91	23.69
HSUPA Subtest-2	22.57	21.63	22.03	23.06	23.60	22.78
HSUPA Subtest-3	22.58	22.21	22.52	23.06	23.47	23.60
HSUPA Subtest-4	22.56	22.27	21.96	23.28	23.76	23.34
HSUPA Subtest-5	24.05	23.05	23.35	24.03	24.54	24.15

2.2 Connection Diagram of Test System

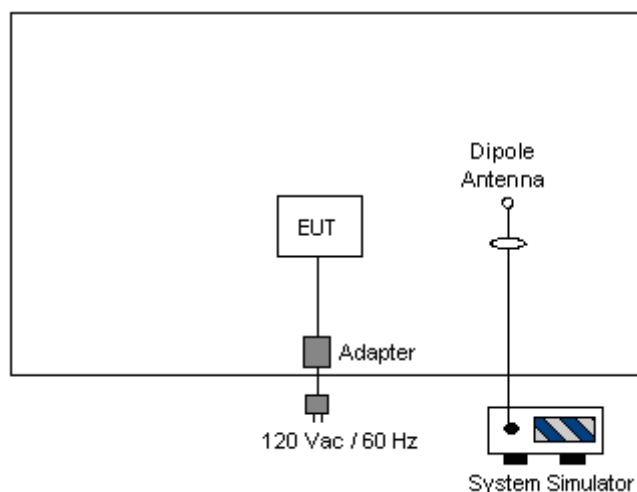

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

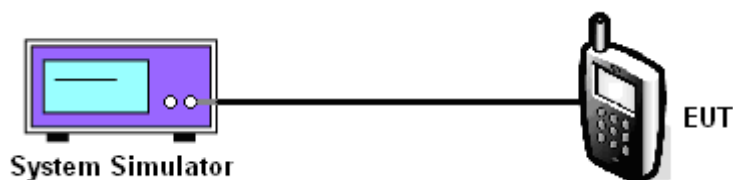

3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GPRS 8)	128 (Low)	824.2	32.76	1.89
	189 (Mid)	836.4	32.85	1.93
	251 (High)	848.8	32.92	1.96
GSM850 (EDGE 8)	128 (Low)	824.2	27.33	0.54
	189 (Mid)	836.4	27.50	0.56
	251 (High)	848.8	27.55	0.57
WCDMA Band V (RMC 12.2Kbps)	4132 (Low)	826.4	24.32	0.27
	4182 (Mid)	836.4	23.65	0.23
	4233 (High)	846.6	23.77	0.24

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GPRS 8)	512 (Low)	1850.2	30.08	1.02
	661 (Mid)	1880.0	29.86	0.97
	810 (High)	1909.8	29.54	0.90
GSM1900 (EDGE 10)	512 (Low)	1850.2	26.59	0.46
	661 (Mid)	1880.0	26.41	0.44
	810 (High)	1909.8	26.15	0.41
WCDMA Band II (HSDPA)	9262 (Low)	1852.4	24.69	0.29
	9400 (Mid)	1880.0	25.11	0.32
	9538 (High)	1907.6	24.81	0.30

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$
 P_s (dBm) : Input power to substitution antenna.
 G_s (dBi or dBd) : Substitution antenna Gain.
 $E_t = R_t + AF$
 $E_s = R_s + AF$
 AF (dB/m) : Receive antenna factor
 R_t : The highest received signal in spectrum analyzer for EUT.
 R_s : The highest received signal in spectrum analyzer for substitution antenna.

3.2.4 Test Setup

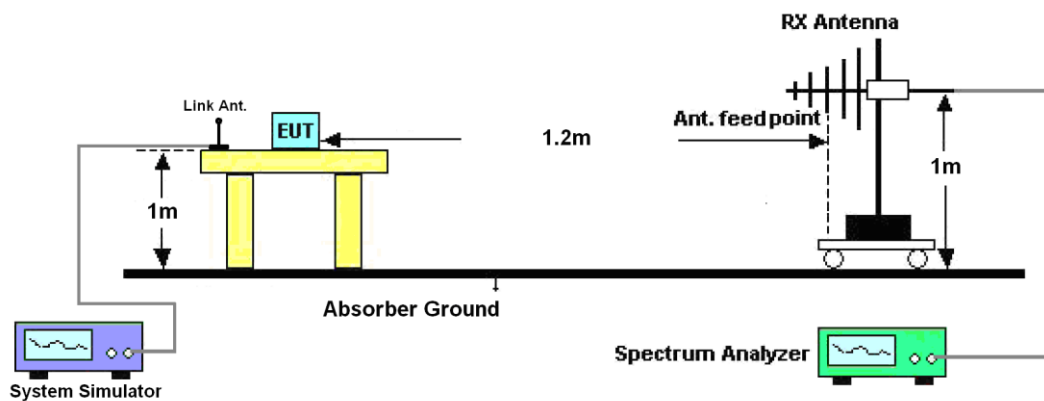

3.2.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-16.57	-48.12	0.00	-1.08	30.47	1.11
836.40	-15.75	-48.28	0.00	-0.93	31.60	1.45
848.80	-16.20	-48.35	0.00	-0.76	31.39	1.38
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-15.05	-47.97	0.00	-1.08	31.84	1.53
836.40	-15.36	-48.01	0.00	-0.93	31.72	1.49
848.80	-15.84	-48.05	0.00	-0.76	31.45	1.40

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-20.20	-48.12	0.00	-1.08	26.84	0.48
836.40	-21.19	-48.28	0.00	-0.93	26.16	0.41
848.80	-21.60	-48.35	0.00	-0.76	25.99	0.40
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-20.02	-47.97	0.00	-1.08	26.87	0.49
836.40	-20.98	-48.01	0.00	-0.93	26.10	0.41
848.80	-21.50	-48.05	0.00	-0.76	25.79	0.38



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-23.09	-48.12	0.00	-1.08	23.95	0.25
836.40	-24.73	-48.28	0.00	-0.93	22.62	0.18
846.60	-24.65	-48.35	0.00	-0.76	22.94	0.20
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-22.88	-47.97	0.00	-1.08	24.01	0.25
836.40	-24.19	-48.01	0.00	-0.93	22.89	0.19
846.60	-24.24	-48.05	0.00	-0.76	23.05	0.20

3.2.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.61	-51.88	0.00	1.96	31.23	1.33
1880.00	-23.37	-52.99	0.00	2.00	31.62	1.45
1909.80	-24.70	-54.28	0.00	1.98	31.56	1.43
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.74	-52.13	0.00	1.96	29.35	0.86
1880.00	-25.15	-53.17	0.00	2.00	30.02	1.00
1909.80	-25.75	-54.13	0.00	1.98	30.36	1.09

GSM1900 (EDGE 10) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.99	-51.88	0.00	1.96	27.85	0.61
1880.00	-26.81	-52.99	0.00	2.00	28.18	0.66
1909.80	-28.42	-54.28	0.00	1.98	27.84	0.61
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.14	-52.13	0.00	1.96	25.95	0.39
1880.00	-29.04	-53.17	0.00	2.00	26.13	0.41
1909.80	-29.24	-54.13	0.00	1.98	26.87	0.49



WCDMA Band II (HSDPA) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-26.58	-51.88	0.00	1.96	27.26	0.53
1880.00	-28.10	-52.99	0.00	2.00	26.89	0.49
1907.60	-29.64	-54.28	0.00	1.98	26.62	0.46
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-28.64	-52.13	0.00	1.96	25.45	0.35
1880.00	-29.94	-53.17	0.00	2.00	25.23	0.33
1907.60	-30.77	-54.13	0.00	1.98	25.34	0.34

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

3.3.4 Test Setup

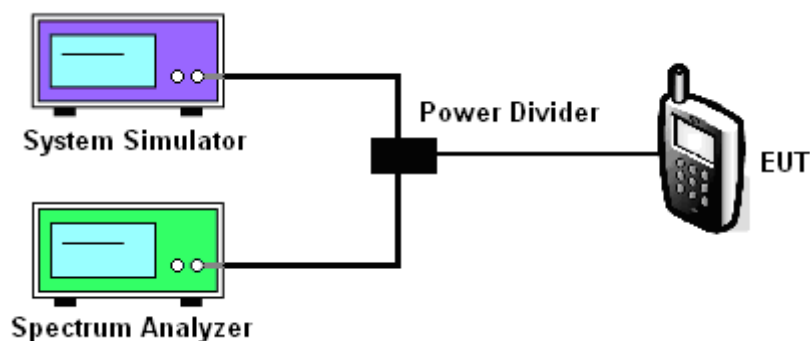


3.3.5 Test Result (Plots) of Occupied Bandwidth

Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS 8 Link		

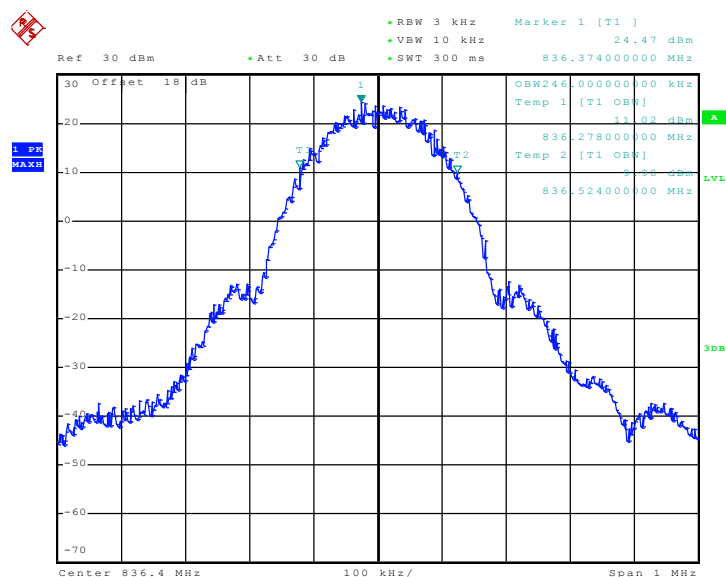99% Occupied Bandwidth Plot on Channel 189


Date: 14.DEC.2009 10:16:51

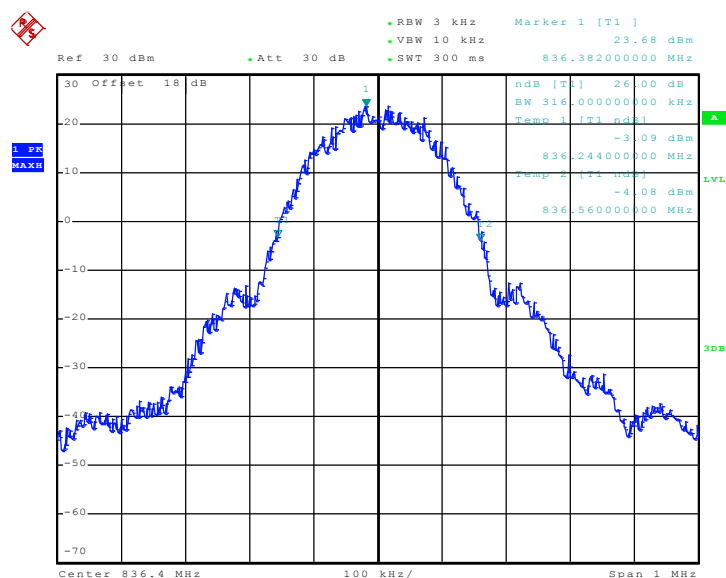
26dB Bandwidth Plot on Channel 189


Date: 14.DEC.2009 10:13:32




Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

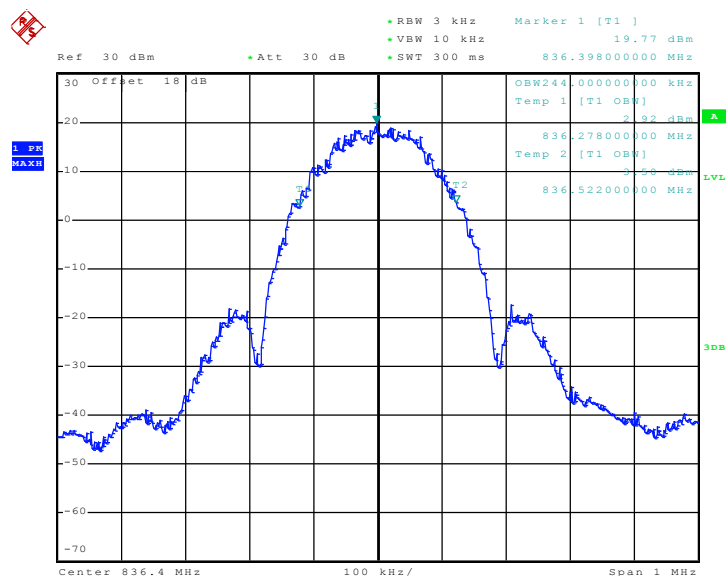

Date: 14.DEC.2009 11:19:17

26dB Bandwidth Plot on Channel 189

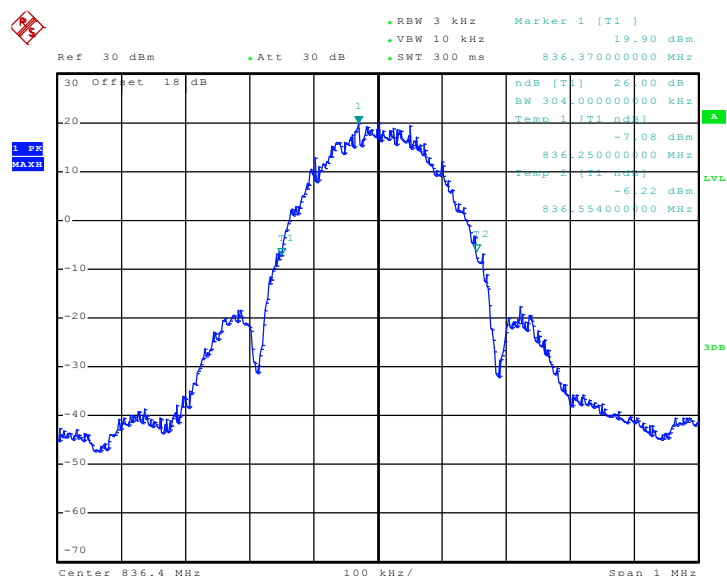


Date: 14.DEC.2009 11:14:54




Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 661

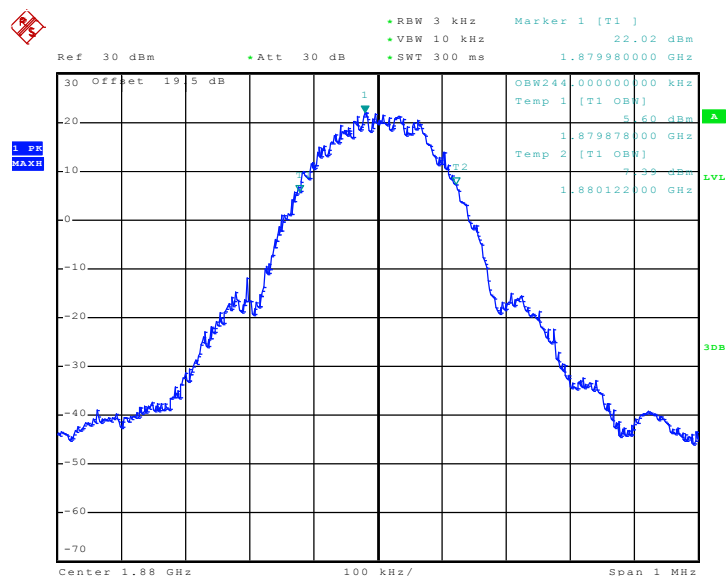

Date: 14.DEC.2009 11:43:01

26dB Bandwidth Plot on Channel 661

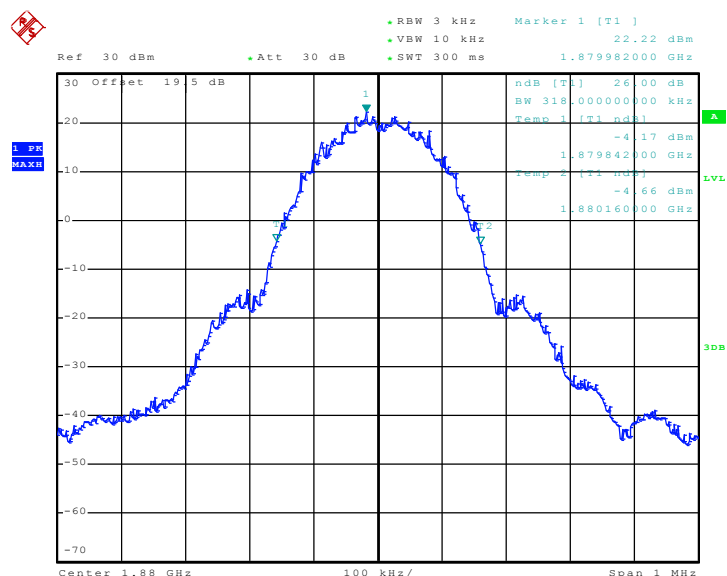


Date: 14.DEC.2009 11:38:17




Band :	GSM 1900	Power Stage :	High
Test Mode :	EDGE 10 Link		

99% Occupied Bandwidth Plot on Channel 661

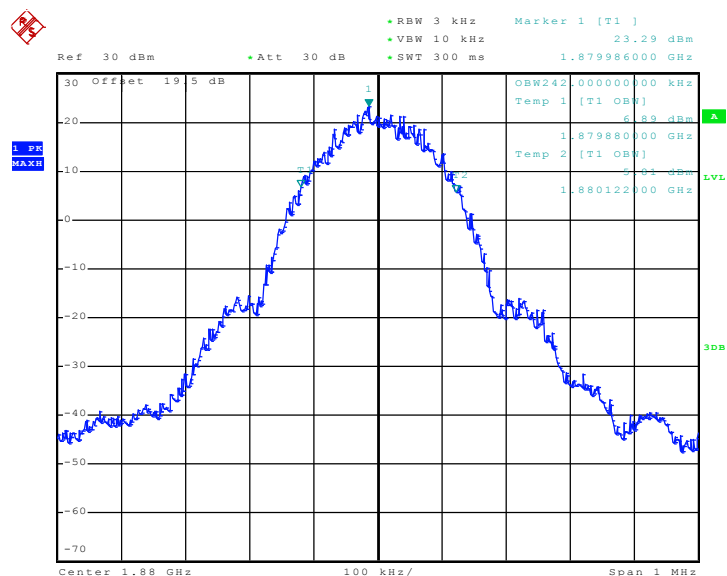

Date: 14.DEC.2009 13:54:06

26dB Bandwidth Plot on Channel 661

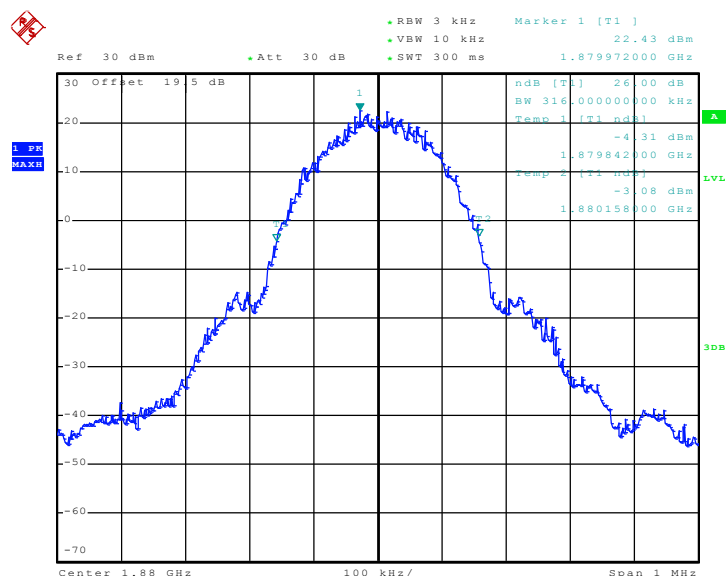


Date: 14.DEC.2009 13:49:51




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

99% Occupied Bandwidth Plot on Channel 4182

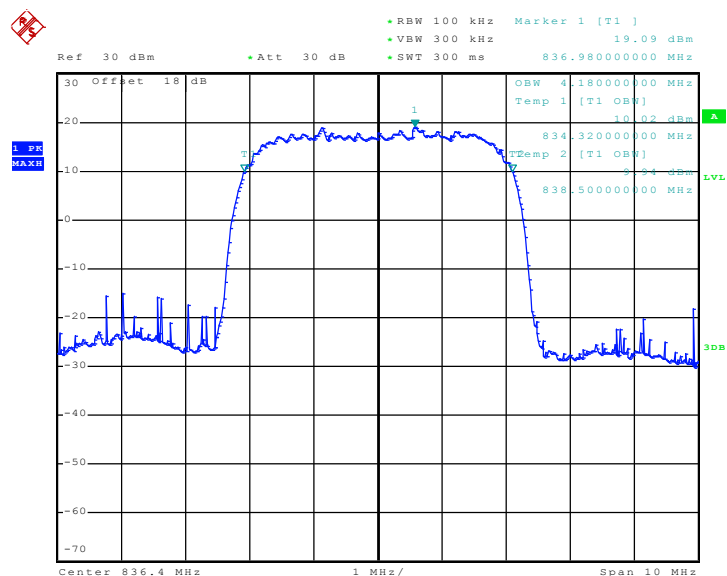

Date: 14.DEC.2009 14:44:58

26dB Bandwidth Plot on Channel 4182

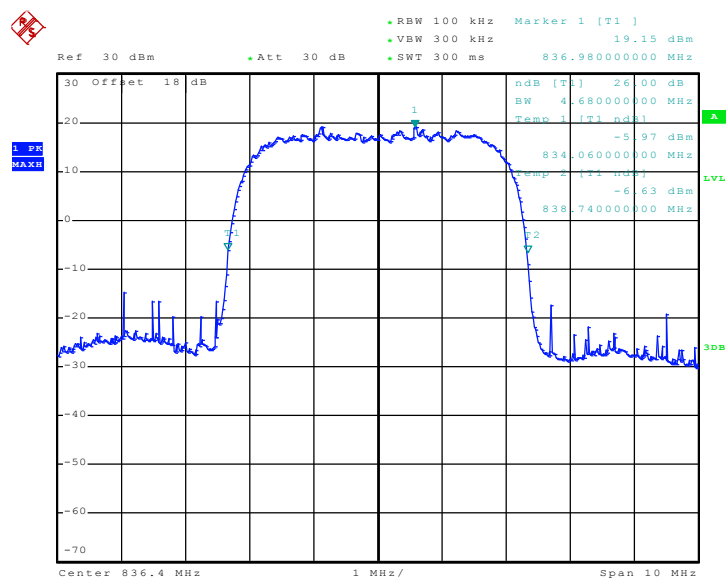


Date: 14.DEC.2009 14:41:45




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	HSDPA Link		

99% Occupied Bandwidth Plot on Channel 9400

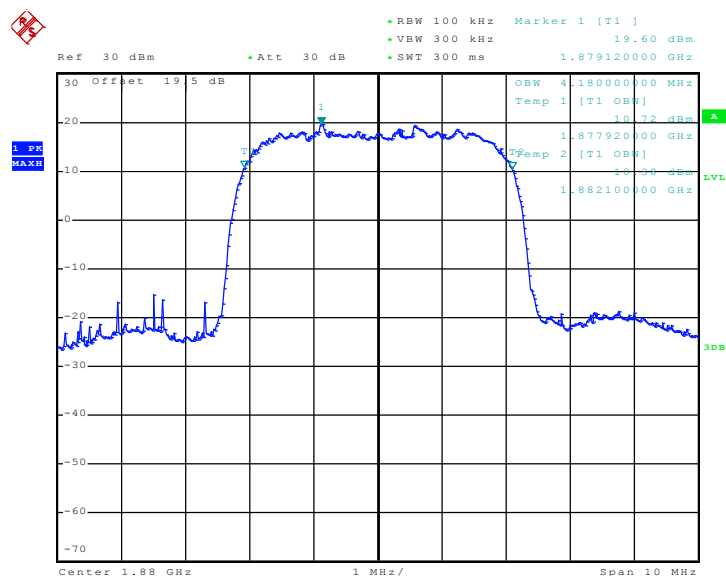

Date: 14.DEC.2009 14:12:53

26dB Bandwidth Plot on Channel 9400

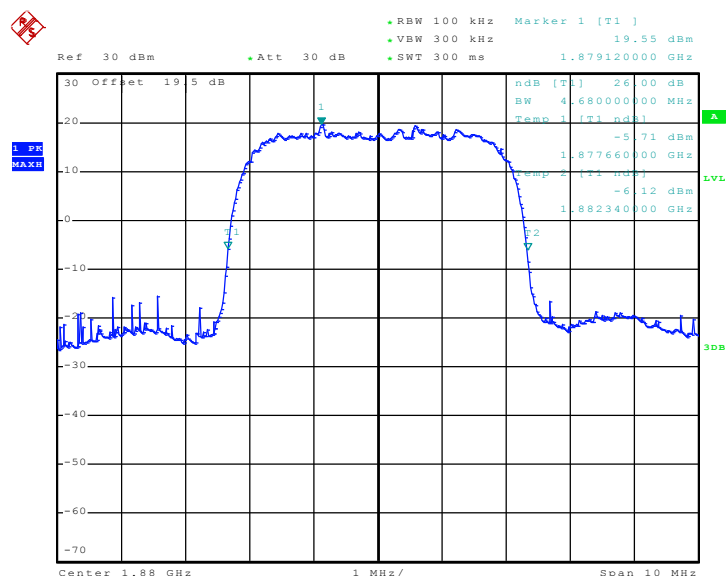

Date: 14.DEC.2009 14:10:48

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

3.4.4 Test Setup


<Conducted Band Edge >

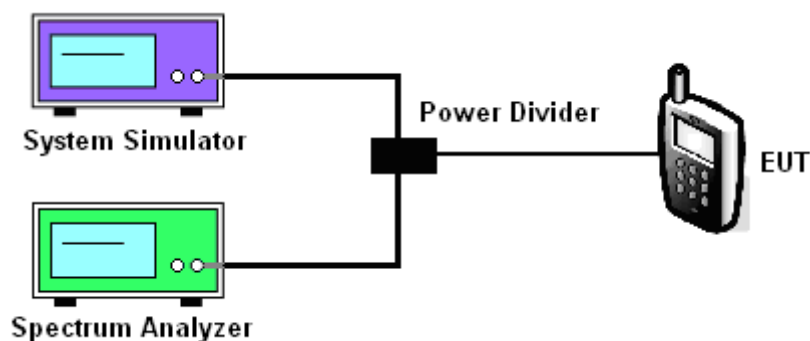




Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

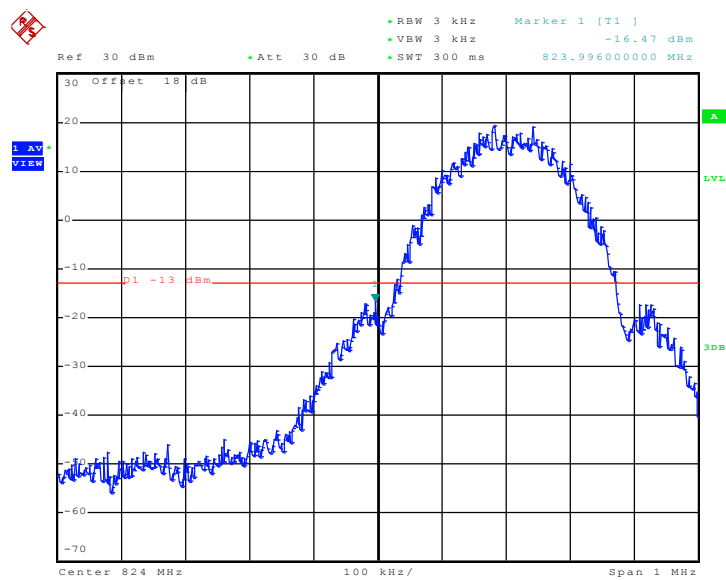

Date: 14 DEC 2009 10:19:59

Higher Band Edge Plot on Channel 251

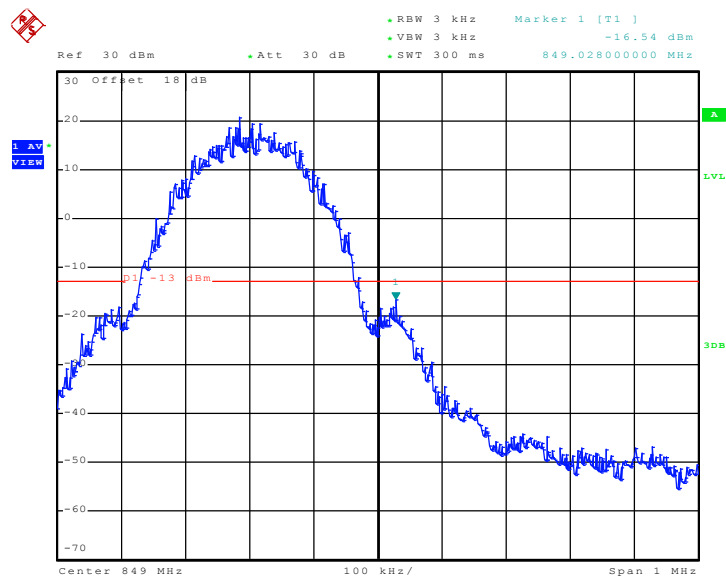


Date: 14.DEC.2009 10:22:49




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

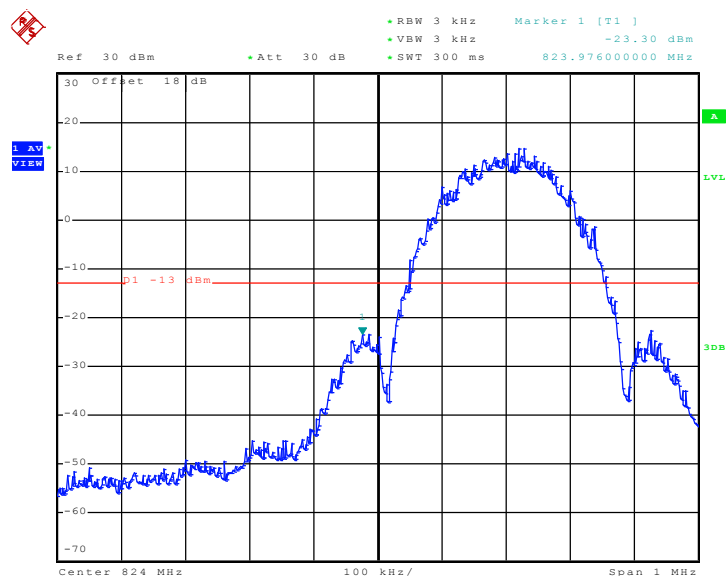

Date: 14.DEC.2009 11:21:56

Higher Band Edge Plot on Channel 251

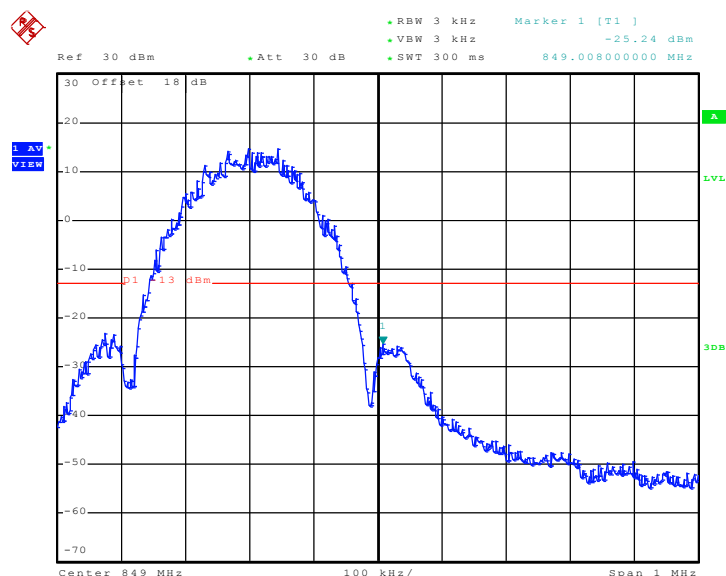

Date: 14.DEC.2009 11:26:09




Ref 30 dBm Att 30 dB RBW 3 kHz VBW 3 kHz SWT 300 ms Marker 1 [T1] -19.54 dBm

30 Offset 19.5 dB

1.849996000 GHz

Center 1.85 GHz 100 kHz/ Span 1 MHz

Higher Band Edge Plot on Channel 810

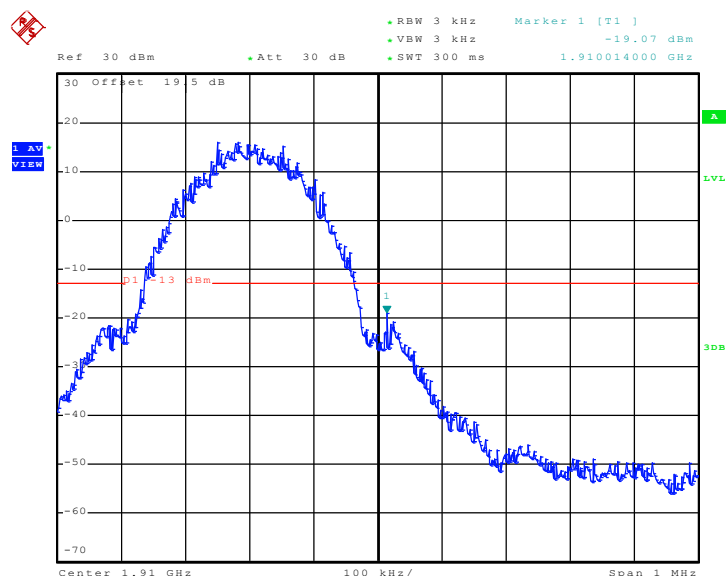

Date: 14 DEC 2009 11:48:10



Ref 30 dBm Att 30 dB RBW 3 kHz VBW 3 kHz SWT 300 ms Marker 1 [T1] -19.63 dBm 1.849992000 GHz

30 Offset 19.5 dB

1 AV VIEW

10

0

-10

-20

-30

-40

-50

-60


-70

01 -13 dBm

1

Center 1.85 GHz 100 kHz/ Span 1 MHz

Higher Band Edge Plot on Channel 810

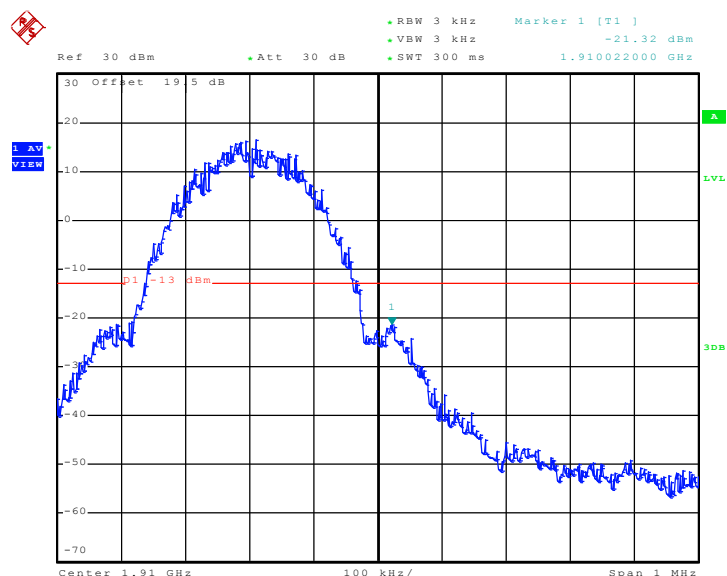


Date: 14.DEC.2009 13:58:27




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 4132

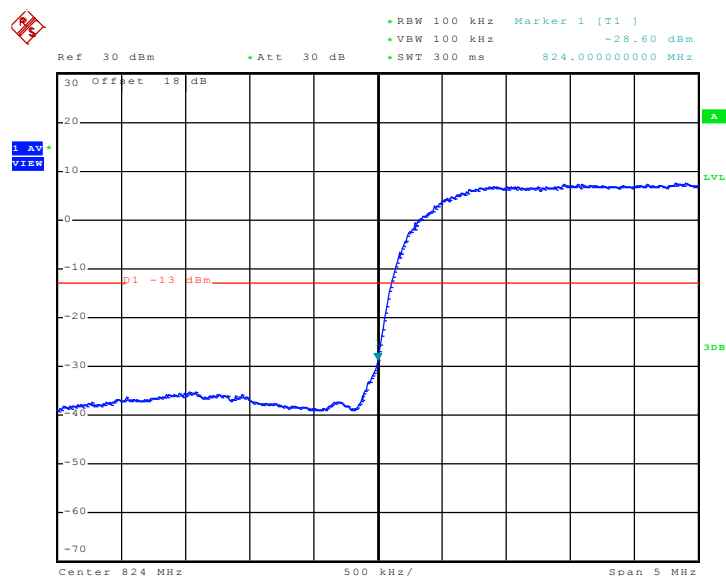

Date: 14.DEC.2009 14:37:29

Higher Band Edge Plot on Channel 4233

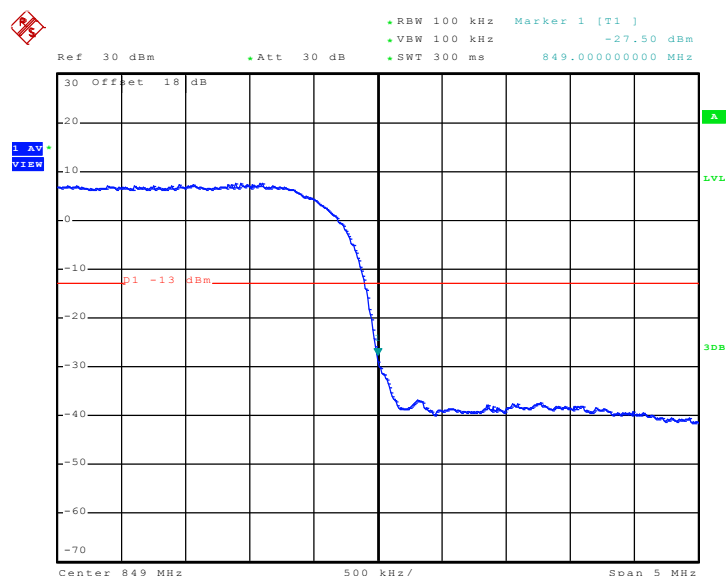


Date: 14.DEC.2009 14:38:30




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	HSDPA Link		

Lower Band Edge Plot on Channel 9262

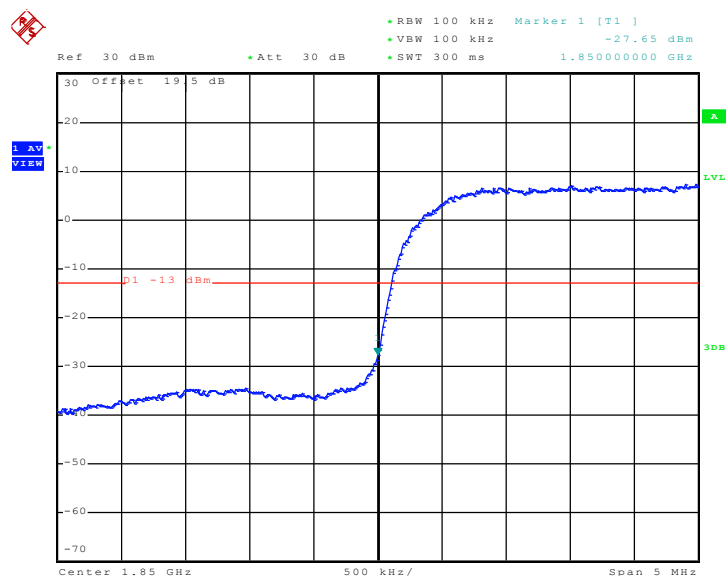

Date: 14.DEC.2009 14:07:28

Higher Band Edge Plot on Channel 9538

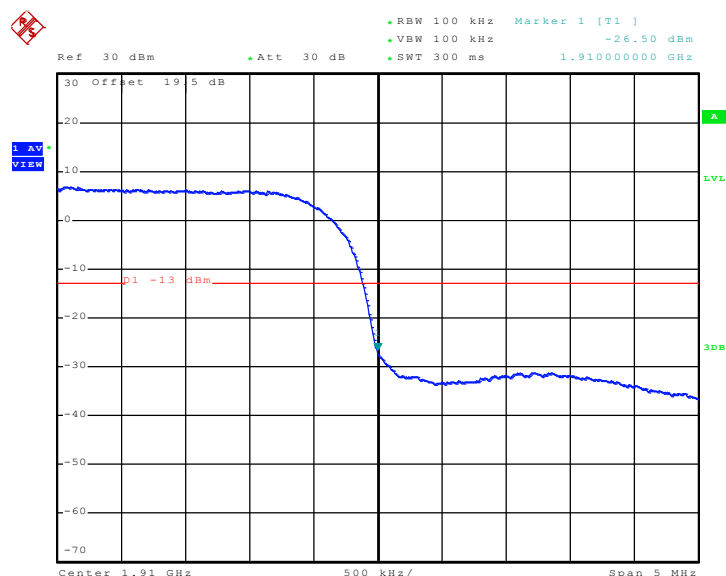

Date: 14.DEC.2009 14:08:53

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.5.4 Test Setup

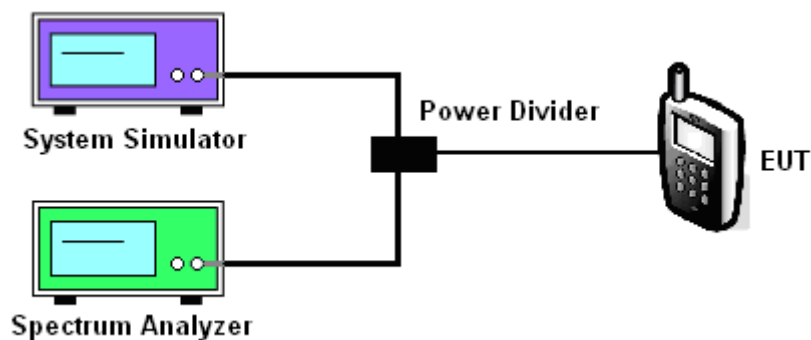


3.5.5 Test Result (Plots) of Conducted Emission

Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

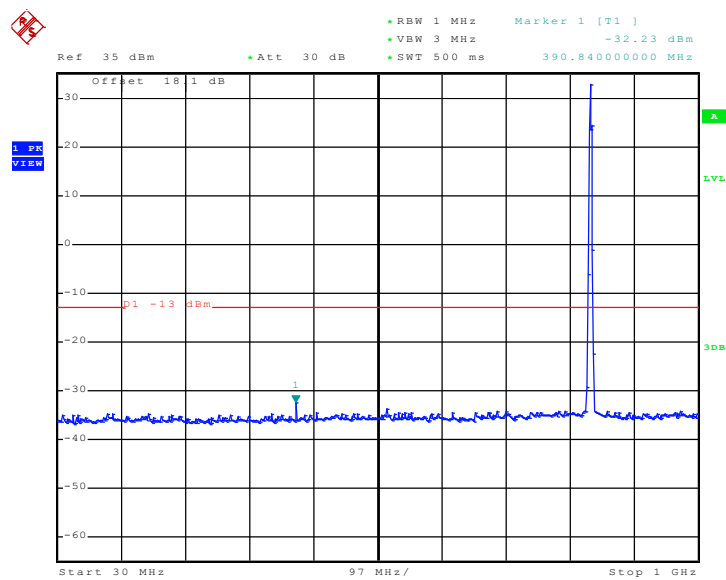
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 14.DEC.2009 10:26:25

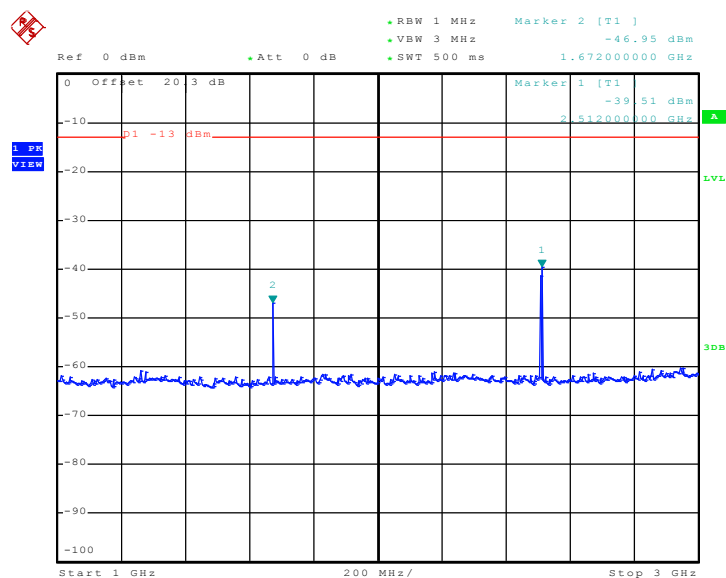Conducted Emission Plot between 1GHz ~ 3GHz


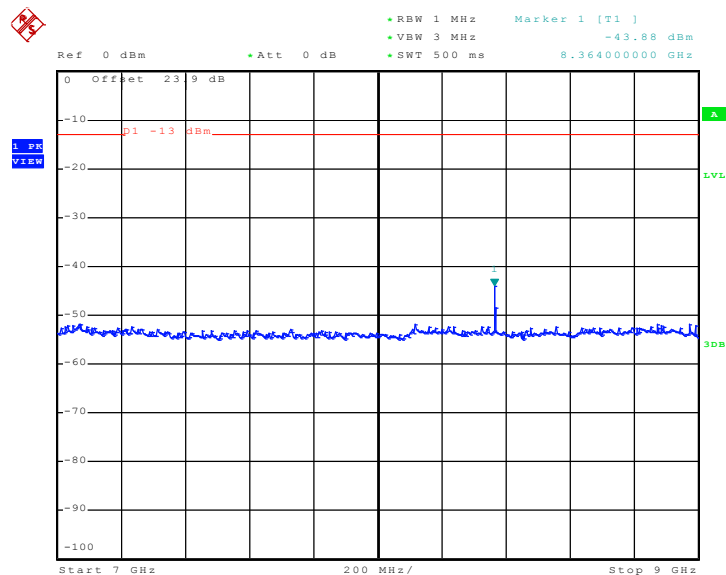
Date: 14.DEC.2009 10:28:59

Conducted Emission Plot between 3GHz ~ 7GHz

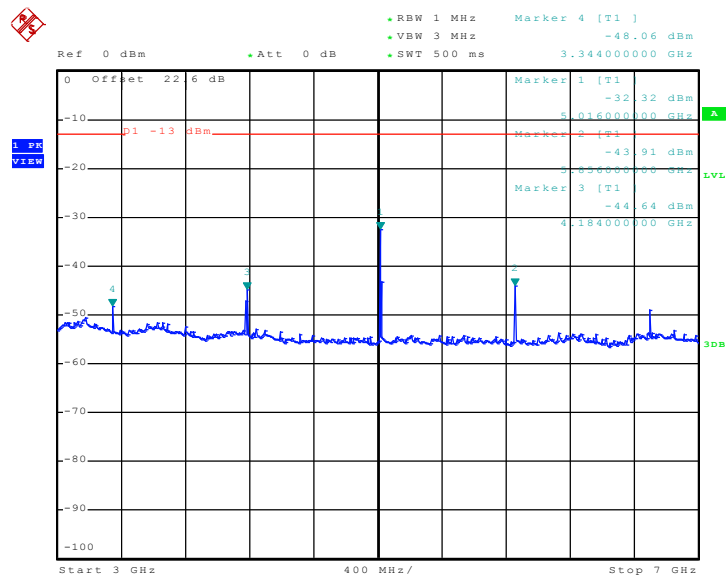

Date: 14.DEC.2009 10:30:16

Conducted Emission Plot between 7GHz ~ 9GHz




Date: 14.DEC.2009 10:31:02




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

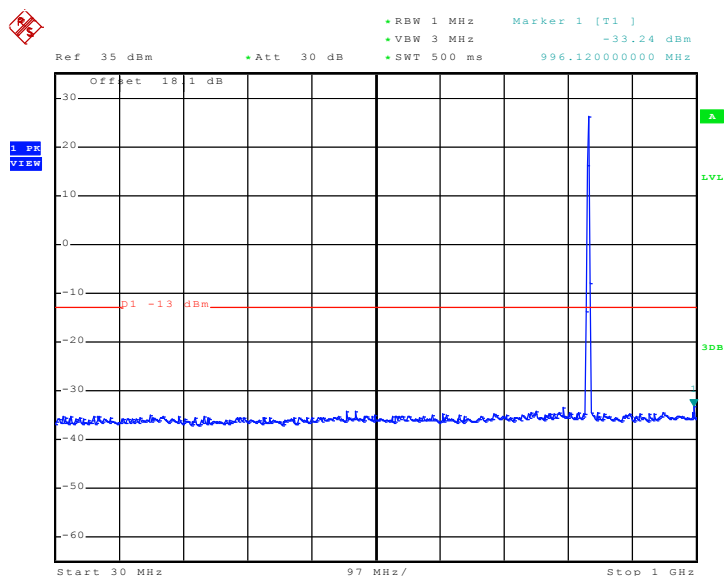


Date: 14.DEC.2009 10:48:24

Conducted Emission Plot between 1GHz ~ 3GHz

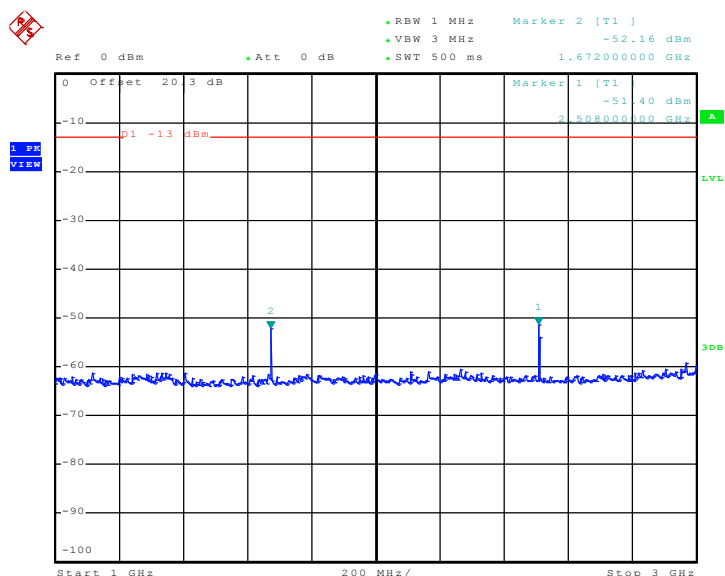


Date: 14.DEC.2009 10:43:28

Conducted Emission Plot between 3GHz ~ 7GHz

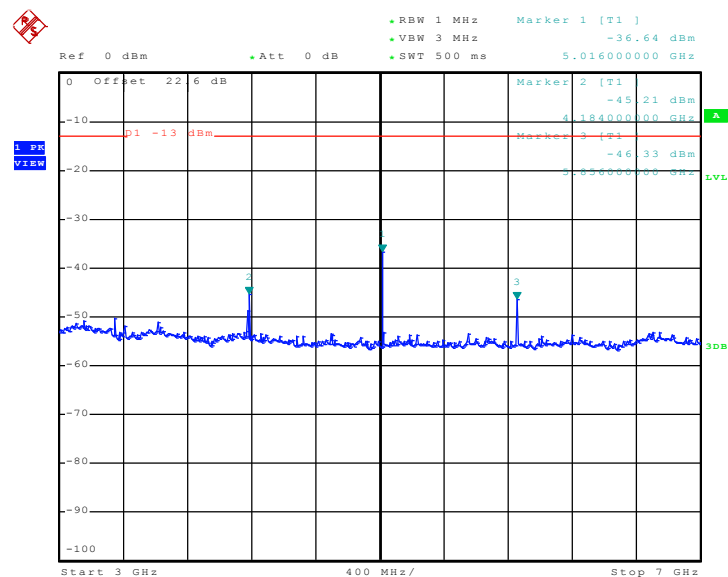

Date: 14.DEC.2009 10:41:19

Conducted Emission Plot between 7GHz ~ 9GHz

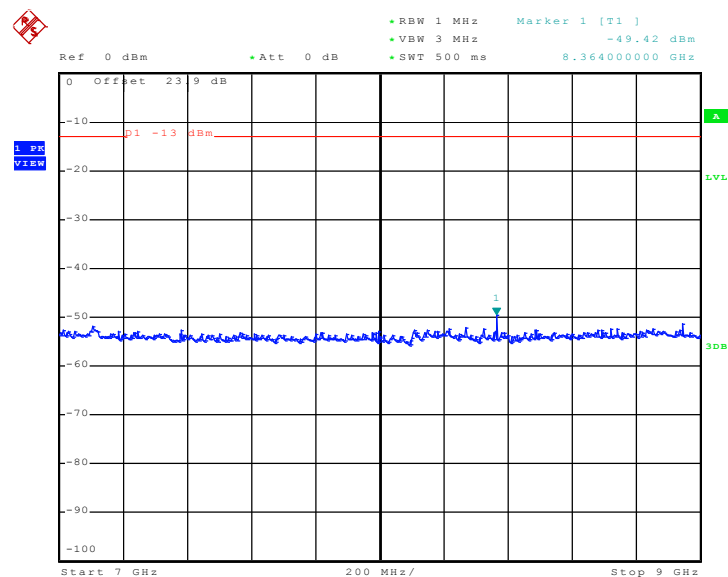


Date: 14.DEC.2009 10:40:15




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

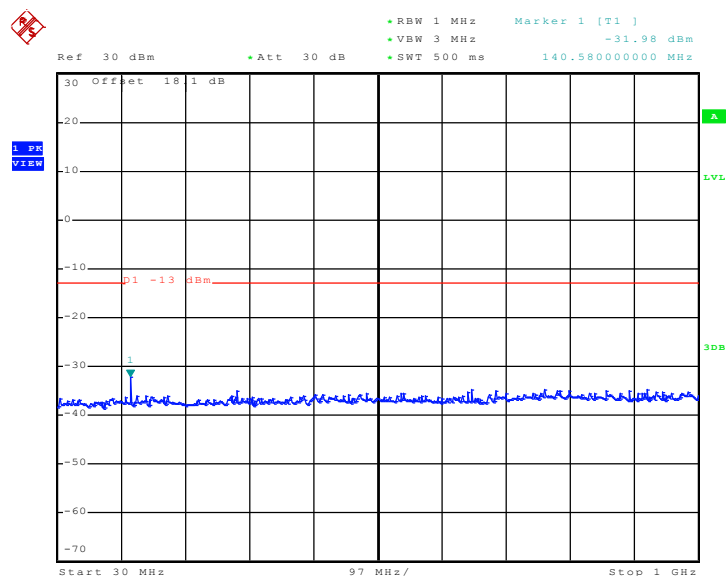


Date: 14.DEC.2009 11:49:17

Conducted Emission Plot between 1GHz ~ 3GHz

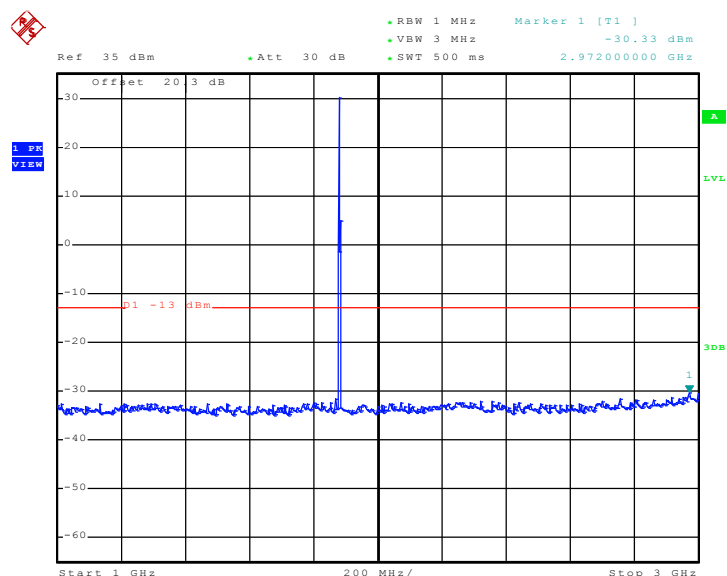


Date: 14.DEC.2009 11:54:56

Conducted Emission Plot between 3GHz ~ 7GHz

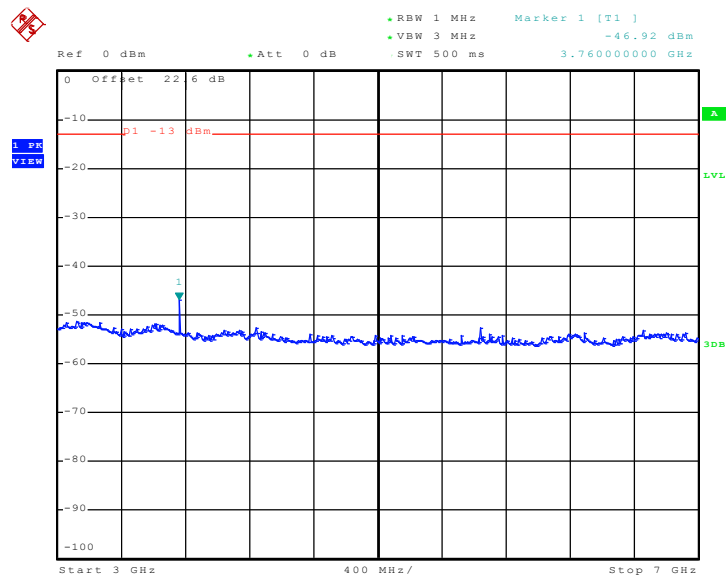

Date: 14 DEC 2009 11:56:12

Conducted Emission Plot between 7GHz ~ 13.6GHz

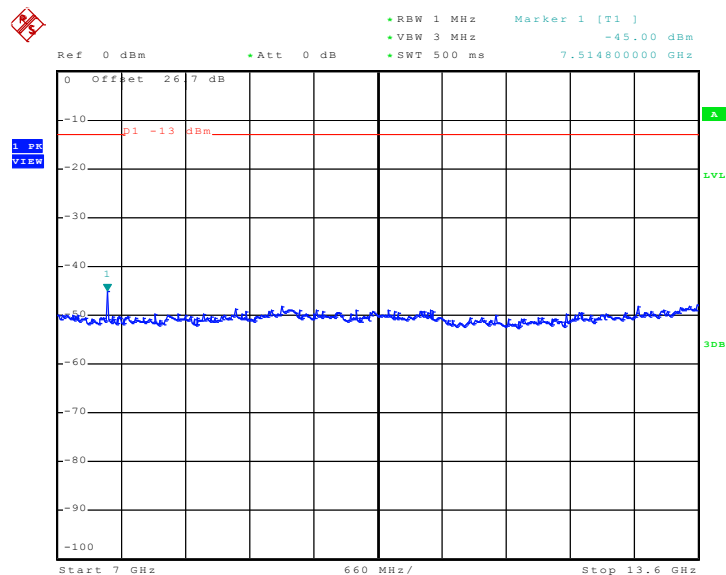

Date: 14.DEC.2009 11:57:10



Ref 0 dBm Att 0 dB RBW 1 MHz VBW 3 MHz SWT 500 ms Marker 1 [T1] -27.76 dBm 18.11000000 GHz

0 Offset 36.5 dB

-10

-20

-30

-40

-50

-60

-70

-80


-90

-100


Start 13.6 GHz 550 MHz/ Stop 19.1 GHz

Date: 14.DEC.2009 11:57:55

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 10 Link		

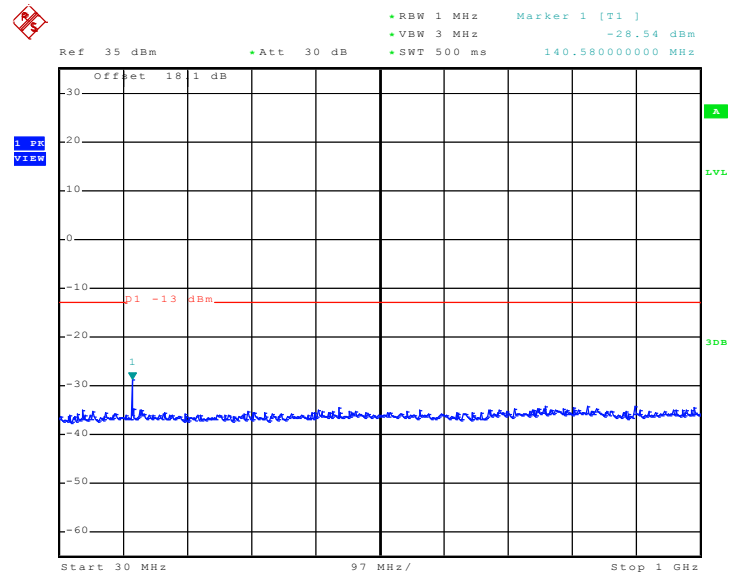
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 14.DEC.2009 13:43:34

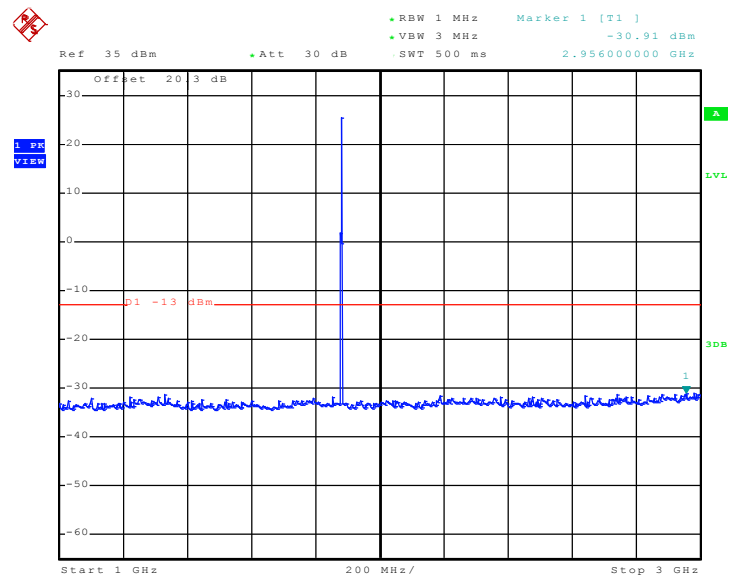Conducted Emission Plot between 1GHz ~ 3GHz


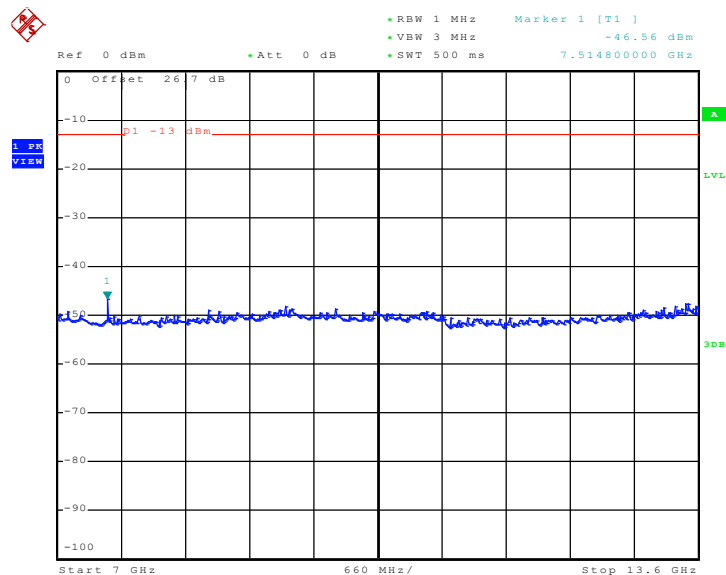
Date: 14.DEC.2009 13:42:17

Conducted Emission Plot between 3GHz ~ 7GHz

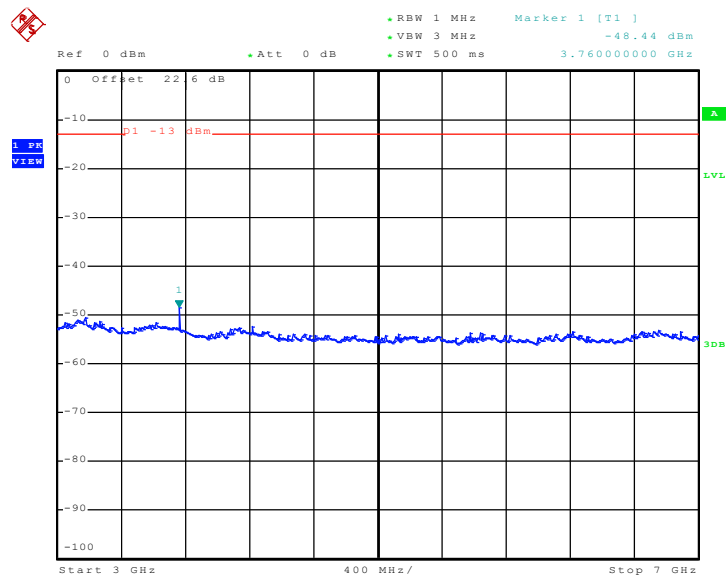

Date: 14.DEC.2009 13:41:08


Conducted Emission Plot between 7GHz ~ 13.6GHz



Date: 14.DEC.2009 13:38:55



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

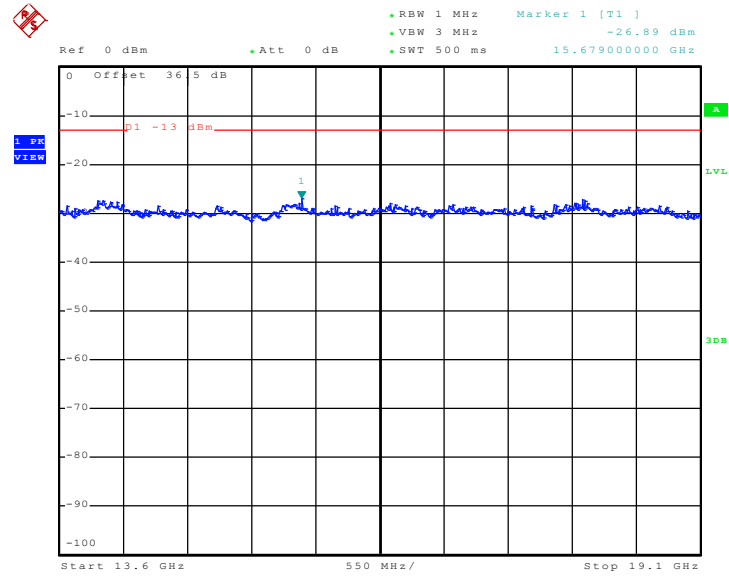


Date: 14.DEC.2009 13:39:48




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

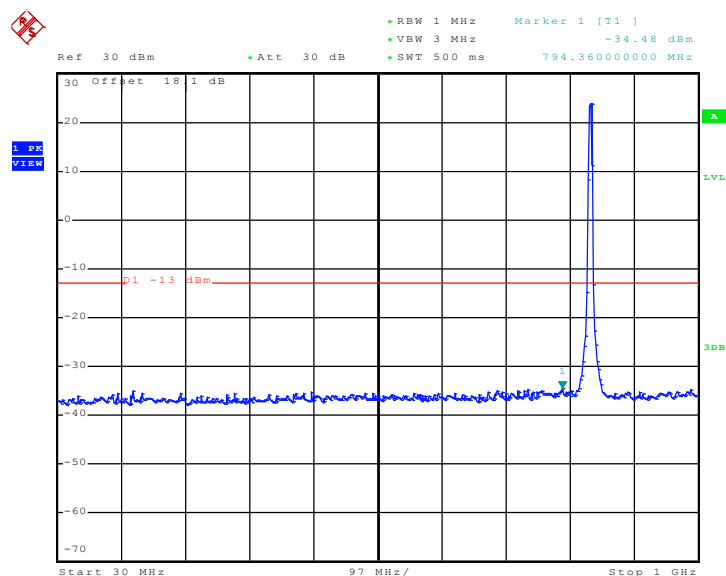


Date: 14.DEC.2009 14:20:42

Conducted Emission Plot between 1GHz ~ 3GHz

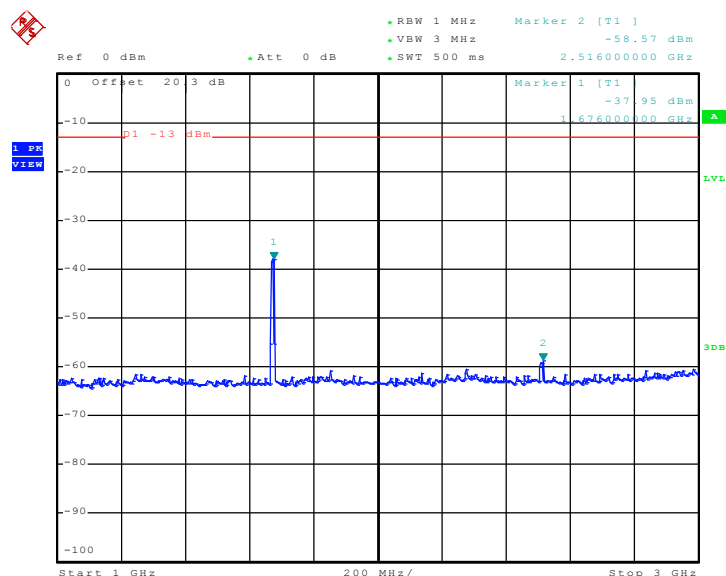


Date: 14.DEC.2009 14:23:25

Conducted Emission Plot between 3GHz ~ 7GHz

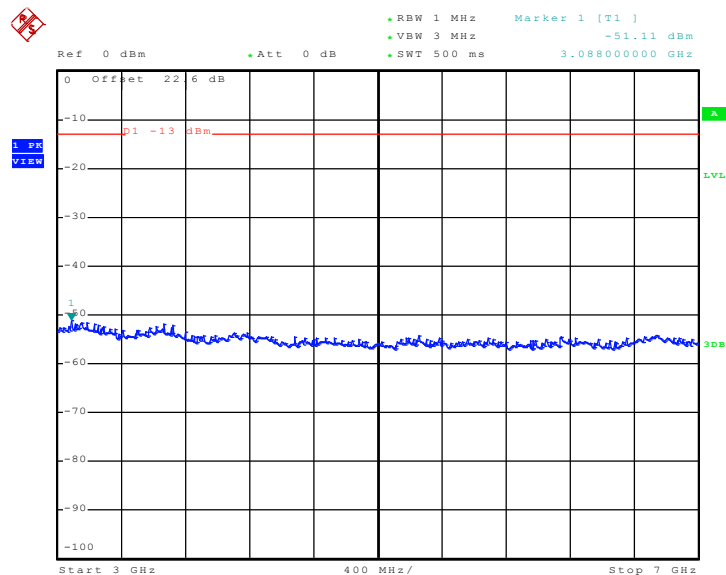

Date: 14.DEC.2009 14:23:59


Conducted Emission Plot between 7GHz ~ 9GHz

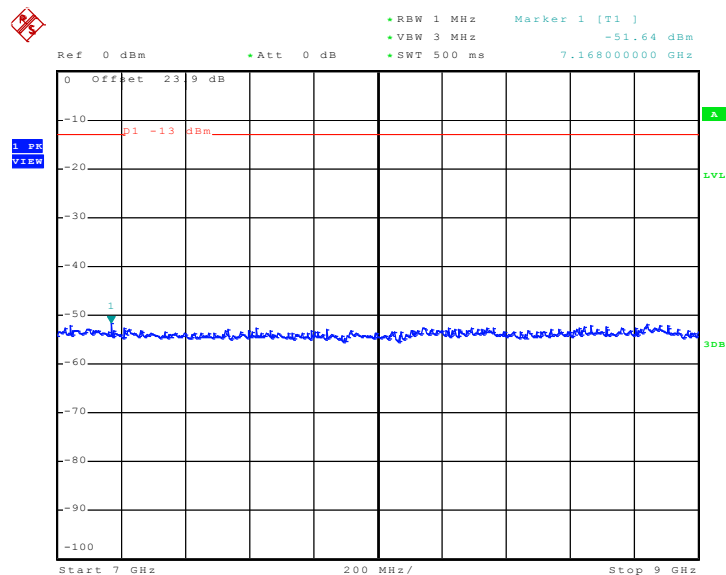

Date: 14.DEC.2009 14:25:21


Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	HSDPA Link		

Conducted Emission Plot between 30MHz ~ 1GHz

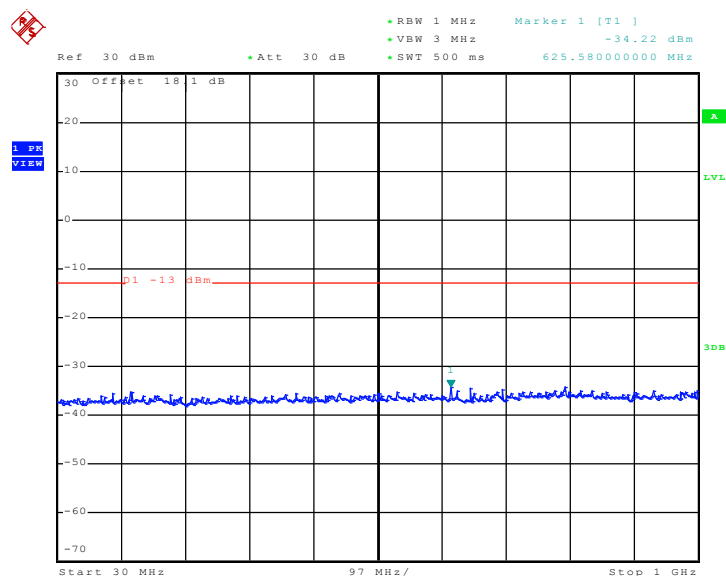


Date: 14.DEC.2009 14:21:03

Conducted Emission Plot between 1GHz ~ 3GHz

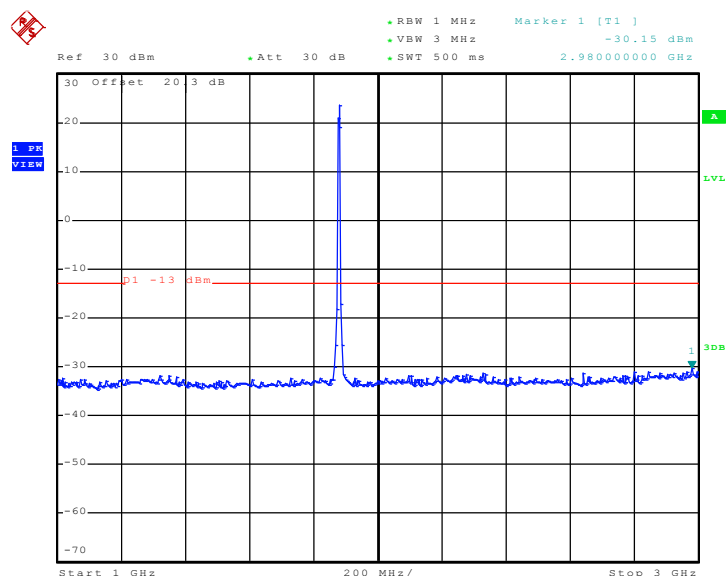


Date: 14.DEC.2009 14:22:17

Conducted Emission Plot between 3GHz ~ 7GHz

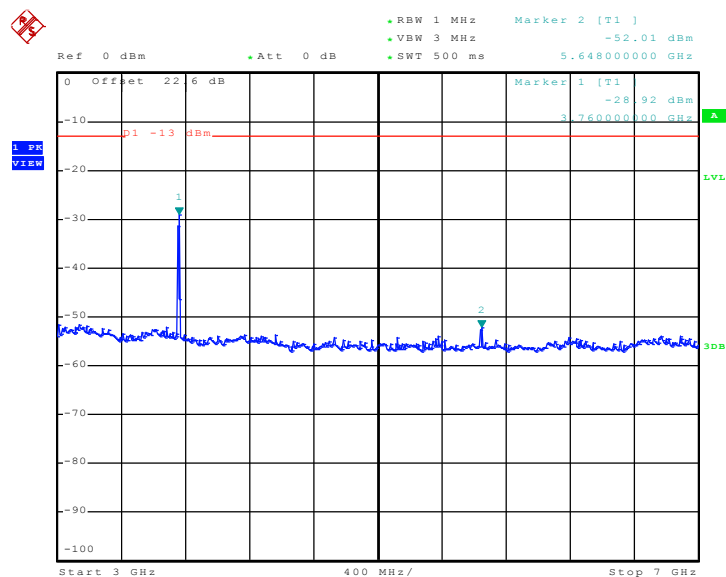

Date: 14.DEC.2009 14:24:32

Conducted Emission Plot between 7GHz ~ 13.6GHz

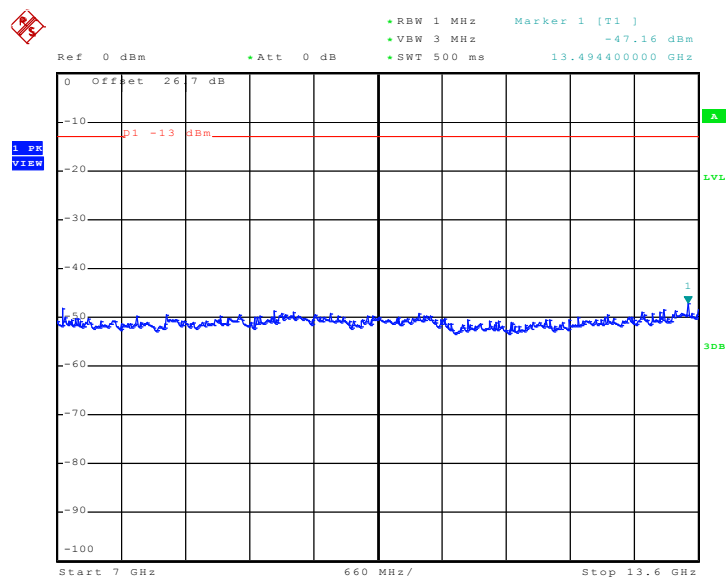

Date: 14.DEC.2009 14:25:55



3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.6.4 Test Setup

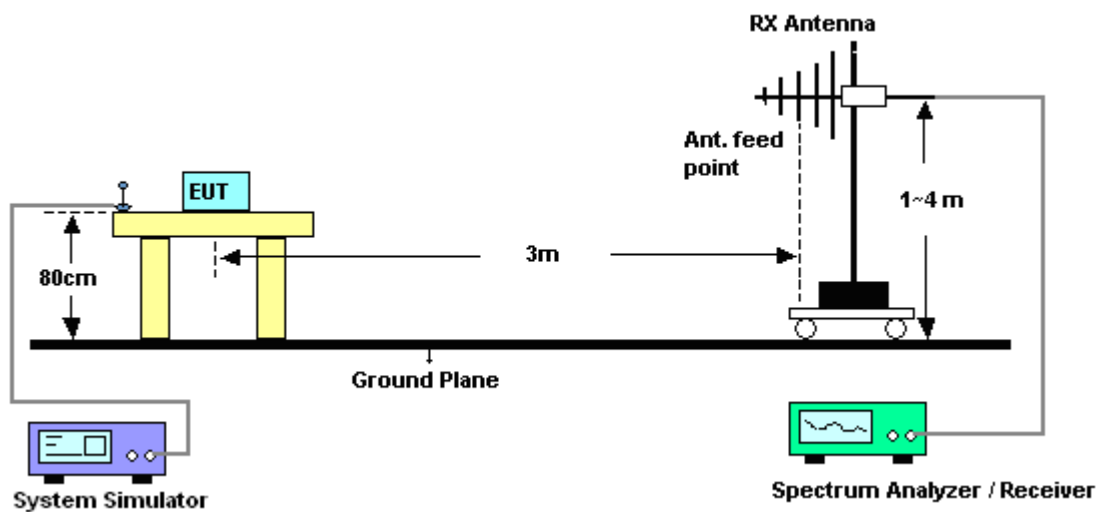


3.6.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	25~26°C
Test Mode :	GPRS 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

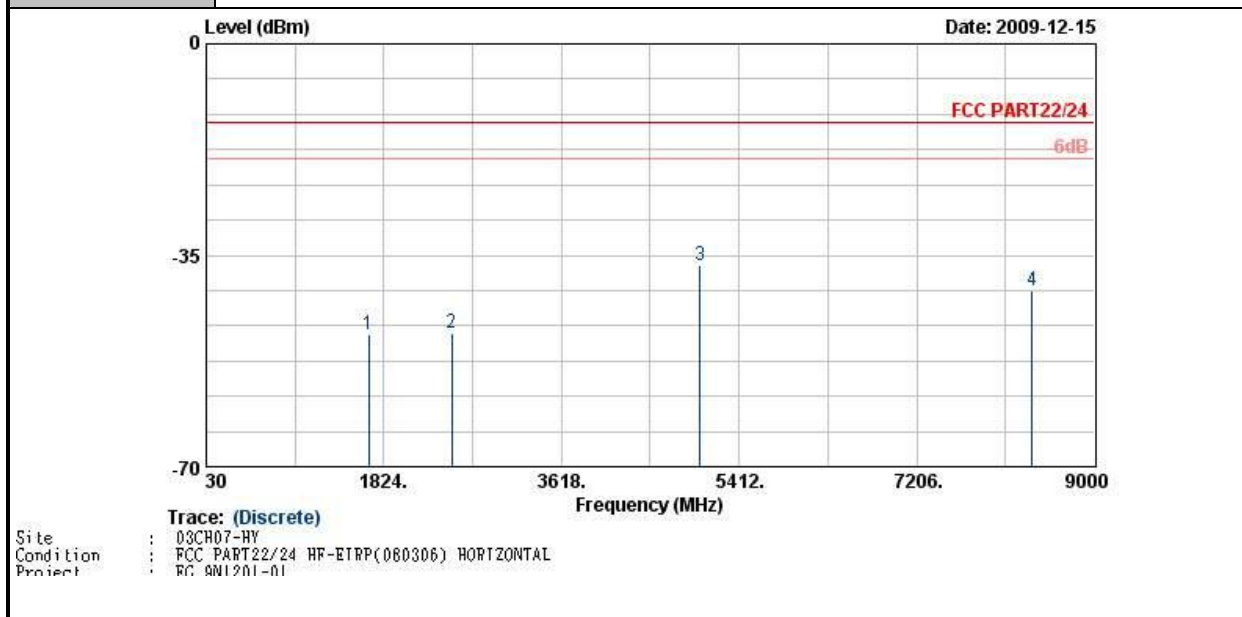


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-48.20	-13	-35.20	-55.47	-48.05	3.39	5.39	H	Pass
2509	-47.77	-13	-34.77	-55.05	-48.03	3.71	6.12	H	Pass
5015	-36.73	-13	-23.73	-52.52	-41.7	2.61	9.73	H	Pass
8370	-40.87	-13	-27.87	-61.67	-46.17	5.59	13.04	H	Pass

Band :	GSM850	Temperature :	25~26°C
Test Mode :	GPRS 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

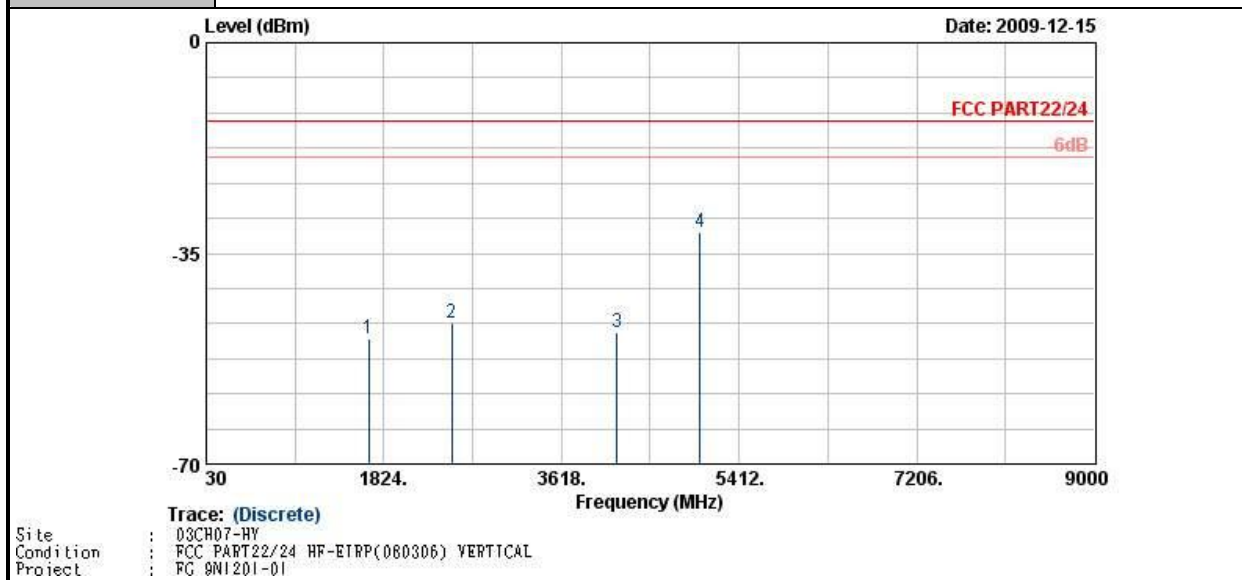


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-49.29	-13	-36.29	-56.84	-49.14	3.39	5.39	V	Pass
2509	-46.62	-13	-33.62	-56.87	-46.88	3.71	6.12	V	Pass
4175	-48.08	-13	-35.08	-60.31	-51.92	3.01	9.00	V	Pass
5015	-31.45	-13	-18.45	-49.07	-36.42	2.61	9.73	V	Pass

Band :	GSM850	Temperature :	25~26°C
Test Mode :	EDGE 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

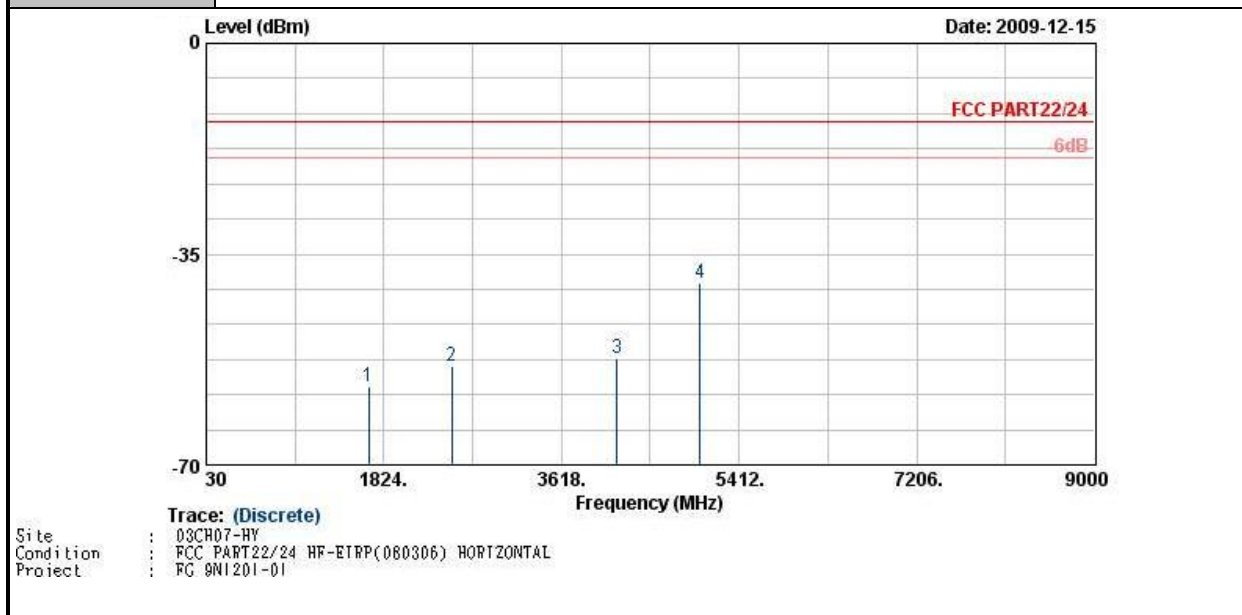


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-56.90	-13	-43.90	-61.2	-56.75	3.39	5.39	H	Pass
2506	-53.67	-13	-40.67	-60.49	-53.93	3.71	6.12	H	Pass
4175	-52.26	-13	-39.26	-63.48	-56.1	3.01	9.00	H	Pass
5015	-39.94	-13	-26.94	-55.69	-44.91	2.61	9.73	H	Pass

Band :	GSM850	Temperature :	25~26°C
Test Mode :	EDGE 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

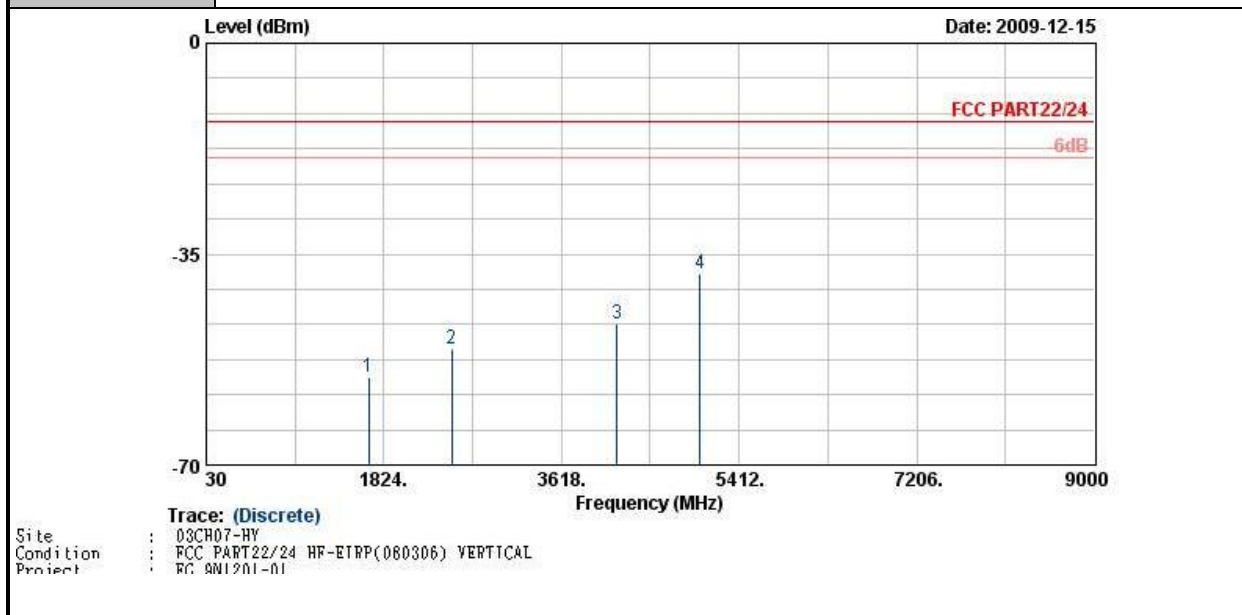


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-55.40	-13	-42.40	-60.44	-55.25	3.39	5.39	V	Pass
2509	-50.68	-13	-37.68	-59.9	-50.94	3.71	6.12	V	Pass
4175	-46.67	-13	-33.67	-59.82	-50.51	3.01	9.00	V	Pass
5015	-38.30	-13	-25.30	-55.07	-43.27	2.61	9.73	V	Pass

Band :	GSM1900	Temperature :	25~26°C
Test Mode :	GPRS 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

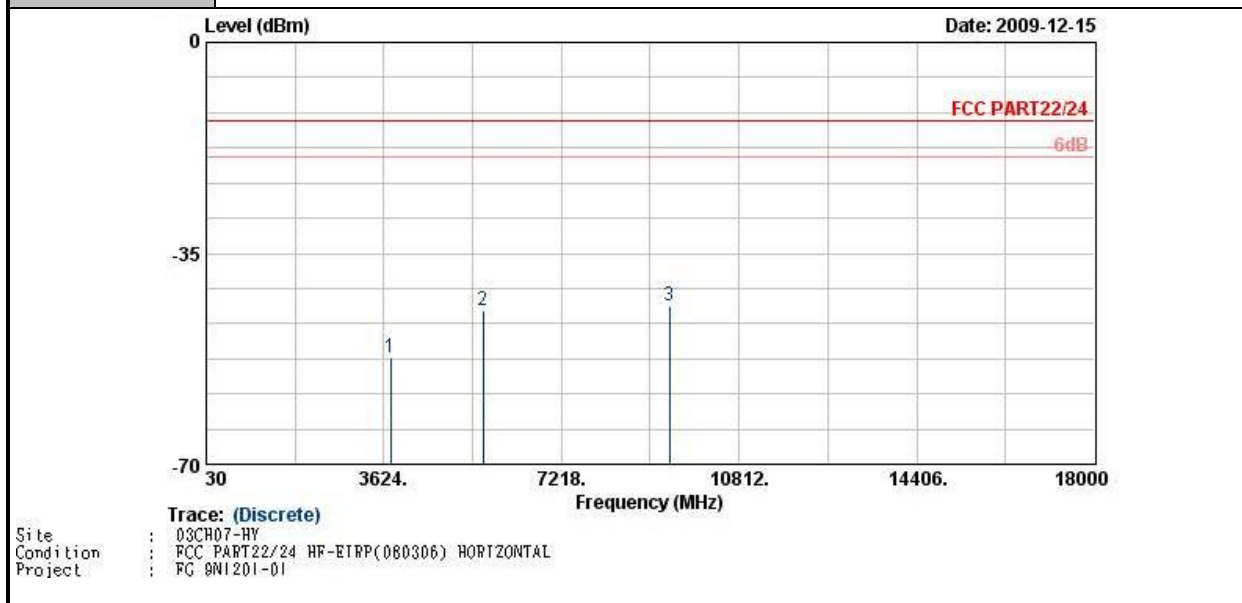

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-52.26	-13	-39.26	-62.99	-54.78	4.88	7.40	H	Pass
5636	-44.41	-13	-31.41	-62.41	-47.67	5.55	8.81	H	Pass
9396	-43.77	-13	-30.77	-65.04	-47.58	6.91	10.72	H	Pass


Band :	GSM1900	Temperature :	25~26°C
Test Mode :	GPRS 8 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

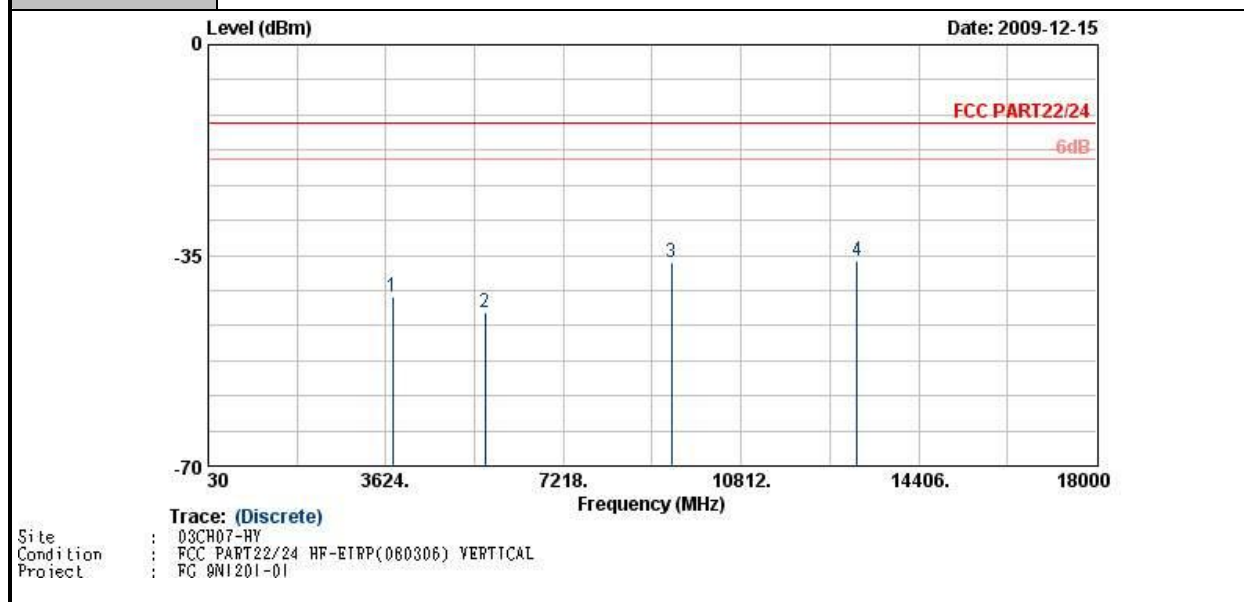

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-41.89	-13	-28.89	-58.16	-44.92	4.88	7.91	V	Pass
5636	-44.38	-13	-31.38	-63.1	-48.6	5.55	9.77	V	Pass
9396	-36.30	-13	-23.30	-64.26	-40.91	6.91	11.52	V	Pass
13156	-35.84	-13	-22.84	-66.29	-39.2	8.8	12.16	V	Pass




Band :	GSM1900	Temperature :	25~26°C
Test Mode :	EDGE 10 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

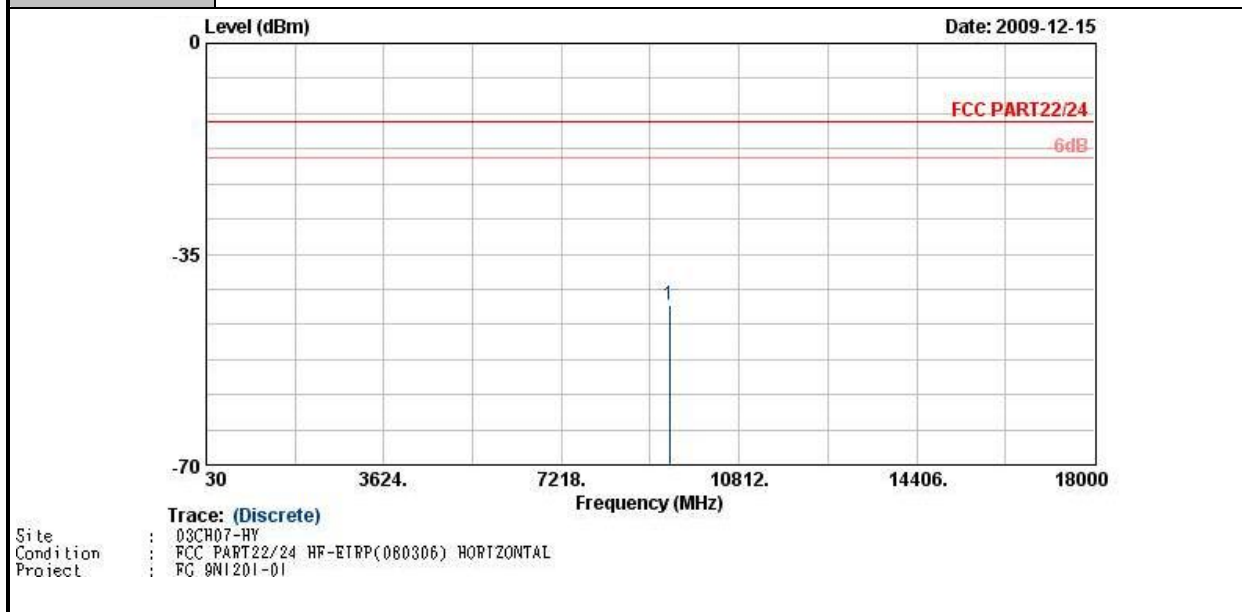

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
9396	-43.36	-13	-30.36	-64.85	-47.17	6.91	10.72	H	Pass


Band :	GSM1900	Temperature :	25~26°C
Test Mode :	EDGE 10 Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

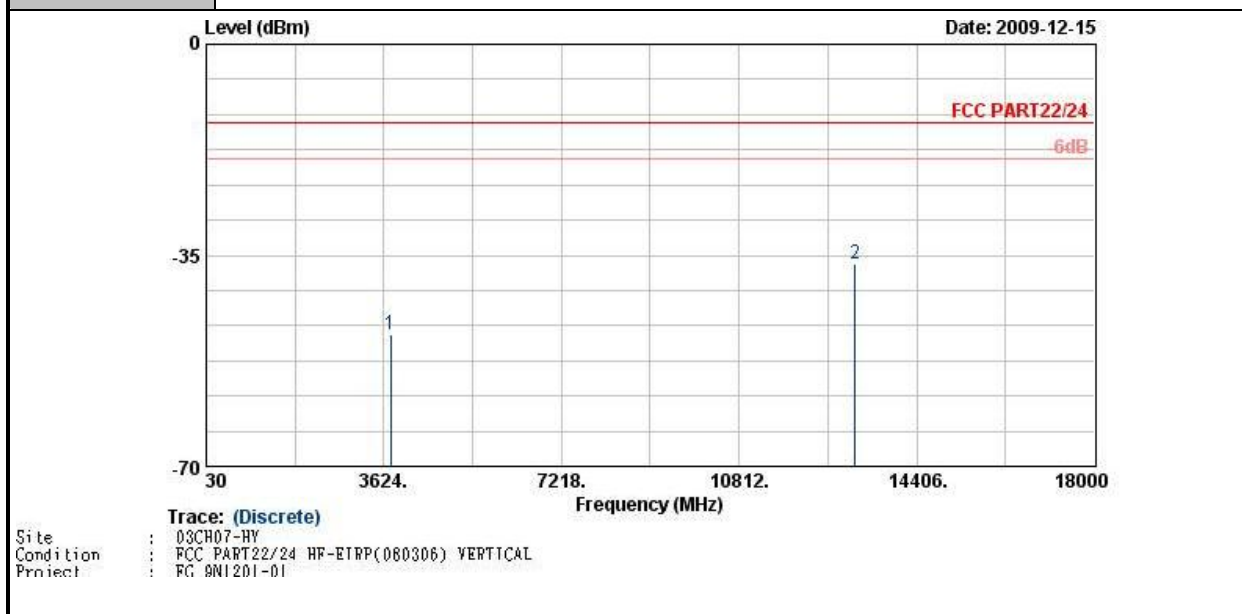

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.11	-13	-35.11	-62.16	-51.14	4.88	7.91	V	Pass
13160	-36.39	-13	-23.39	-66.84	-39.75	8.8	12.16	V	Pass




Band :	WCDMA Band V	Temperature :	25~26°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

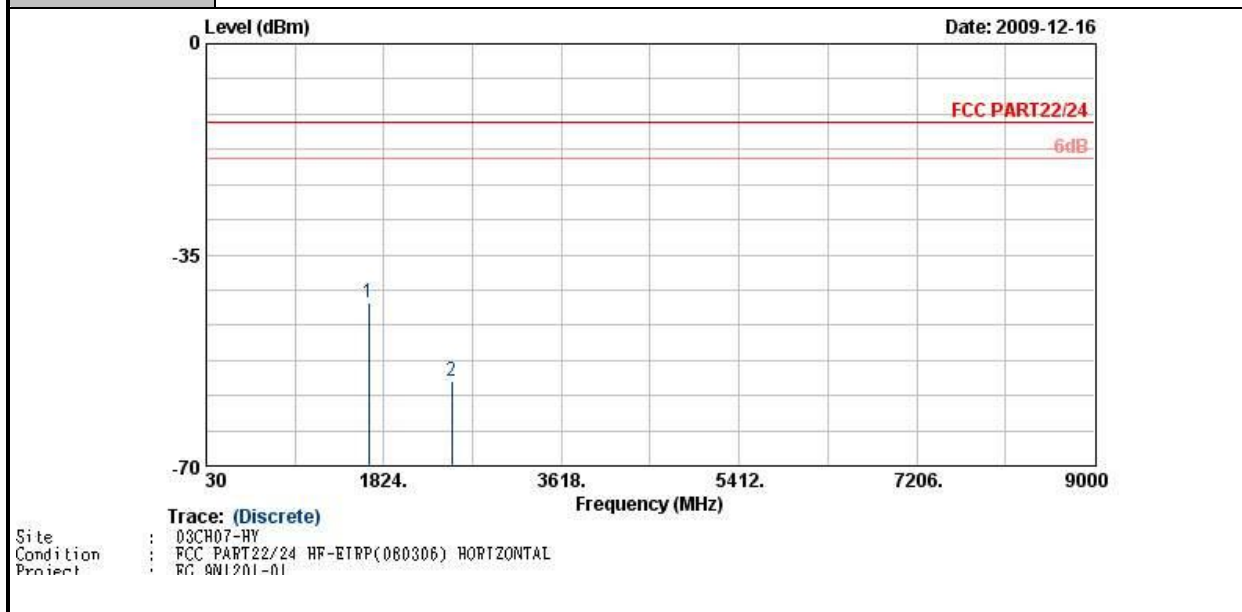

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-43.06	-13	-30.06	-53.91	-42.91	3.39	5.39	H	Pass
2509	-56.03	-13	-43.03	-62.85	-56.29	3.71	6.12	H	Pass




Band :	WCDMA Band V	Temperature :	25~26°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

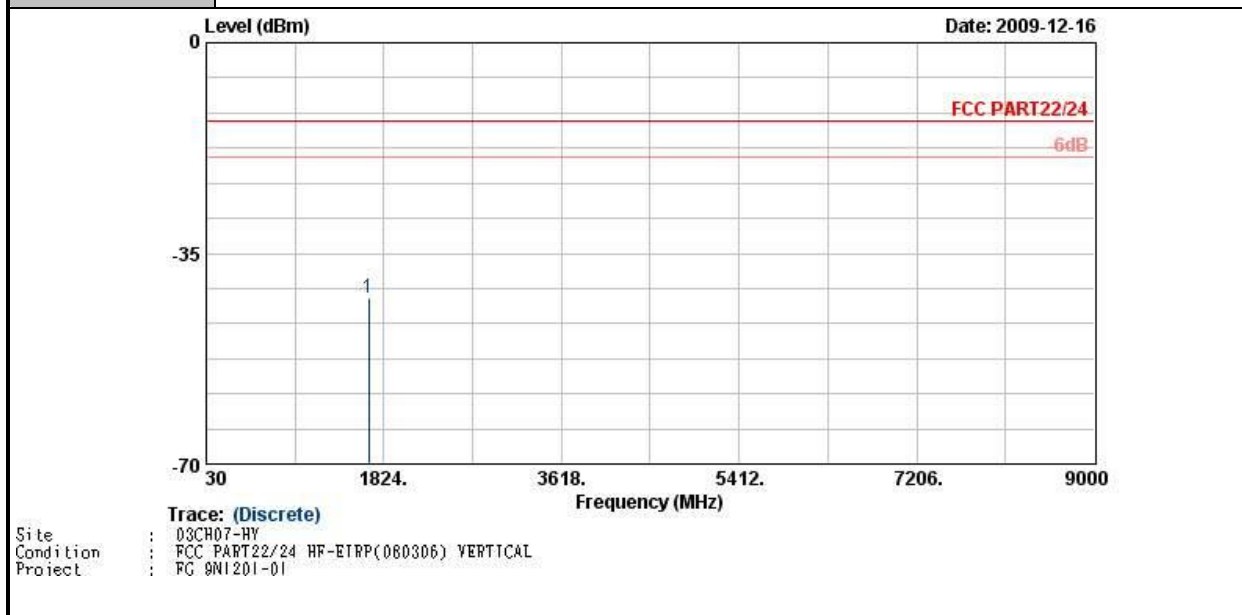

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-42.93	-13	-29.93	-51.28	-42.78	3.39	5.39	V	Pass


Band :	WCDMA Band II	Temperature :	25~26°C
Test Mode :	HSDPA Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

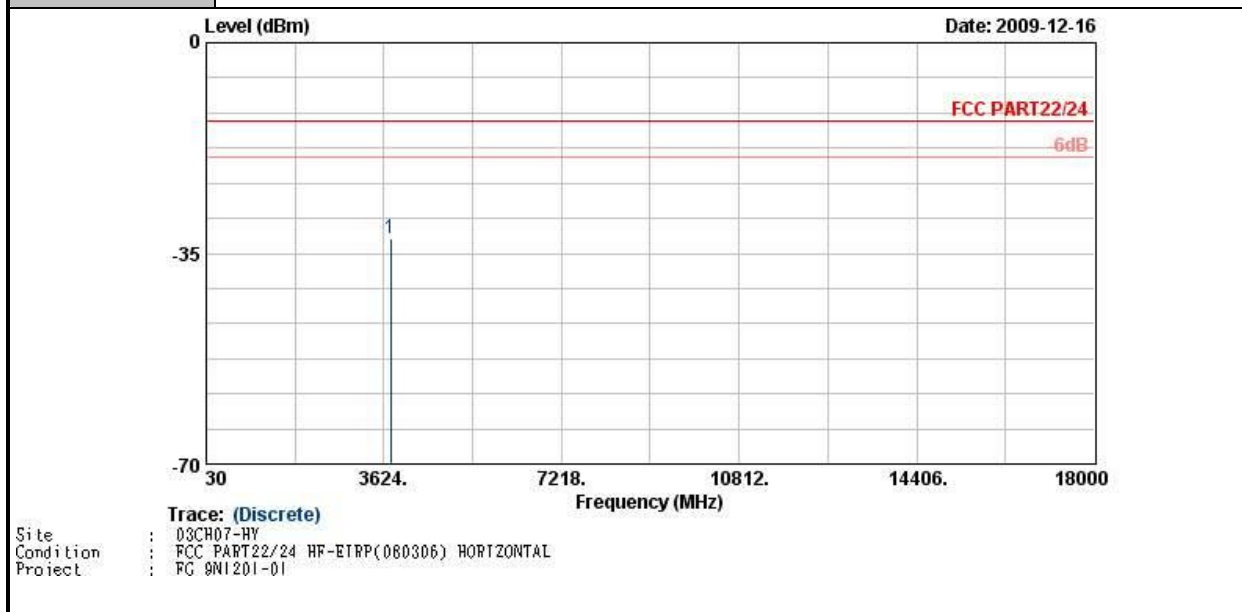

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-32.61	-13	-19.61	-47.53	-35.13	4.88	7.40	H	Pass



Band :	WCDMA Band II	Temperature :	25~26°C
Test Mode :	HSDPA Link	Relative Humidity :	50~53%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

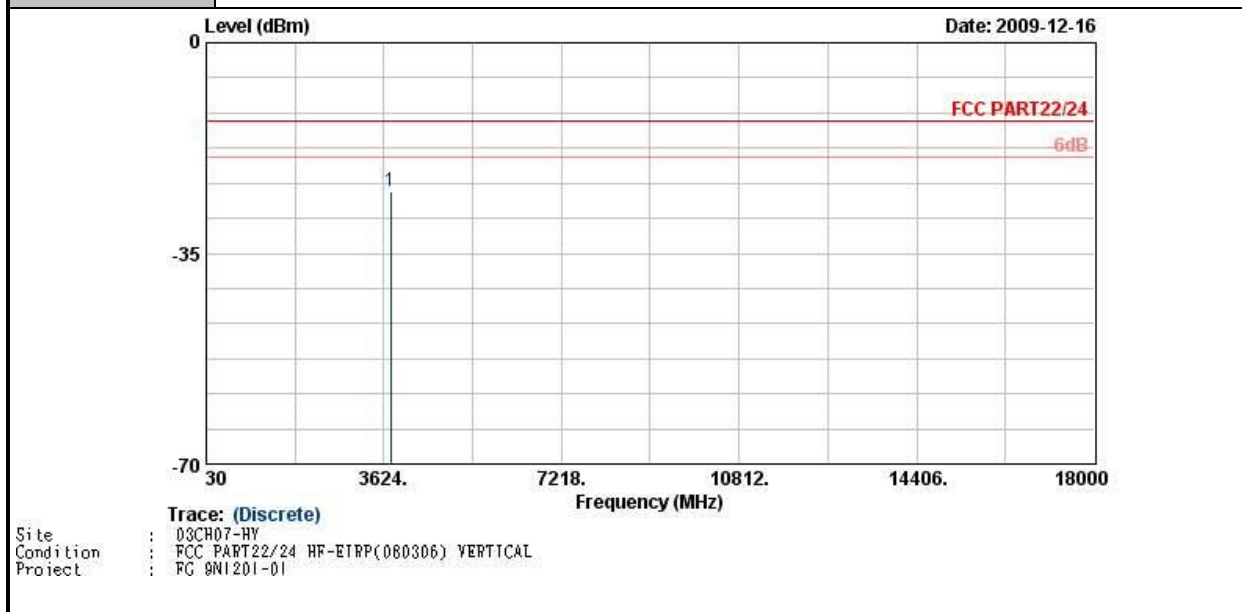

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-24.61	-13	-11.61	-43.87	-27.64	4.88	7.91	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

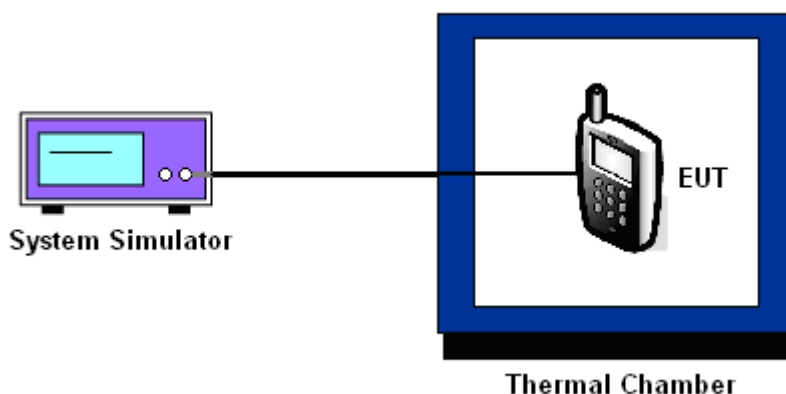

3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	N/A	N/A	N/A	N/A	
-10	-61	-0.07	-63	-0.07	
0	-33	-0.04	-44	-0.05	
10	-37	-0.04	-41	-0.05	
20	-27	-0.03	-36	-0.04	
30	-21	-0.02	-37	-0.04	
40	-25	-0.03	-30	-0.04	
50	-36	-0.04	-33	-0.04	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 10		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	N/A	N/A	N/A	N/A	
-10	-78	-0.04	-72	-0.04	
0	-80	-0.04	-61	-0.03	
10	-73	-0.04	-65	-0.03	
20	-78	-0.04	-53	-0.03	
30	-94	-0.05	-60	-0.03	
40	-91	-0.05	-52	-0.03	
50	-87	-0.05	-69	-0.04	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-27	-0.03	
0	-13	-0.02	
10	16	0.02	
20	14	0.02	
30	13	0.02	
40	11	0.01	
50	-16	-0.02	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5		

Temperature (°C)	HSDPA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-61	-0.03	
0	-36	-0.02	
10	-44	-0.02	
20	-34	-0.02	
30	-31	-0.02	
40	-28	-0.01	
50	-27	-0.01	

Note: The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.

3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.8	-40	-0.05	2.5	PASS
		BEP	-51	-0.06		
		4.2	-49	-0.06		
	EDGE 8	3.8	-59	-0.07		
		BEP	-57	-0.07		
		4.2	-56	-0.07		
GSM 1900 CH661	GPRS 8	3.8	-110	-0.06		
		BEP	-98	-0.05		
		4.2	-96	-0.05		
	EDGE 10	3.8	-98	-0.05		
		BEP	-67	-0.04		
		4.2	-74	-0.04		
WCDMA Band V CH4182	RMC 12.2Kbps	3.8	-25	-0.03		
		BEP	-32	-0.04		
		4.2	-22	-0.03		
WCDMA Band II CH9400	HSDPA	3.8	-42	-0.02		
		BEP	-59	-0.03		
		4.2	-51	-0.03		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.35 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	116456	N/A	Jun. 05, 2008	Jun. 04, 2010	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Jul. 29, 2009	Jul. 28, 2010	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB. GAIN	Mar. 27, 2009	Mar. 26, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 KHz~30 MHz	May 22, 2008	May 21, 2010	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	117997	N/A	May 14, 2009	May 13, 2011	-

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Photographs of EUT

Please refer to Sporton report number EP9N1201-01 as below.