

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_open/Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.431 mW/g


LHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
 dz=3mm

Reference Value = 17.740 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.524 mW/g

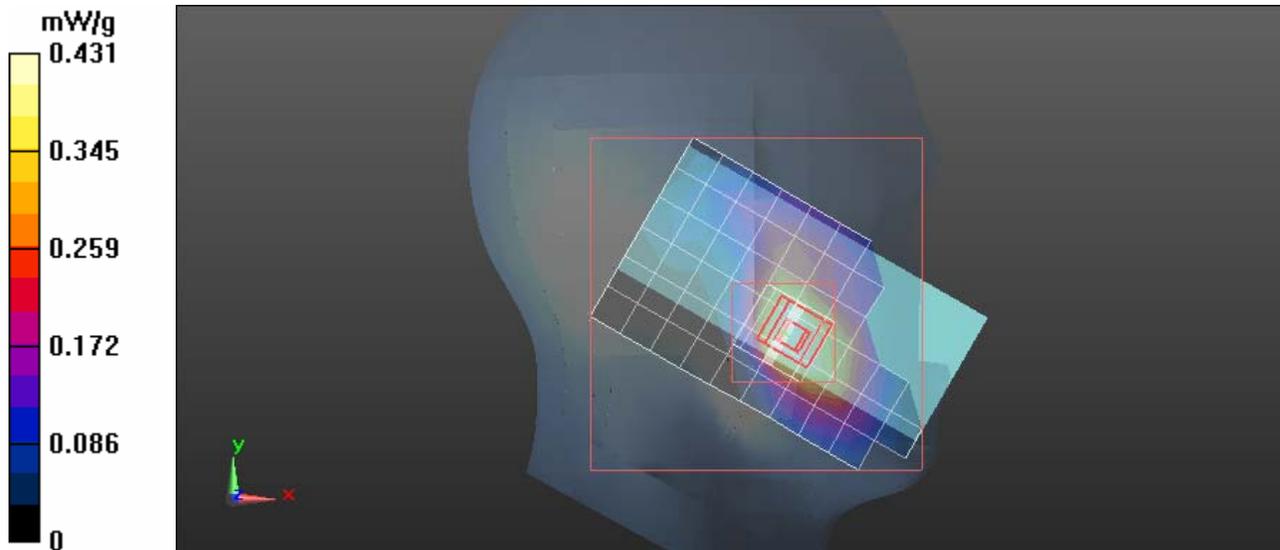


Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1

LHS_open/Touch_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.071 mW/g

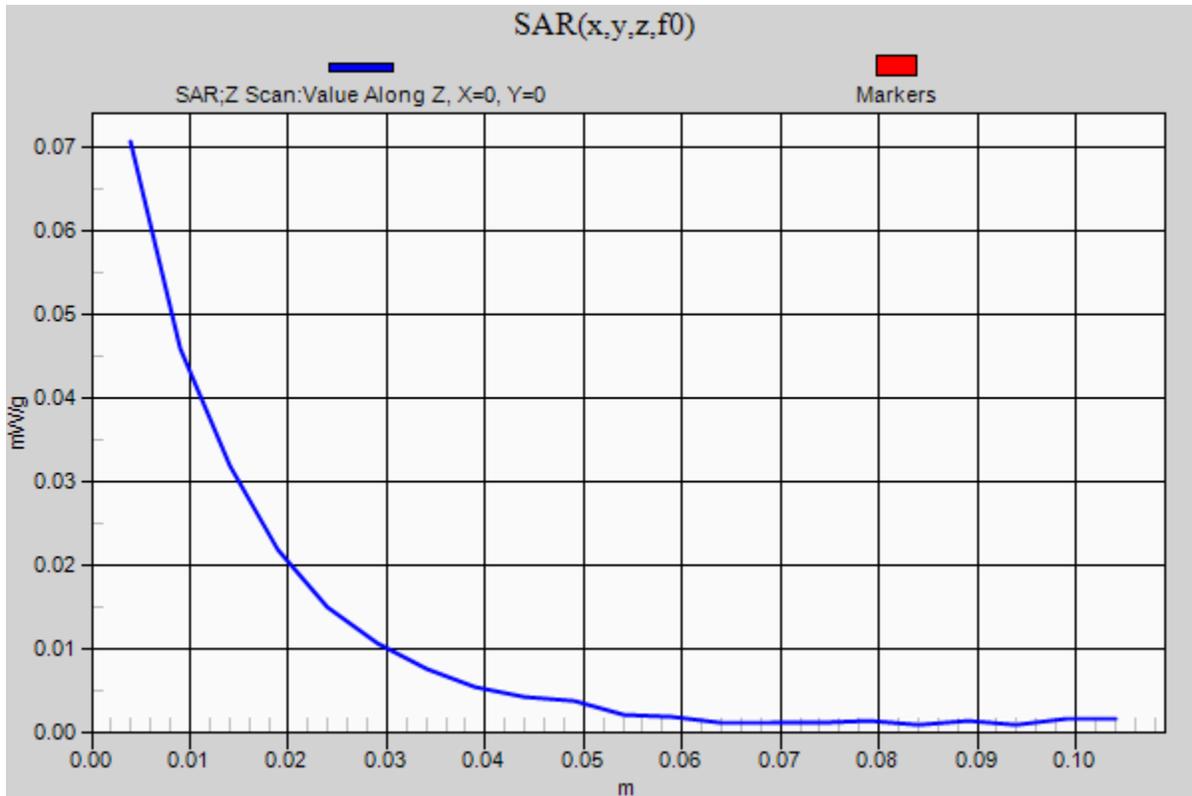

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_open/Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 mW/g


LHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.612 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

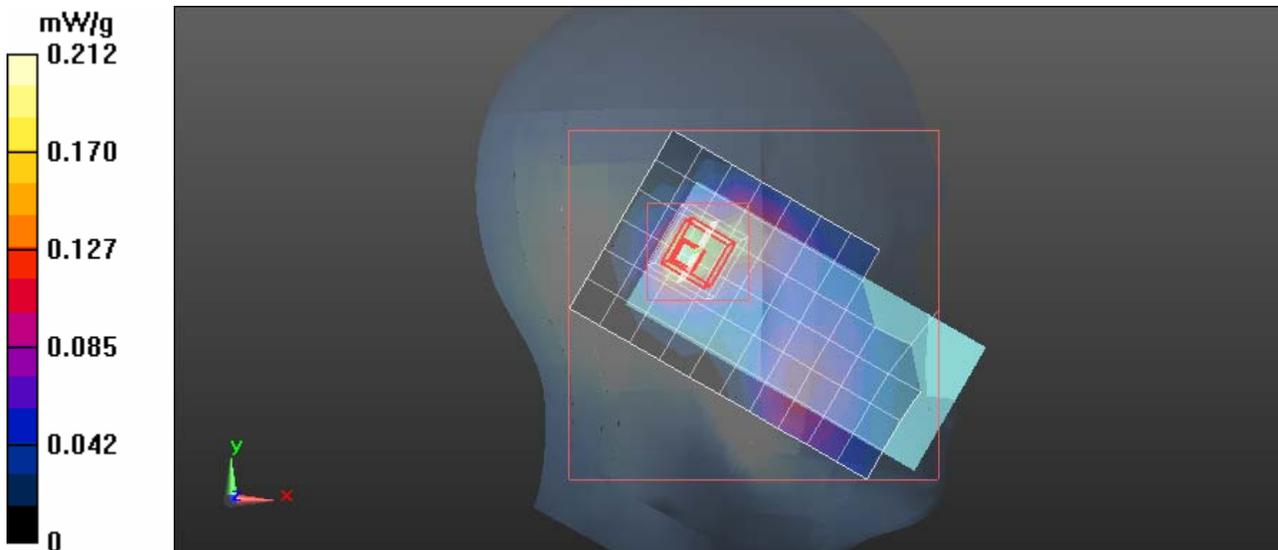

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_closed/Touch_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.464 mW/g


LHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 18.247 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.403 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

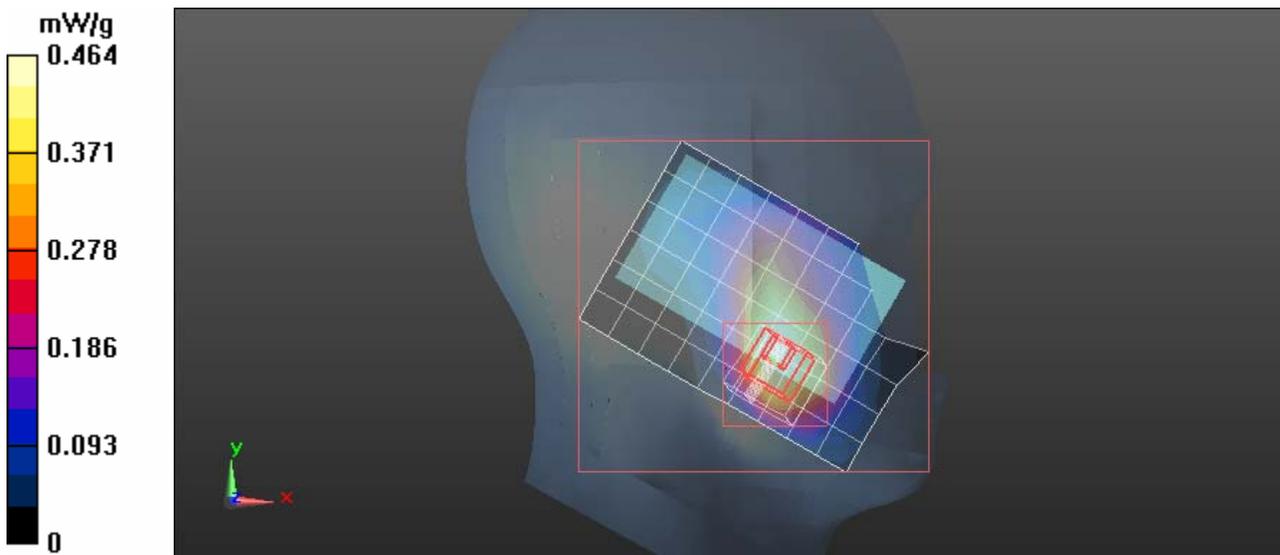

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_closed/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.216 mW/g

LHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.441 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.337 W/kg
SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.129 mW/g
Maximum value of SAR (measured) = 0.264 mW/g

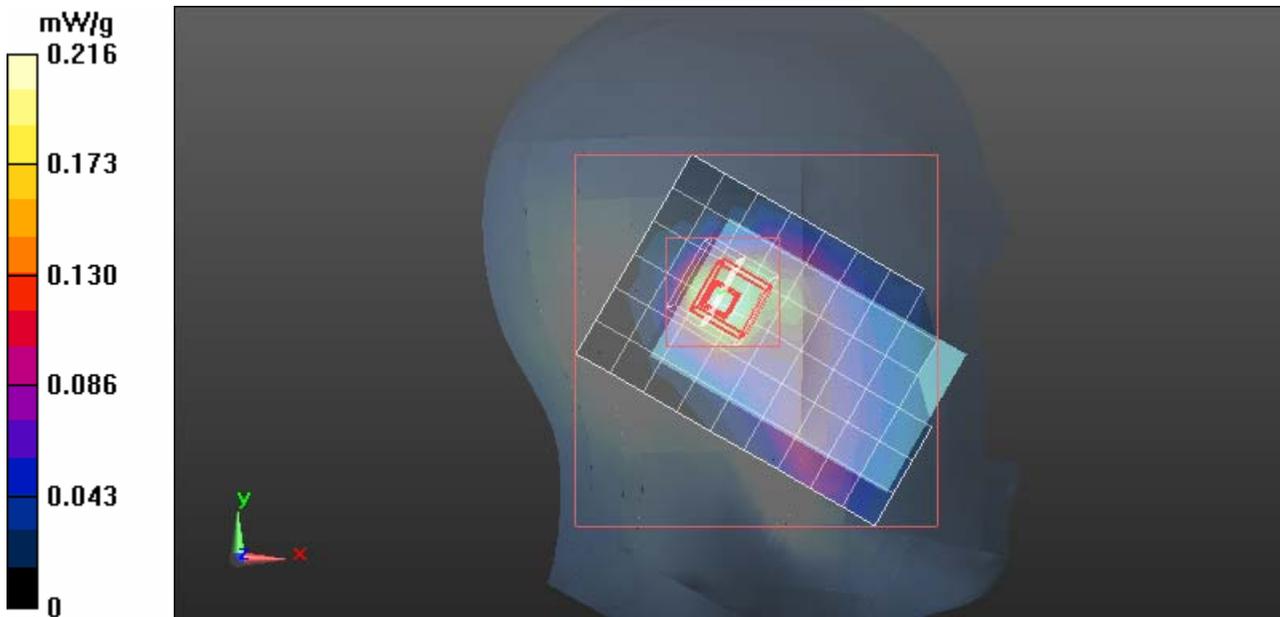

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_open/Touch_M-ch/Area Scan 2 (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.309 mW/g


RHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.035 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.304 mW/g

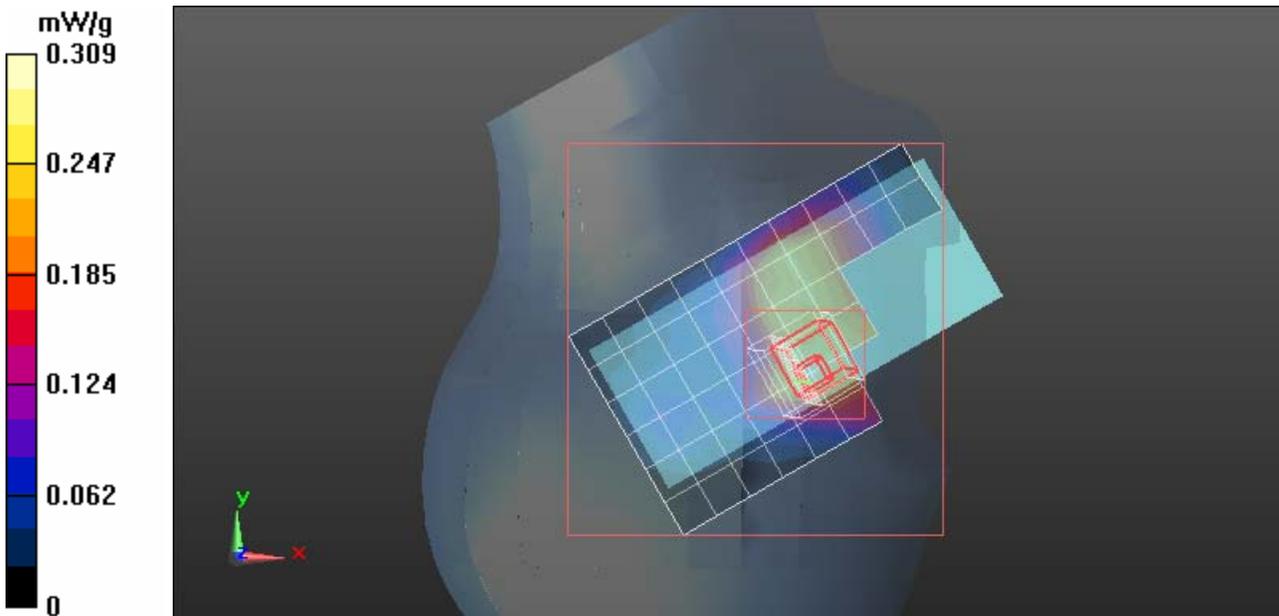

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_open/Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.229 mW/g

RHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.977 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.327 W/kg
SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.114 mW/g
Maximum value of SAR (measured) = 0.255 mW/g

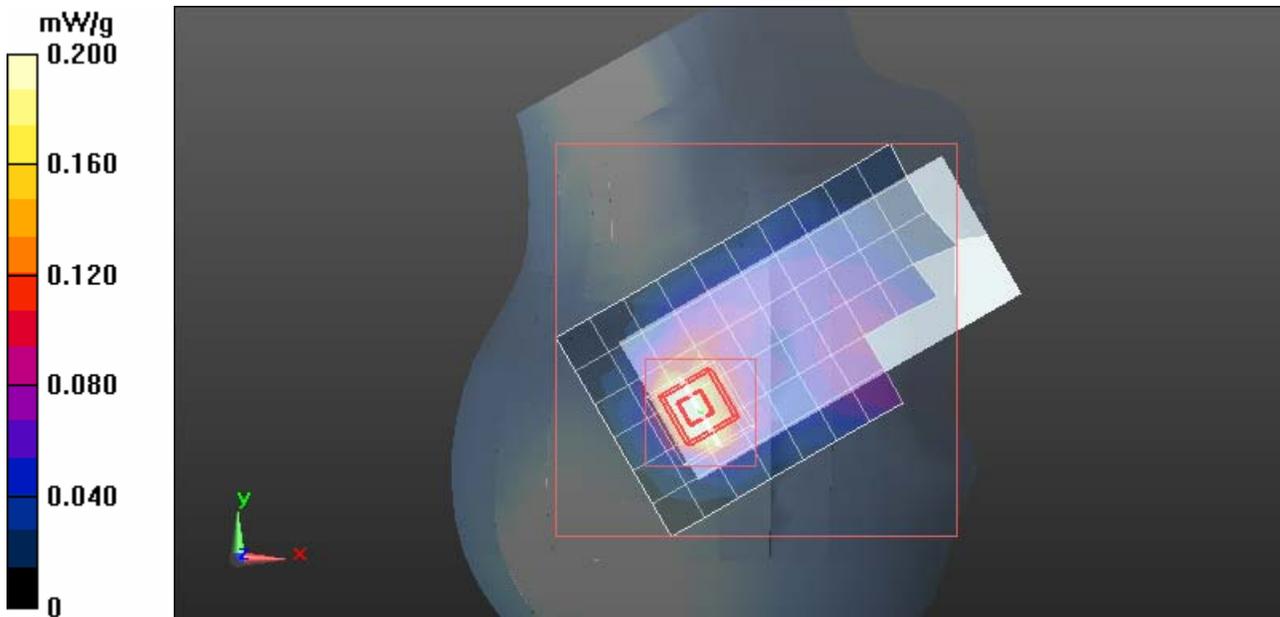

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

RHS_closed/Touch_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.340 mW/g

RHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 15.859 V/m; Power Drift = -0.21 dB
Peak SAR (extrapolated) = 0.429 W/kg
SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.193 mW/g
Maximum value of SAR (measured) = 0.343 mW/g

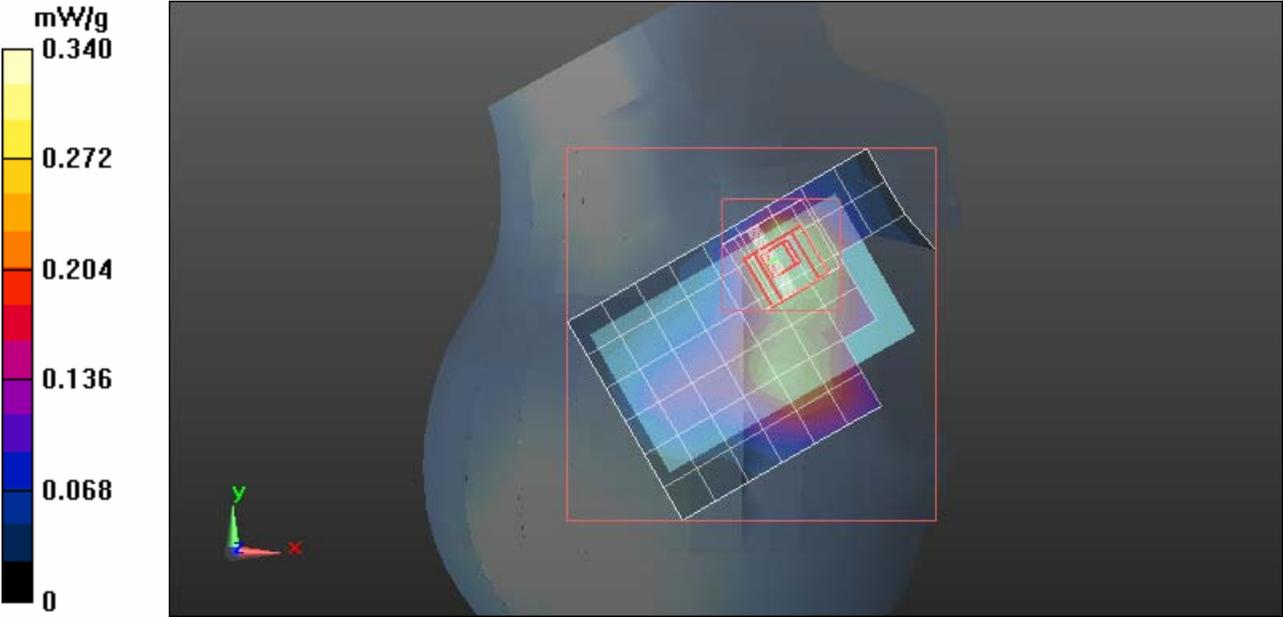

Test Laboratory: UL CCS

CDMA2000 PCS band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_closed/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.281 mW/g

RHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.350 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.470 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.170 mW/g
Maximum value of SAR (measured) = 0.375 mW/g

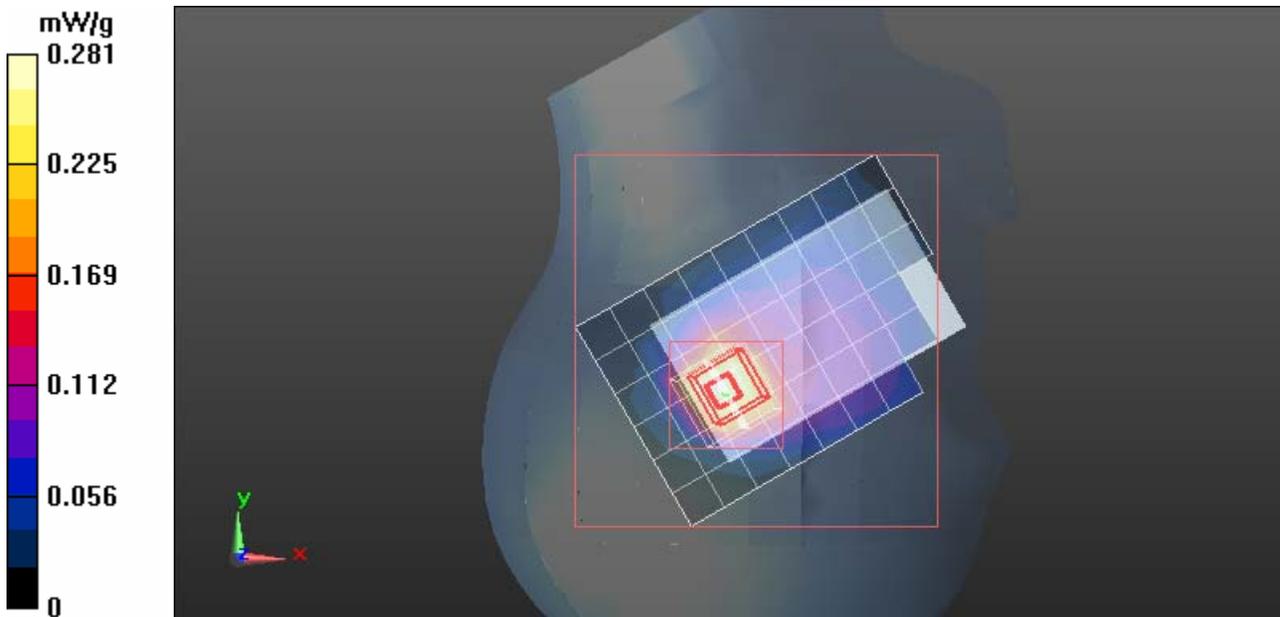

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Front side/1xRTT SO32_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.237 mW/g

Front side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
 dz=3mm

Reference Value = 12.814 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.240 mW/g


Front side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm,
 dz=3mm

Reference Value = 12.814 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

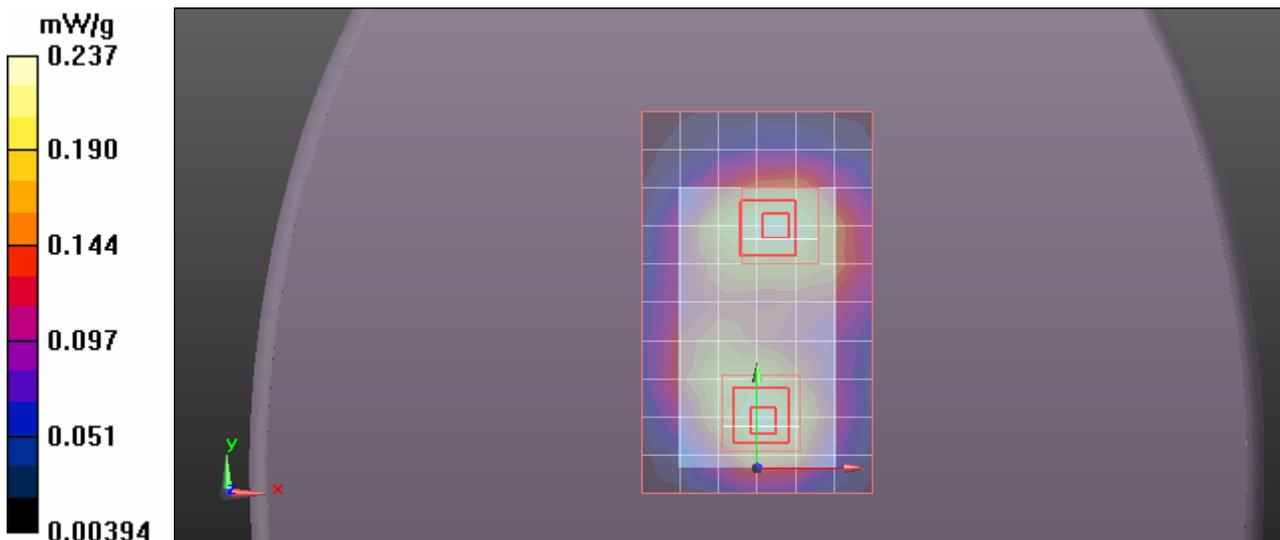

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.436$ mho/m; $\epsilon_r = 53.239$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.030 mW/g


Back side/1xRTT SO32_L-ch/Zoom Scan (8x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.008 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.295 W/kg

SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.503 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.053 mW/g

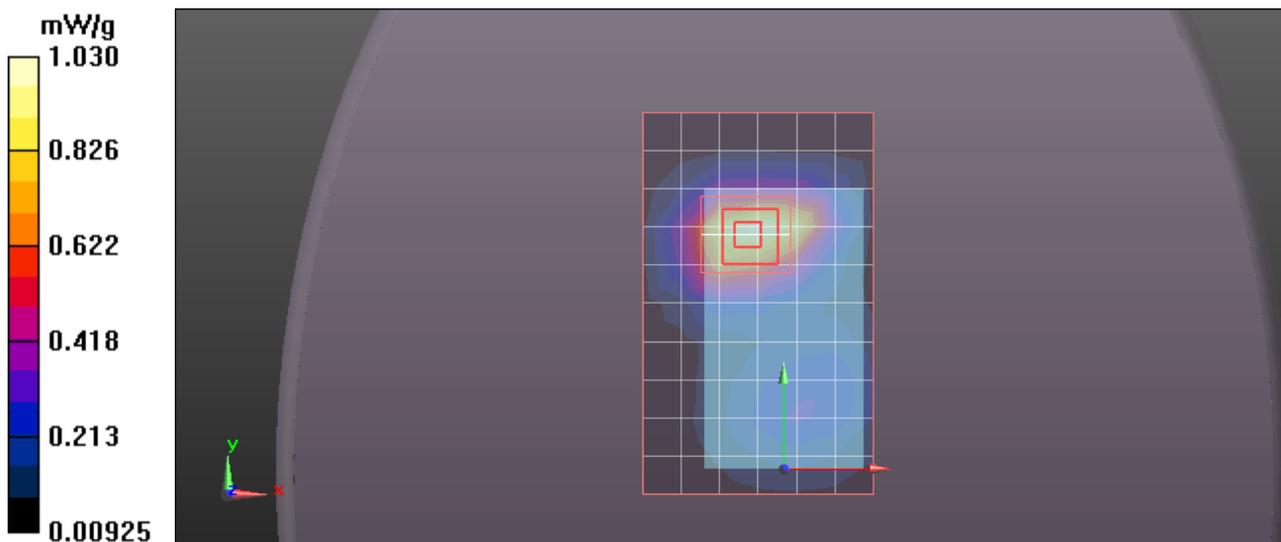

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.141 mW/g


Back side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28.242 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.502 W/kg

SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.580 mW/g

Maximum value of SAR (measured) = 1.172 mW/g

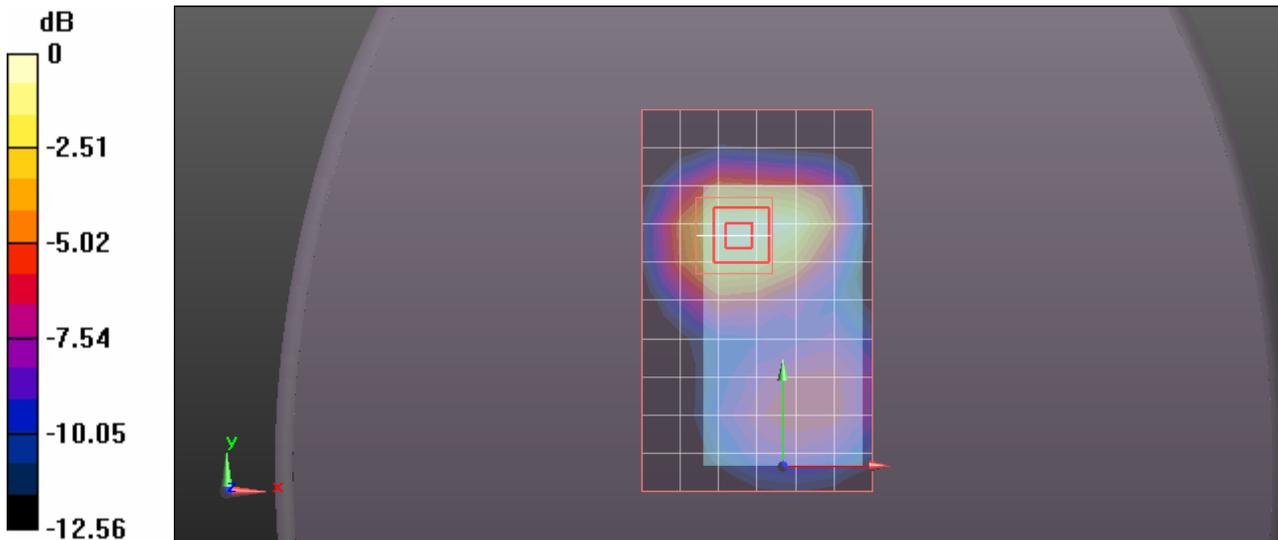

0 dB = 1.170mW/g


Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1

Back side/1xRTT SO32_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.180 mW/g

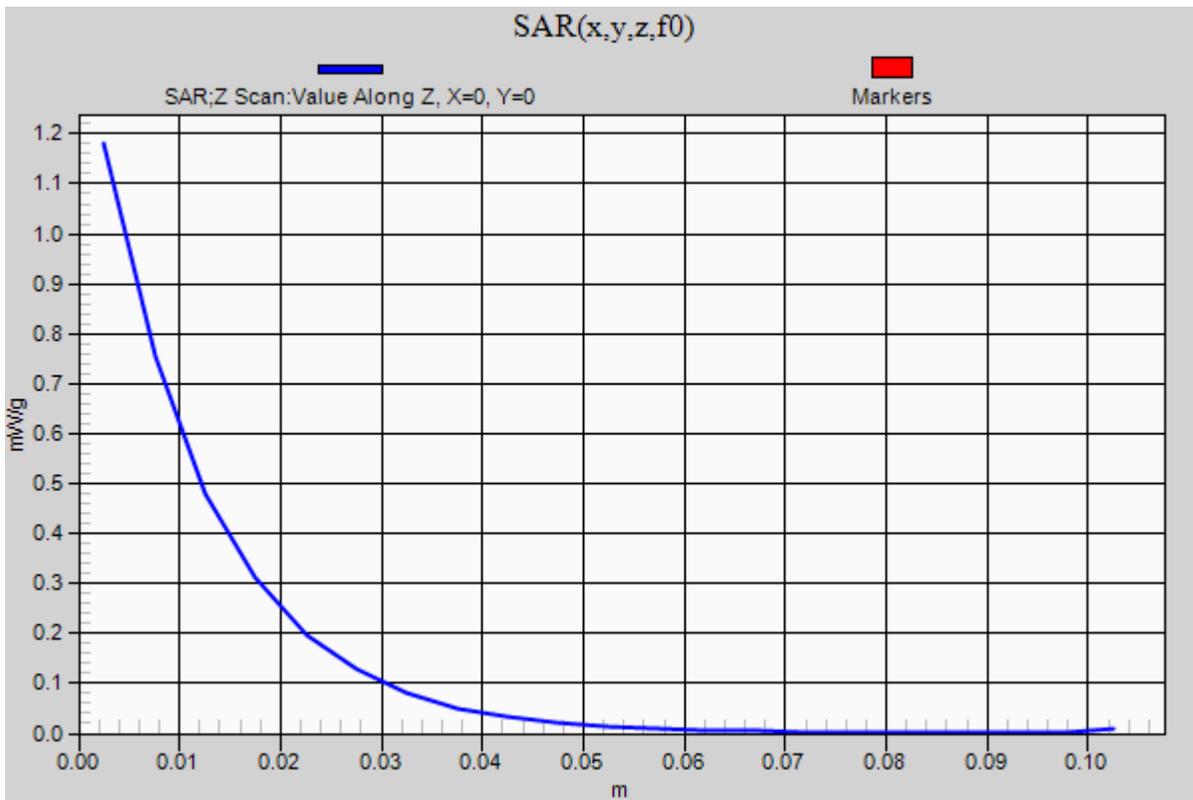

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.504$ mho/m; $\epsilon_r = 53.05$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_H-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.975 mW/g

Back side/1xRTT SO32_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 25.518 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.298 W/kg

SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.500 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.029 mW/g

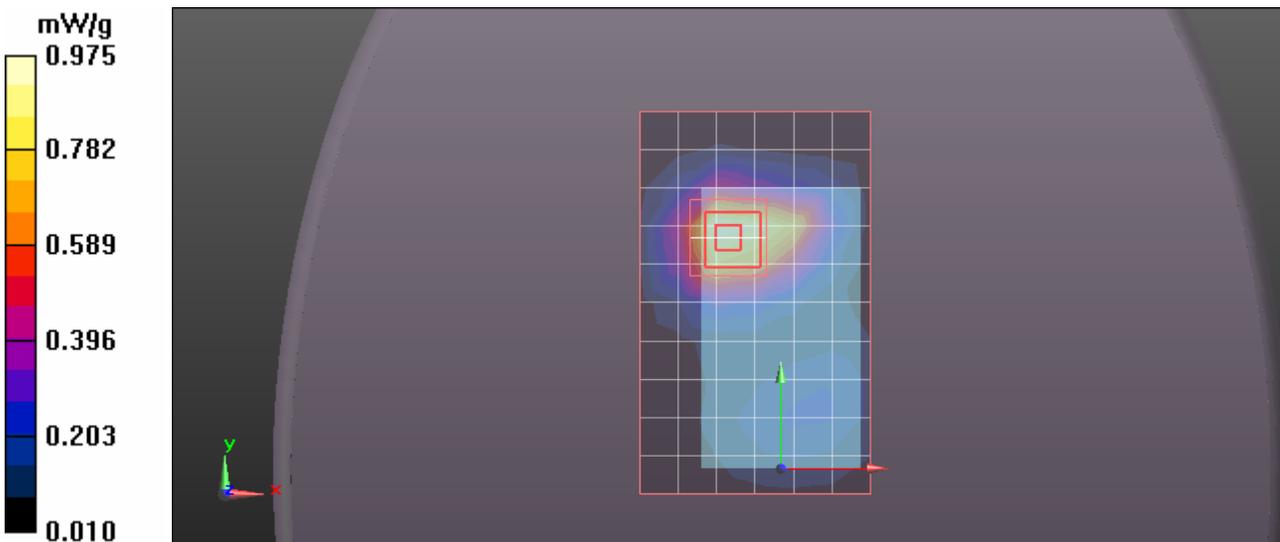

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_M-ch W/ Headset/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.109 mW/g

Back side/1xRTT SO32_M-ch W/ Headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 27.700 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.458 W/kg
SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.533 mW/g
Maximum value of SAR (measured) = 1.131 mW/g

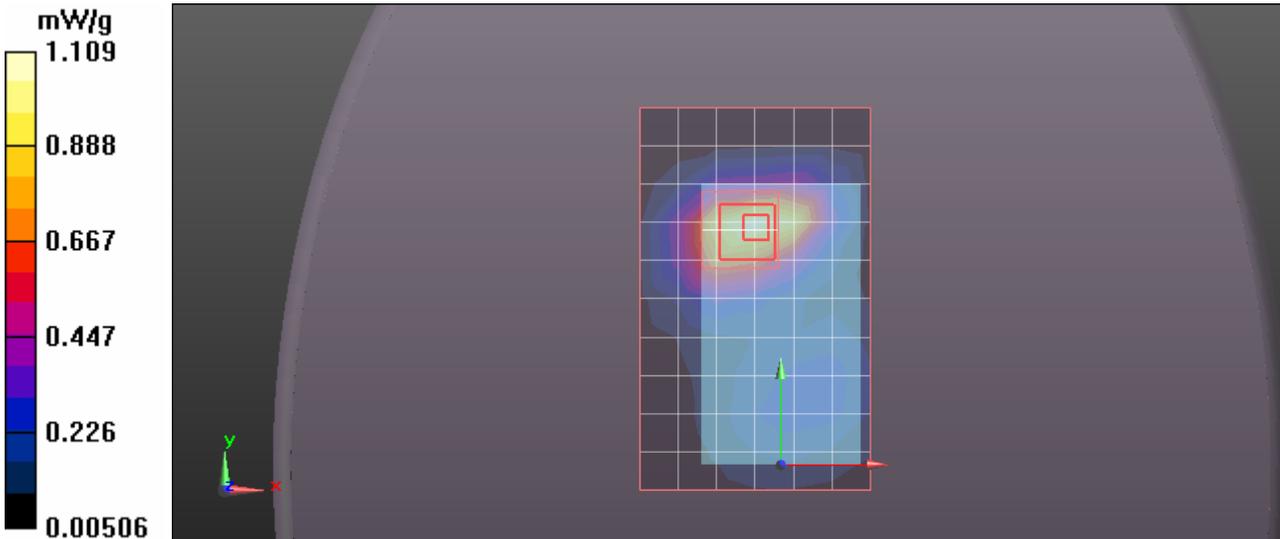

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Front side/1xRTT SO32_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 mW/g


Front side/1xRTT SO32_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.880 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

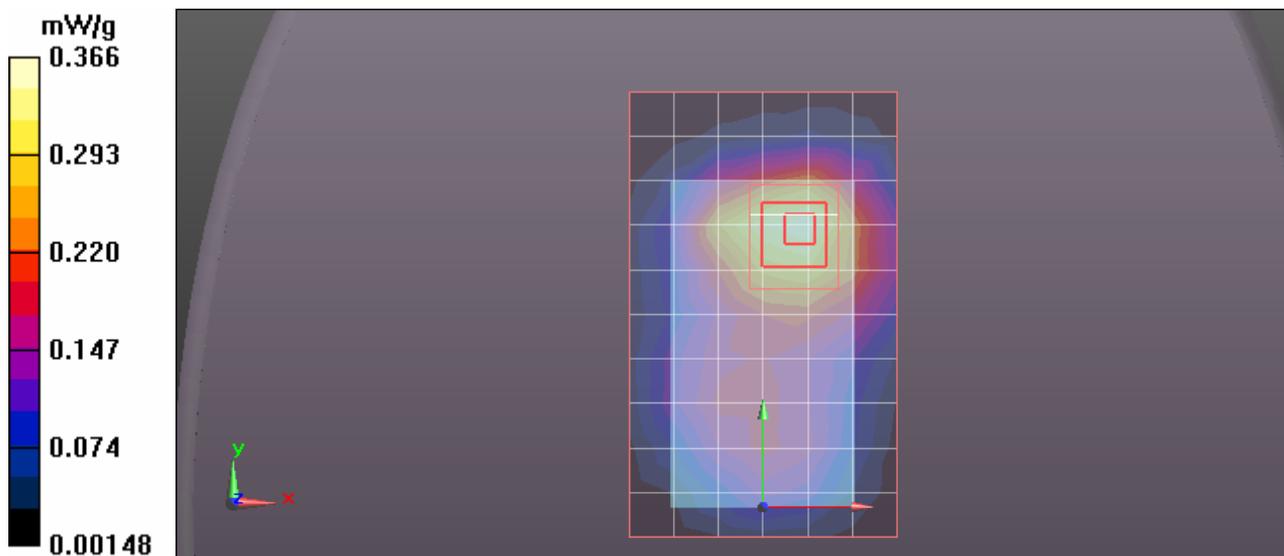

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Front side/EV-DO Rel.0_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.234 mW/g


Front side/EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.752 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated)= 0.496W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

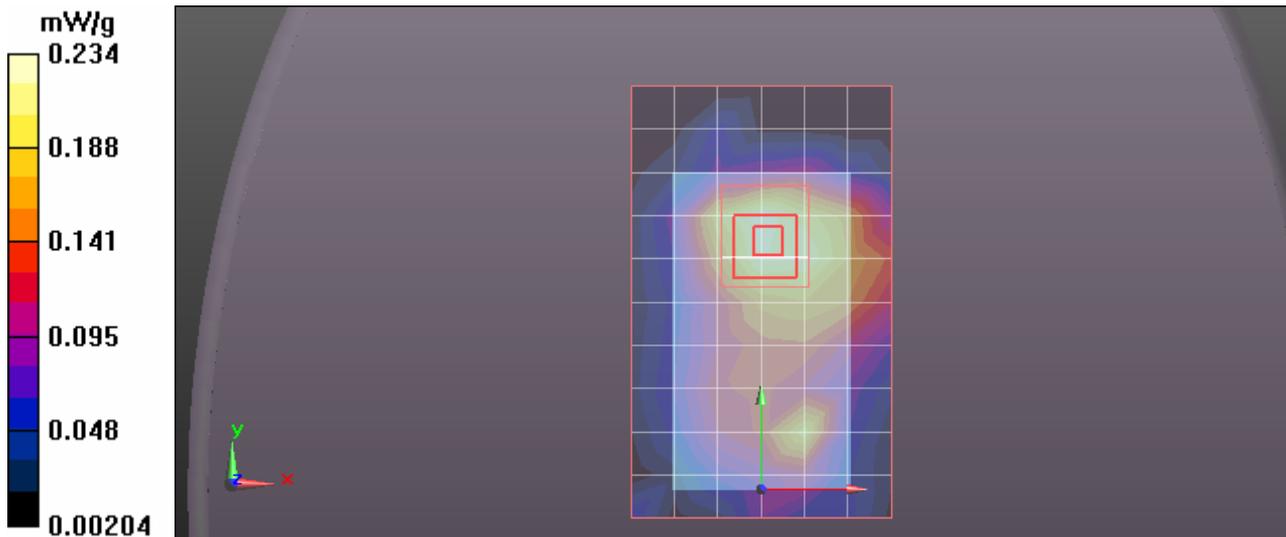

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 52.269$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.702 mW/g

Back side/1xRTT SO32_L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 34.447 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.272 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.746 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.692 mW/g

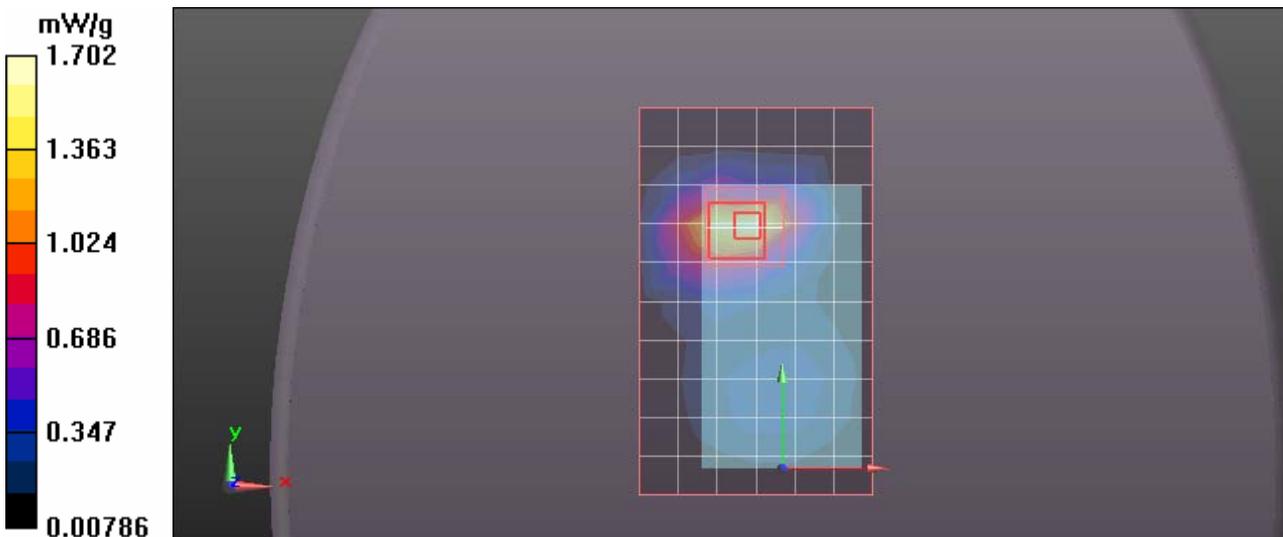

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.748 mW/g


Back side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 34.558 V/m; Power Drift = 0.0071 dB

Peak SAR (extrapolated) = 2.346 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.836 mW/g

Maximum value of SAR (measured) = 1.798 mW/g

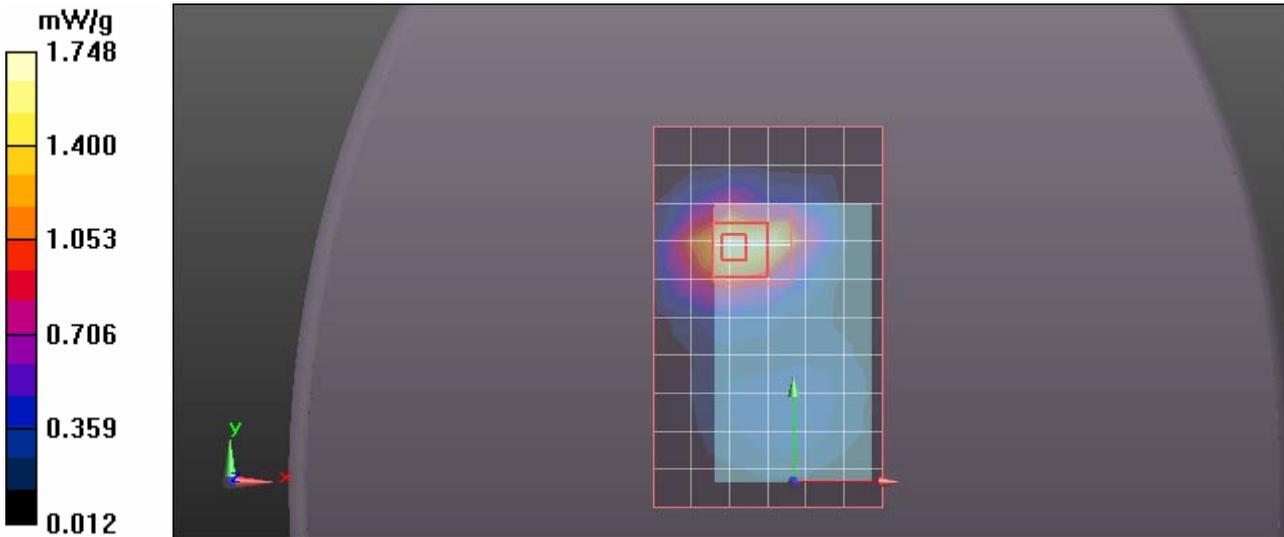

Test Laboratory: UL CCS


CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1

Back side/1xRTT SO32_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.794 mW/g

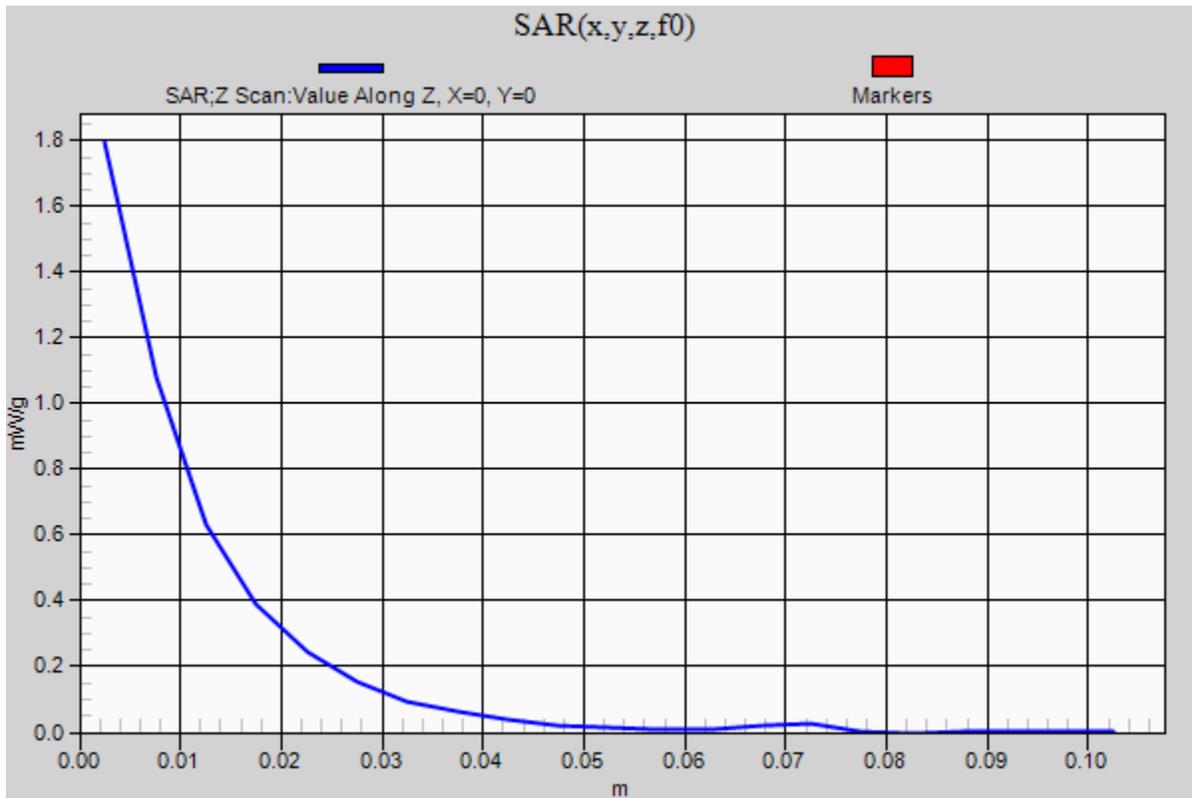

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1908.75 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.121$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_H-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.496 mW/g

Back side/1xRTT SO32_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 31.918 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.951 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.715 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.512 mW/g

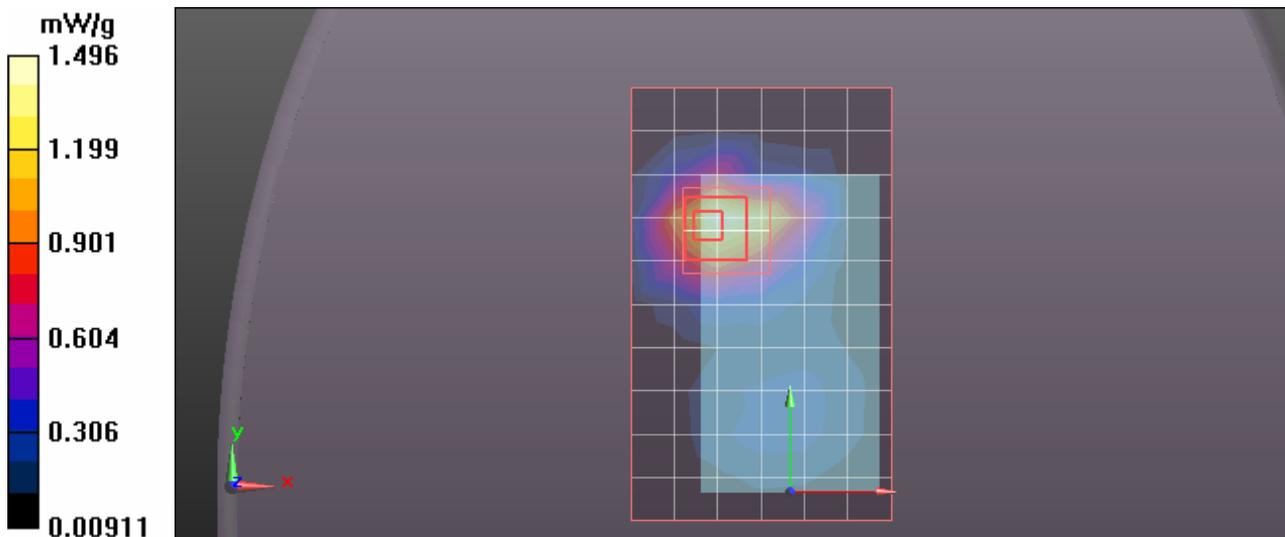

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.434$ mho/m; $\epsilon_r = 52.269$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.317 mW/g

Back side/EV-DO Rel.0_L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 30.418 V/m; Power Drift = 0.24 dB

Peak SAR (extrapolated) = 1.900 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.668 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.453 mW/g

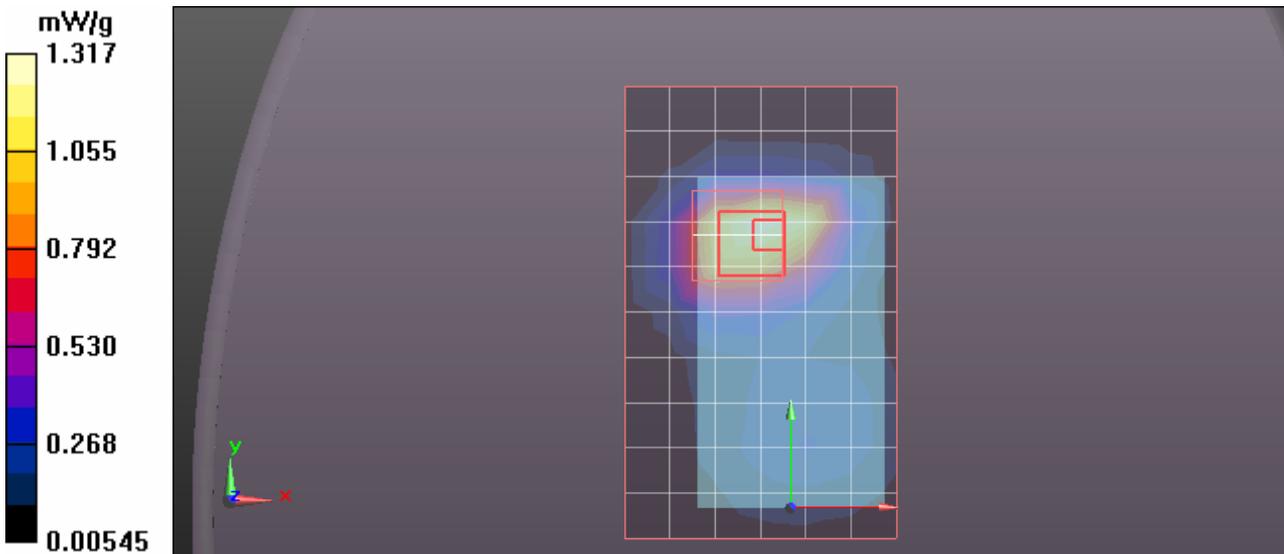

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.414 mW/g


Back side/EV-DO Rel.0_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 31.056 V/m; Power Drift = -0.0052 dB

Peak SAR (extrapolated) = 2.394 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.832 mW/g

Maximum value of SAR (measured) = 1.816 mW/g

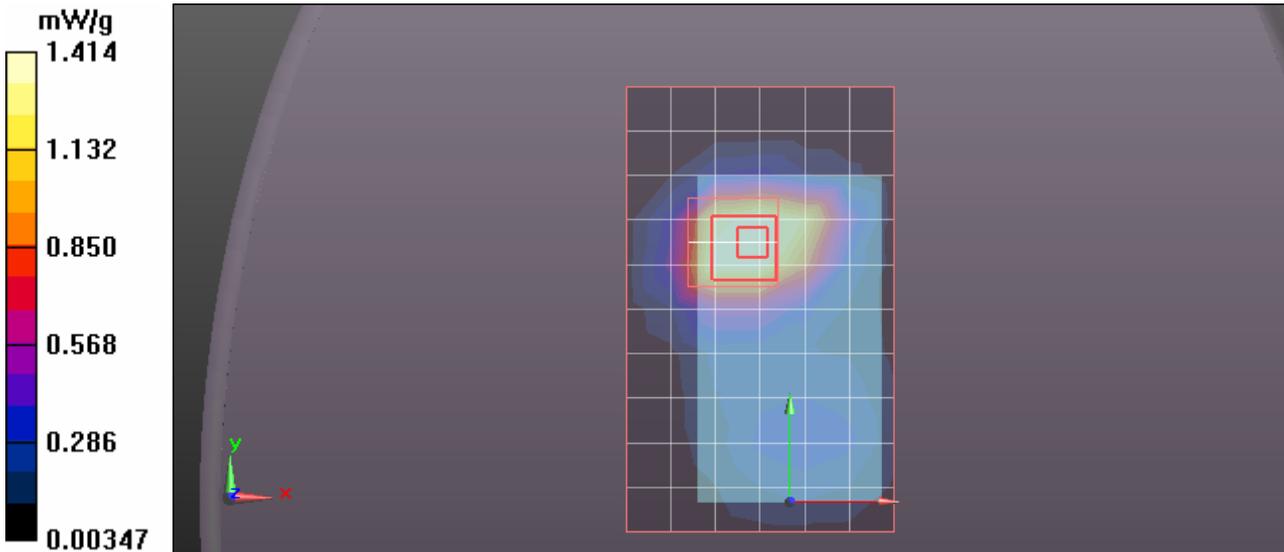

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1908.75 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.121$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_H-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.175 mW/g

Back side/EV-DO Rel.0_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 28.196 V/m; Power Drift = -0.00047 dB

Peak SAR (extrapolated) = 1.706 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.641 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.356 mW/g

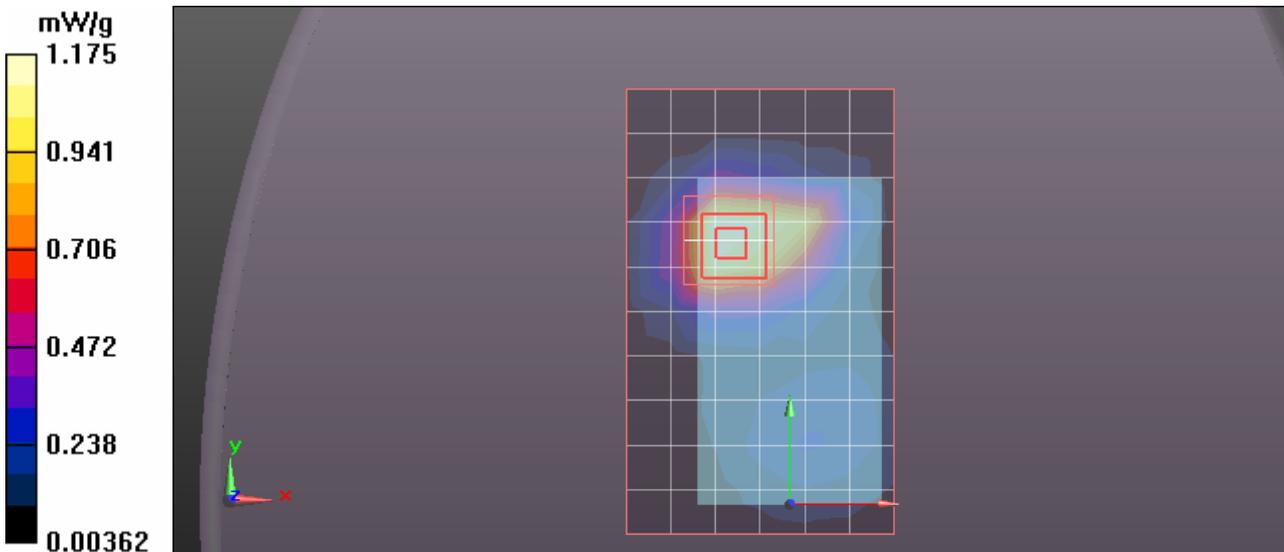

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Left edge/1xRTT SO32_M-ch/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.780 mW/g


Left edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.058 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.776 mW/g

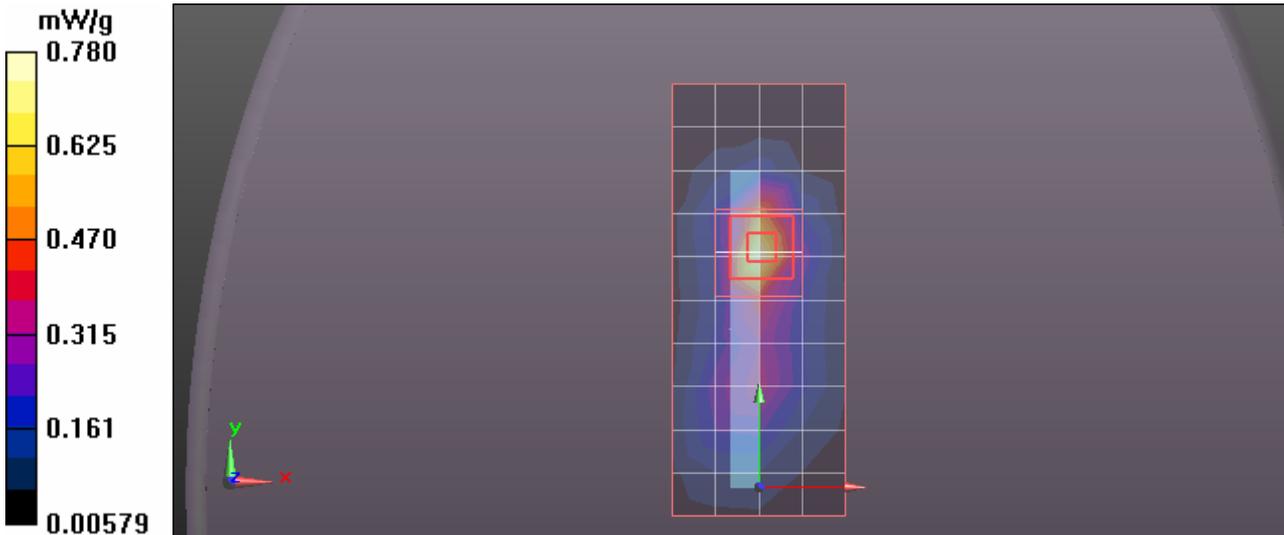

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Left edge/EV-DO Rel.0_M-ch/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.611 mW/g


Left edge/EV-DO Rel.0_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.495 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.272 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

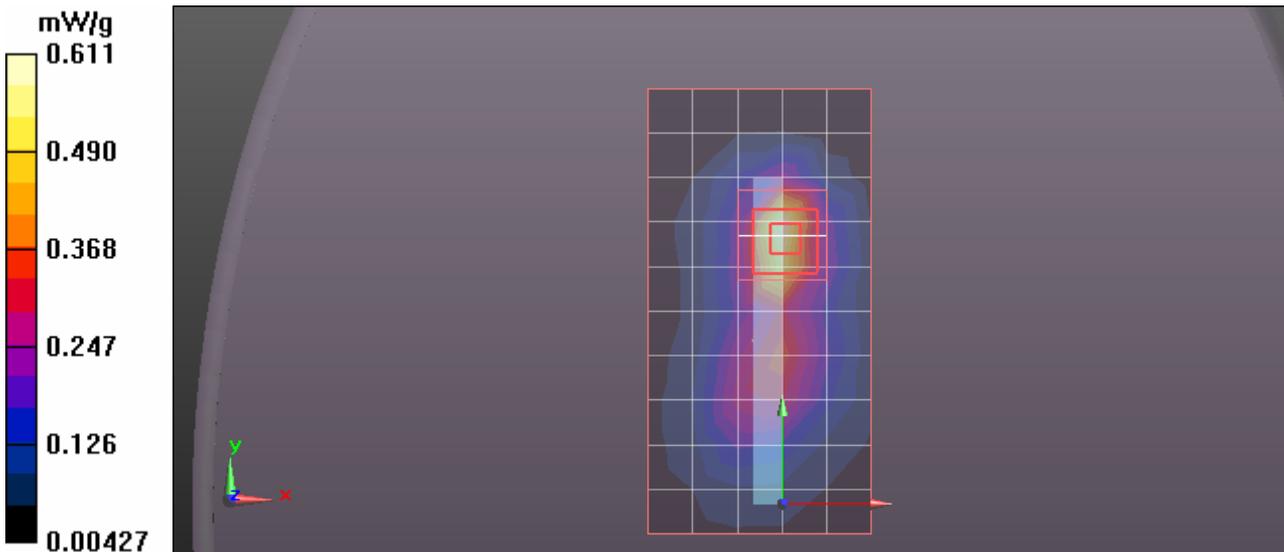

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Right edge/1xRTT SO32_M-ch/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.085 mW/g


Right edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.613 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.160 mW/g

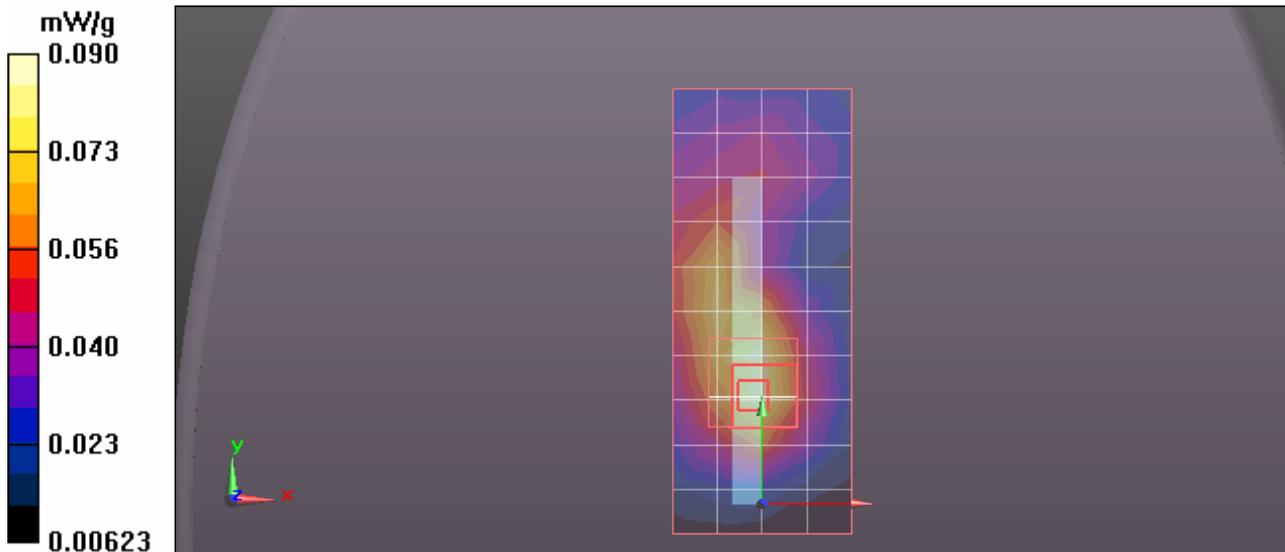

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Right edge/EV-DO Rel.0_M-ch/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.074 mW/g


Right edge/EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.106 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

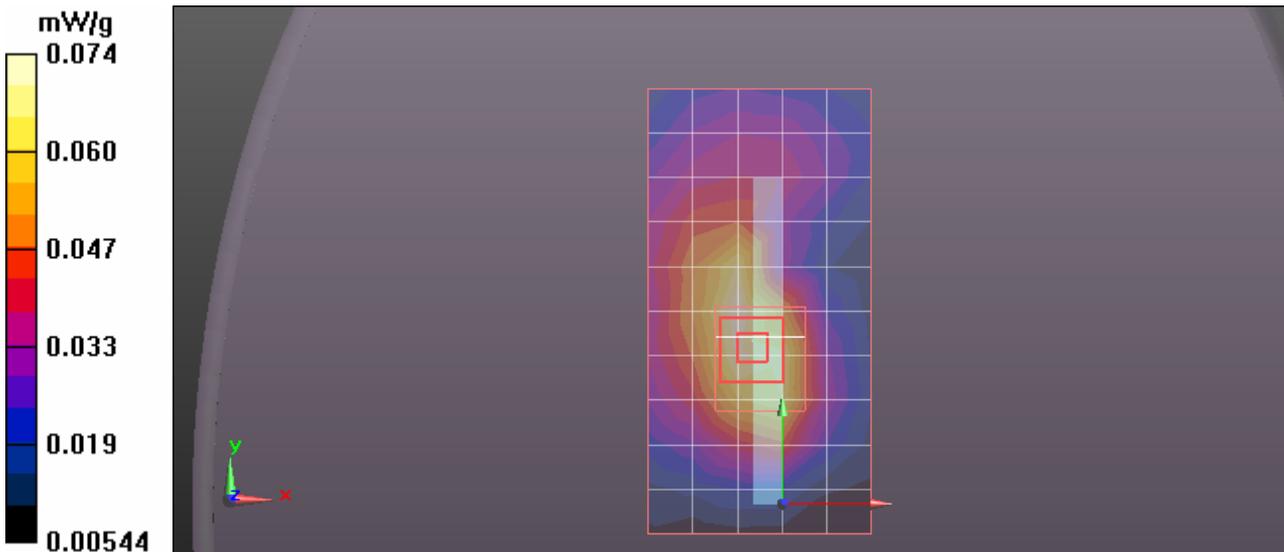

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Top edge/1xRTT SO32_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.048 mW/g


Top edge/1xRTT SO32_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.680 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.067 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

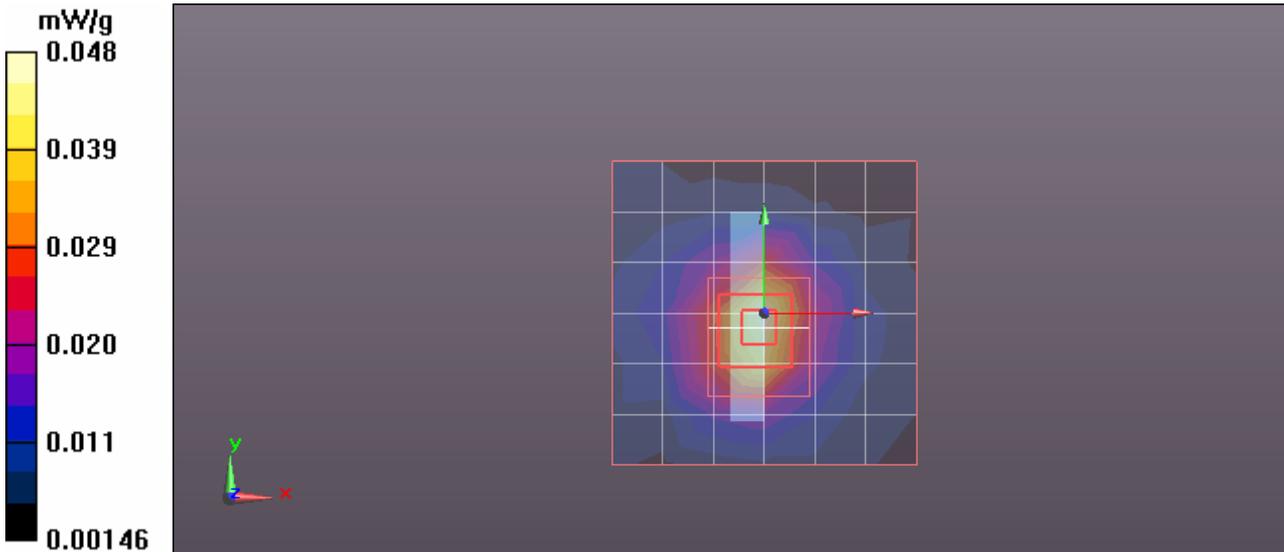

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Top edge/ EV-DO Rel.0_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.048 mW/g

Top edge/ EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.641 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.065 W/kg
SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.023 mW/g
Maximum value of SAR (measured) = 0.049 mW/g

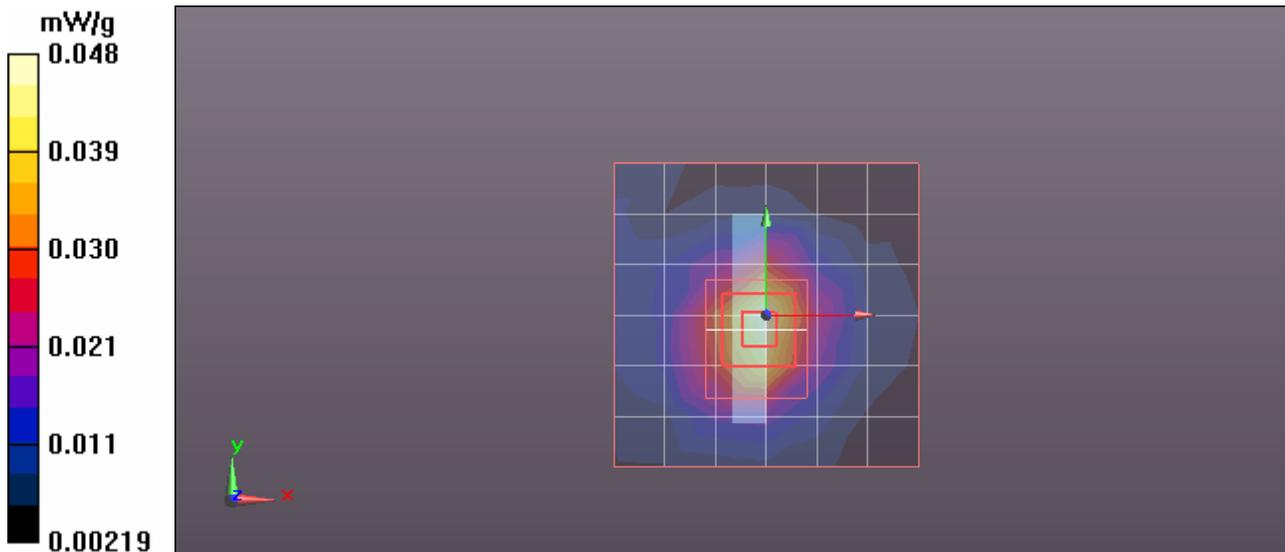

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Bottom edge/1xRTT SO32_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.259 mW/g

Bottom edge/1xRTT SO32_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.415 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.395 W/kg
SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.141 mW/g
Maximum value of SAR (measured) = 0.309 mW/g

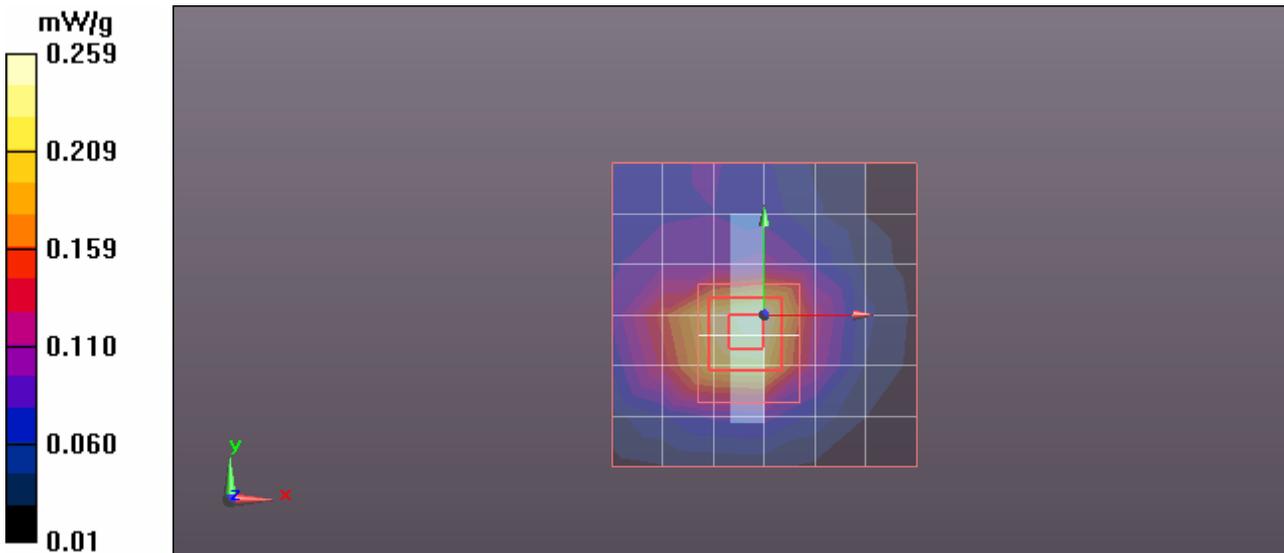

Test Laboratory: UL CCS

CDMA2000 PCS band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.468$ mho/m; $\epsilon_r = 52.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Bottom edge/EV-DO Rel.0_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.267 mW/g

Bottom edge/EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.655 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.398 W/kg
SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.142 mW/g
Maximum value of SAR (measured) = 0.309 mW/g

