

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

LHS_open/Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.369 mW/g


LHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.024 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.249 mW/gInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.371 mW/g

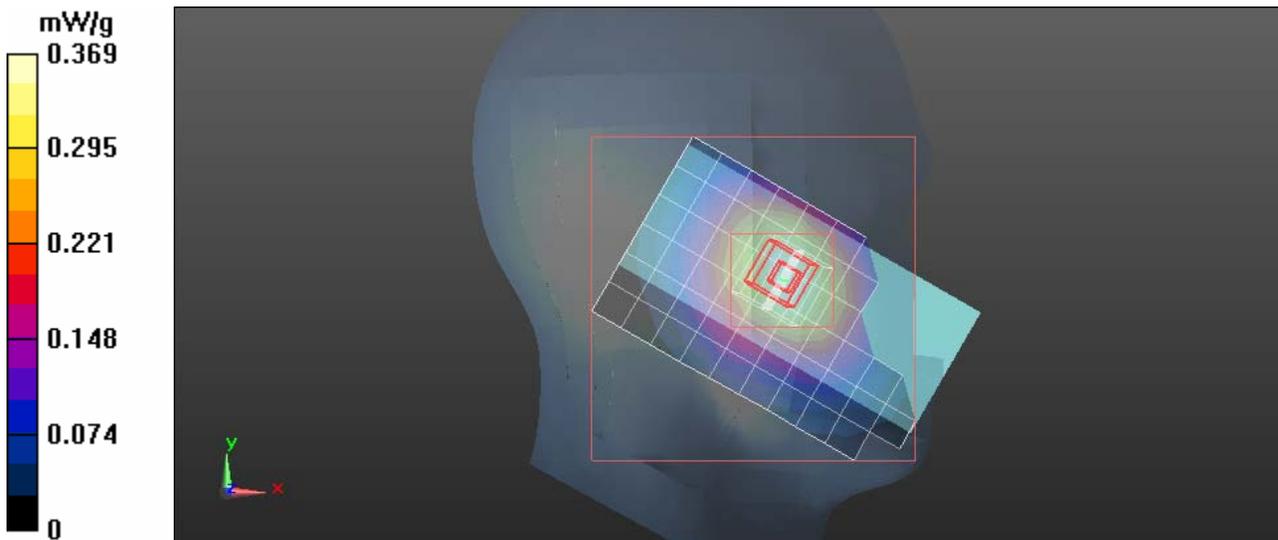

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_open/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.173 mW/g

LHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 13.965 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.121 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.180 mW/g

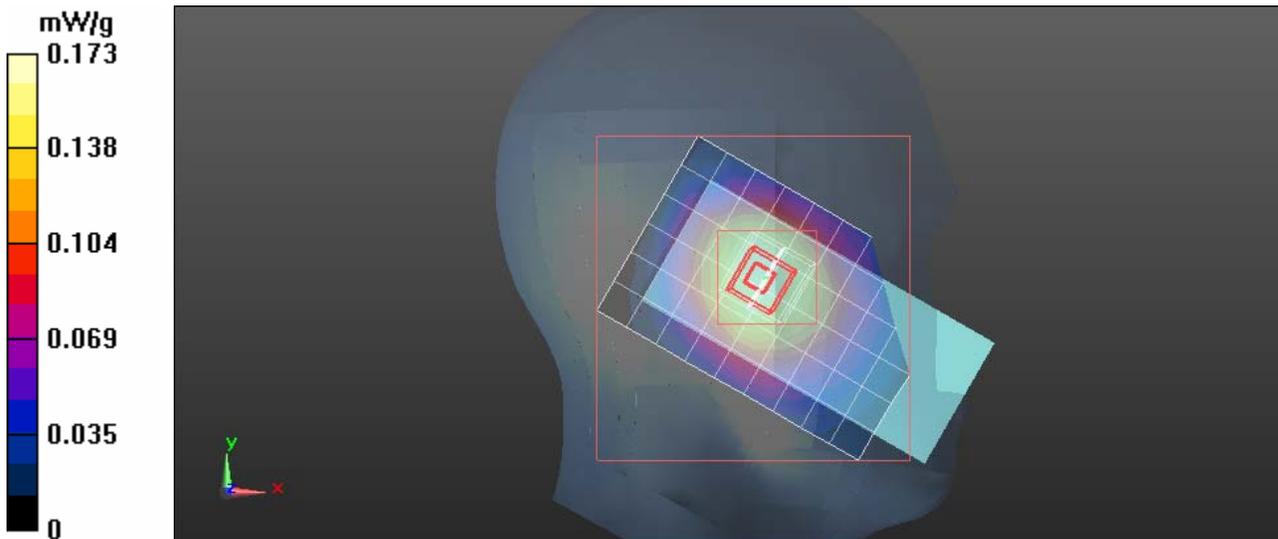

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_closed/Touch_M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.497 mW/g

LHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 23.475 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.336 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.510 mW/g

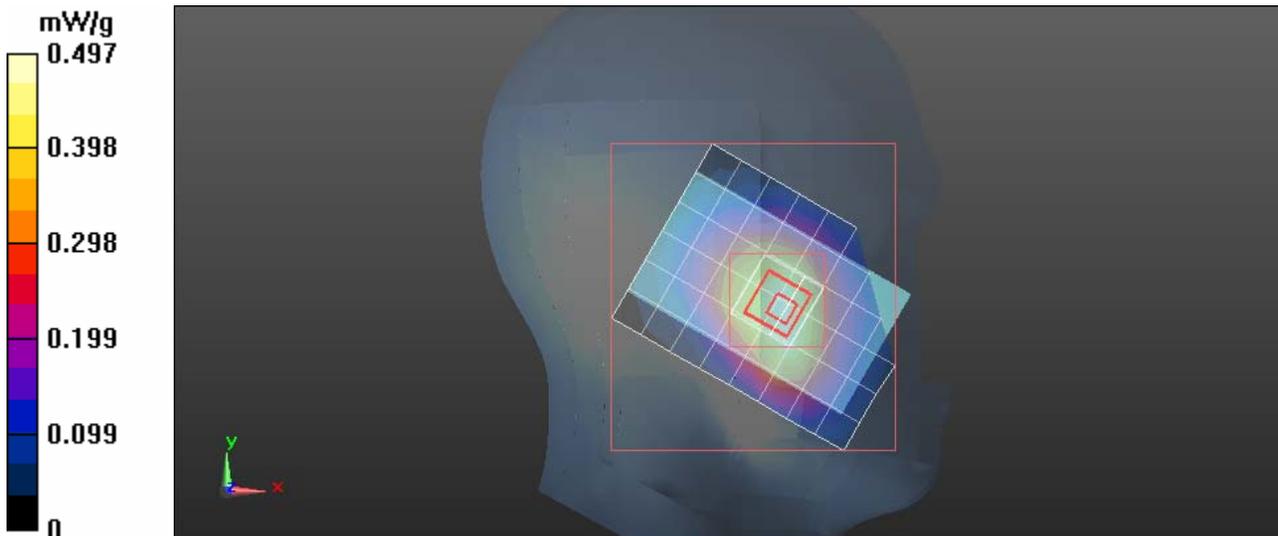

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

LHS_closed/Tilt_M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.399 mW/g

LHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 21.236 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.267 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.406 mW/g

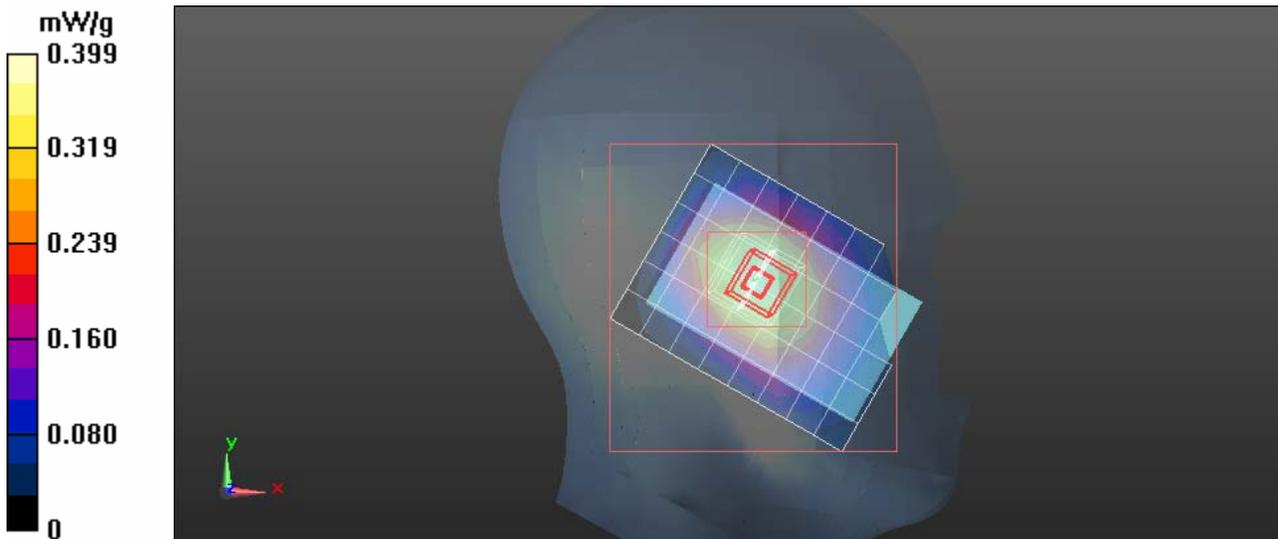

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

RHS_open/Touch_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.431 mW/g

RHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 22.229 V/m; Power Drift = 0.0012 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.308 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.465 mW/g

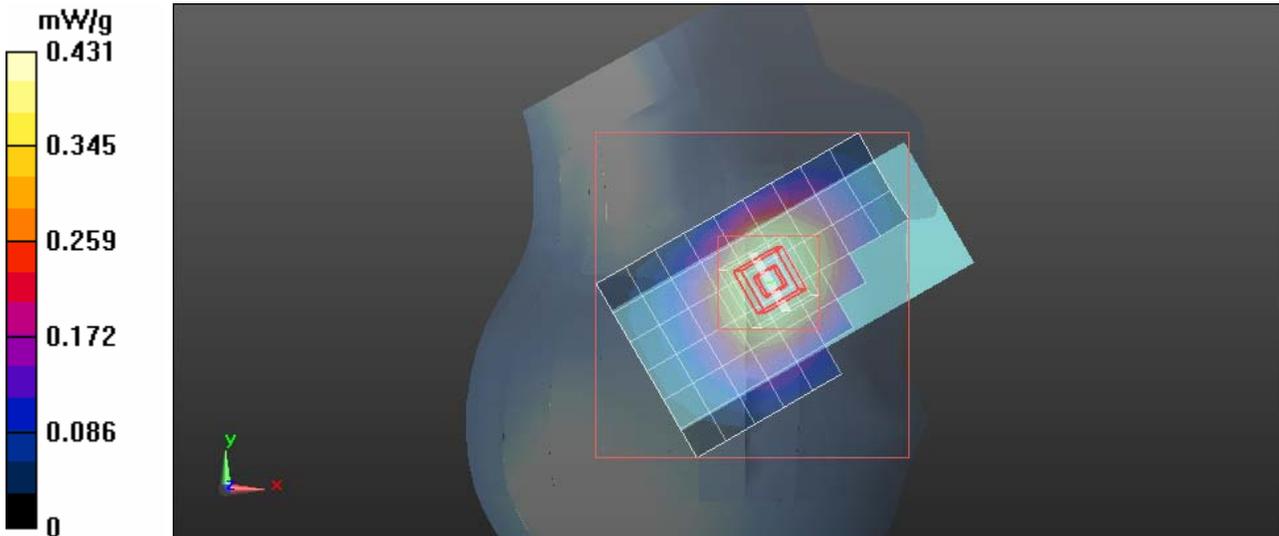

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

RHS_open/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.209 mW/g

RHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 15.281 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.140 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.208 mW/g

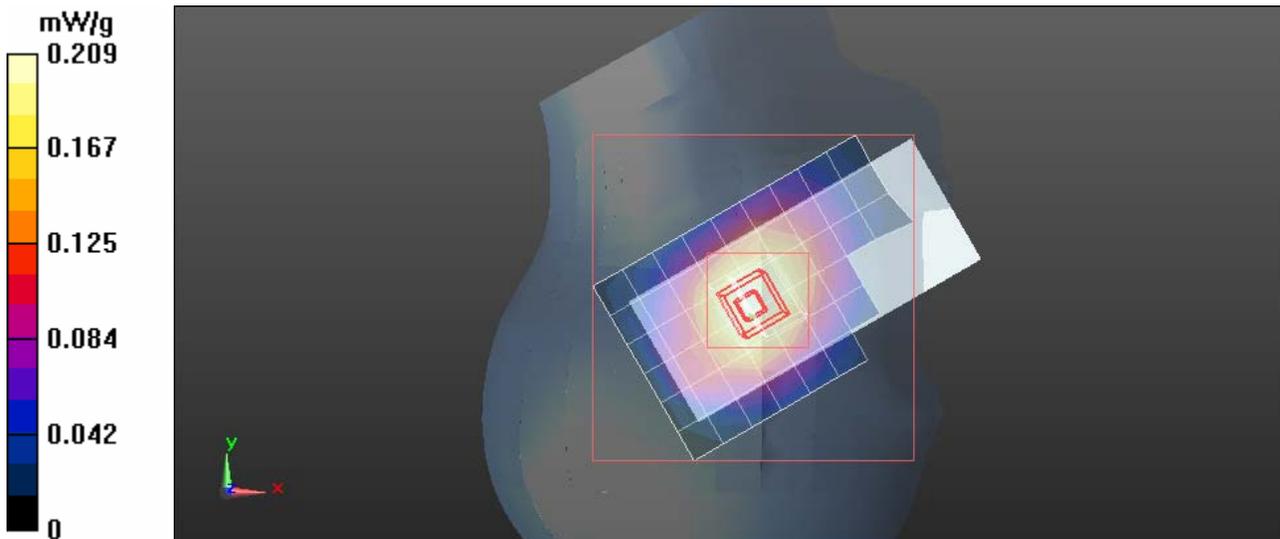

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

RHS_closed/Touch_M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 mW/g

RHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 26.035 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.406 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.603 mW/g

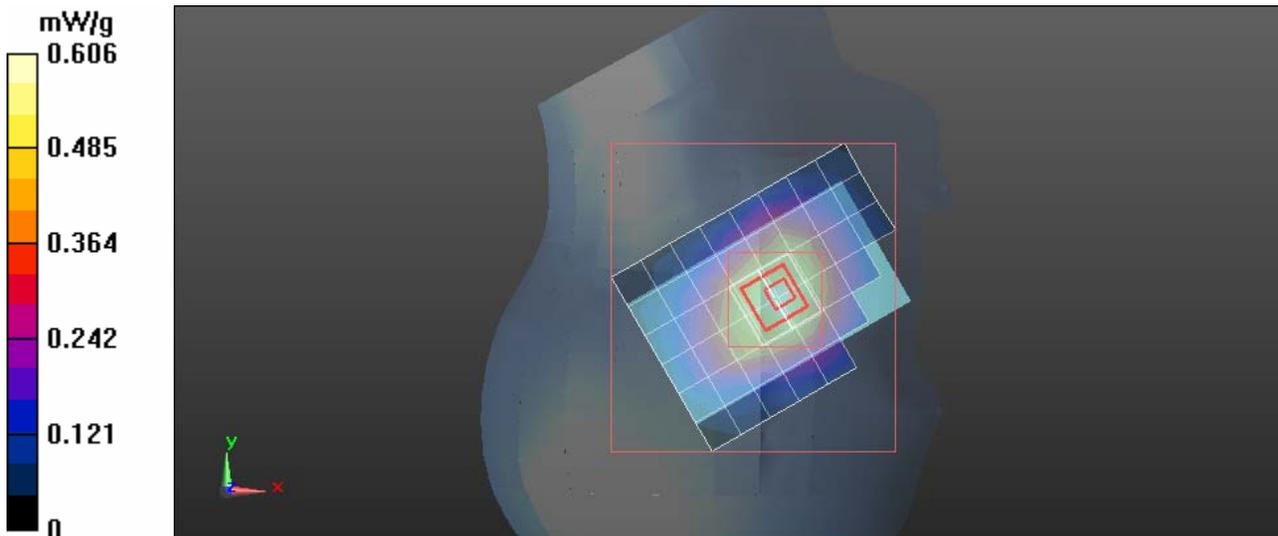

Test Laboratory: UL CCS

CDMA2000 Cell band_Head


DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1

RHS_closed/Touch_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.149 mW/g

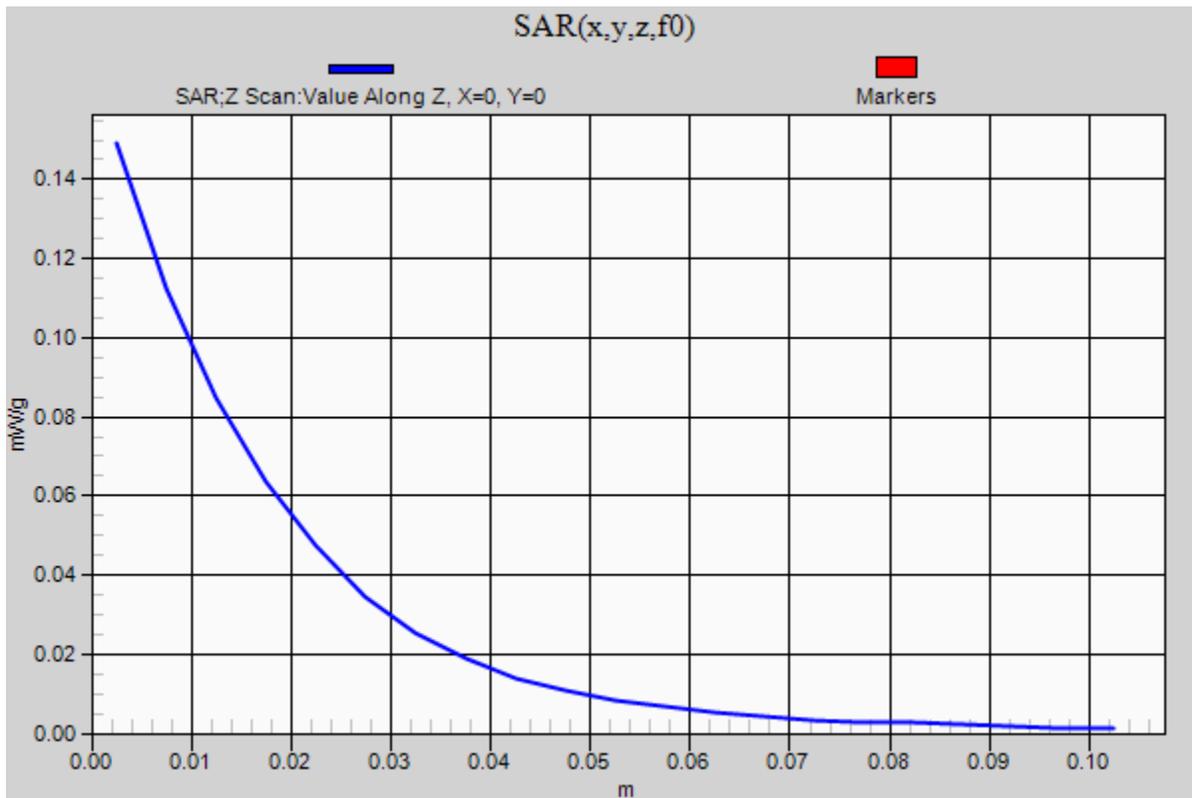

Test Laboratory: UL CCS

CDMA2000 Cell band_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band for Palm; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 42.451$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.65, 8.65, 8.65); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

RHS_closed/Tilt_M-ch/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.450 mW/g

RHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 22.419 V/m; Power Drift = 0.0071 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.296 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.454 mW/g

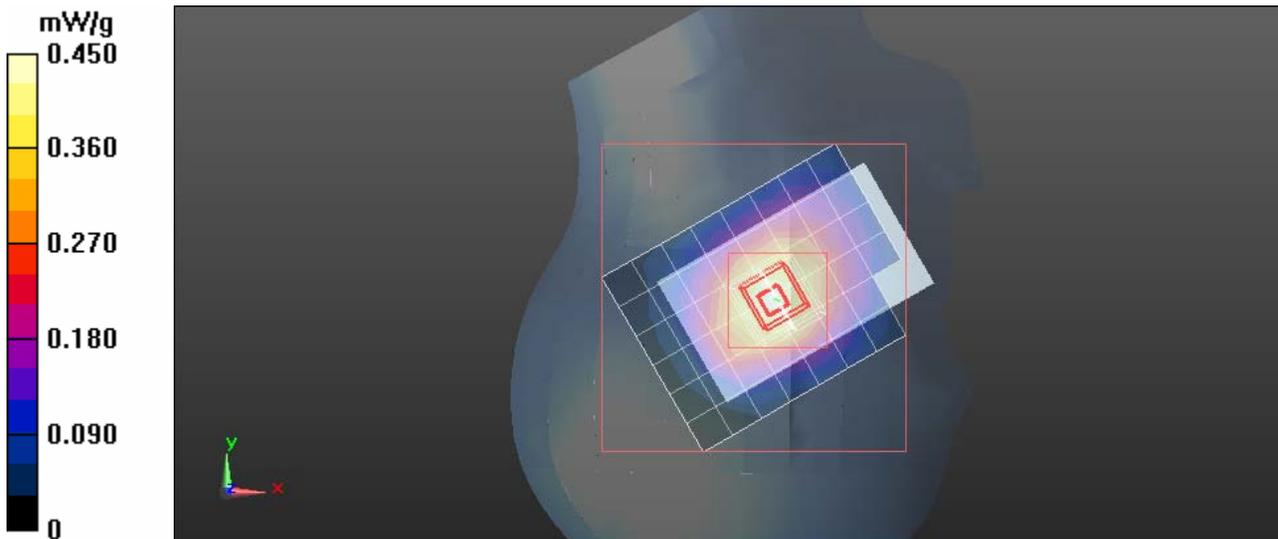

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Front side/1xRTT SO32_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.527 mW/g


Front side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.397 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.402 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.528 mW/g

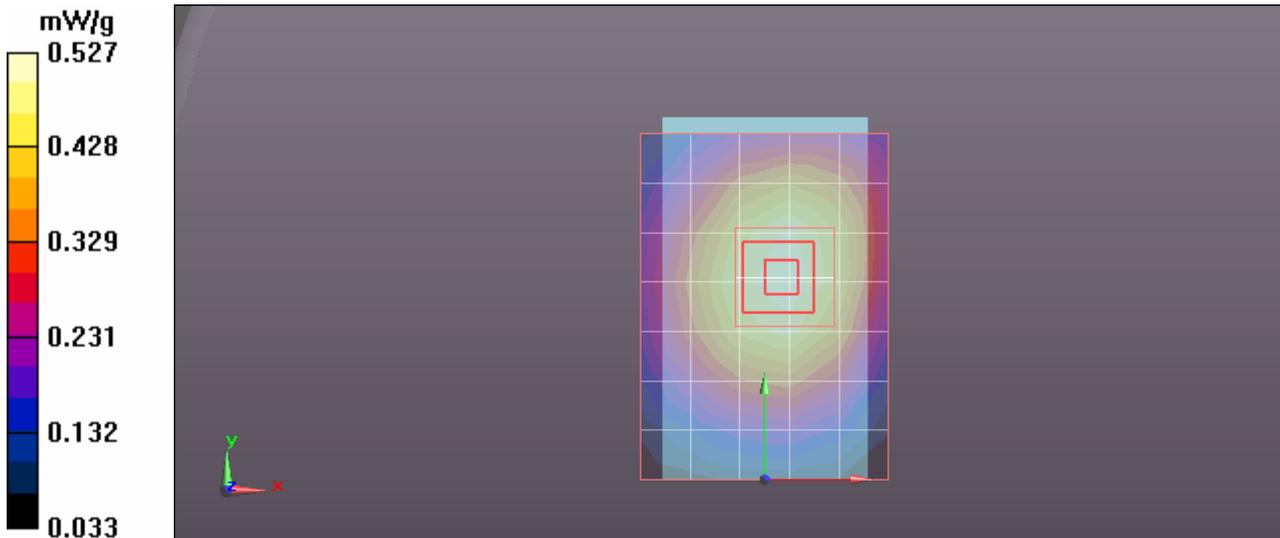

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 54.426$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_L-ch/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.949 mW/g


Back side/1xRTT SO32_L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 31.464 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.097 W/kg

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.708 mW/g

Maximum value of SAR (measured) = 0.993 mW/g

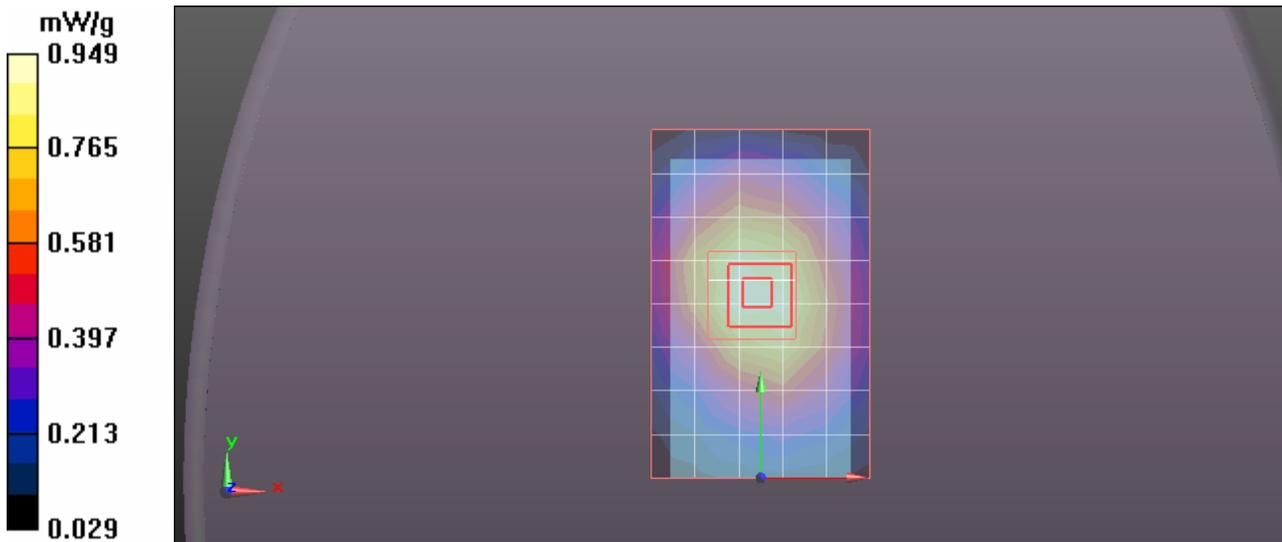


Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1

Back side/1xRTT SO32_L-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.985 mW/g

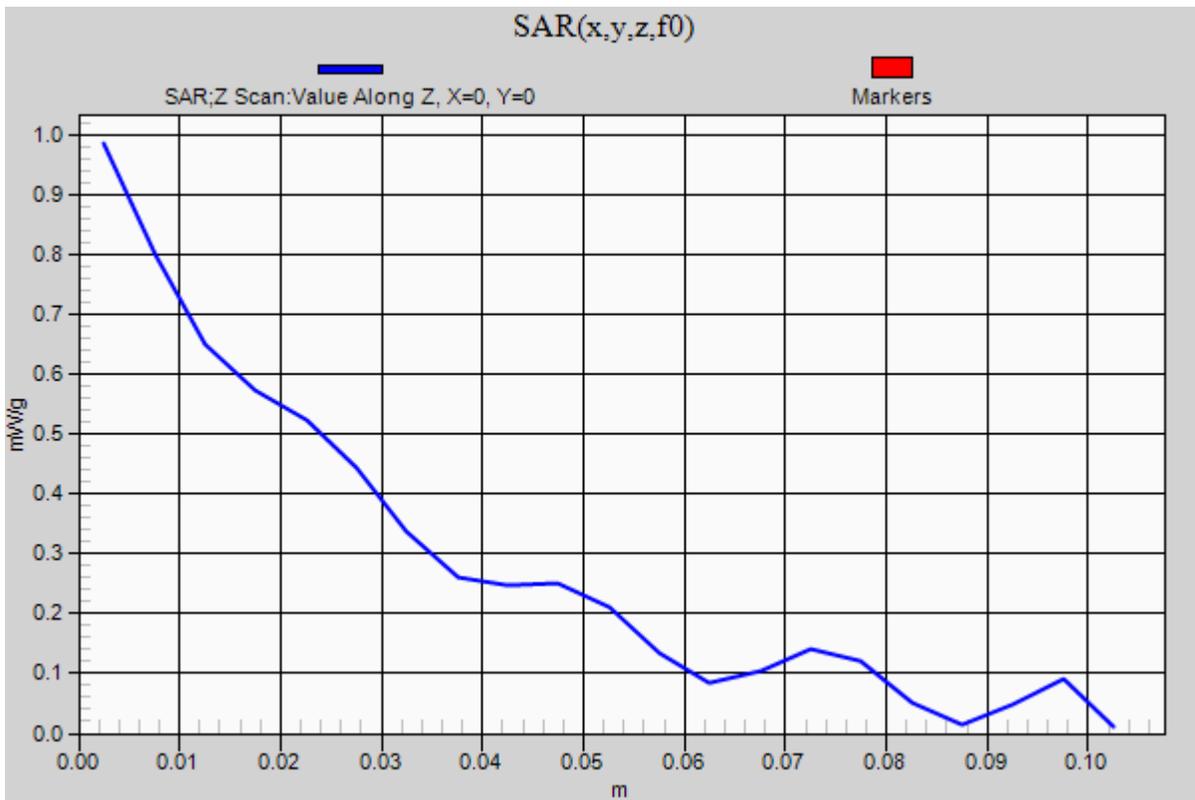

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 54.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_M-ch/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.919 mW/g

Back side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 30.765 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.061 W/kg

SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.680 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.973 mW/g

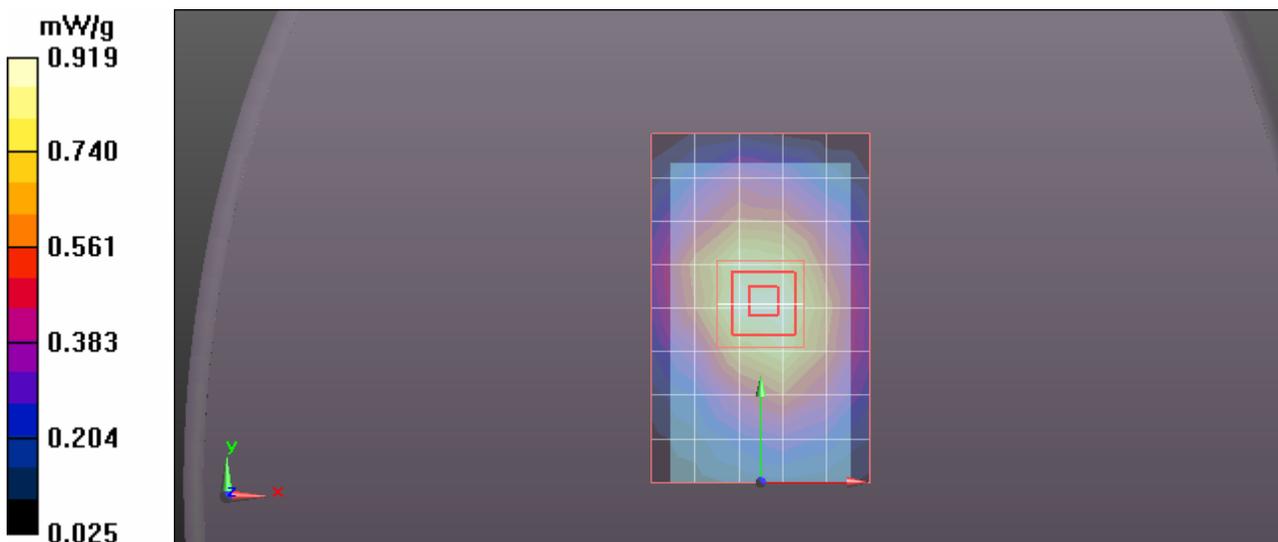

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.211$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_H-ch/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.763 mW/g

Back side/1xRTT SO32_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 27.875 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.559 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.790 mW/g

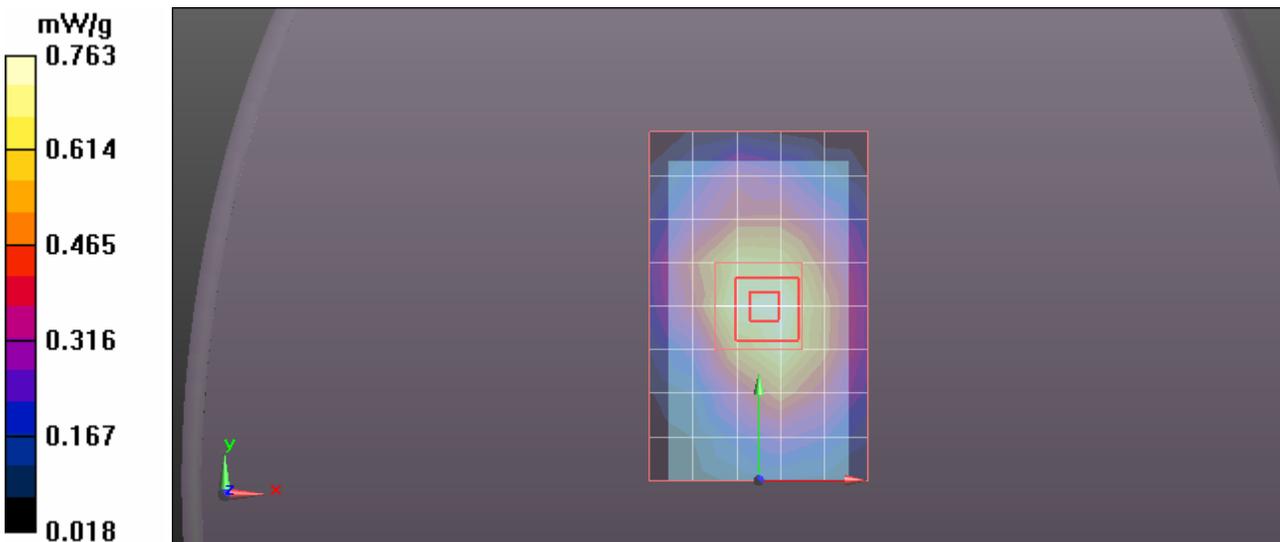

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 54.426$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/1xRTT SO32_L-ch W/ Headset/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.616 mW/g

Back side/1xRTT SO32_L-ch W/ Headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 25.207 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.724 W/kg
SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.458 mW/g
Maximum value of SAR (measured) = 0.654 mW/g

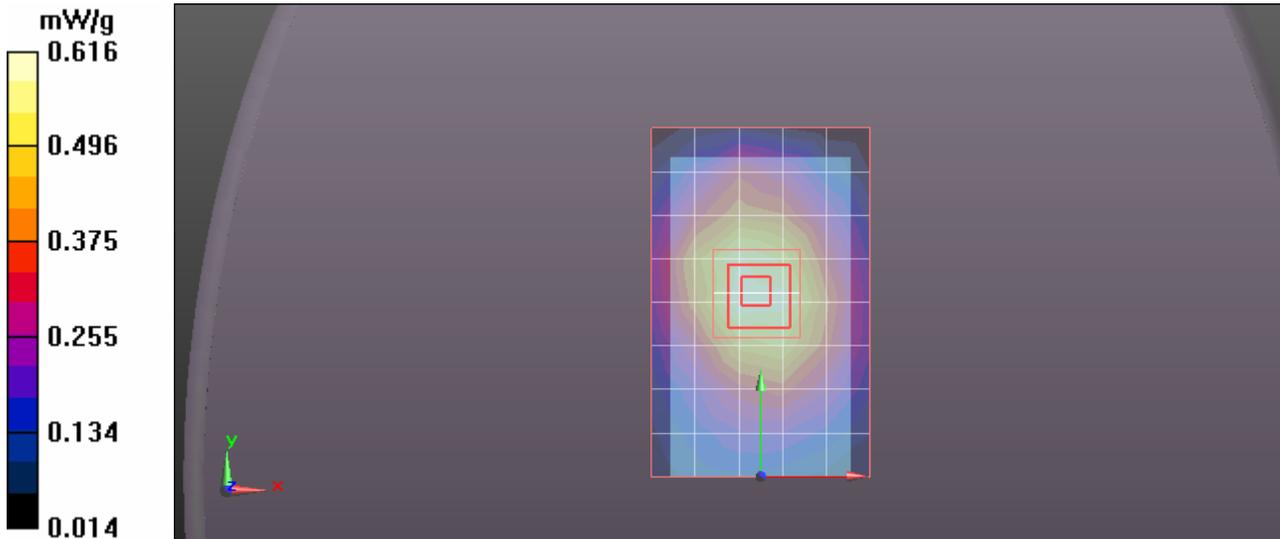

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Front side/EV-DO Rel.0_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.456 mW/g


Front side/EV-DO Rel.0_M-ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.604 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.399 mW/g; SAR(10 g) = 0.303 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.417 mW/g

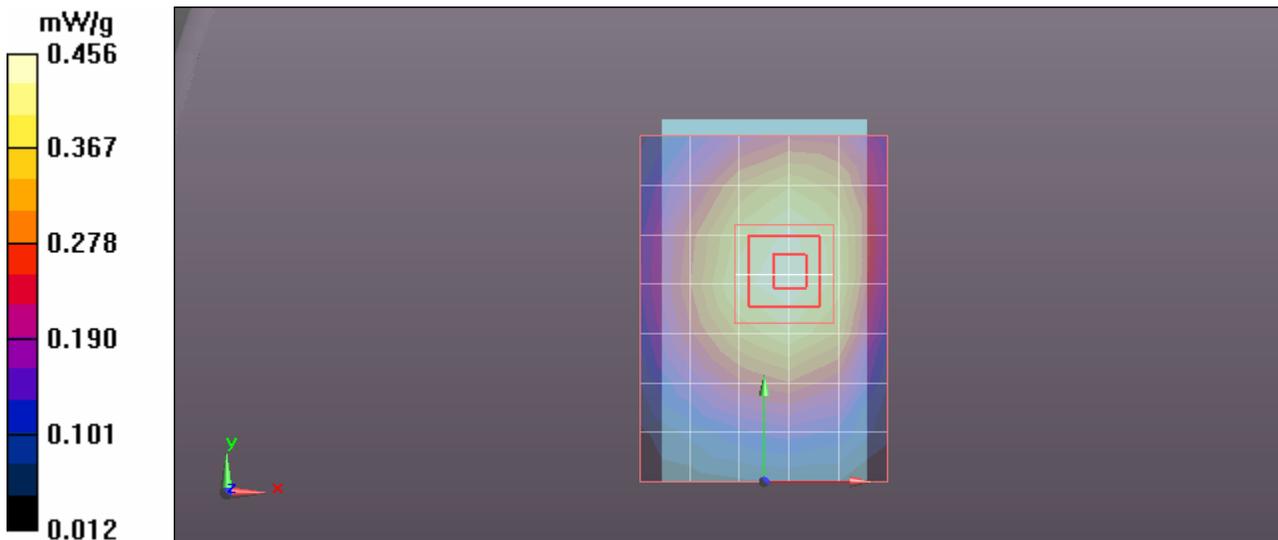

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Front side/1xRTT SO32_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.447 mW/g

Front side/1xRTT SO32_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 21.472 V/m; Power Drift = -0.0041 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.300 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.448 mW/g

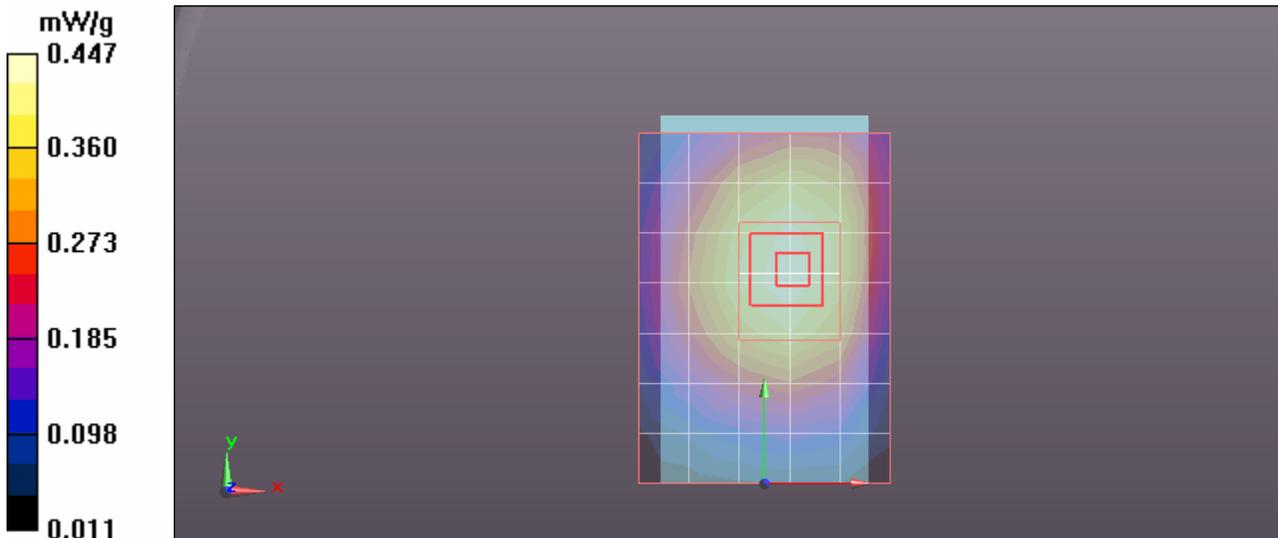

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, V52.2 Build 0;Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

Back side/1xRTT SO32_L-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.28 mW/g


Back side/1xRTT SO32_L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 36.4 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.810 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

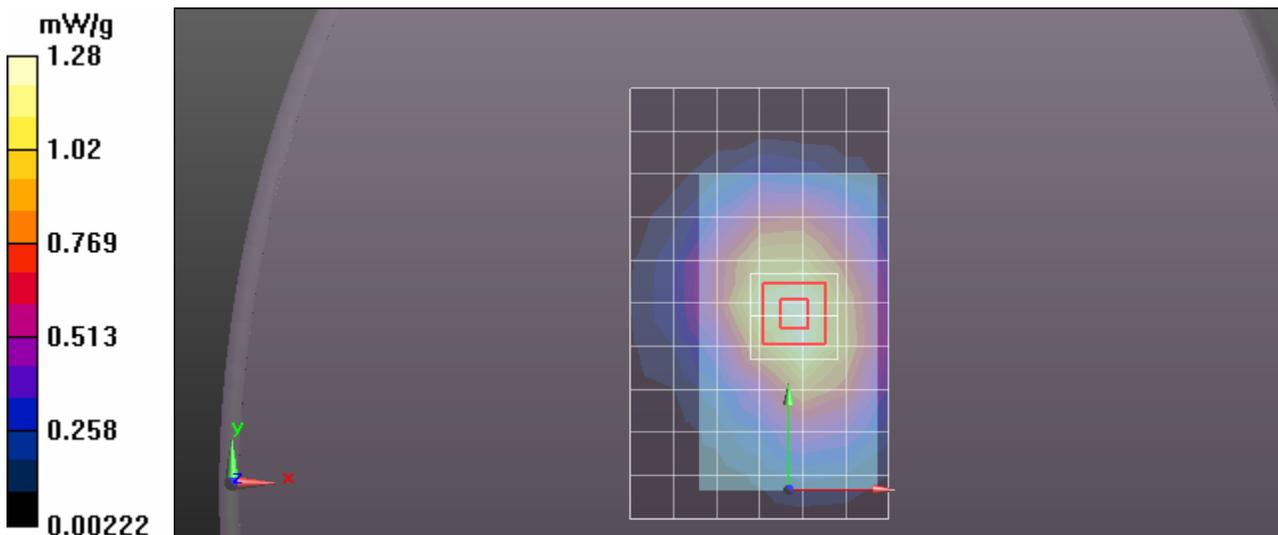


Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1

Back side/1xRTT SO32_L-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.31 mW/g

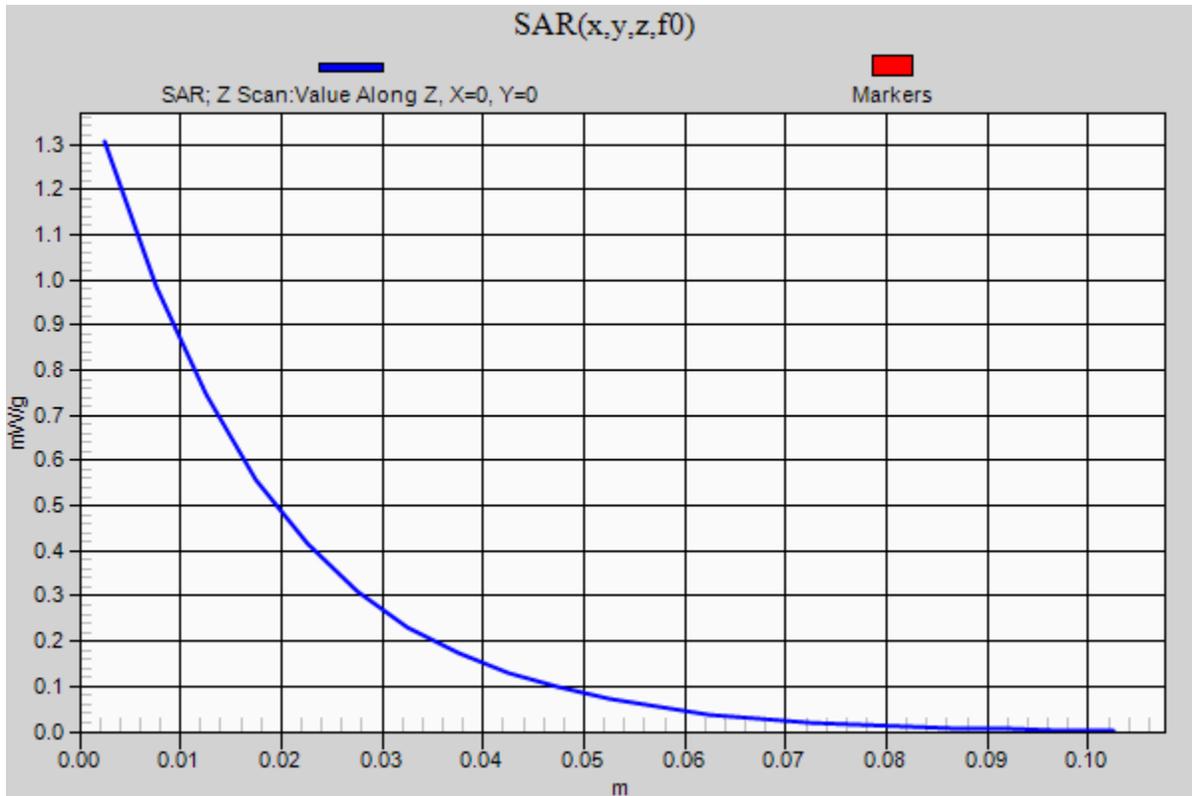

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, V52.2 Build 0;Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

Back side/1xRTT SO32_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.17 mW/g

Back side/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 34.8 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.738 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.2 mW/g

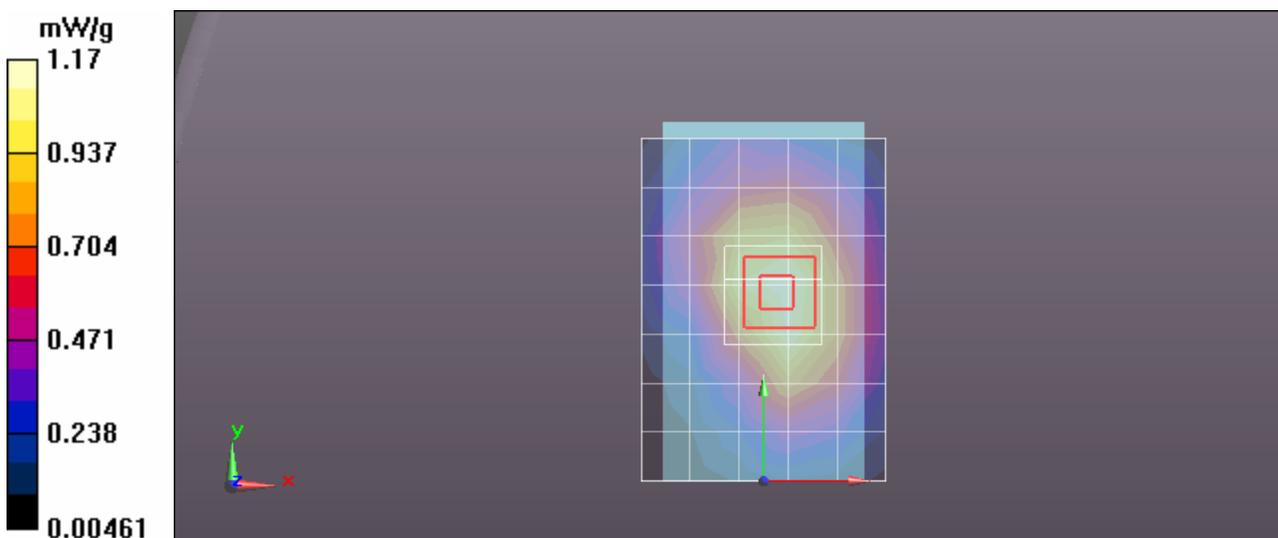

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, V52.2 Build 0;Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

Back side/1xRTT SO32_H-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.886 mW/g

Back side/1xRTT SO32_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 30.1 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.545 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.885 mW/g

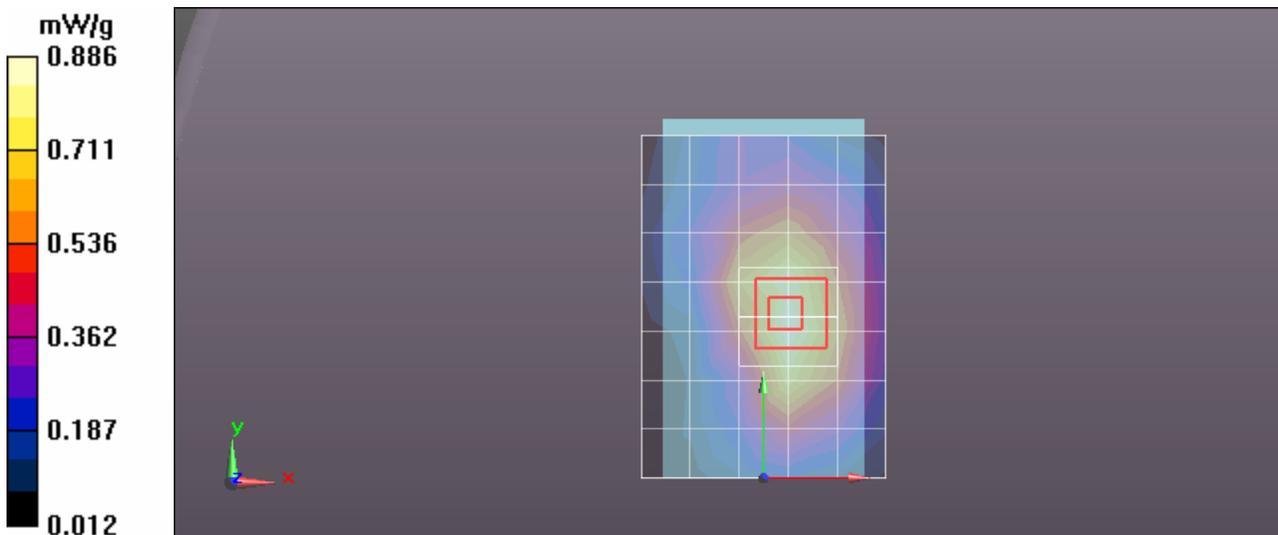

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 53.596$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.2 (0);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_L-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.243 mW/g


Back side/EV-DO Rel.0_L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 36.107 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.500 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.806 mW/g

Maximum value of SAR (measured) = 1.294 mW/g

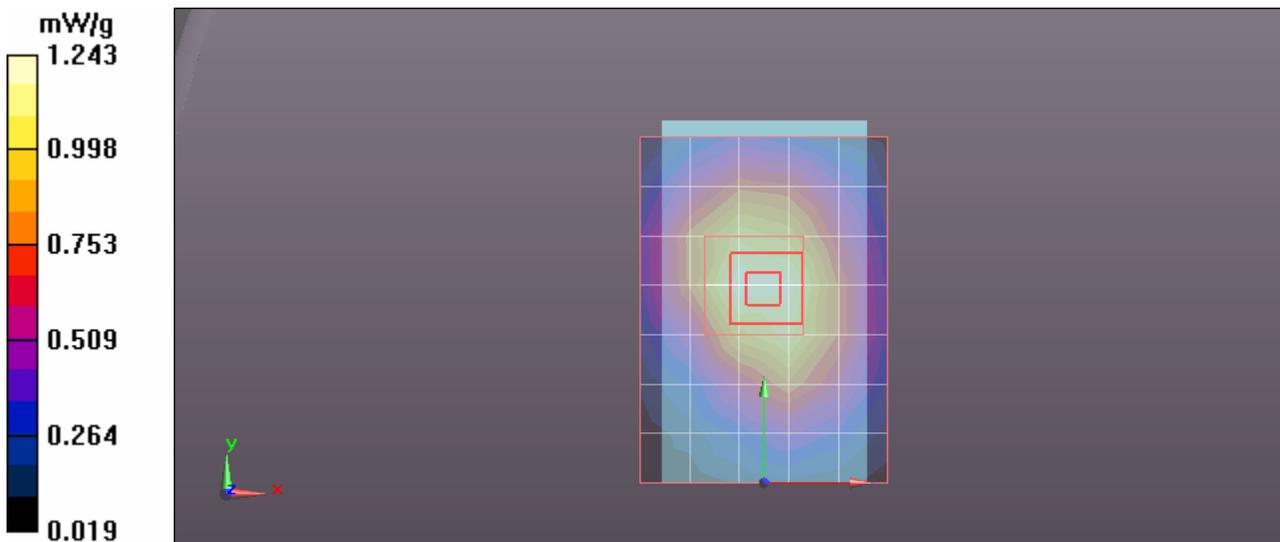

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.2 (0);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.157 mW/g

Back side/EV-DO Rel.0_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=3mm


Reference Value = 34.541 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.400 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.745 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.210 mW/g

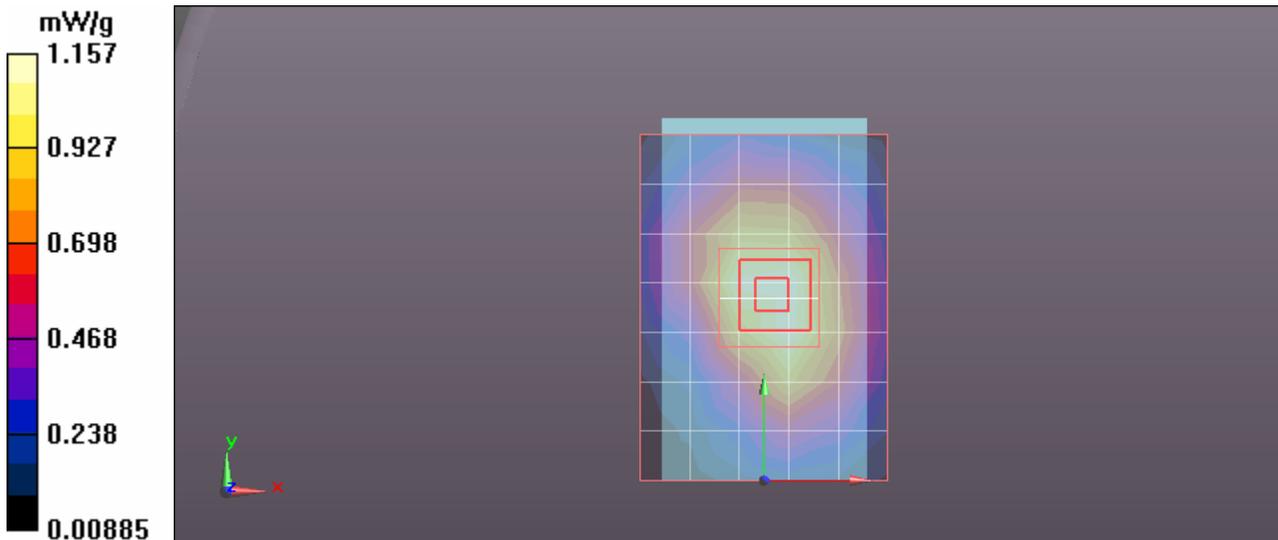

Test Laboratory: The name of your organization

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.2 (0);SEMCAD X Version 14.4.2 (2595)

Back side/EV-DO Rel.0_H-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.861 mW/g

Back side/EV-DO Rel.0_H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=3mm


Reference Value = 14.260 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.013 W/kg

SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.545 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.878 mW/g

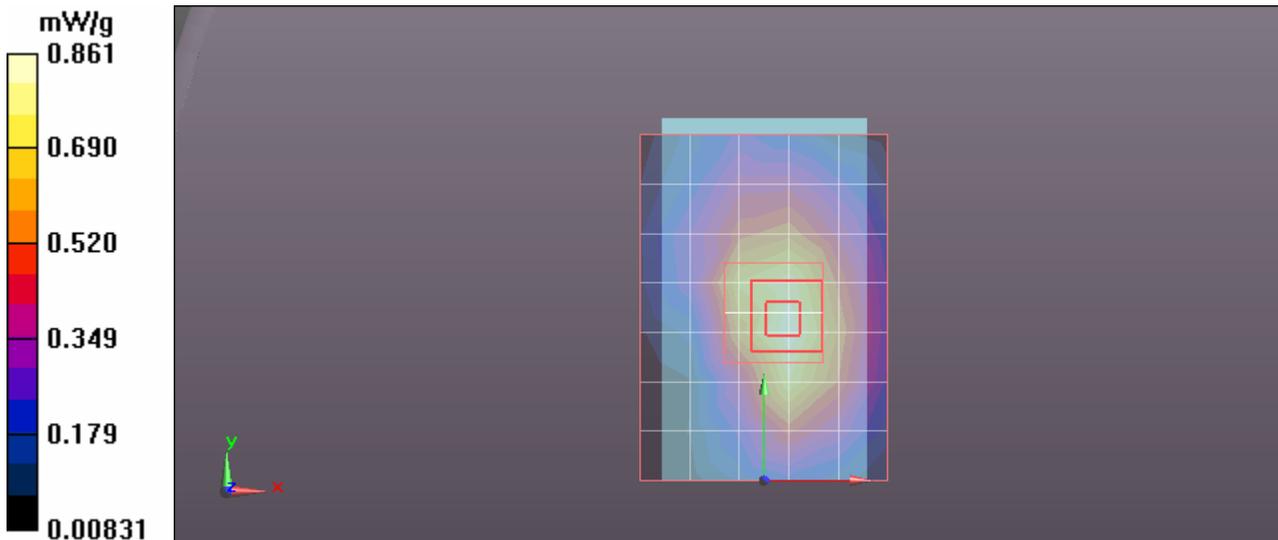

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Left edge/1xRTT SO32_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.631 mW/g

Left edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 25.467 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.398 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.641 mW/g

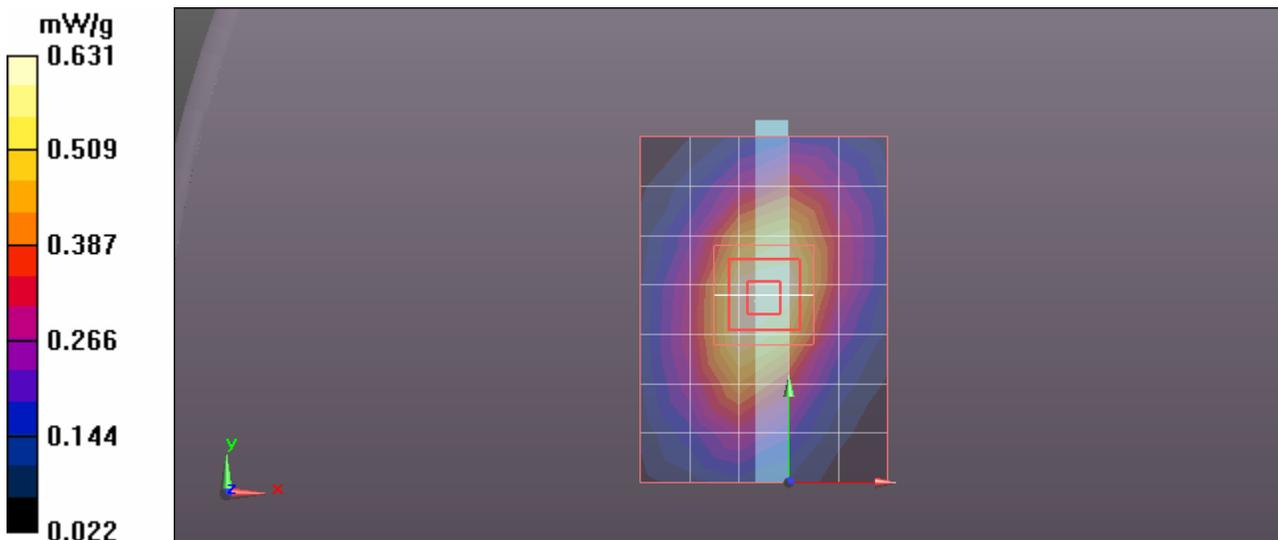

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Left edge/EV-DO Rel.0_M-ch/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.623 mW/g

Left edge/EV-DO Rel.0_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 25.428 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.399 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.711 mW/g

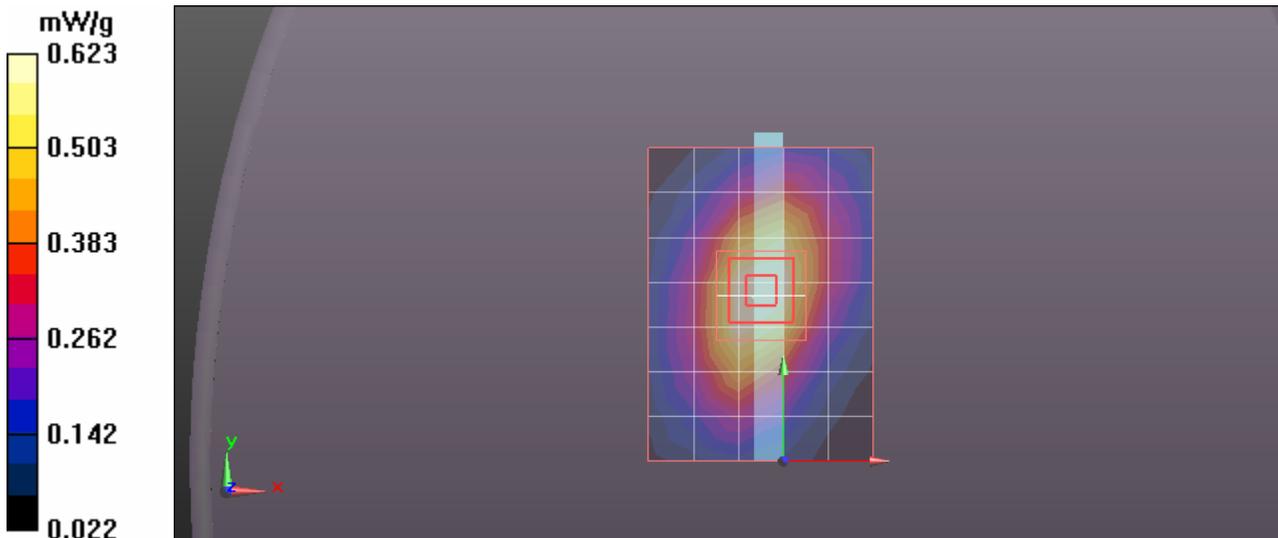

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Right edge/1xRTT SO32_M-ch/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.552 mW/g

Right edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 23.949 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.729 W/kg

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.357 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.547 mW/g

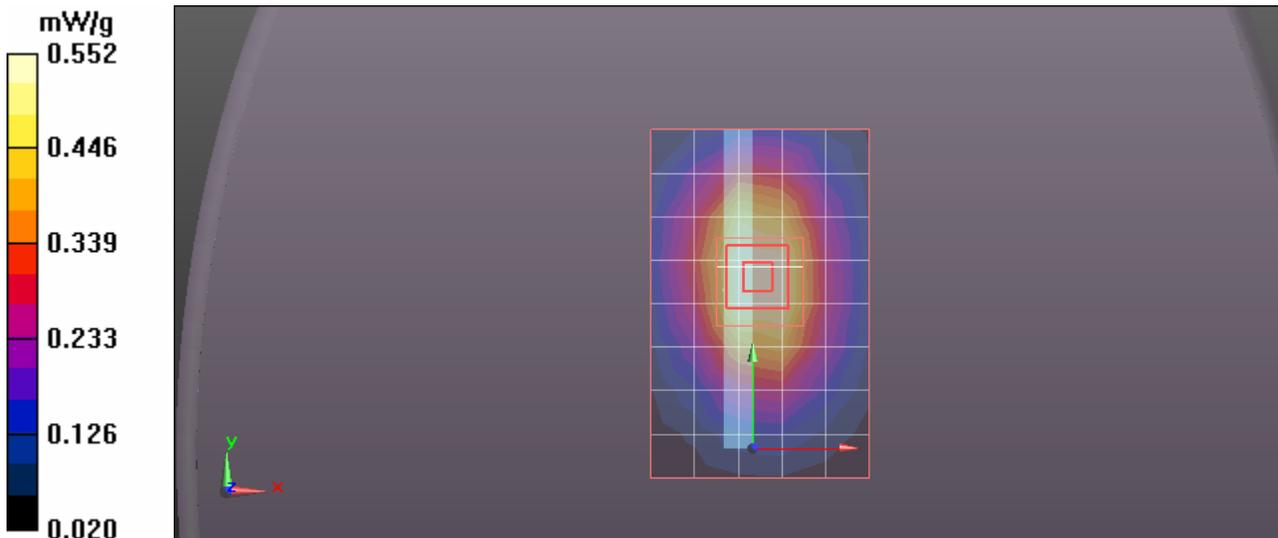

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Right edge/EV-DO Rel.0_M-ch/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.555 mW/g

Right edge/EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 23.966 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.355 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.608 mW/g

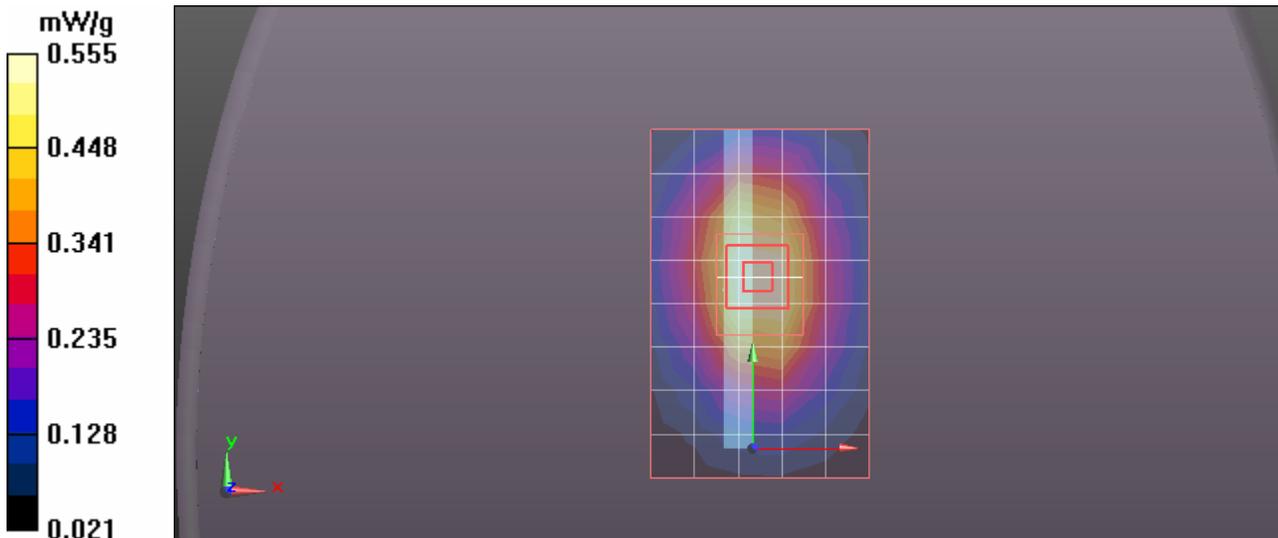

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Top edge/EV-DO Rel.0_M-ch/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.033 mW/g

Top edge/EV-DO Rel.0_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=3mm


Reference Value = 5.747 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.040 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.021 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.030 mW/g

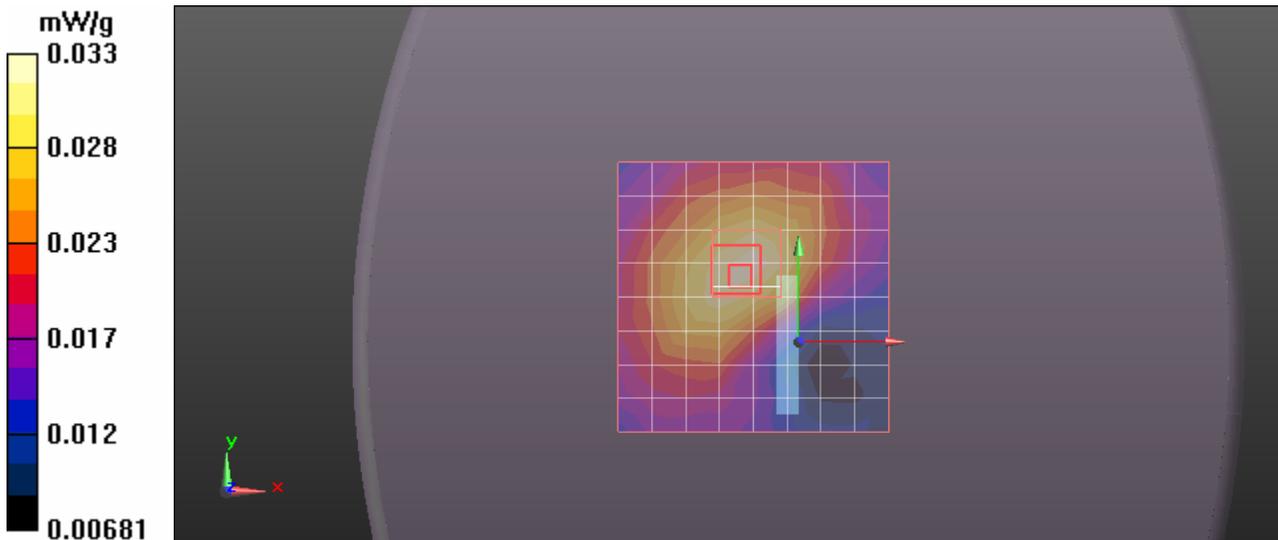

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Top edge/1xRTT SO32_M-ch/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.032 mW/g

Top edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=3mm


Reference Value = 5.694 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.039 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.021 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.030 mW/g

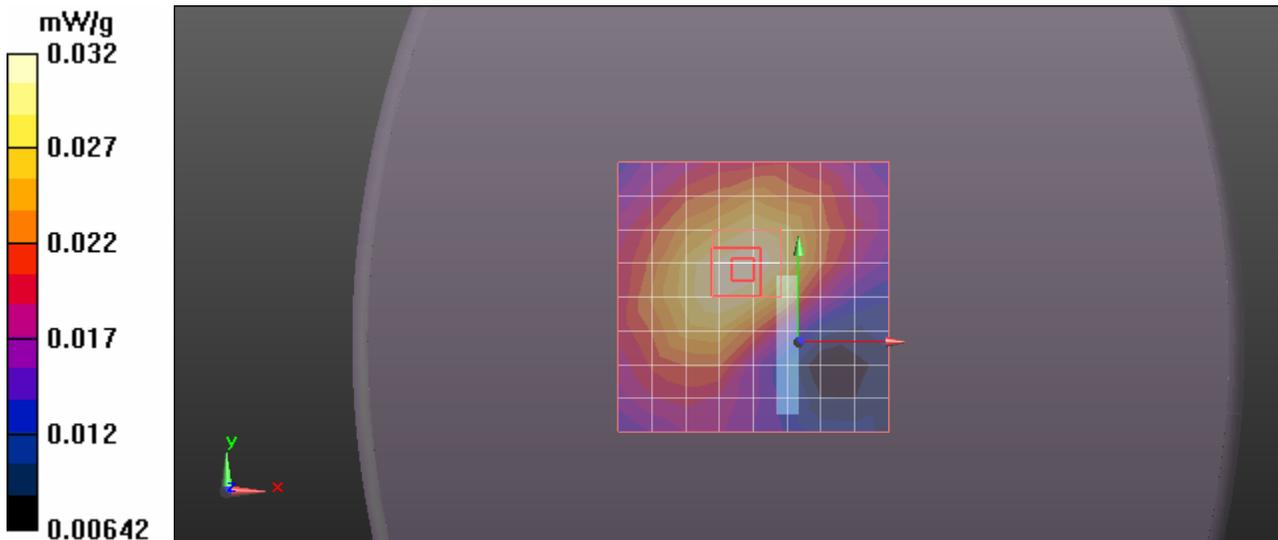

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Bottom edge/1xRTT SO32_M-ch/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.119 mW/g

Bottom edge/1xRTT SO32_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 7.572 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.057 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.105 mW/g

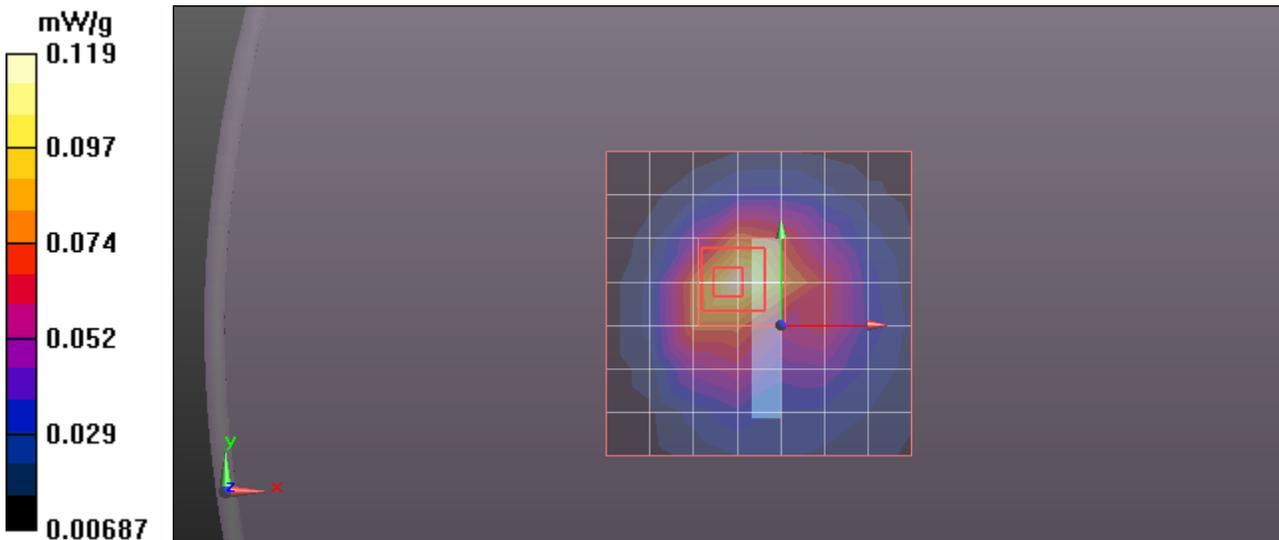

Test Laboratory: UL CCS

CDMA2000 Cell band_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 53.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Bottom edge/EV-DO Rel.0_M-ch/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.120 mW/g

Bottom edge/EV-DO Rel.0_M-ch/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.216 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.053 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.113 mW/g

