

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

LHS_open/Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.278 mW/g


LHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 14.385 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

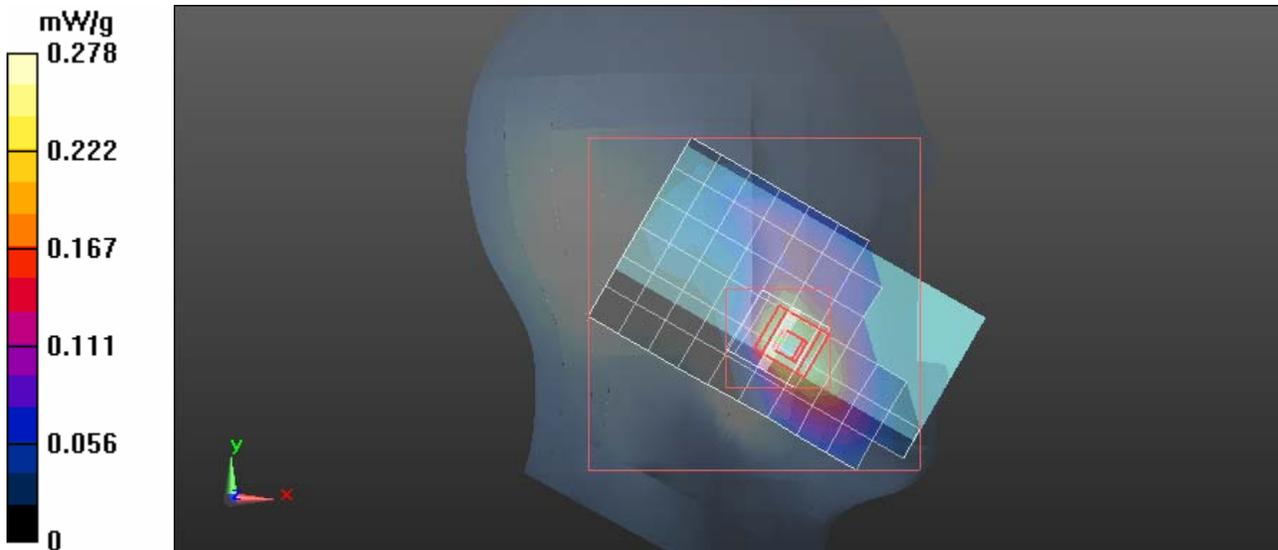


Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz;Duty Cycle: 1:8.00018

LHS_open/Touch_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.034 mW/g

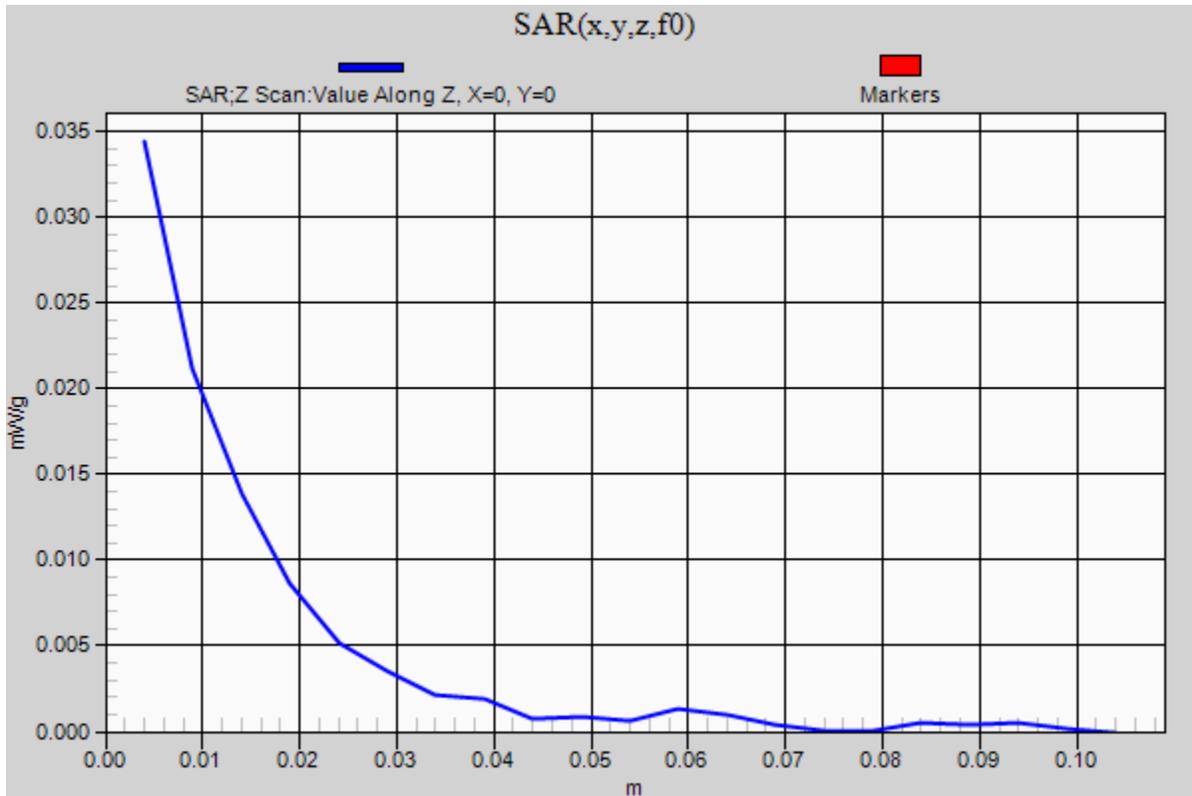

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

LHS_open/Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.103 mW/g


LHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.786 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.115 mW/g

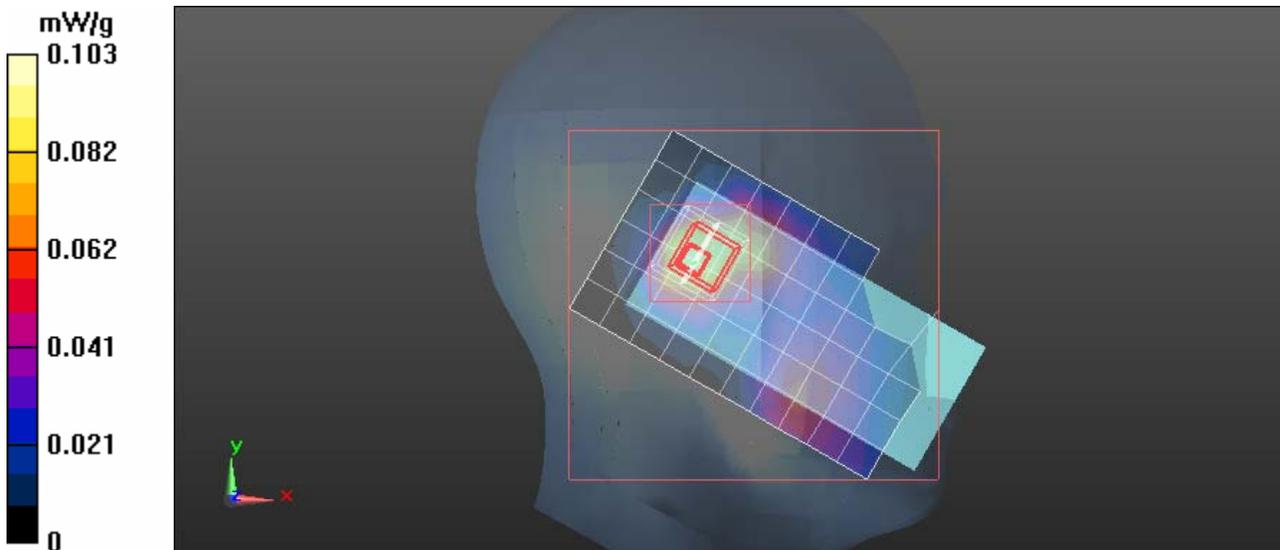

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

LHS_closed/Touch_M-ch/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.193 mW/g


LHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 11.960 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

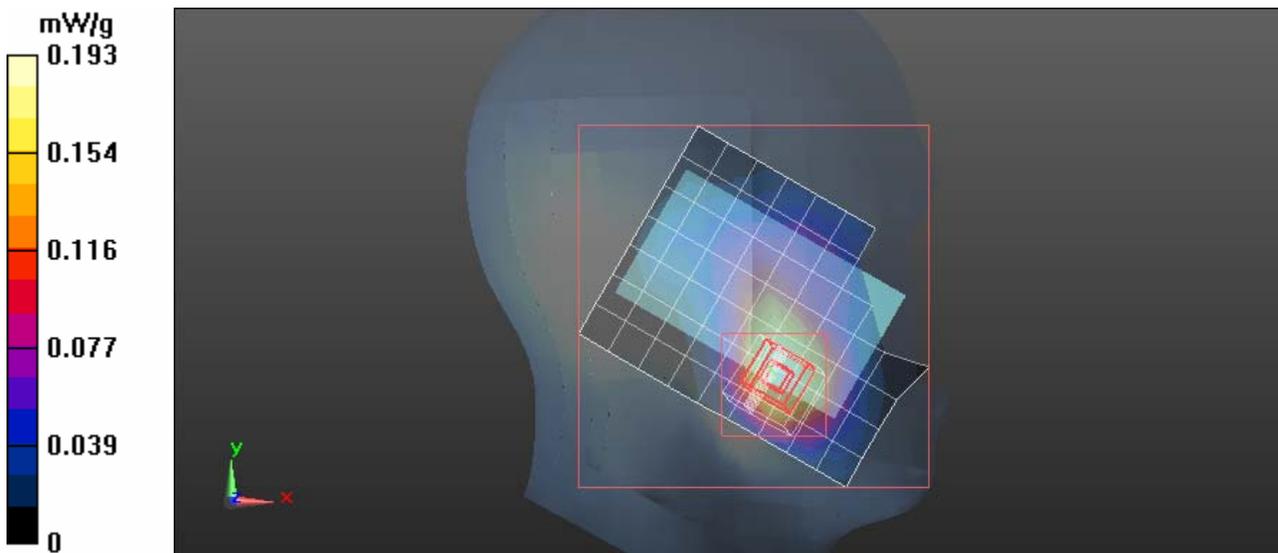

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Left Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

LHS_closed/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.091 mW/g

LHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.152 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.145 W/kg
SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.116 mW/g

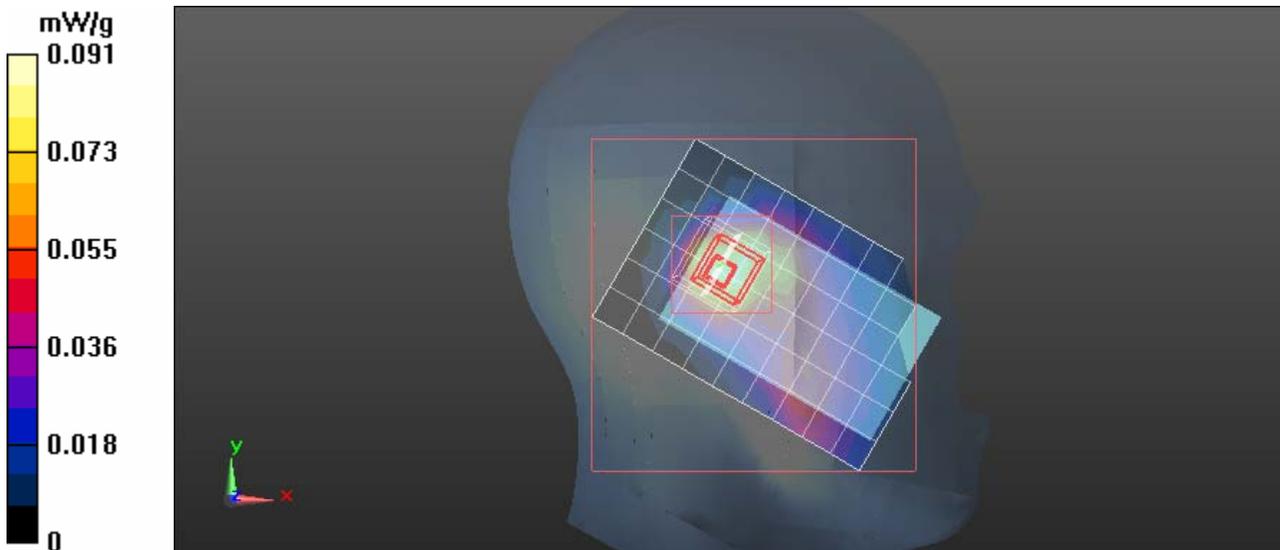

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_open/Touch_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.221 mW/g


RHS_open/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.633 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

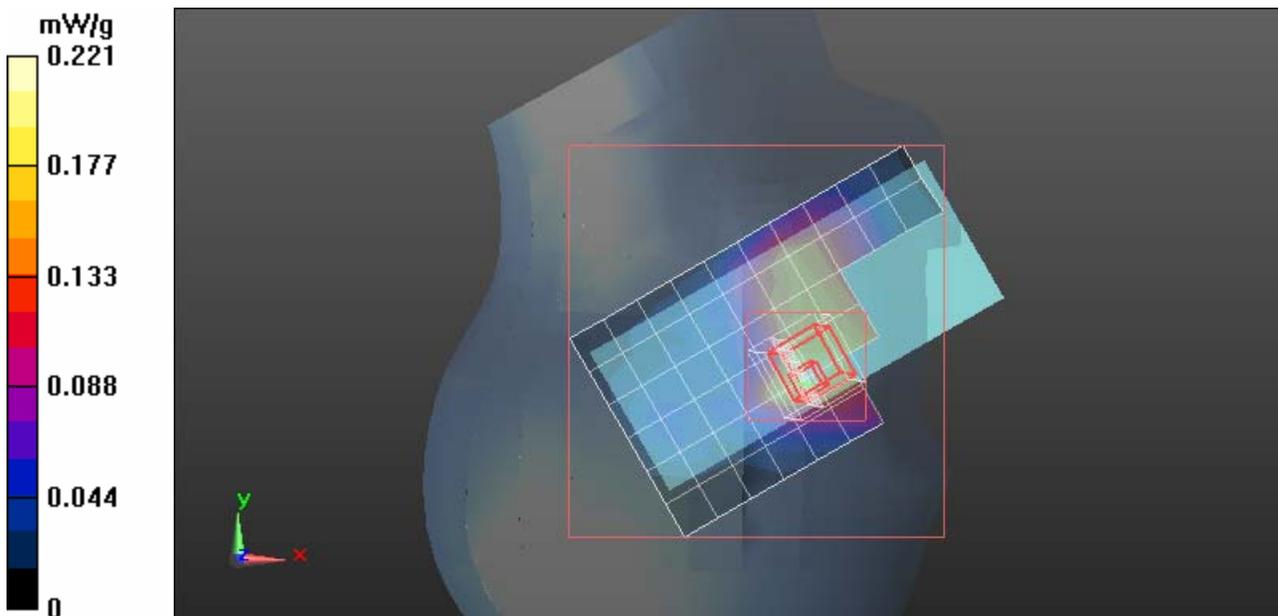

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_open/Tilt_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.140 mW/g

RHS_open/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.023 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.193 W/kg
SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.066 mW/g
Maximum value of SAR (measured) = 0.151 mW/g

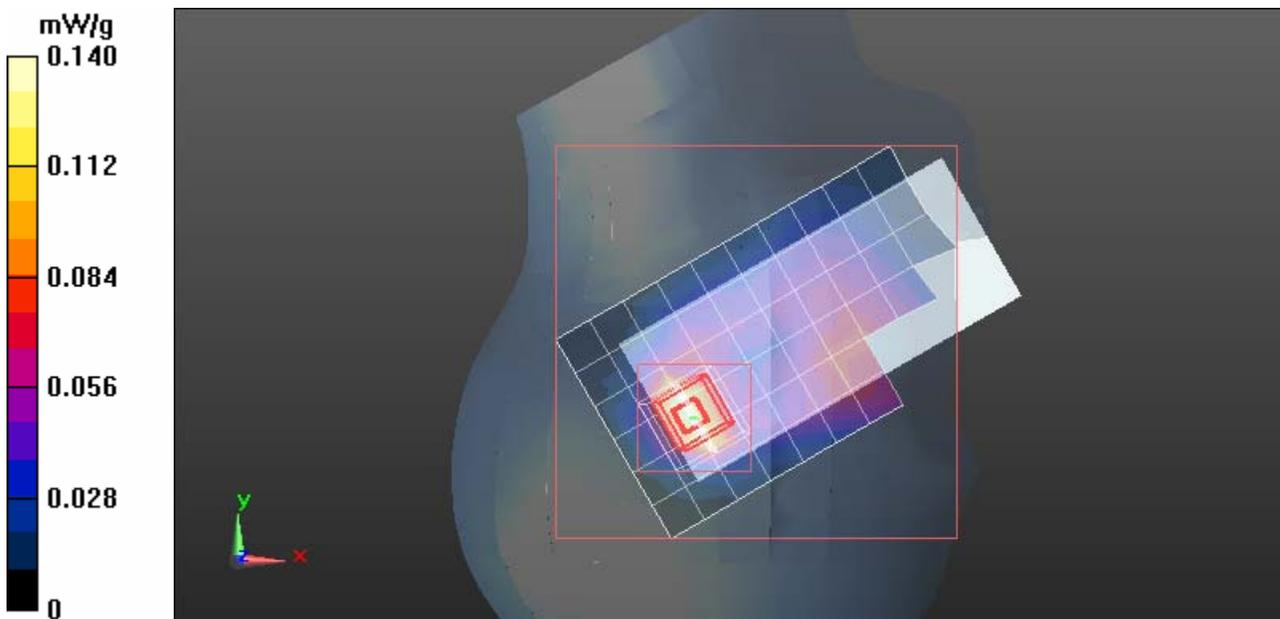

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_closed/Touch_M-ch/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.200 mW/g


RHS_closed/Touch_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 12.159 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

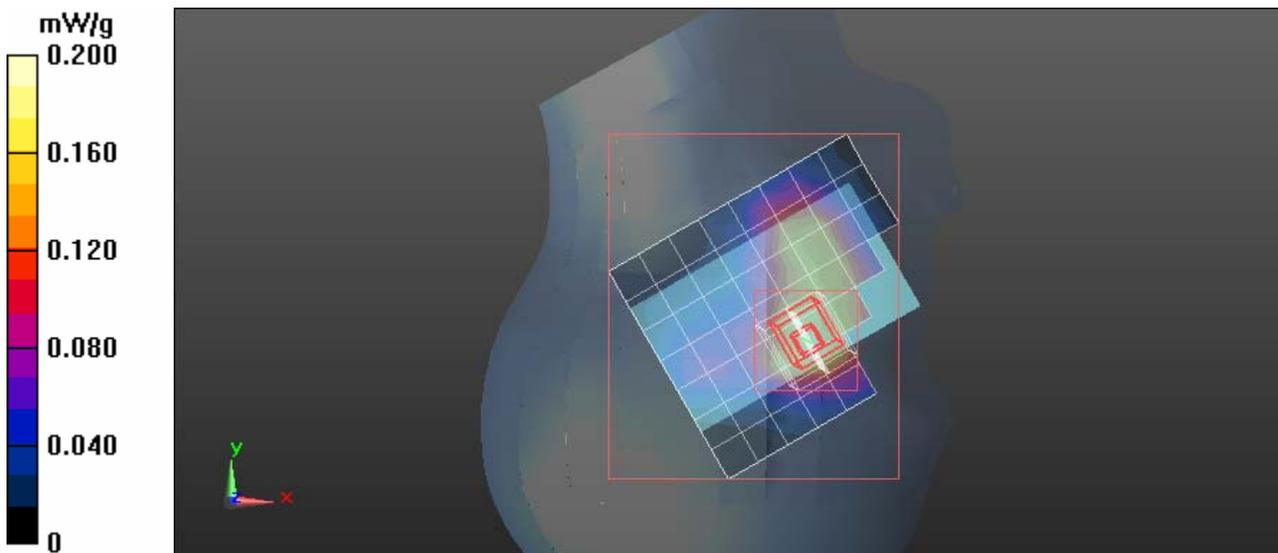

Test Laboratory: UL CCS

GSM1900_Head

DUT: Plam; Type: n/a; Serial: n/a

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.00018
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r = 40.966$; $\rho = 1000$ kg/m³
Phantom section: Right Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.42, 7.42, 7.42); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: SAM with CRP; Type: SAM; Serial: 1602
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

RHS_closed/Tilt_M-ch/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.145 mW/g

RHS_closed/Tilt_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.430 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.074 mW/g
Maximum value of SAR (measured) = 0.163 mW/g

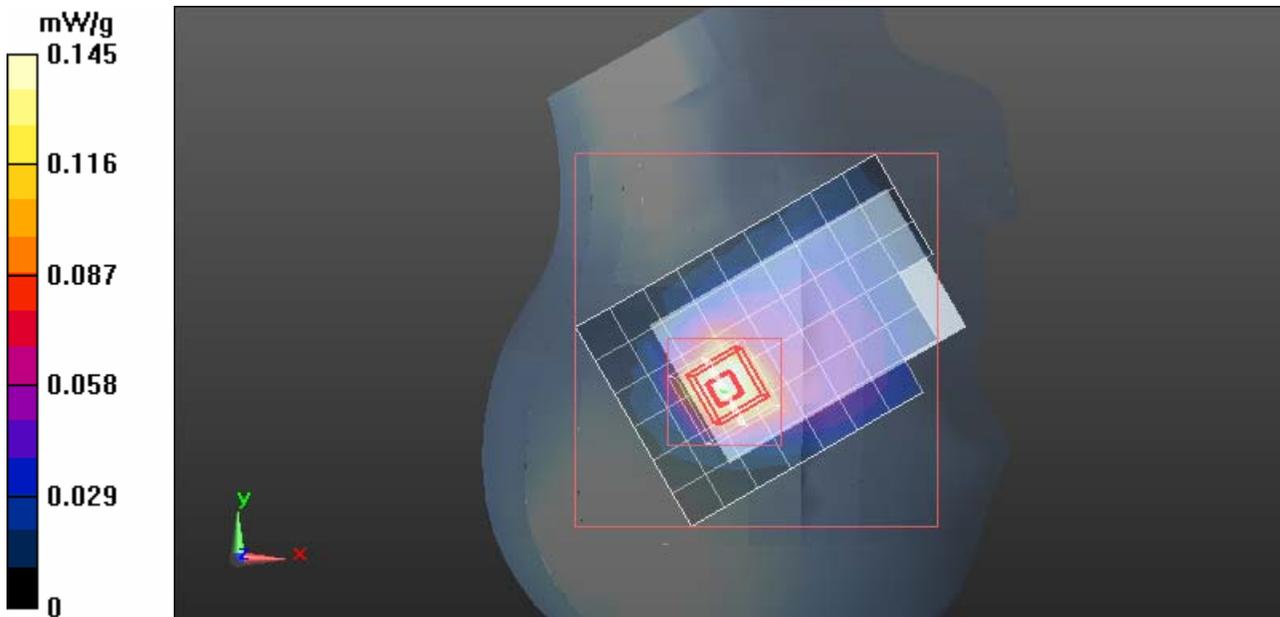

Test Laboratory: UL CCS

GPRS1900_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66993
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Front side/3 slot_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 mW/g

Front side/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.714 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.149 mW/g


Front side/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.714 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.138 mW/g

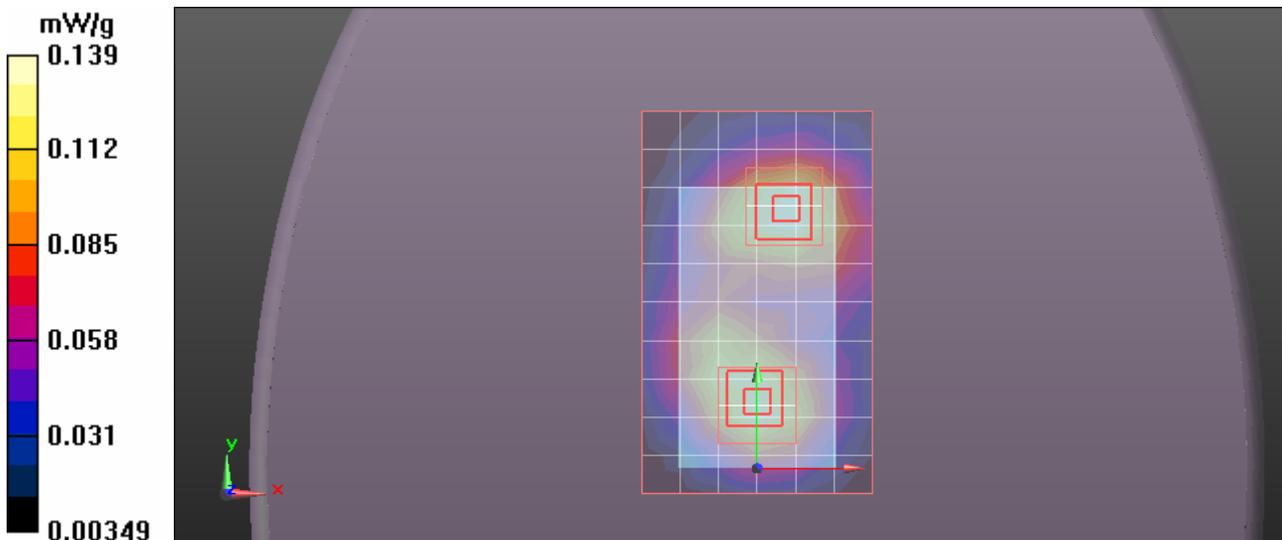

Test Laboratory: UL CCS

GPRS1900_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/3 slot_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.557 mW/g

Back side/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 19.411 V/m; Power Drift = -0.21 dB
Peak SAR (extrapolated) = 0.706 W/kg
SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.259 mW/g
Maximum value of SAR (measured) = 0.541 mW/g

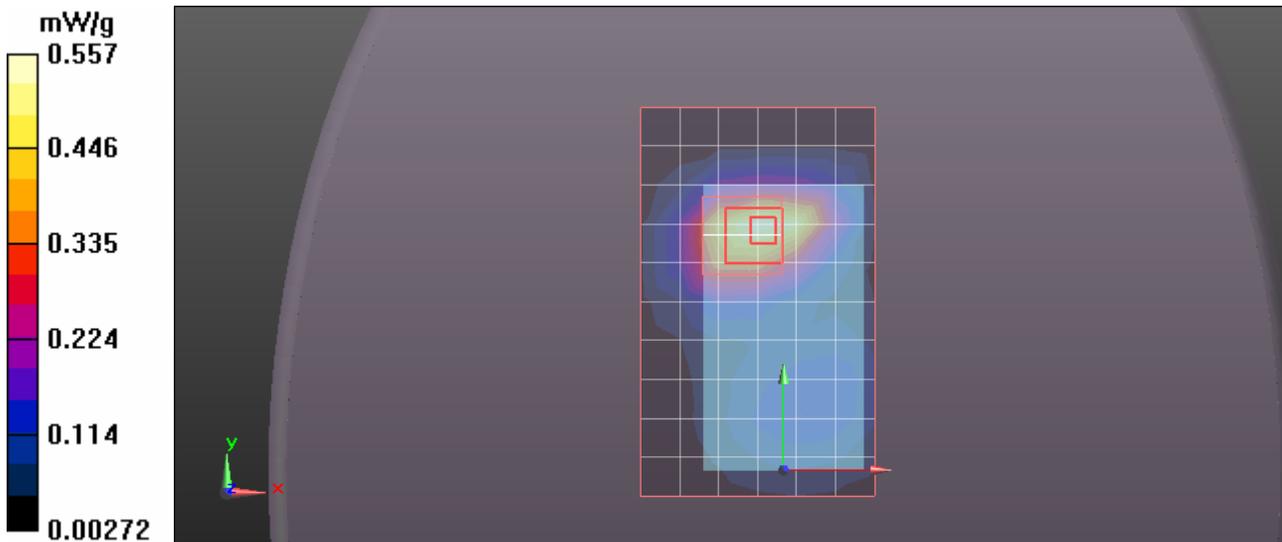


Test Laboratory: UL CCS

GPRS1900_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993

Back side/3 slot_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.525 mW/g

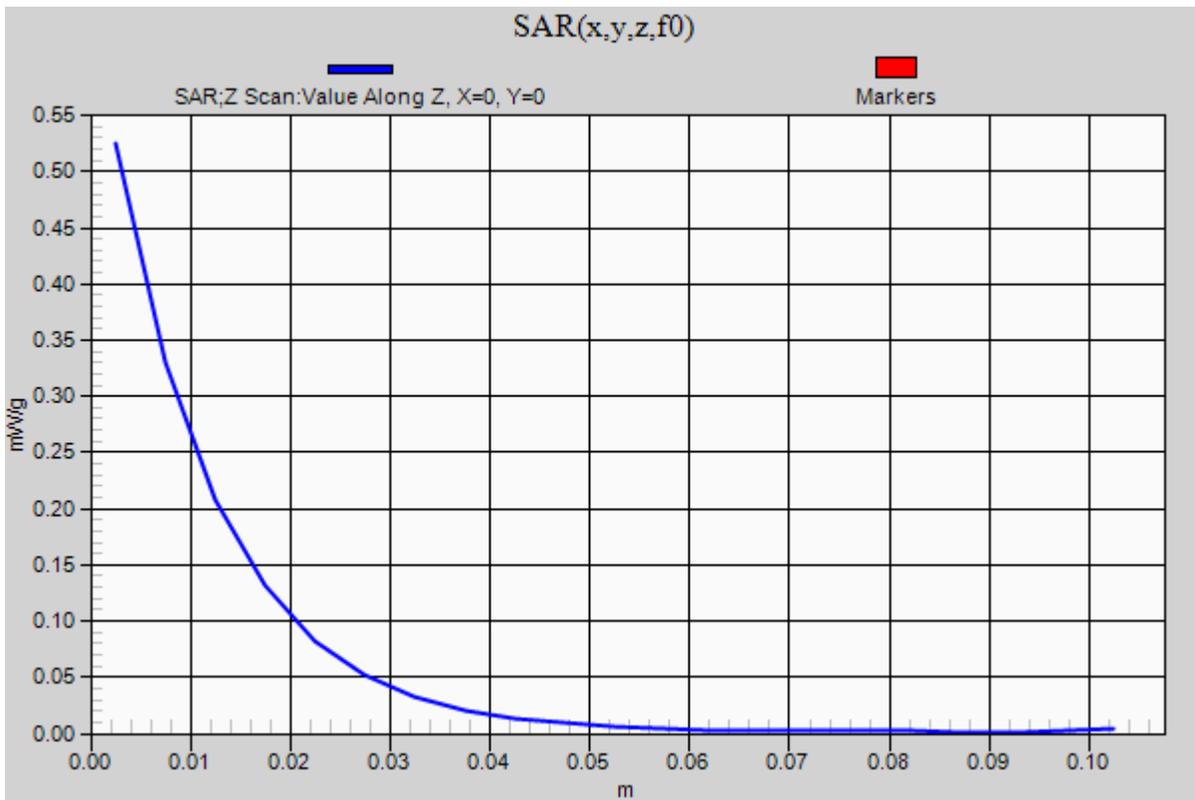

Test Laboratory: UL CCS

GPRS1900_Body Worn_1.5cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.15$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Back side/3 slot_M-ch /w headset/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.509 mW/g


Back side/3 slot_M-ch /w headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.730 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

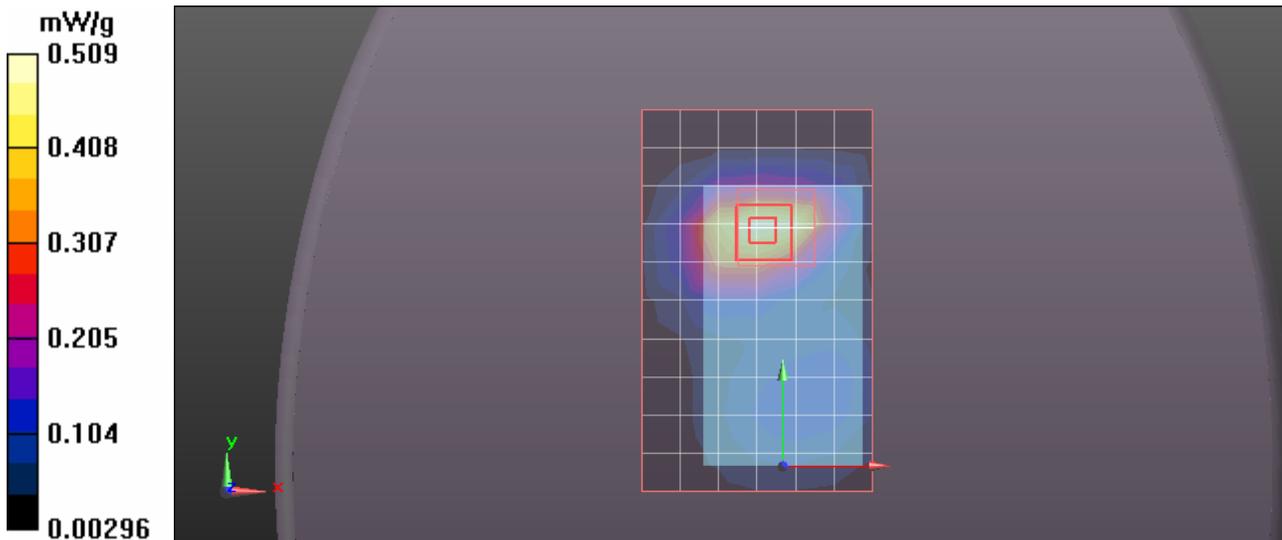

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Front side/3 slot_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 mW/g


Front side/3 slot_M-ch/Zoom Scan (12x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.828 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

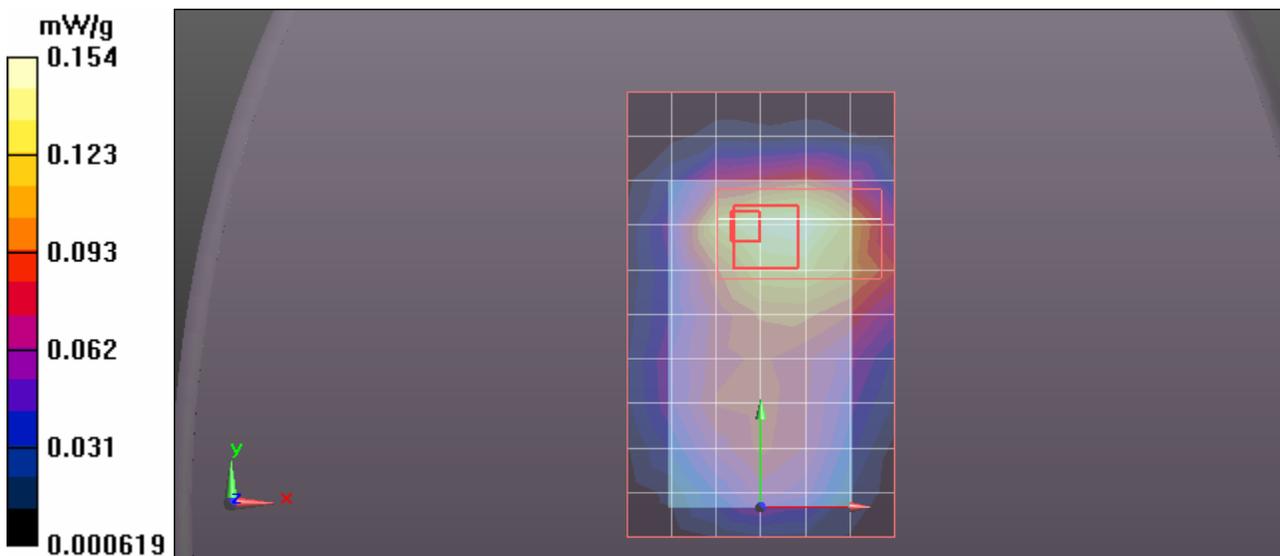

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Back side/3 slot_M-ch/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.839 mW/g

Back side/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 23.711 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.224 W/kg
SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.450 mW/g
Maximum value of SAR (measured) = 0.944 mW/g

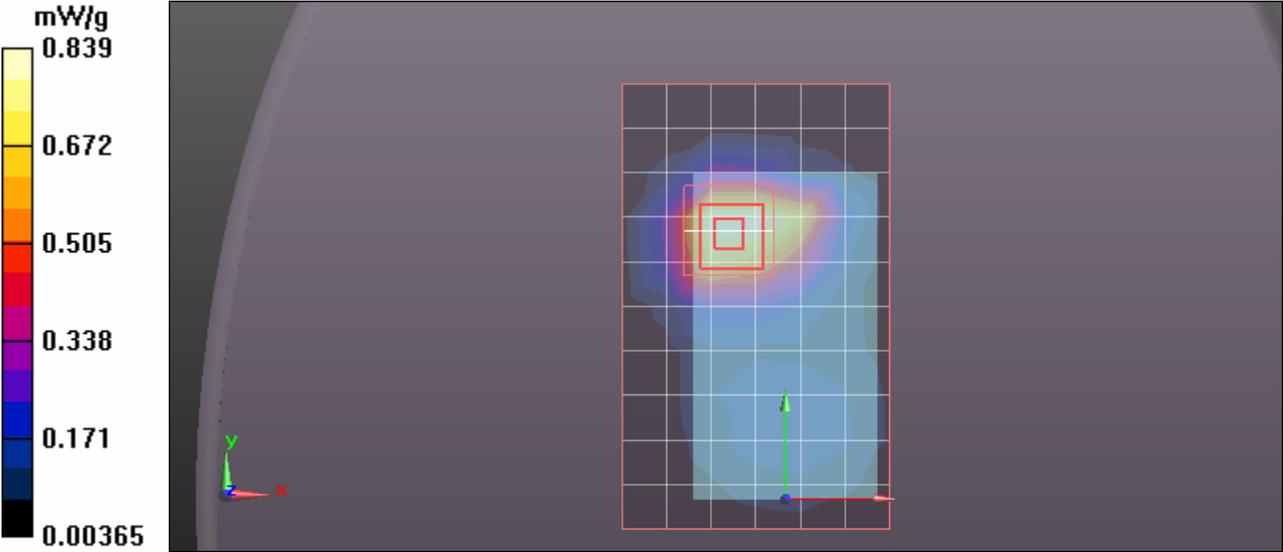


Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993

Back side/3 slot_M-ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.938 mW/g

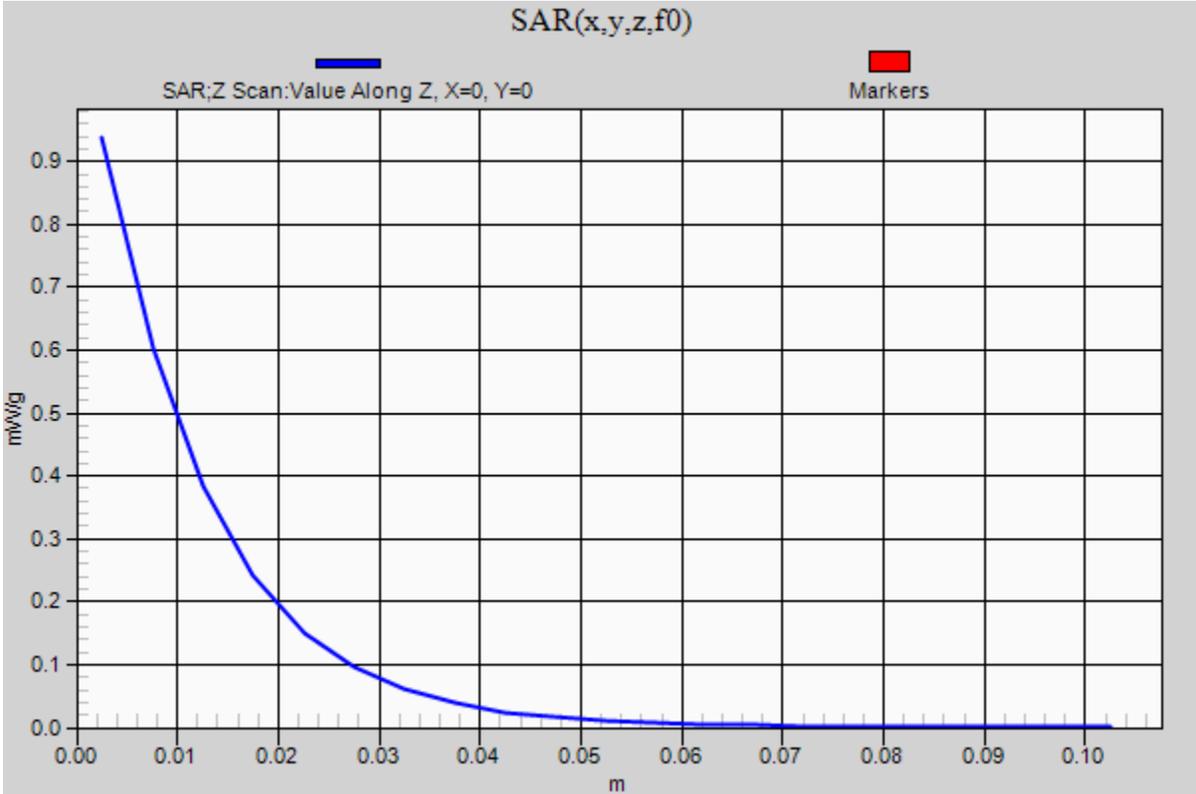

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Back side/3 slot_M-ch /w headset/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.761 mW/g


Back side/3 slot_M-ch /w headset/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 22.578 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.143 W/kg

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.864 mW/g

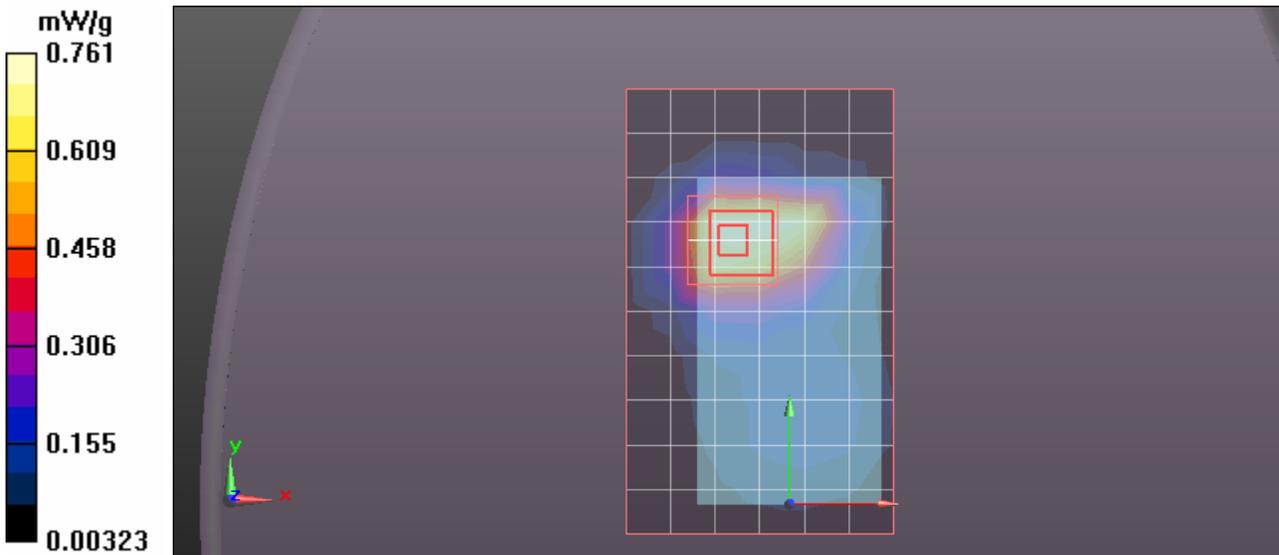

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Left edge/3 slot_M-ch/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.406 mW/g

Left edge/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 16.565 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.596 W/kg
SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.186 mW/g
Maximum value of SAR (measured) = 0.455 mW/g

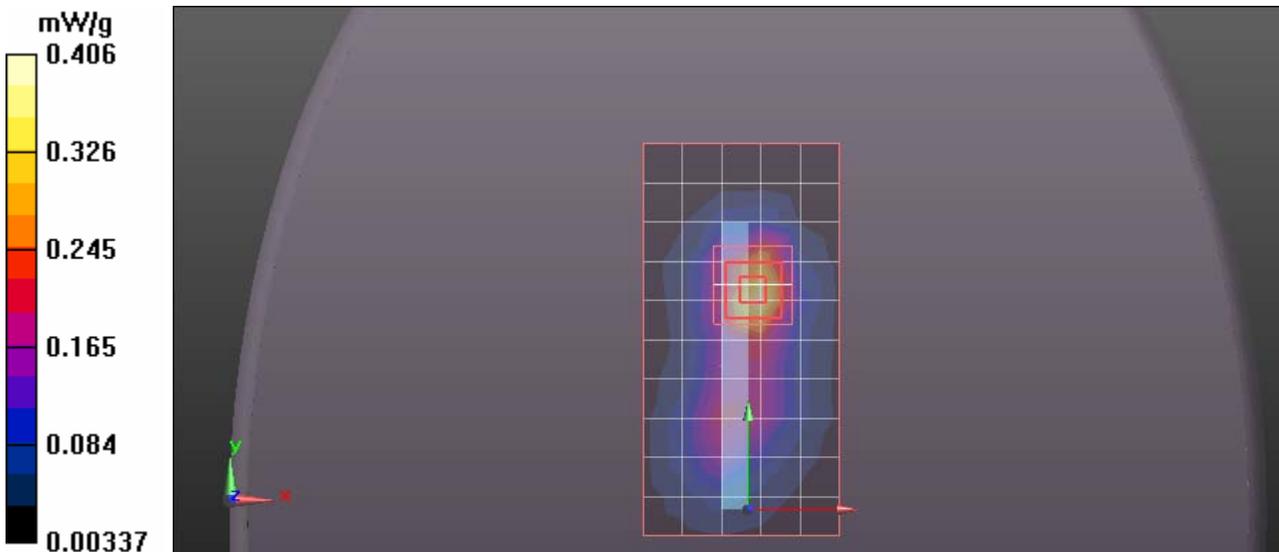

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Right edge/3 slot_M-ch/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.044 mW/g


Right edge/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=3mm

Reference Value = 5.437 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.056 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

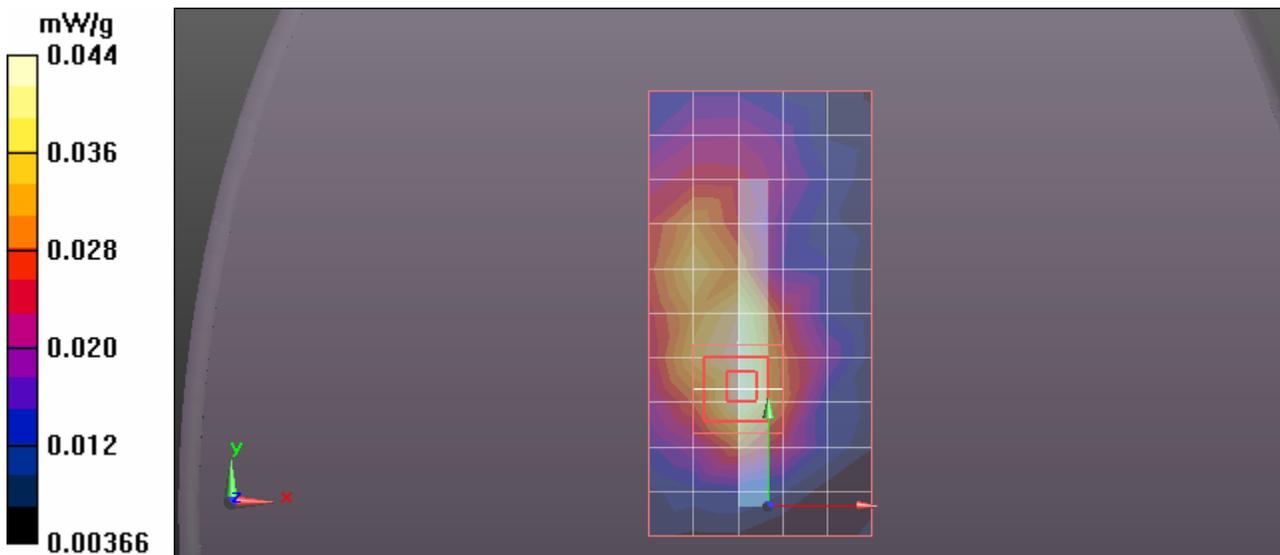

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz;Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

Top edge/3 slot_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.045 mW/g

Top edge/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.564 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.060 W/kg
SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.053 mW/g

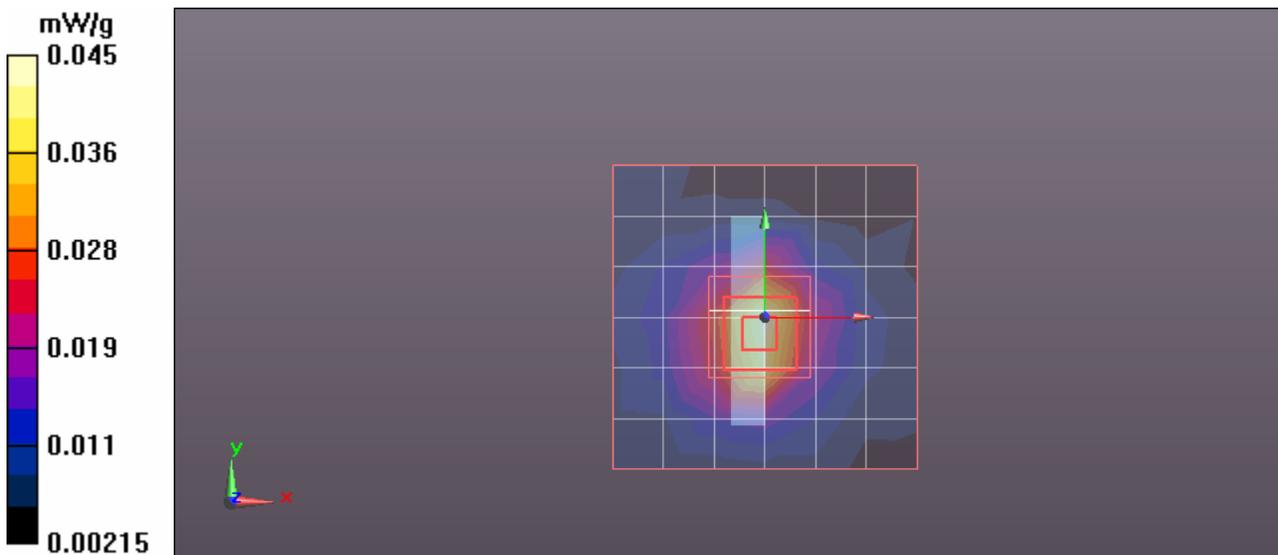

Test Laboratory: UL CCS

GPRS1900_Body Worn_1cm

DUT: Plam; Type: n/a; Serial: n/a

Communication System: PCS Band 3 slot; Frequency: 1880 MHz; Duty Cycle: 1:2.66993
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.509$ mho/m; $\epsilon_r = 54.167$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

Bottom edge/3 slot_M-ch/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.147 mW/g

Bottom edge/3 slot_M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.586 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

