



REPORT No. : SZ15060099E01A

# FCC TEST REPORT

APPLICANT : Hewlett-Packard Company  
PRODUCT NAME : Tablet PC  
MODEL NAME : HSTNH-T510F  
TRADE NAME : N/A  
BRAND NAME : HP  
FCC ID : B94HHT510F  
STANDARD(S) : 47 CFR Part 15 Subpart B  
TEST DATE : 2015-07-08 to 2015-07-23  
ISSUE DATE : 2015-08-05



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525  
Http://www.morlab.cn E-mail: service@morlab.cn



## DIRECTORY

<b><u>1. TECHNICAL INFORMATION</u></b> .....	<b>5</b>
1.1. APPLICANT INFORMATION.....	5
1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....	5
<b><u>2. TEST RESULTS</u></b> .....	<b>7</b>
2.1. APPLIED REFERENCE DOCUMENTS .....	7
<b><u>3. TEST CONDITIONS SETTING</u></b> .....	<b>8</b>
3.1. TEST MODE .....	8
3.2. TEST SETUP AND EQUIPMENTS LIST.....	9
3.2.1. CONDUCTED EMISSION .....	9
3.2.2. RADIATED EMISSION.....	11
<b><u>4. 47 CFR PART 15B REQUIREMENTS</u></b> .....	<b>13</b>
4.1. CONDUCTED EMISSION.....	13
4.1.1. REQUIREMENT .....	13
4.1.2. TEST DESCRIPTION .....	13
4.1.3. TEST RESULT .....	13
4.2. RADIATED EMISSION.....	16
4.2.1. REQUIREMENT .....	16
4.2.2. TEST DESCRIPTION .....	16
4.2.3. FREQUENCY RANGE OF MEASUREMENT .....	17
4.2.4. TEST RESULT .....	17
<b><u>ANNEX A PHOTOS OF THE EUT</u></b> .....	<b>20</b>
<b><u>ANNEX B TEST SETUP PHOTOS</u></b> .....	<b>27</b>
<b><u>ANNEX C TEST UNCERTAINTY</u></b> .....	<b>29</b>



**ANNEX D TESTING LABORATORY INFORMATION .....30**

- 1. IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY .....30**
- 2. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION.....30**
- 3. ACCREDITATION CERTIFICATE .....30**
- 4. TEST ENVIRONMENT CONDITIONS .....30**

Change History		
Issue	Date	Reason for change
1.0	2015-08-05	First edition



## Test Report Declaration

Applicant	Hewlett-Packard Company
Applicant Address	1501 Page Mill Road, Palo Alto, CA 94304
Manufacturer	TCL Communication Ltd.
Manufacturer Address	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R. China
Product Name	Tablet PC
Model Name	HSTNH-T510F
Brand Name	HP
HW Version	V04
SW Version	5D20
Test Standards	47 CFR Part 15 Subpart B
Test Result	PASS

Tested by : Kuang Xinhua  
Kuang Xinhua (Test Engineer)

Reviewed by : Xiao Xiong  
Xiao Xiong (EMC Manager)

Approved by : Zeng Dexin  
Zeng Dexin (Chief Engineer)



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant Information

Company: Hewlett-Packard Company  
Address: 1501 Page Mill Road, Palo Alto, CA 94304

## 1.2. Equipment under Test (EUT) Description

<b>EUT Type:</b>	Tablet PC
<b>Serial No:</b>	(n.a., marked #1 by test site)
<b>Hardware Version:</b>	V04
<b>Software Version:</b>	5D20

<b>Power supply:</b>	<b>Battery</b>	
	Brand Name:	N/A
	Model No.:	TLp040FC
	Serial No.:	(n.a. marked #1 by test site)
	Capacity:	4060mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
<b>Ancillary Equipment1:</b>	<b>AC Adapter (Charger for Battery)</b>	
	Brand Name:	ALCATEL onetouch
	Model No.:	UC13US
	Serial No.:	(n.a. marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 500mA
	Rated Output:	≡ 5V, 2000mA
<b>Ancillary Equipment2:</b>	<b>USB Cable</b>	
	Length:	80cm
	Type:	shielded cable

### NOTE:

1. The EUT is a Tablet PC. It supports ISM 2.4GHz Bluetooth band and WIFI (802.11b/g/n) band. It is equipped with a T-Flash card slot, a Micro-B USB port which can be connected to the ancillary equipments e.g. the PC.



REPORT No. : SZ15060099E01A

2. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.107	Conducted Emission	2015.07.18	PASS
2	15.109	Radiated Emission	2015.07.18	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2009.



### 3. Test Conditions Setting


#### 3.1. Test Mode

1	<b>The first test mode (Data Transmission)</b> The EUT configuration of the emission tests is EUT + Battery + T-Flash Card + PC. In this test mode, the EUT with a T-Flash Card embedded was connected to a PC via the Micro-B USB port. During the measurement, the data is transmitting between the PC and the T-Flash Card of the EUT.
2	<b>The second test mode (Standby)</b> The EUT configuration of the emission tests is EUT + Battery + Charger. During the measurement, the EUT was charged by its adapter and turned on.
Note: All test modes are performed, only the worse case(Data Transmission) is recorded in this report.	

## 3.2. Test Setup and Equipments List

### 3.2.1. Conducted Emission

#### A. Test Setup:

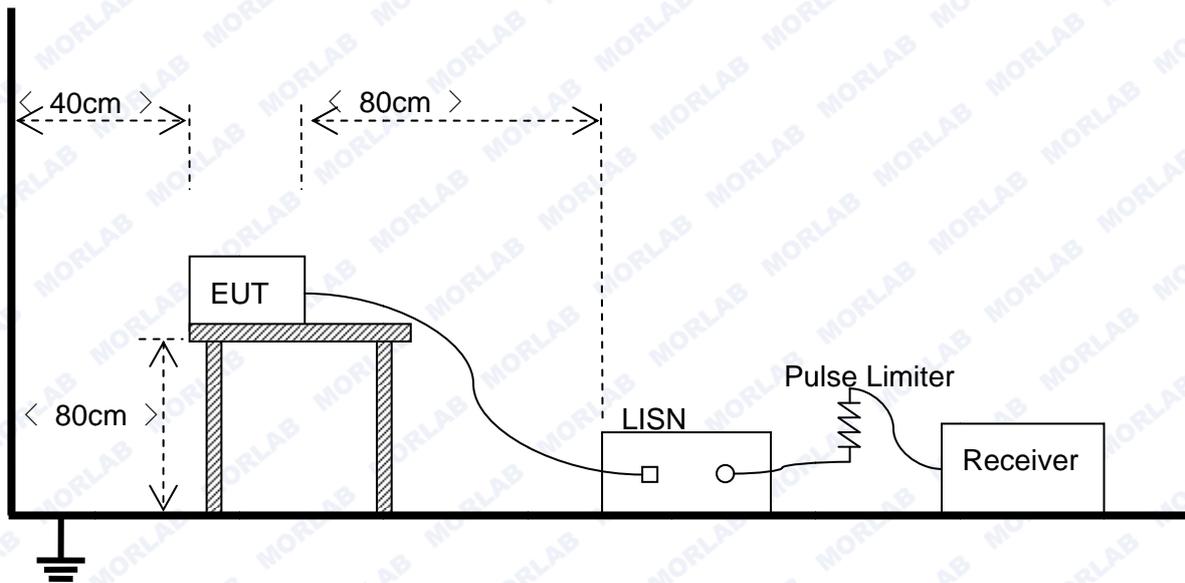

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2009 at Clause 4.3.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
Receiver	Narda	PMM 9010	595WX11007	2015.2.21	2016.2.20
EMC Analyzer	Agilent	E7405A	US44210471	2015.2.21	2016.2.20
LISN	Schwarzbeck	NSLK 8127	812744	2015.2.24	2016.2.23
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)




REPORT No. : SZ15060099E01A

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
PC	Apple	A1370	C02FQ2PYD DQW	(n.a.)	(n.a.)


### 3.2.2. Radiated Emission

#### A. Test Setup:

1. For radiated emissions from 30MHz to1GHz

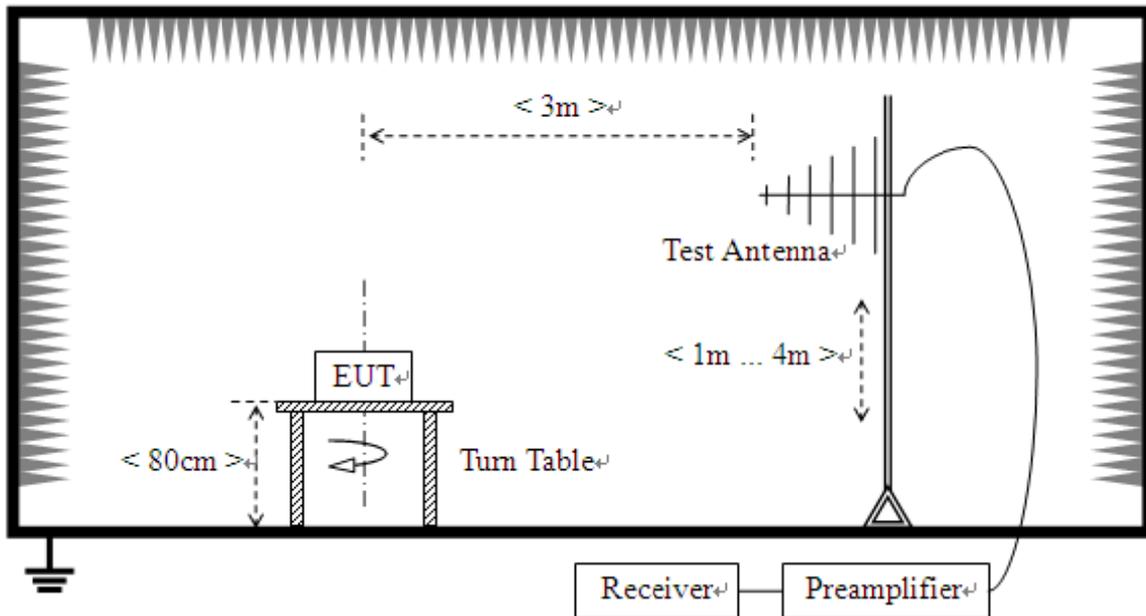

2. For radiated emissions above 1GHz

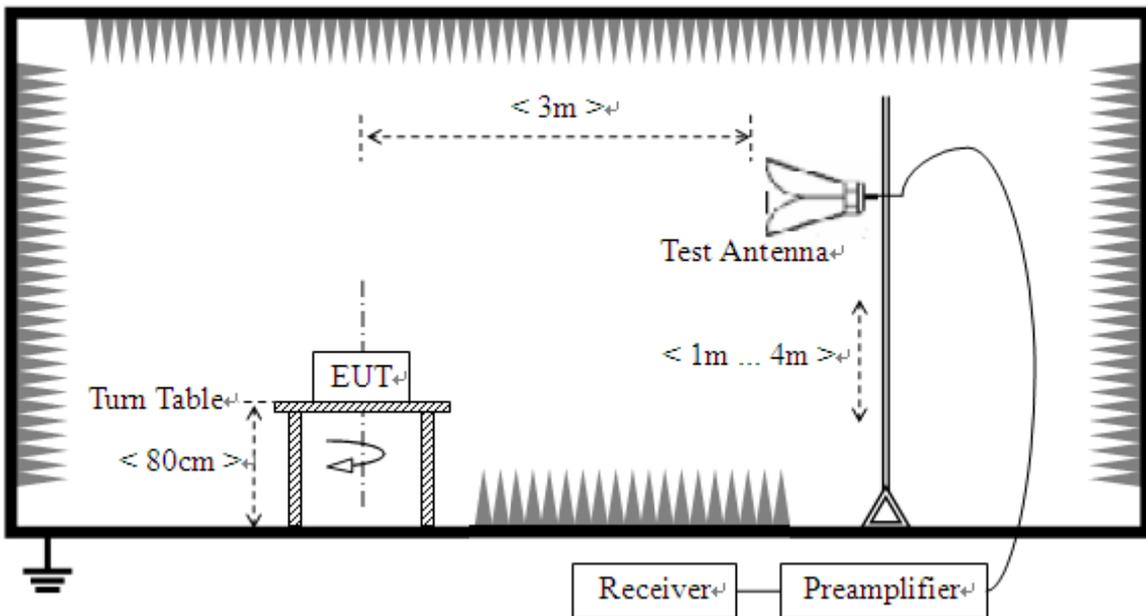



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
EMC Analyzer	Agilent	E7405A	US44210471	2015.2.21	2016.2.20
Receiver	Narda	PMM 9060	001WX11001	2015.2.21	2016.2.20
Receiver	Narda	PMM 9010	595WX11007	2015.2.21	2016.2.20
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2015.2.21	2016.2.20
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2015.2.25	2016.2.24
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2015.2.25	2016.2.24
PC	Apple	A1370	C02FQ2PYD DQW	(n.a.)	(n.a.)



## 4. 47 CFR Part 15B Requirements

### 4.1. Conducted Emission

#### 4.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.


#### 4.1.2. Test Description

See section 3.2.1 of this report.


#### 4.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

##### A. Test Plot and Suspicious Points:

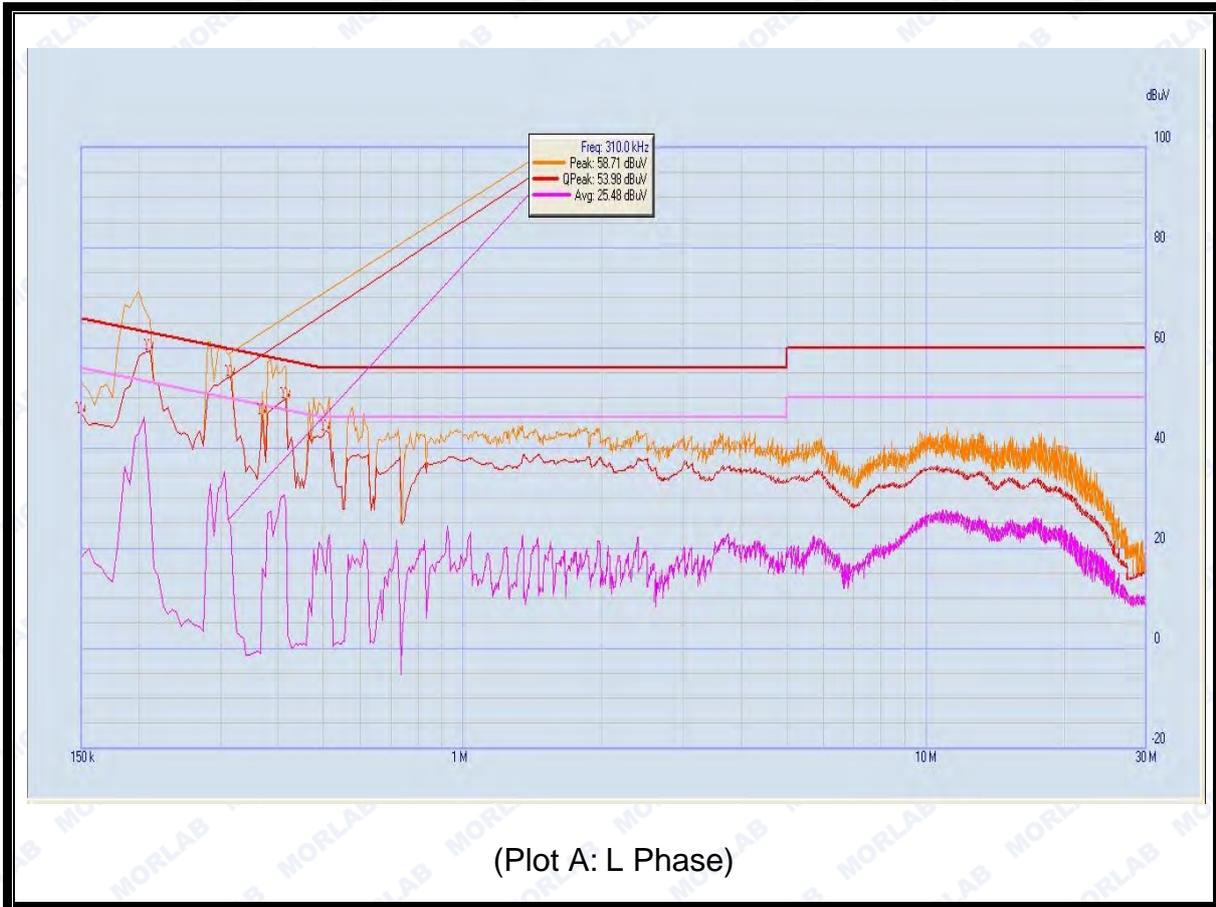

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	46.84	18.18	66.00	56.00	Line	PASS
2	0.21	59.43	30.16	64.29	54.29		PASS
3	0.315	54.29	24.63	61.29	51.29		PASS
4	0.37	46.63	15.94	59.71	49.71		PASS
5	0.415	49.80	27.90	58.43	48.43		PASS
6	0.505	43.37	15.04	56.00	46.00		PASS

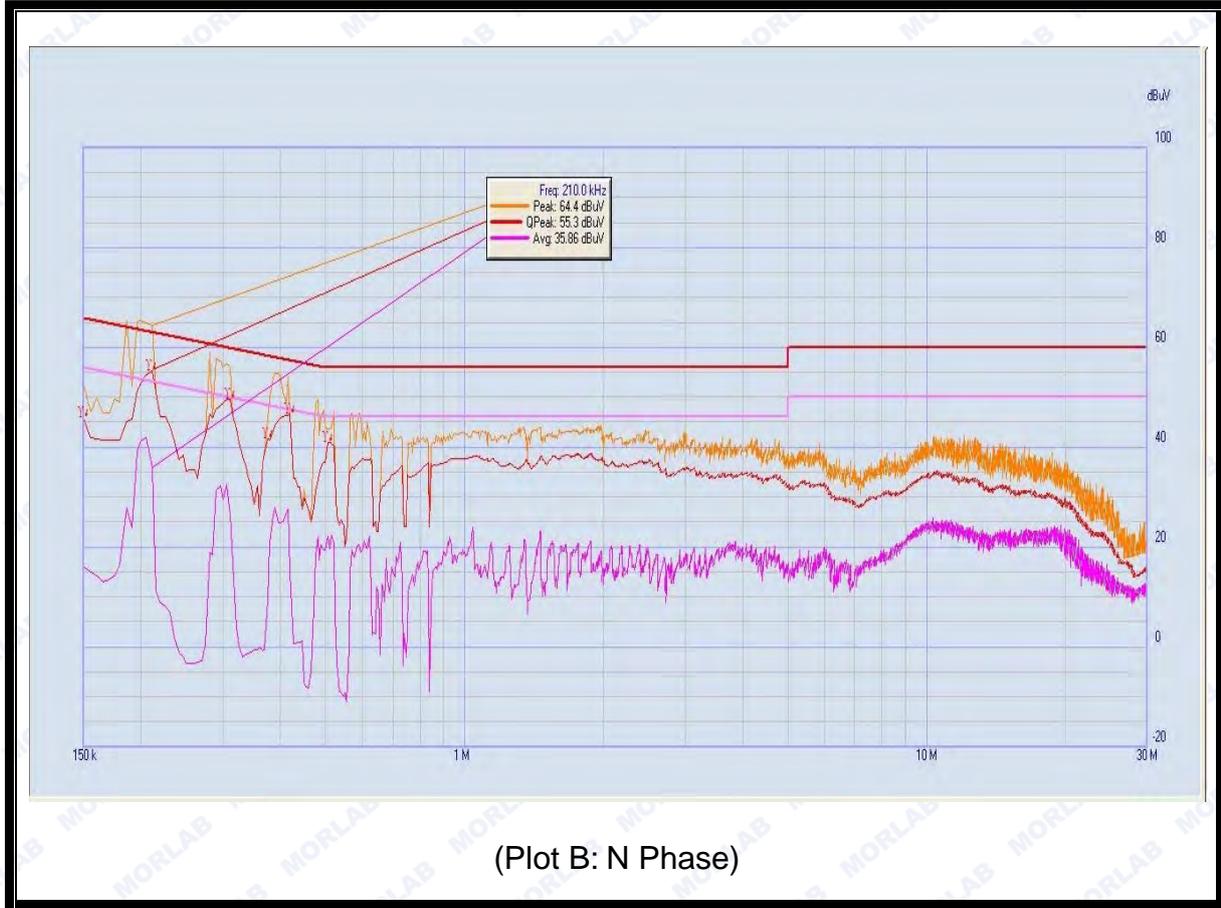

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	45.97	15.96	66.00	56.00	Neutral	PASS
2	0.21	55.30	35.86	64.29	54.29		PASS
3	0.31	49.64	26.65	61.43	51.43		PASS
4	0.375	41.62	9.40	59.57	49.57		PASS
5	0.42	46.71	14.94	58.29	48.29		PASS
6	0.505	40.90	22.09	56.00	46.00		PASS

**Test Result: PASS**



## 4.2. Radiated Emission

### 4.2.1. Requirement

According to FCC section 15.109(a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dB}\mu\text{V/m}$  is calculated by  $20\log$  Emission Level( $\mu\text{V/m}$ ).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .

Example:

F.S Limit at 30m distance is  $30\mu\text{V/m}$ , then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$$

### 4.2.2. Test Description

See section 3.2.2 of this report.



### 4.2.3. Frequency range of measurement

Highest frequency generated or used in the device is the highest speed of the processor, lowest frequency generated or used in the device is the lowest frequency of the oscillator. According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:

Frequency	Frequency generated or used in the device	Frequency range of radiated measurement in the report
Highest	1.5GHz	7.5GHz


### 4.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

#### A. Test Plots and Suspicious Points:

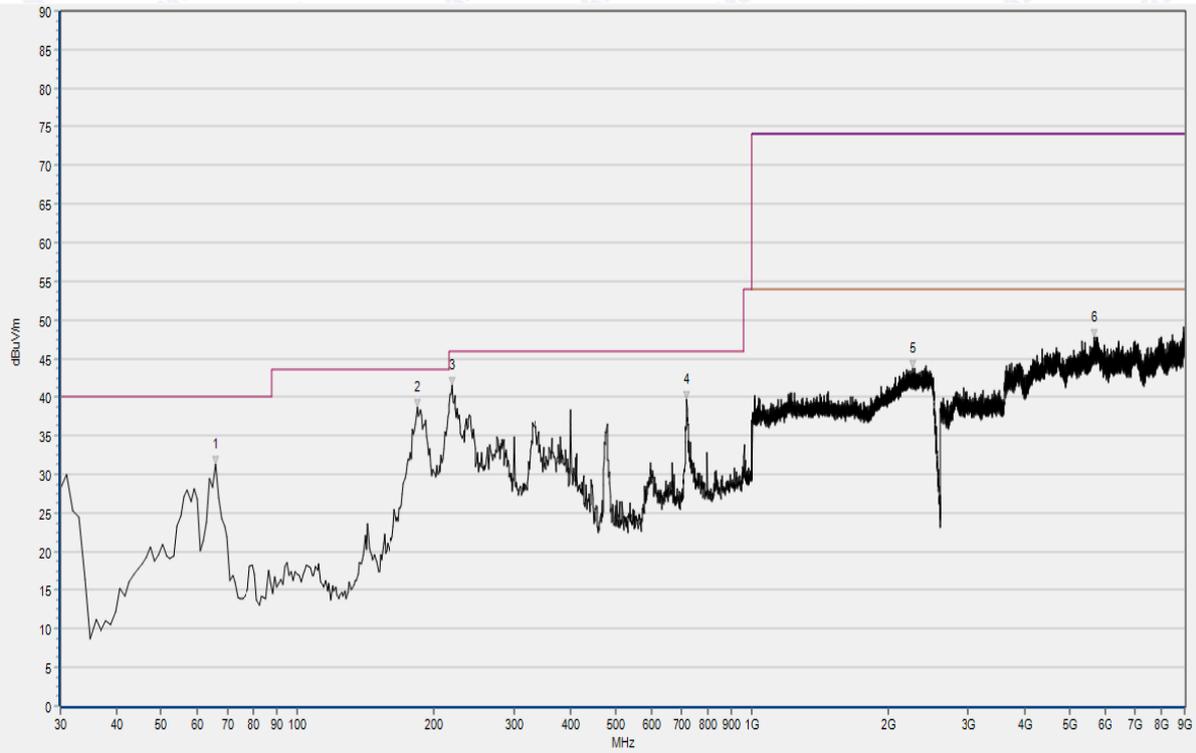

(Plot A: 30MHz – 9GHz, Test Antenna Vertical)

NO.	Fre. MHz	Pk dB $\mu$ V/m	QP dB $\mu$ V/m	AV dB $\mu$ V/m	Limit-PK dB $\mu$ V/m	Limit-QP dB $\mu$ V/m	Limit-AV dB $\mu$ V/m	ANT	Verdict
1	65.890	N.A	31.28	N.A	N.A	40.00	N.A	V	PASS
2	184.230	N.A	35.67	N.A	N.A	43.50	N.A	V	PASS
3	219.150	N.A	37.46	N.A	N.A	46.00	N.A	V	PASS
4	719.670	N.A	39.68	N.A	N.A	46.00	N.A	V	PASS
5	2254.40	43.66	N.A	35.31	74.00	N.A	54.00	V	PASS
6	5669.44	47.75	N.A	38.76	74.00	N.A	54.00	V	PASS

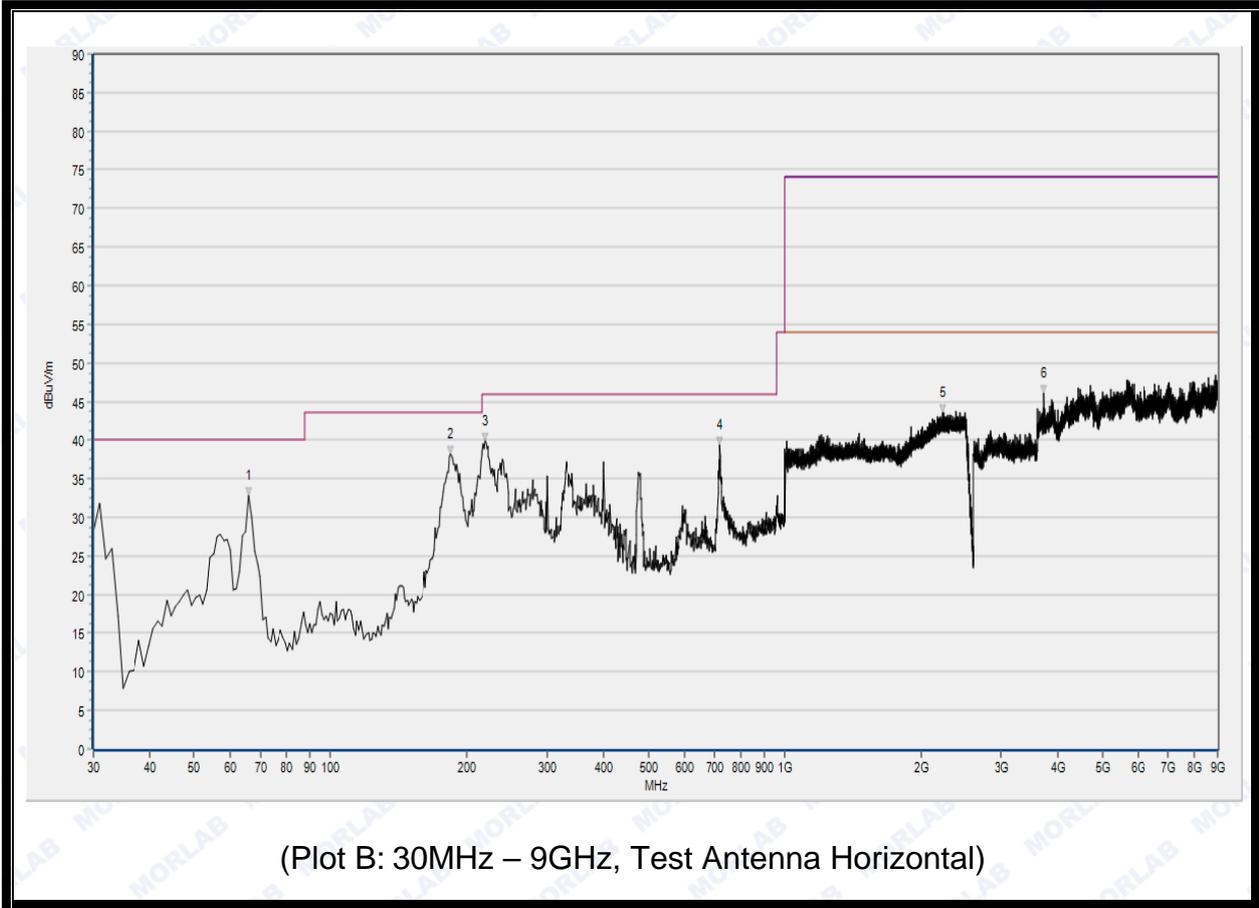


NO.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	65.890	N.A	32.79	N.A	N.A	40.00	N.A	H	Pass
2	184.230	N.A	33.75	N.A	N.A	43.50	N.A	H	Pass
3	219.150	N.A	37.24	N.A	N.A	46.00	N.A	H	Pass
4	719.670	N.A	39.45	N.A	N.A	46.00	N.A	H	Pass
5	2223.467	43.52	N.A	35.10	74.00	N.A	54.00	H	Pass
6	3727.680	46.13	N.A	36.69	74.00	N.A	54.00	H	Pass


**Test Result: PASS**

## Annex A Photos of the EUT

### 1. Appearance of the EUT:

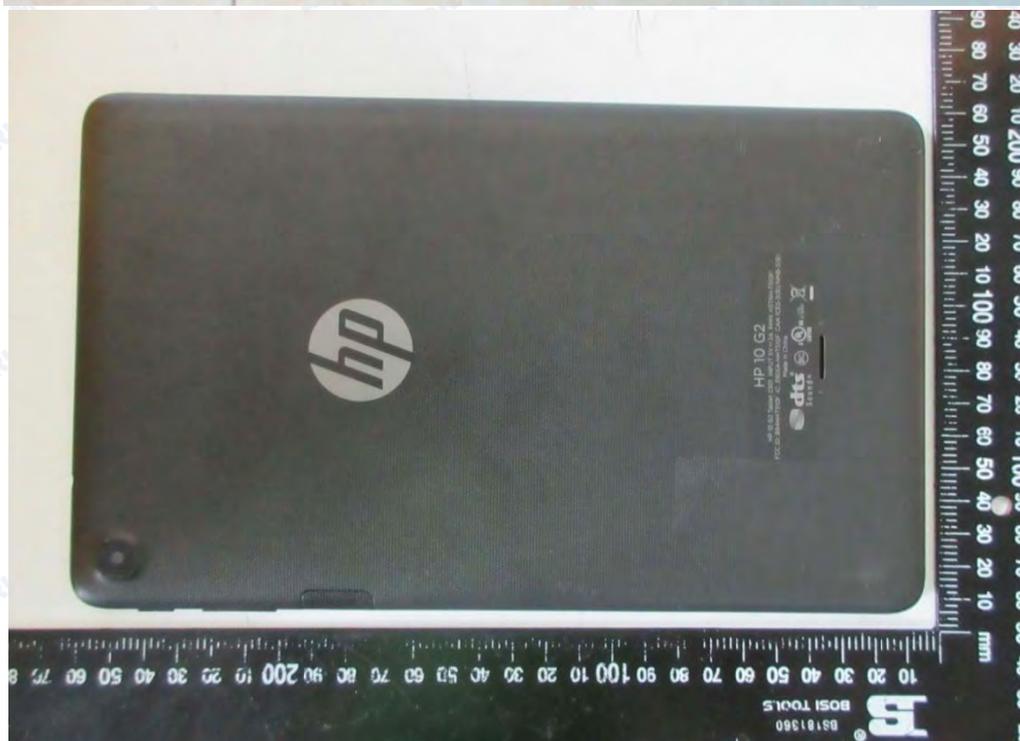



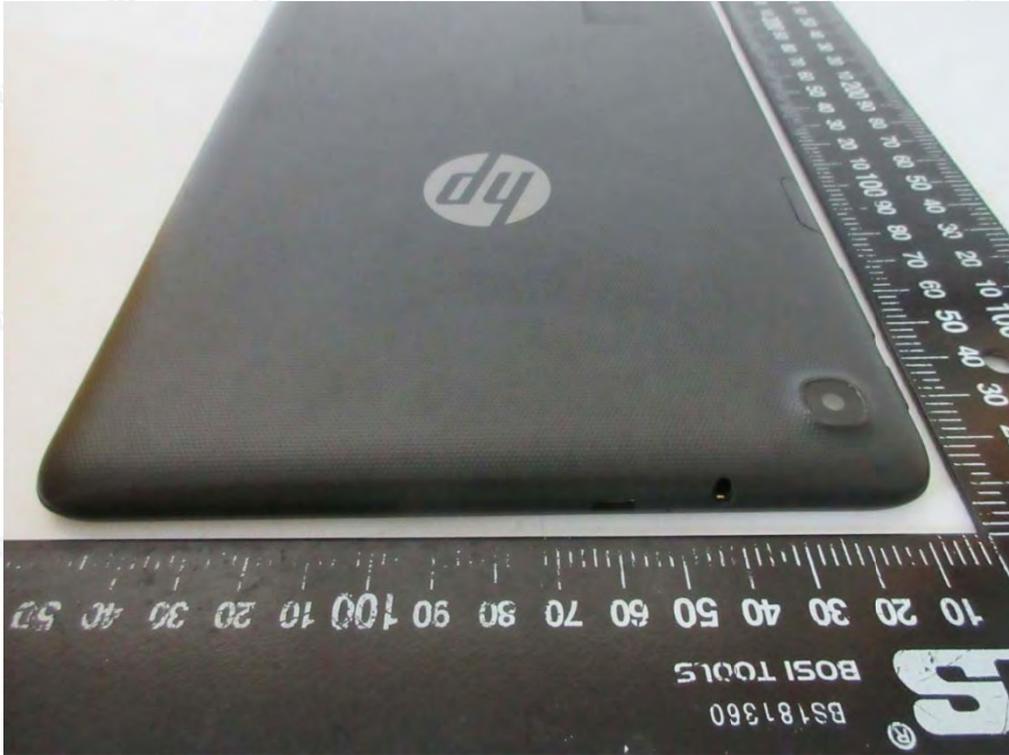



2. Inside of the EUT:









REPORT No. : SZ15060099E01A





REPORT No. : SZ15060099E01A

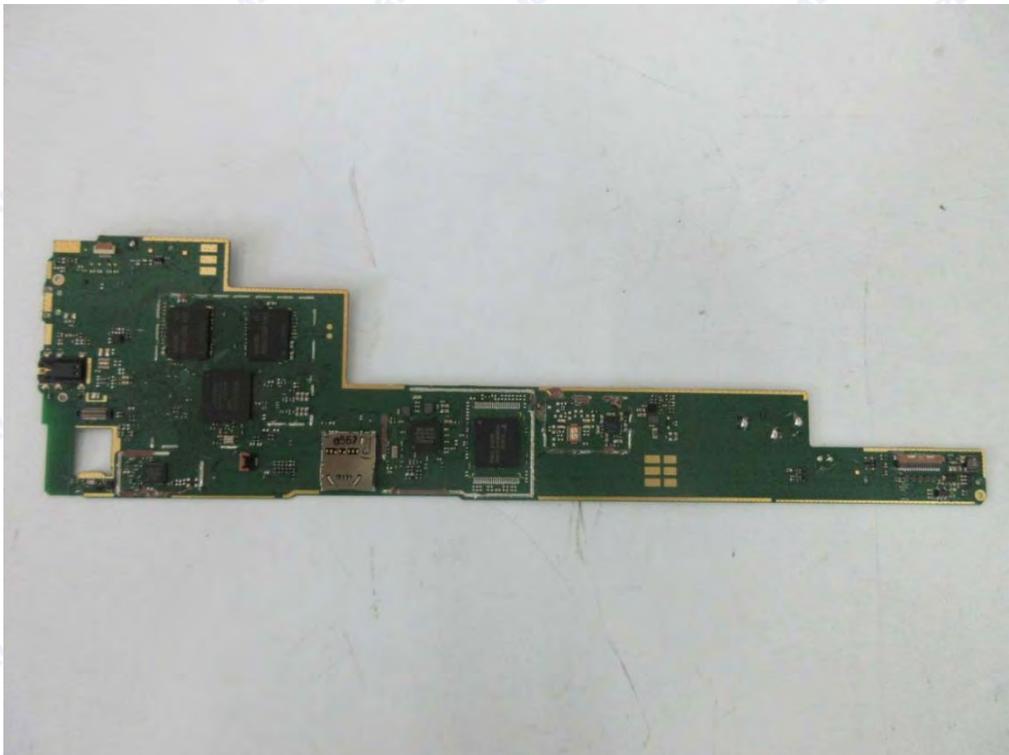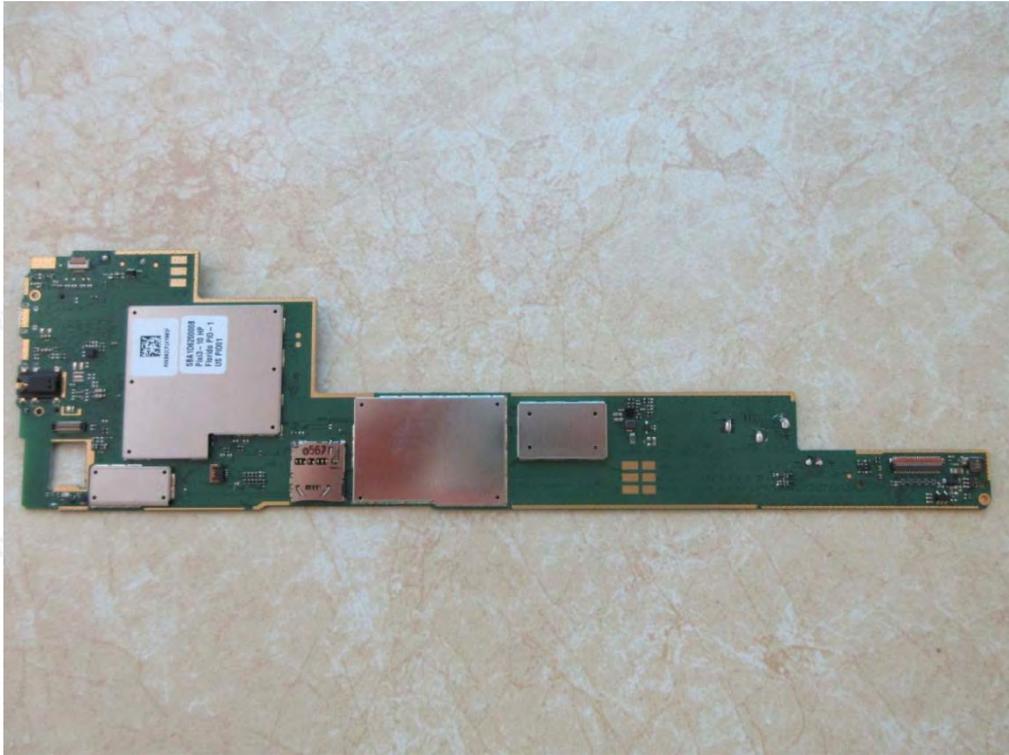

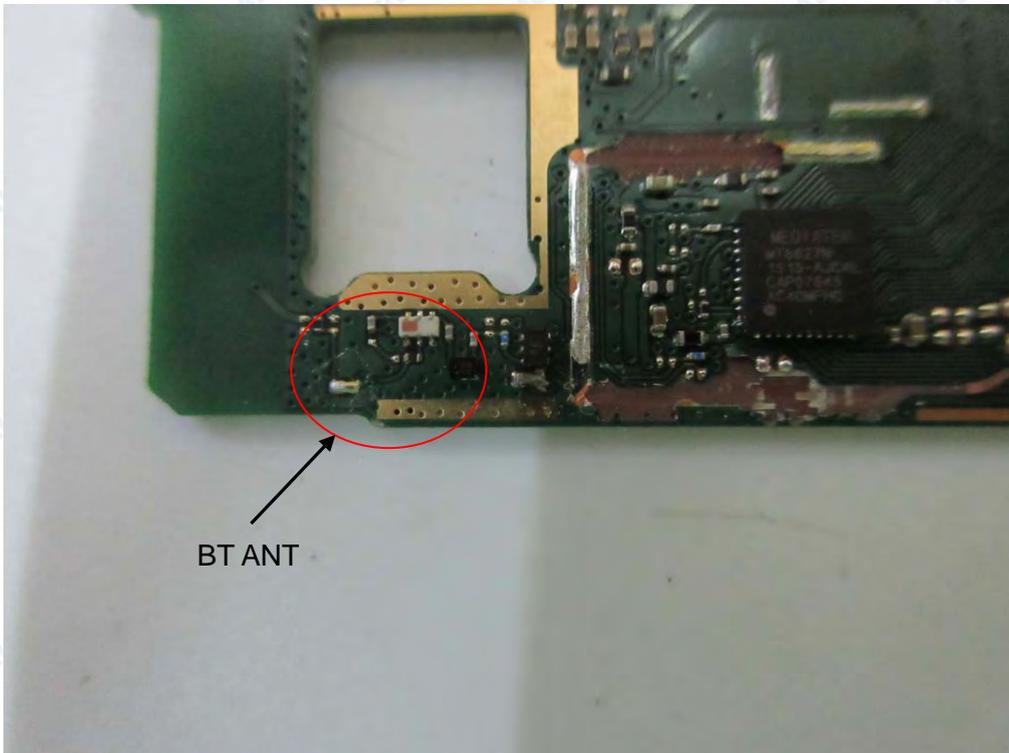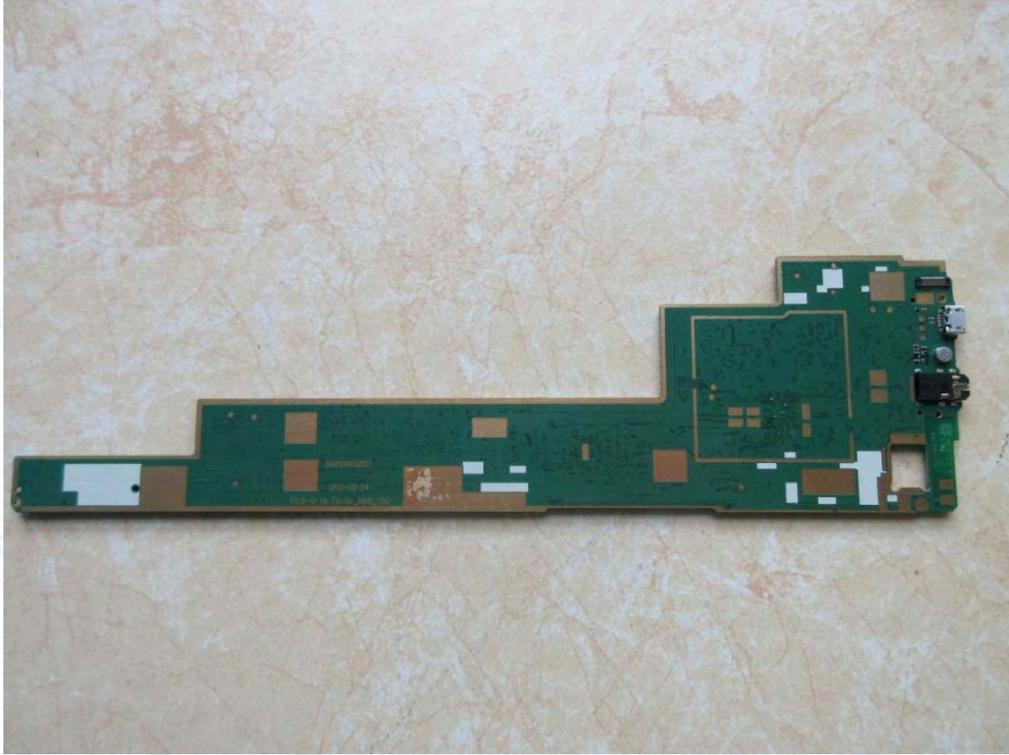

## Annex B Test Setup photos

### 1. Mains Terminal Disturbance Voltage Measurement





2. Radiated Field Strength Measurement (30MHz-1GHz)



3. Radiated Field Strength Measurement (Above 1GHz)





## Annex C Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$\pm 1.8\text{dB}$
Uncertainty of Radiated Emission:	$\pm 3.1\text{dB}$



## Annex D Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Accreditation Certificate

Accredited Testing Laboratory: The FCC registration number is 695796.  
(Shenzhen Morlab Communications Technology Co., Ltd.)

### 4. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

\*\*\*\*\* END OF REPORT \*\*\*\*\*