



FCC RADIO TEST REPORT

FCC ID : B94HNC05C4TKR
Equipment : Convertible PC
Brand Name : HP
Model Name : HSN-C05C-4
Applicant : HP Inc.
3390 East Harmony Road, Fort Collins,
Colorado, United States 80528
Standard : 47 CFR Part 2, 96

The product was received on Mar. 31, 2020 and testing was started from Apr. 27, 2020 and completed on May 16, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Frequency List of Low/Middle/High Channels.....	9
3 Radiated Test Items	10
3.1 Measuring Instruments.....	10
3.2 Test Setup	10
3.3 Test Result of Radiated Test.....	11
3.4 Radiated Spurious Emission	12
4 List of Measuring Equipment.....	13
5 Uncertainty of Evaluation.....	14
Appendix A. Test Results of Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG030919-04F	01	Initial issue of report	Jun. 19, 2020
FG030919-04F	02	Revise applicant information	Jun. 29, 2020
FG030919-04F	03	1. Remove test Photo and manufacturer information 2. Adding module information	Jul. 01, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	-	See Note
-	§96.41	Peak-to-Average Ratio	-	See Note
-	§96.41	Effective Isotropic Radiated Power	-	See Note
		Power Density	-	See Note
-	§2.1049 §96.41	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
3.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 8.27 dB at 28408.000 MHz

Note: The module (Model: T99W175) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou

1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, and GNSS.

Product Specification subjective to this standard	
WWAN Module	Brand Name: FOXCONN Model Name: T99W175
Antenna Type	WWAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna (Rx only) <Ant. 3>: PIFA Antenna <Ant. 4>: PIFA Antenna (Rx only) WLAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/BDS/Galileo: PIFA Antenna NFC: Loop Antenna

WWAN Antenna Information NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna AUP6Y-100015 (DC33002DS00)	AWAN	PIFA	824-849MHz -1.42 dBi (peak)
			880-915MHz -1.89 dBi (peak)
			1710-1785MHz -1.67 dBi (peak)
			1850-1910MHz -2.43 dBi (peak)
			1920-1980MHz -1.44 dBi (peak)
			704-716MHz -1.25 dBi (peak)
			746-756MHz -2.26 dBi (peak)
			777-787MHz -1.63 dBi (peak)
			832-862MHz -1.45 dBi (peak)
			1710-1755MHz -1.54 dBi (peak)
			2305-2315MHz -2.12 dBi (peak)
			2570-2620MHz -3.68 dBi (peak)
			2300-2400MHz -0.94 dBi (peak)
			2500-2570MHz -2.12 dBi (peak)
			3400-3600MHz -2.05 dBi (peak)
			3600-3800MHz -2.99 dBi (peak)
MIMO3 Antenna AXP6Y-100004 (DC33002DS30)	AWAN	PIFA	5150-5925MHz -0.62 dBi (peak)
			1710-1785MHz 0.95 dBi (peak)
			1805-1880MHz 0.34 dBi (peak)
			1850-1915MHz 1.39 dBi (peak)
			1920-1980MHz 0.13 dBi (peak)
			1930-1995MHz 0.18 dBi (peak)
			2110-2200MHz -0.91 dBi (peak)
			2300-2400MHz -0.40 dBi (peak)
			2496-2690MHz -1.10 dBi (peak)
			3300-4200MHz -1.9 dBi (peak)

WWAN Antenna Information TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna AUP6Y-100015 (DC33002DS00)	AWAN	PIFA	824-849MHz -4.39 dBi (peak)
			880-915MHz -4.51 dBi (peak)
			1710-1785MHz -2.98 dBi (peak)
			1850-1910MHz -1.38 dBi (peak)
			1920-1980MHz 0.48 dBi (peak)
			704-716MHz -4.33 dBi (peak)
			746-756MHz -4.97 dBi (peak)
			777-787MHz -2.02 dBi (peak)
			832-862MHz -4.63 dBi (peak)
			1710-1755MHz -2.76 dBi (peak)
			2305-2315MHz -2.14 dBi (peak)
			2570-2620MHz -3.23 dBi (peak)
			2300-2400MHz -1.13dBi (peak)
			2500-2570MHz -2.04 dBi (peak)
			3400-3600MHz -1.46 dBi (peak)
			3600-3800MHz -2.45 dBi (peak)
			5150-5925MHz 1.39 dBi (peak)
MIMO3 Antenna AXP6Y-100004 (DC33002DS30)	AWAN	PIFA	1710-1785MHz -0.49 dBi (peak)
			1805-1880MHz -2.07 dBi (peak)
			1850-1915MHz -1.56 dBi (peak)
			1920-1980MHz -3.04 dBi (peak)
			1930-1995MHz -3.52 dBi (peak)
			2110-2200MHz -4.53 dBi (peak)
			2300-2400MHz -0.83 dBi (peak)
			2496-2690MHz -2.22 dBi (peak)
			3300-4200MHz -4.87 dBi (peak)

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature	19~22°C
Relative Humidity	52~60%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in Tablet Mode (three orthogonal panels, X, Y, Z) and Notebook Mode. The worst cases (Notebook Mode with Accessory) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	48	-	-				v	v			v			v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

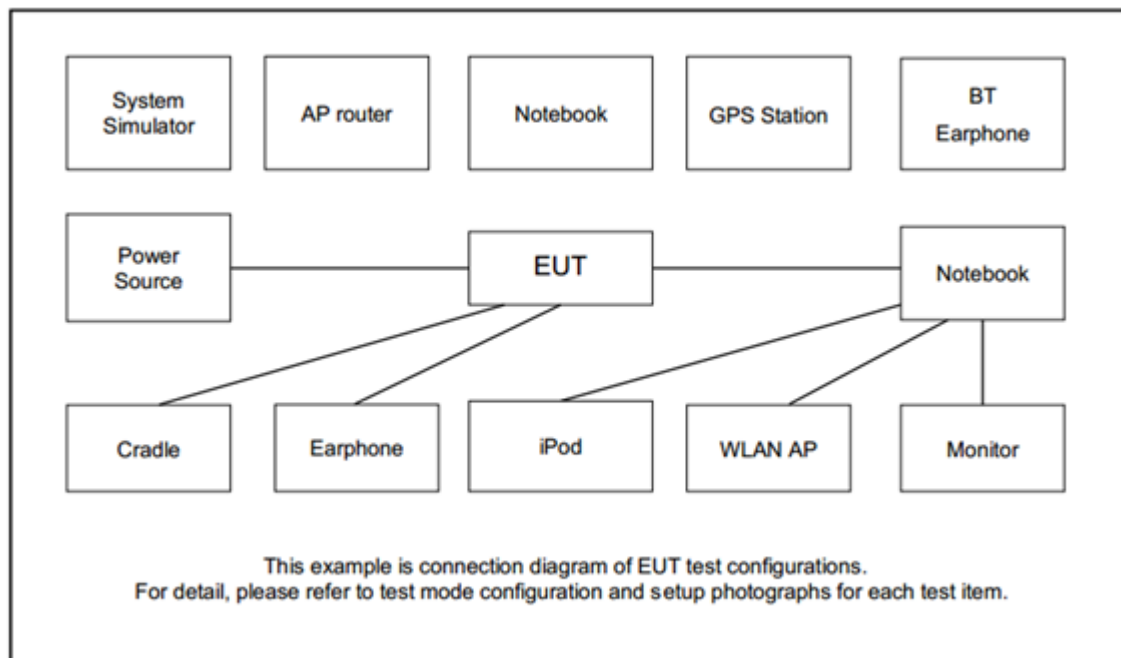

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A



2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions below 30MHz

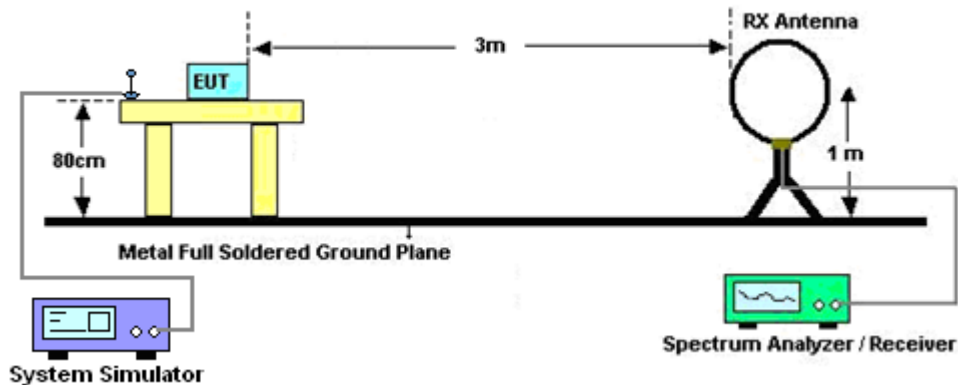

For radiated emissions from 30MHz to 1GHz

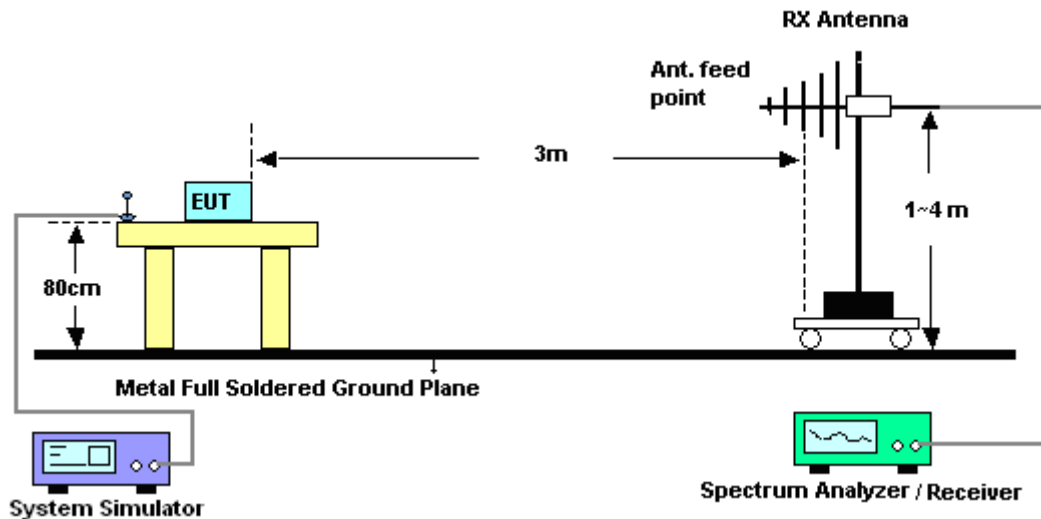

For radiated emissions above 1GHz

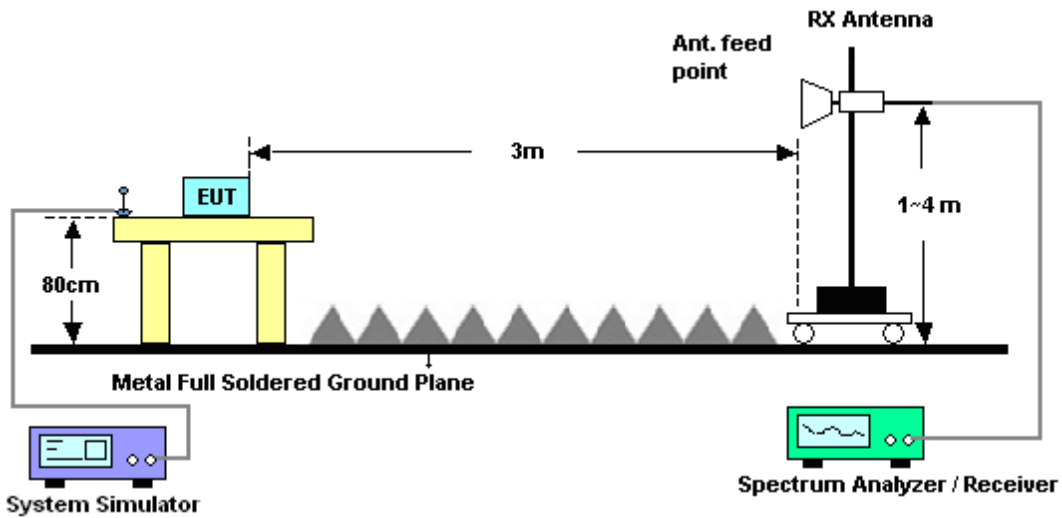

3.3 Test Result of Radiated Test

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Apr. 27, 2020~ May 16, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Apr. 27, 2020~ May 16, 2020	Oct 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 14, 2019	Apr. 27, 2020~ May 16, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1522	1GHz ~ 18GHz	Sep. 19, 2019	Apr. 27, 2020~ May 16, 2020	Sep. 18, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz ~ 40GHz	Dec. 10, 2019	Apr. 27, 2020~ May 16, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170980	18GHz ~ 40GHz	Jan. 10, 2019	Apr. 27, 2020~ May 16, 2020	Jan. 09, 2021	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Apr. 27, 2020~ May 16, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800-30-10P	1601180002	1GHz~18GHz	Feb. 07, 2020	Apr. 27, 2020~ May 16, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Apr. 27, 2020~ May 16, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Dec. 20, 2019	Apr. 27, 2020~ May 16, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Signal Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Mar. 12, 2020	Apr. 27, 2020~ May 16, 2020	Mar. 11, 2021	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Apr. 27, 2020~ May 16, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Dec. 12, 2019	Apr. 27, 2020~ May 16, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Apr. 27, 2020~ May 16, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 25, 2020	Apr. 27, 2020~ May 16, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 27, 2020~ May 16, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 27, 2020~ May 16, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 27, 2020~ May 16, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Apr. 27, 2020~ May 16, 2020	N/A	Radiation (03CH12-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.24
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.62
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.06
---	------



Appendix A. Test Results of Radiated Test

LTE Band 48

LTE Band 48 / 20MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7100	-58.77	-40	-18.77	-60.74	-68.74	1.77	11.74	H
	10655	-58.95	-40	-18.95	-61.23	-67.38	2.47	10.90	H
	14205	-57.48	-40	-17.48	-64.54	-66.32	2.87	11.71	H
	21306	-52.58	-40	-12.58	-74.44	-69.30	1.98	18.70	H
	24857	-51.37	-40	-11.37	-76.03	-67.38	2.07	18.07	H
	28408	-50.61	-40	-10.61	-76.13	-67.85	2.32	19.56	H
									H
	7100	-59.04	-40	-19.04	-60.62	-69.01	1.77	11.74	V
	10655	-59.16	-40	-19.16	-61.18	-67.59	2.47	10.90	V
	14205	-57.47	-40	-17.47	-64.25	-66.31	2.87	11.71	V
	21306	-53.06	-40	-13.06	-74.78	-69.78	1.98	18.70	V
	24857	-50.71	-40	-10.71	-76.58	-66.72	2.07	18.07	V
	28408	-48.27	-40	-8.27	-75.61	-65.51	2.32	19.56	V
									V



LTE Band 48 / 20MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7230	-57.99	-40	-17.99	-60.36	-67.68	1.84	11.53	H
	10850	-59.39	-40	-19.39	-61.72	-67.72	2.57	10.90	H
	14462	-58.06	-40	-18.06	-65.33	-66.30	2.85	11.09	H
	18080	-53.76	-40	-13.76	-71.87	-69.99	1.76	17.98	H
	21696	-53.20	-40	-13.20	-74.72	-69.99	1.99	18.78	H
	25312	-50.39	-40	-10.39	-75.55	-66.99	2.14	18.74	H
									H
	7230	-58.31	-40	-18.31	-60.42	-68.00	1.84	11.53	V
	10850	-59.21	-40	-19.21	-61.33	-67.54	2.57	10.90	V
	14462	-58.45	-40	-18.45	-64.9	-66.69	2.85	11.09	V
	18080	-54.53	-40	-14.53	-71.71	-70.76	1.76	17.98	V
	21696	-53.24	-40	-13.24	-74.75	-70.03	1.99	18.78	V
	25312	-49.38	-40	-9.38	-75.8	-65.98	2.14	18.74	V
									V
Highest	7360	-57.42	-40	-17.42	-59.76	-66.83	1.91	11.32	H
	11045	-58.91	-40	-18.91	-61.39	-67.23	2.63	10.95	H
	14724	-57.82	-40	-17.82	-66.66	-66.62	2.91	11.72	H
	18405	-53.65	-40	-13.65	-71.97	-69.70	1.87	17.92	H
	22086	-52.06	-40	-12.06	-74.23	-68.85	2.08	18.87	H
	25767	-50.13	-40	-10.13	-76.12	-67.15	2.03	19.05	H
									H
	7360	-59.11	-40	-19.11	-61.26	-68.52	1.91	11.32	V
	11045	-58.94	-40	-18.94	-61.25	-67.26	2.63	10.95	V
	14724	-59.33	-40	-19.33	-66.5	-68.13	2.91	11.72	V
	18405	-55.00	-40	-15.00	-72.44	-71.05	1.87	17.92	V
	22086	-52.34	-40	-12.34	-74.51	-69.13	2.08	18.87	V
	25767	-49.01	-40	-9.01	-76.19	-66.03	2.03	19.05	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————