



LTE Band 26 Channel Band width: 1.4MHz

Channel 26797

Frequency Range : 9kHz~1GHz

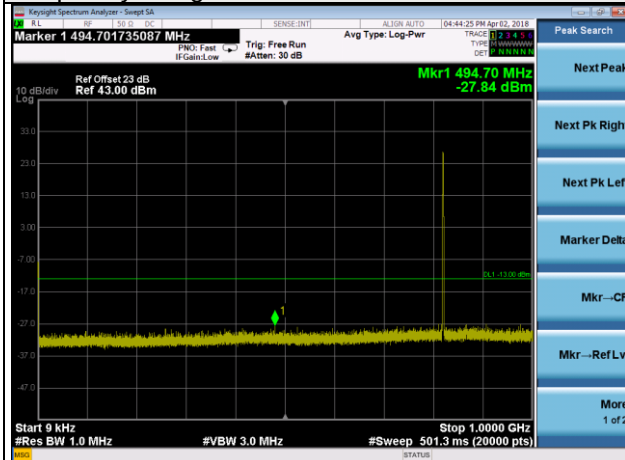


Frequency Range : 1GHz~10GHz

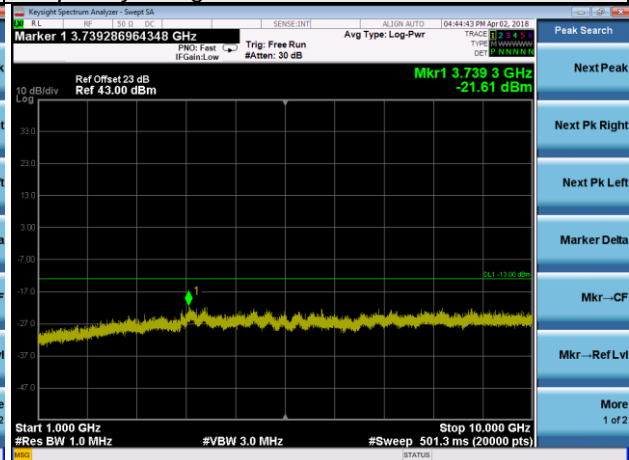


Channel 26915

Frequency Range : 9kHz~1GHz

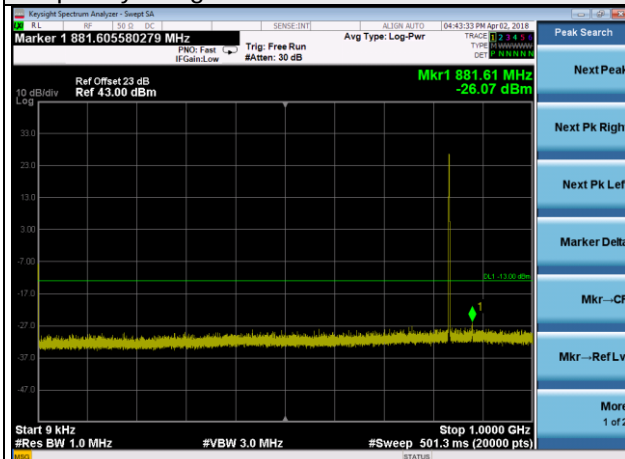


Frequency Range : 1GHz~10GHz

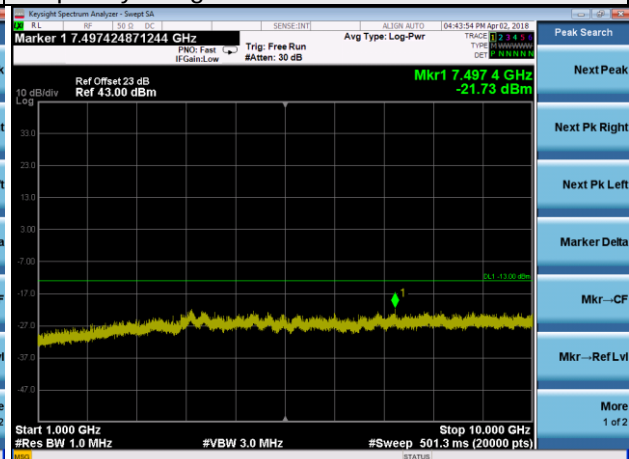


Channel 27033

Frequency Range : 9kHz~1GHz

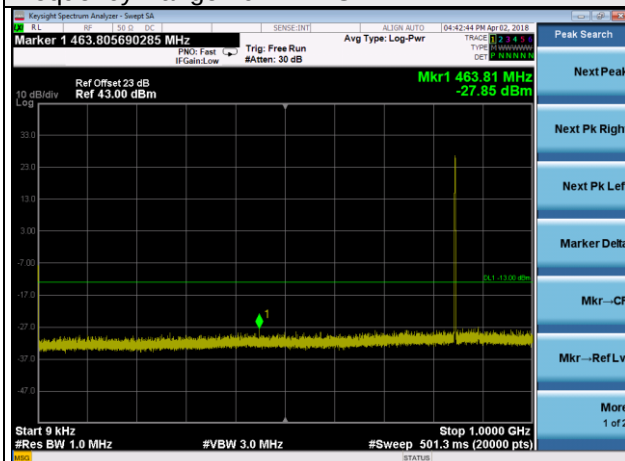


Frequency Range : 1GHz~10GHz

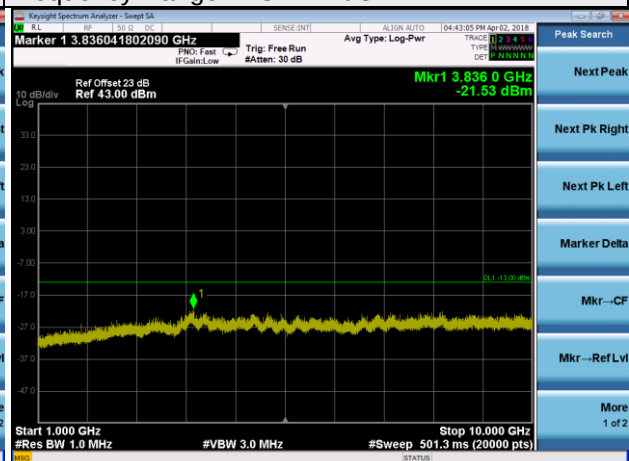


LTE Band 26 Channel Band width: 3MHz

Channel 26805

Frequency Range : 9kHz~1GHz

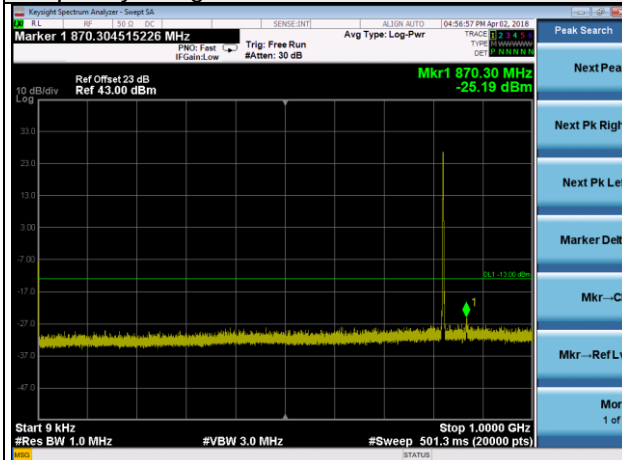


Frequency Range : 1GHz~10GHz

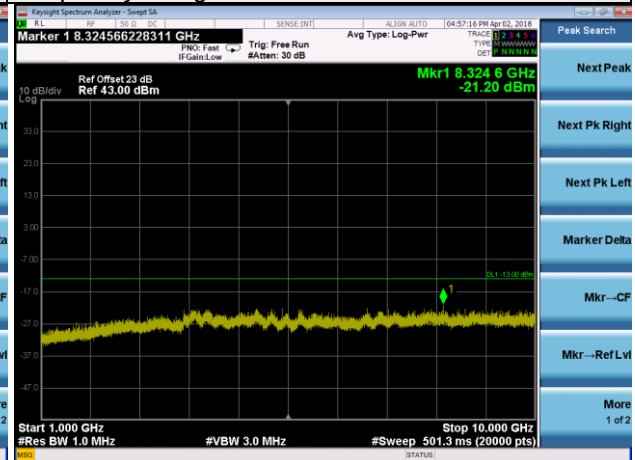


Channel 26915

Frequency Range : 9kHz~1GHz

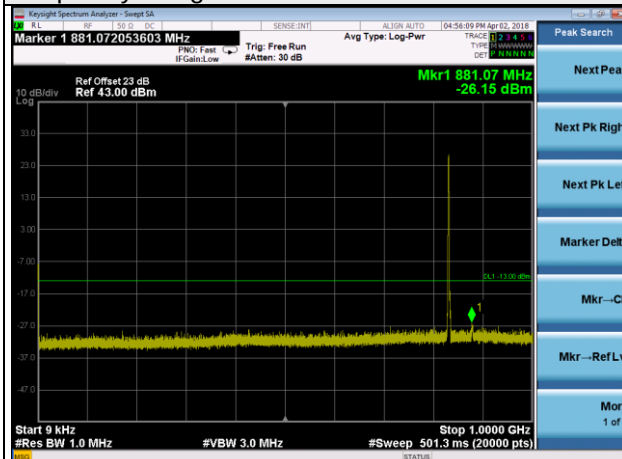


Frequency Range : 1GHz~10GHz

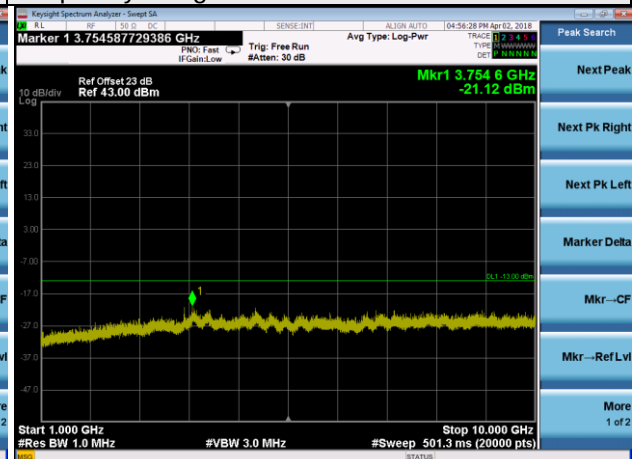


Channel 27025

Frequency Range : 9kHz~1GHz

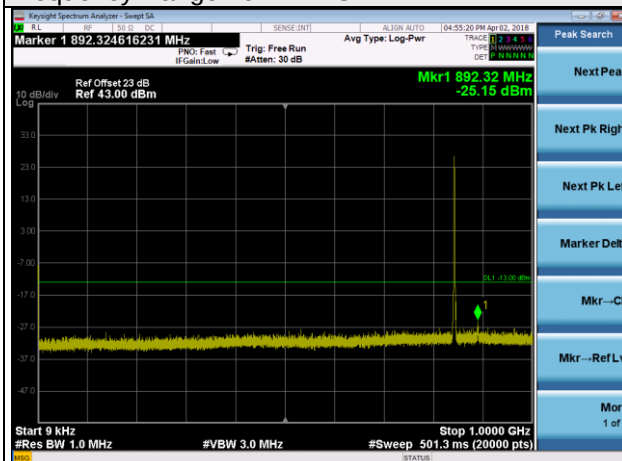

Frequency Range : 1GHz~10GHz


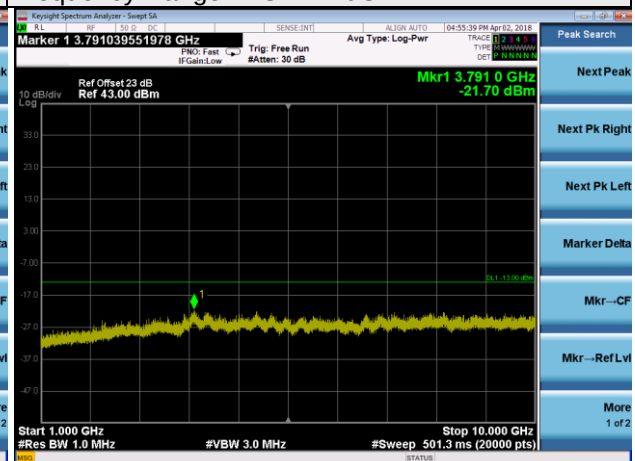


LTE Band 26 Channel Band width: 5MHz

Channel 26815

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~10GHz

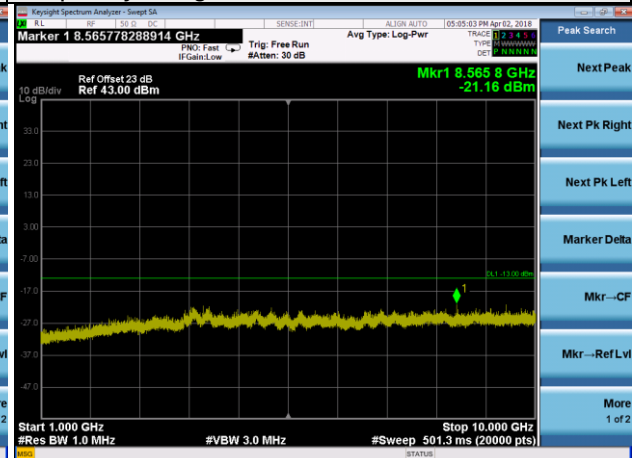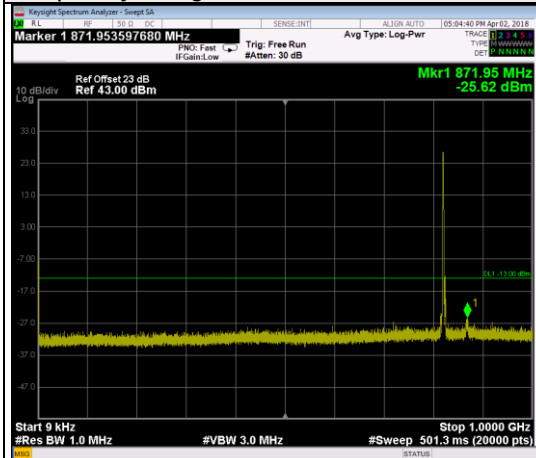

Channel 26915

Frequency Range : 9kHz~1GHz



Frequency Range : 1GHz~10GHz

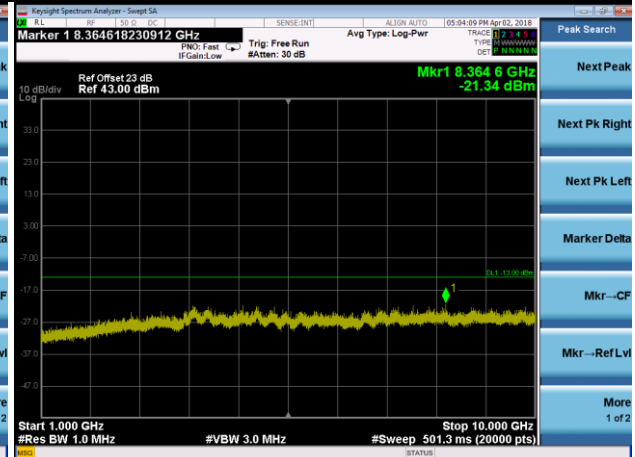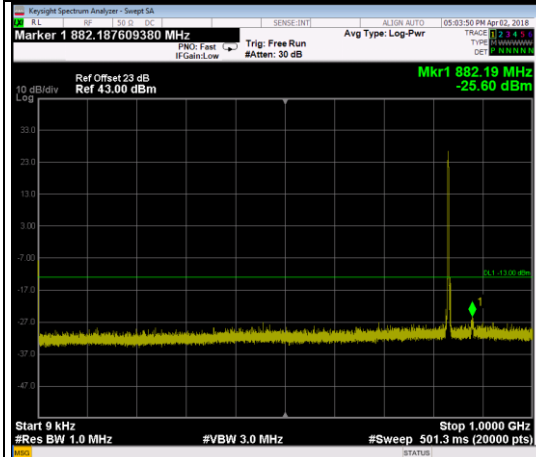

Channel 27015

Frequency Range : 9kHz~1GHz


Frequency Range : 1GHz~10GHz

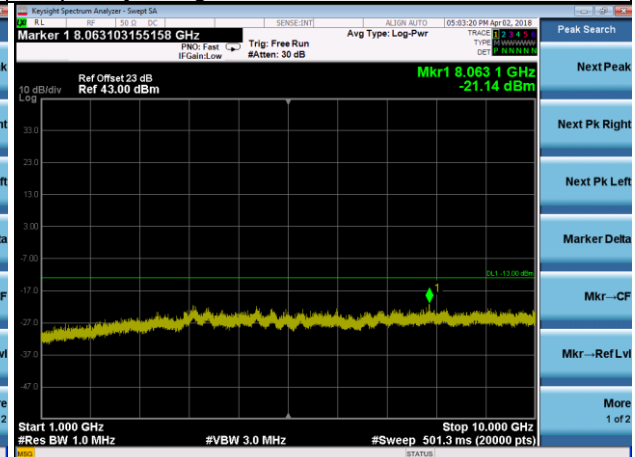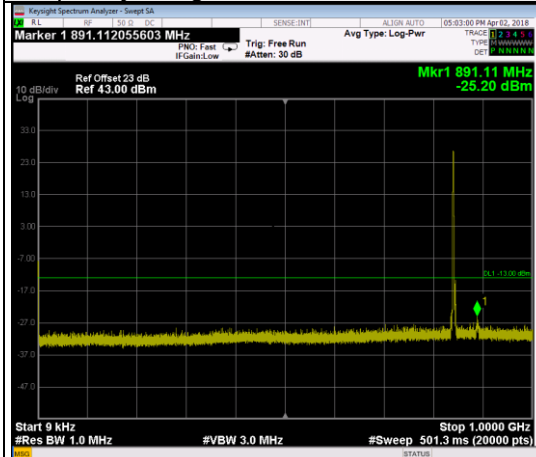


LTE Band 26 Channel Band width: 10MHz

Channel 26840

Frequency Range : 9kHz~1GHz

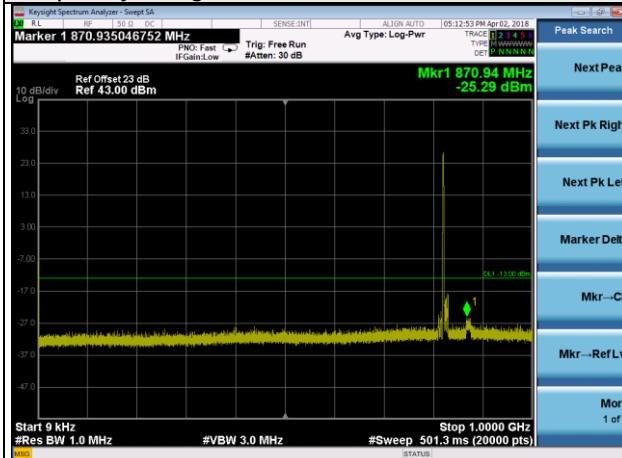


Frequency Range : 1GHz~10GHz

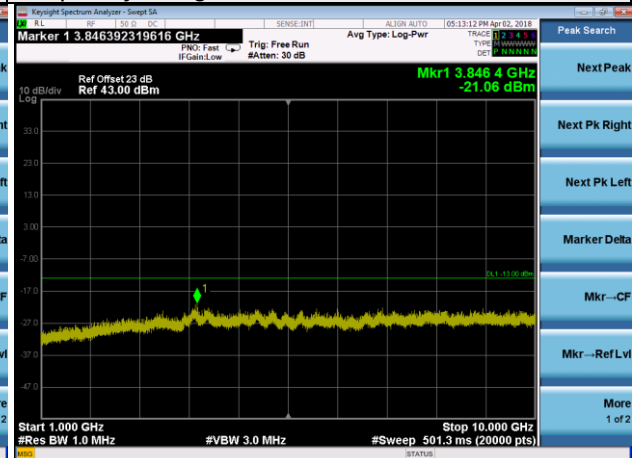


Channel 26915

Frequency Range : 9kHz~1GHz

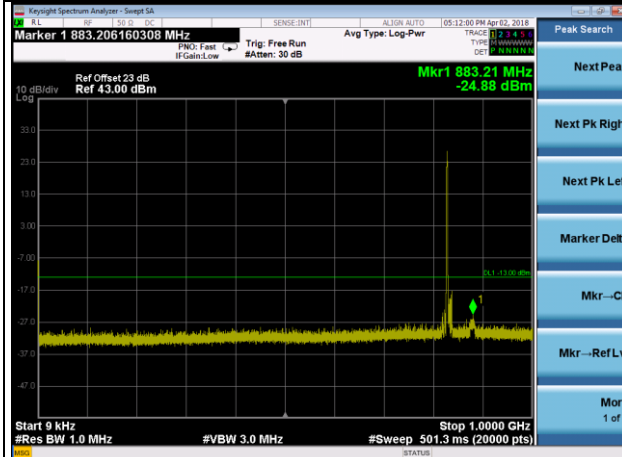


Frequency Range : 1GHz~10GHz

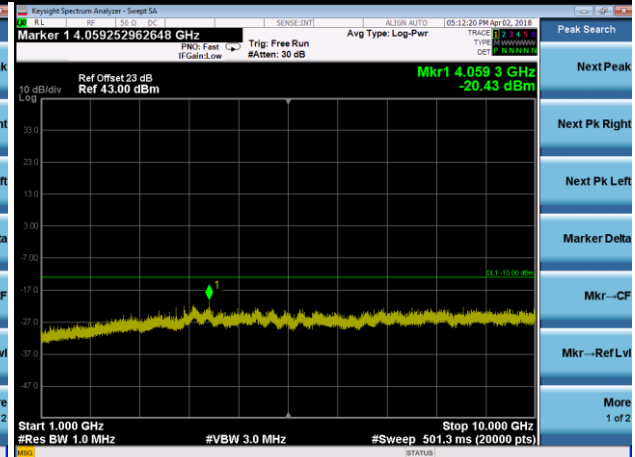


Channel 26990

Frequency Range : 9kHz~1GHz

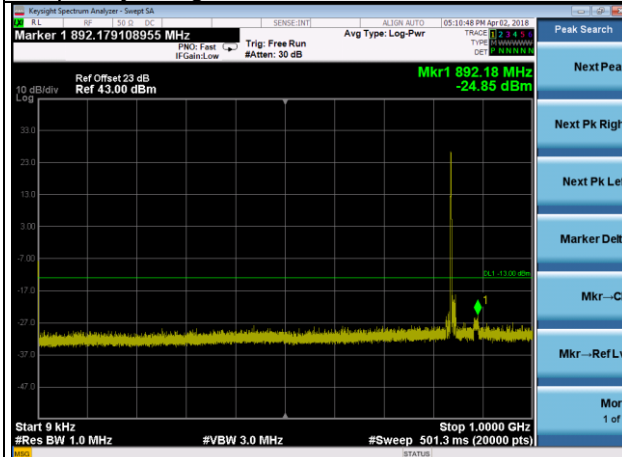


Frequency Range : 1GHz~10GHz

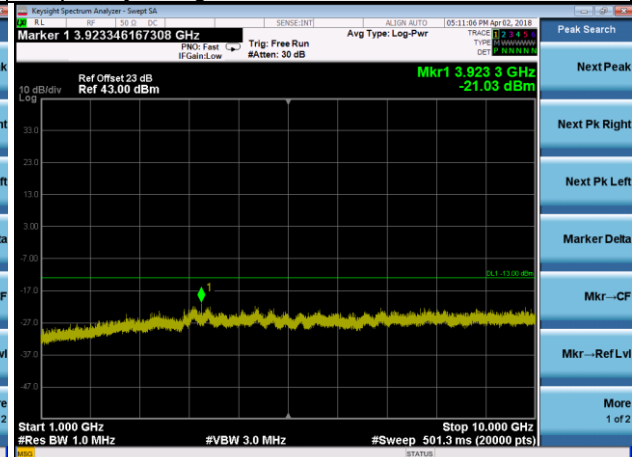


LTE Band 26 Channel Band width: 15MHz

Channel 26865

Frequency Range : 9kHz~1GHz

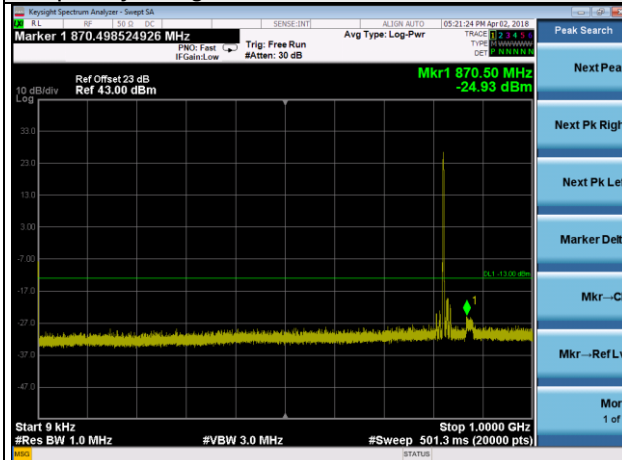


Frequency Range : 1GHz~10GHz

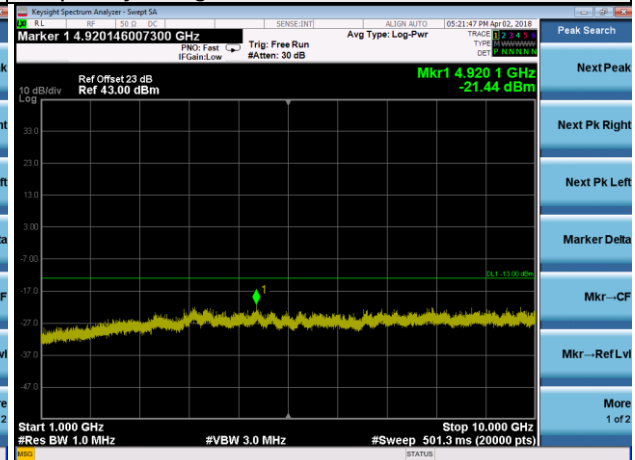


Channel 26915

Frequency Range : 9kHz~1GHz

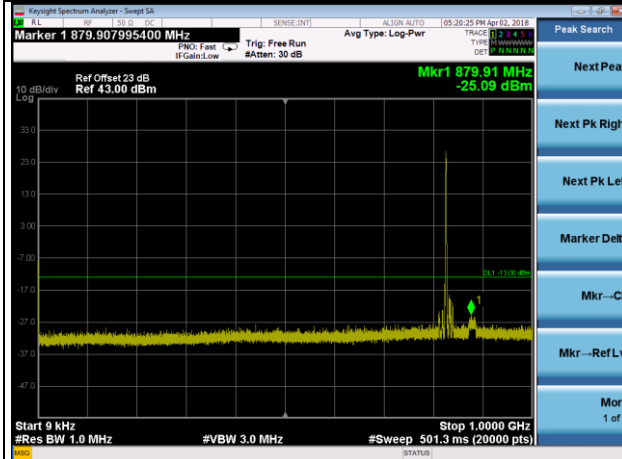


Frequency Range : 1GHz~10GHz

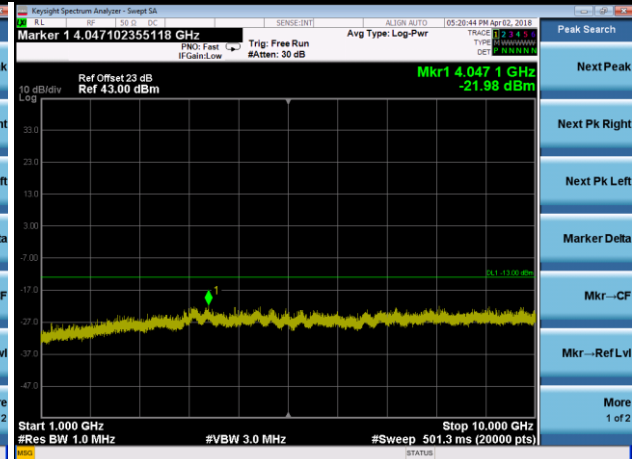


Channel 26965

Frequency Range : 9kHz~1GHz

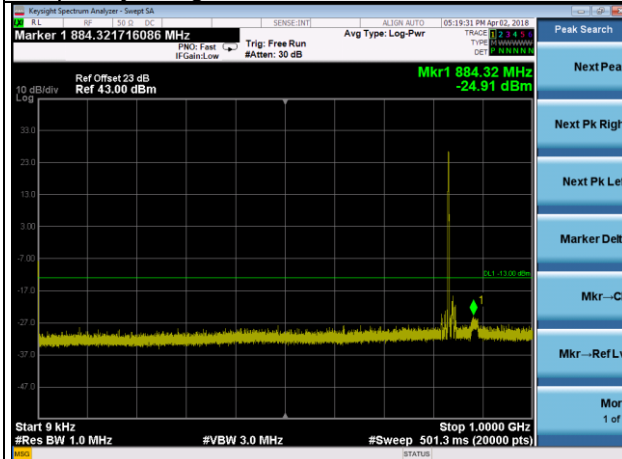

Frequency Range : 1GHz~10GHz

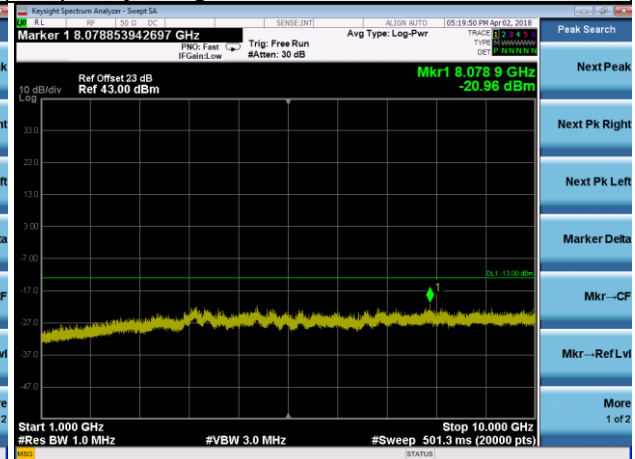

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.8.2 Test Procedure


- a. The power was measured with Spectrum Analyzer.
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step b. Record the power level of S.G
- d. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$.
- e. ERP power can be calculated form EIRP power by subtracting the gain of dipole, $\text{ERP power} = \text{EIRP power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


4.8.3 Deviation from Test Standard

No deviation.

4.8.4 Test Setup For Below 1GHz

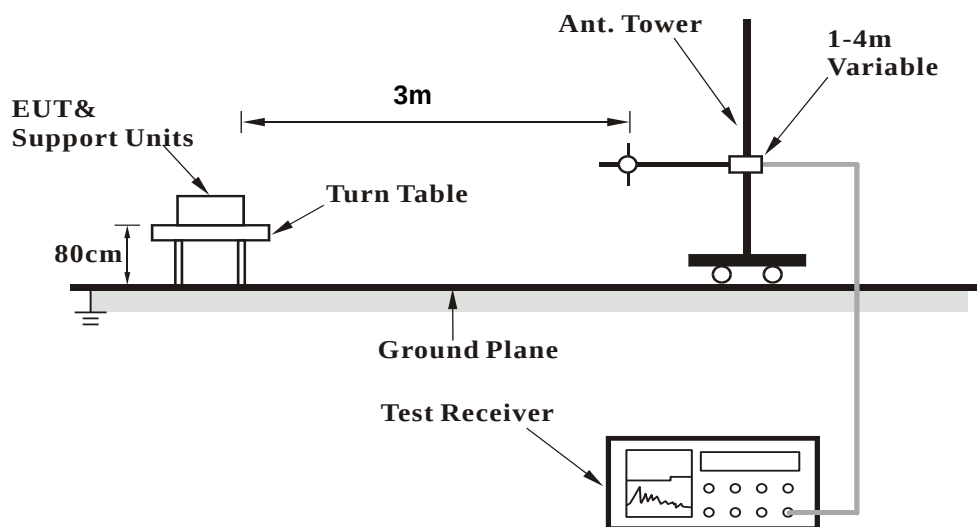

For Above 1GHz:

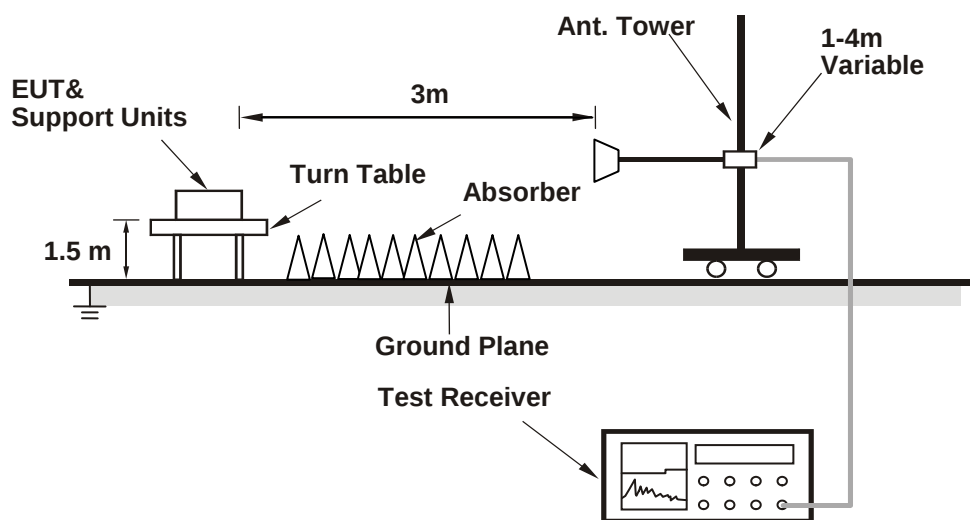

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

BELOW 1GHz

WCDMA:

Mode	TX channel 4132	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	92.42	34.61	-57.30	-1.04	-58.35	-13	-45.35
2	237.44	35.04	-60.32	3.84	-56.48	-13	-43.48
3	289.73	33.16	-62.31	3.78	-58.52	-13	-45.52
4	344.61	33.18	-64.51	3.61	-60.90	-13	-47.90
5	469.18	35.34	-61.84	2.84	-59.00	-13	-46.00
6	737.63	29.80	-66.57	1.02	-65.54	-13	-52.54
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	70.16	30.35	-57.28	-4.91	-62.19	-13	-49.19
2	94.49	33.85	-57.95	-1.00	-58.96	-13	-45.96
3	130.09	28.42	-62.93	-1.23	-64.17	-13	-51.17
4	239.4	30.95	-64.41	3.82	-60.59	-13	-47.59
5	507.88	33.03	-62.36	2.81	-59.55	-13	-46.55
6	609.84	32.72	-61.97	1.78	-60.19	-13	-47.19

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 4182	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	93.02	35.35	-56.56	-1.04	-57.61	-13	-44.61
2	238.66	35.08	-60.28	3.84	-56.44	-13	-43.44
3	288.02	34.35	-61.12	3.78	-57.33	-13	-44.33
4	346.18	34.79	-62.90	3.61	-59.29	-13	-46.29
5	469.51	36.03	-61.15	2.84	-58.31	-13	-45.31
6	738.04	30.87	-65.50	1.02	-64.47	-13	-51.47

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	67.75	31.73	-55.90	-4.91	-60.81	-13	-47.81
2	94.02	34.09	-57.71	-1.00	-58.72	-13	-45.72
3	129.71	28.43	-62.92	-1.23	-64.16	-13	-51.16
4	238.34	32.46	-62.90	3.82	-59.08	-13	-46.08
5	509.04	34.70	-60.69	2.81	-57.88	-13	-44.88
6	609.61	34.68	-60.01	1.78	-58.23	-13	-45.23

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 4233	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	91.24	34.52	-57.39	-1.04	-58.44	-13	-45.44
2	237.32	34.08	-61.28	3.84	-57.44	-13	-44.44
3	287.77	32.99	-62.48	3.78	-58.69	-13	-45.69
4	344.9	33.41	-64.28	3.61	-60.67	-13	-47.67
5	469.72	36.62	-60.56	2.84	-57.72	-13	-44.72
6	737.5	29.40	-66.97	1.02	-65.94	-13	-52.94
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	69.64	31.62	-56.01	-4.91	-60.92	-13	-47.92
2	94.01	33.00	-58.80	-1.00	-59.81	-13	-46.81
3	128.82	27.59	-63.76	-1.23	-65.00	-13	-52.00
4	237.36	31.52	-63.84	3.82	-60.02	-13	-47.02
5	510.9	32.64	-62.75	2.81	-59.94	-13	-46.94
6	609.21	33.30	-61.39	1.78	-59.61	-13	-46.61

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 1.4MHz

Mode	TX channel 20407	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.47	35.76	-56.15	-1.04	-57.20	-13	-44.20
2	137.54	35.48	-59.88	3.84	-56.04	-13	-43.04
3	289.28	33.77	-61.70	3.78	-57.91	-13	-44.91
4	343.93	33.68	-64.01	3.61	-60.40	-13	-47.40
5	471.84	34.94	-62.24	2.84	-59.40	-13	-46.40
6	736.47	30.18	-66.19	1.02	-65.16	-13	-52.16
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.11	27.48	-60.15	-4.91	-65.06	-13	-52.06
2	92.62	30.83	-60.97	-1.00	-61.98	-13	-48.98
3	129.72	25.82	-65.53	-1.23	-66.77	-13	-53.77
4	238.56	29.01	-66.35	3.82	-62.53	-13	-49.53
5	509.43	30.30	-65.09	2.81	-62.28	-13	-49.28
6	607.61	30.75	-63.94	1.78	-62.16	-13	-49.16

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.96	35.91	-56.00	-1.04	-57.05	-13	-44.05
2	137.75	36.07	-59.29	3.84	-55.45	-13	-42.45
3	289.23	34.45	-61.02	3.78	-57.23	-13	-44.23
4	344.89	34.07	-63.62	3.61	-60.01	-13	-47.01
5	471.22	36.16	-61.02	2.84	-58.18	-13	-45.18
6	736.44	31.07	-65.30	1.02	-64.27	-13	-51.27
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.31	27.05	-60.58	-4.91	-65.49	-13	-52.49
2	92.75	30.63	-61.17	-1.00	-62.18	-13	-49.18
3	130.37	25.57	-65.78	-1.23	-67.02	-13	-54.02
4	238.85	27.77	-67.59	3.82	-63.77	-13	-50.77
5	508.9	29.07	-66.32	2.81	-63.51	-13	-50.51
6	607.21	29.95	-64.74	1.78	-62.96	-13	-49.96

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20643	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.77	35.71	-56.20	-1.04	-57.25	-13	-44.25
2	137.73	34.08	-61.28	3.84	-57.44	-13	-44.44
3	289.68	32.76	-62.71	3.78	-58.92	-13	-45.92
4	344.38	33.30	-64.39	3.61	-60.78	-13	-47.78
5	472.58	34.59	-62.59	2.84	-59.75	-13	-46.75
6	735.63	29.28	-67.09	1.02	-66.06	-13	-53.06
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.48	26.47	-61.16	-4.91	-66.07	-13	-53.07
2	91.78	30.38	-61.42	-1.00	-62.43	-13	-49.43
3	129.95	25.00	-66.35	-1.23	-67.59	-13	-54.59
4	239.08	28.71	-66.65	3.82	-62.83	-13	-49.83
5	509.12	30.18	-65.21	2.81	-62.40	-13	-49.40
6	607.58	29.34	-65.35	1.78	-63.57	-13	-50.57

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 3MHz

Mode	TX channel 20415	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.93	34.76	-57.15	-1.04	-58.20	-13	-45.20
2	137.21	35.57	-59.79	3.84	-55.95	-13	-42.95
3	288.03	34.02	-61.45	3.78	-57.66	-13	-44.66
4	346.9	31.83	-65.86	3.61	-62.25	-13	-49.25
5	469.92	34.85	-62.33	2.84	-59.49	-13	-46.49
6	736.91	30.20	-66.17	1.02	-65.14	-13	-52.14
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.47	26.77	-60.86	-4.91	-65.77	-13	-52.77
2	92.21	30.07	-61.73	-1.00	-62.74	-13	-49.74
3	129.45	24.57	-66.78	-1.23	-68.02	-13	-55.02
4	239.11	28.77	-66.59	3.82	-62.77	-13	-49.77
5	509.4	28.81	-66.58	2.81	-63.77	-13	-50.77
6	608.48	29.47	-65.22	1.78	-63.44	-13	-50.44

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.68	34.88	-57.03	-1.04	-58.08	-13	-45.08
2	137.46	35.80	-59.56	3.84	-55.72	-13	-42.72
3	289	34.13	-61.34	3.78	-57.55	-13	-44.55
4	346.5	32.77	-64.92	3.61	-61.31	-13	-48.31
5	470.38	35.07	-62.11	2.84	-59.27	-13	-46.27
6	737.4	30.24	-66.13	1.02	-65.10	-13	-52.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.17	26.45	-61.18	-4.91	-66.09	-13	-53.09
2	92.18	29.92	-61.88	-1.00	-62.89	-13	-49.89
3	130.25	25.49	-65.86	-1.23	-67.10	-13	-54.10
4	237.67	27.98	-67.38	3.82	-63.56	-13	-50.56
5	508.56	28.95	-66.44	2.81	-63.63	-13	-50.63
6	607.25	30.03	-64.66	1.78	-62.88	-13	-49.88

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20635	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.55	34.75	-57.16	-1.04	-58.21	-13	-45.21
2	137.02	35.05	-60.31	3.84	-56.47	-13	-43.47
3	288.94	32.96	-62.51	3.78	-58.72	-13	-45.72
4	347.07	31.06	-66.63	3.61	-63.02	-13	-50.02
5	469.68	33.38	-63.80	2.84	-60.96	-13	-47.96
6	735.97	29.82	-66.55	1.02	-65.52	-13	-52.52

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.6	26.34	-61.29	-4.91	-66.20	-13	-53.20
2	92.7	29.95	-61.85	-1.00	-62.86	-13	-49.86
3	129.82	25.47	-65.88	-1.23	-67.12	-13	-54.12
4	237.85	28.42	-66.94	3.82	-63.12	-13	-50.12
5	508.67	29.87	-65.52	2.81	-62.71	-13	-49.71
6	607.42	30.04	-64.65	1.78	-62.87	-13	-49.87

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 5MHz

Mode	TX channel 20425	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.62	34.43	-57.48	-1.04	-58.53	-13	-45.53
2	137.12	34.22	-61.14	3.84	-57.30	-13	-44.30
3	288.63	33.23	-62.24	3.78	-58.45	-13	-45.45
4	346.61	33.21	-64.48	3.61	-60.87	-13	-47.87
5	469.22	35.38	-61.80	2.84	-58.96	-13	-45.96
6	735.86	30.51	-65.86	1.02	-64.83	-13	-51.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.62	27.10	-60.53	-4.91	-65.44	-13	-52.44
2	93.27	29.91	-61.89	-1.00	-62.90	-13	-49.90
3	129.22	24.95	-66.40	-1.23	-67.64	-13	-54.64
4	238.09	28.48	-66.88	3.82	-63.06	-13	-50.06
5	508.69	29.91	-65.48	2.81	-62.67	-13	-49.67
6	607.3	29.65	-65.04	1.78	-63.26	-13	-50.26

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.34	35.58	-56.33	-1.04	-57.38	-13	-44.38
2	136.79	35.36	-60.00	3.84	-56.16	-13	-43.16
3	289.14	33.30	-62.17	3.78	-58.38	-13	-45.38
4	345.82	33.47	-64.22	3.61	-60.61	-13	-47.61
5	469.97	36.08	-61.10	2.84	-58.26	-13	-45.26
6	736.32	30.87	-65.50	1.02	-64.47	-13	-51.47
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.91	26.20	-61.43	-4.91	-66.34	-13	-53.34
2	91.65	29.87	-61.93	-1.00	-62.94	-13	-49.94
3	128.76	24.84	-66.51	-1.23	-67.75	-13	-54.75
4	238.78	27.88	-67.48	3.82	-63.66	-13	-50.66
5	508.52	30.03	-65.36	2.81	-62.55	-13	-49.55
6	607.29	29.28	-65.41	1.78	-63.63	-13	-50.63

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20625	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.73	33.14	-58.77	-1.04	-59.82	-13	-46.82
2	137.37	33.56	-61.80	3.84	-57.96	-13	-44.96
3	288.94	32.43	-63.04	3.78	-59.25	-13	-46.25
4	347.59	32.31	-65.38	3.61	-61.77	-13	-48.77
5	470.03	34.47	-62.71	2.84	-59.87	-13	-46.87
6	736.12	30.47	-65.90	1.02	-64.87	-13	-51.87
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	67.11	26.88	-60.75	-4.91	-65.66	-13	-52.66
2	91.9	30.57	-61.23	-1.00	-62.24	-13	-49.24
3	129.33	25.68	-65.67	-1.23	-66.91	-13	-53.91
4	238.87	28.53	-66.83	3.82	-63.01	-13	-50.01
5	510.05	30.08	-65.31	2.81	-62.50	-13	-49.50
6	607.5	29.38	-65.31	1.78	-63.53	-13	-50.53

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 10MHz

Mode	TX channel 20450	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.39	33.94	-57.97	-1.04	-59.02	-13	-46.02
2	136.21	35.35	-60.01	3.84	-56.17	-13	-43.17
3	288.84	32.25	-63.22	3.78	-59.43	-13	-46.43
4	345.41	32.22	-65.47	3.61	-61.86	-13	-48.86
5	470.15	33.79	-63.39	2.84	-60.55	-13	-47.55
6	736.03	29.11	-67.26	1.02	-66.23	-13	-53.23
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	67.08	27.07	-60.56	-4.91	-65.47	-13	-52.47
2	92.37	30.02	-61.78	-1.00	-62.79	-13	-49.79
3	129.01	25.74	-65.61	-1.23	-66.85	-13	-53.85
4	237.81	28.14	-67.22	3.82	-63.40	-13	-50.40
5	510.05	29.81	-65.58	2.81	-62.77	-13	-49.77
6	608.56	29.90	-64.79	1.78	-63.01	-13	-50.01

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.78	34.42	-57.49	-1.04	-58.54	-13	-45.54
2	137	35.48	-59.88	3.84	-56.04	-13	-43.04
3	288.86	33.33	-62.14	3.78	-58.35	-13	-45.35
4	345	32.70	-64.99	3.61	-61.38	-13	-48.38
5	469.78	34.67	-62.51	2.84	-59.67	-13	-46.67
6	736.12	30.07	-66.30	1.02	-65.27	-13	-52.27

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.26	27.40	-60.23	-4.91	-65.14	-13	-52.14
2	93.23	29.71	-62.09	-1.00	-63.10	-13	-50.10
3	130.12	24.74	-66.61	-1.23	-67.85	-13	-54.85
4	239.21	28.54	-66.82	3.82	-63.00	-13	-50.00
5	510.3	30.12	-65.27	2.81	-62.46	-13	-49.46
6	607	30.02	-64.67	1.78	-62.89	-13	-49.89

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20600	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.94	33.42	-58.49	-1.04	-59.54	-13	-46.54
2	136.01	34.35	-61.01	3.84	-57.17	-13	-44.17
3	288.58	31.37	-64.10	3.78	-60.31	-13	-47.31
4	344.78	30.77	-66.92	3.61	-63.31	-13	-50.31
5	470.67	33.05	-64.13	2.84	-61.29	-13	-48.29
6	735.51	27.74	-68.63	1.02	-67.60	-13	-54.60
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.84	26.93	-60.70	-4.91	-65.61	-13	-52.61
2	92.9	30.19	-61.61	-1.00	-62.62	-13	-49.62
3	129.6	24.76	-66.59	-1.23	-67.83	-13	-54.83
4	238.6	27.78	-67.58	3.82	-63.76	-13	-50.76
5	508.93	29.57	-65.82	2.81	-63.01	-13	-50.01
6	608.42	30.54	-64.15	1.78	-62.37	-13	-49.37

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE CA_5C (5MHz+10MHz)

Mode	TX channel 20528+20600	Frequency Range	Below 1000 MHz
------	------------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	86.23	29.45	-62.46	-1.04	-63.51	-13	-50.51
2	138.84	27.04	-68.32	3.84	-64.48	-13	-51.48
3	289.11	32.58	-62.89	3.78	-59.10	-13	-46.10
4	344.79	35.02	-62.67	3.61	-59.06	-13	-46.06
5	472.83	34.13	-63.05	2.84	-60.21	-13	-47.21
6	736.26	38.06	-58.31	1.02	-57.28	-13	-44.28
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	64.62	32.04	-55.59	-4.91	-60.50	-13	-47.50
2	95.55	30.21	-61.59	-1.00	-62.60	-13	-49.60
3	132.82	34.91	-56.44	-1.23	-57.68	-13	-44.68
4	238.68	37.07	-58.29	3.82	-54.47	-13	-41.47
5	513.54	36.02	-59.37	2.81	-56.56	-13	-43.56
6	604.54	39.13	-55.56	1.78	-53.78	-13	-40.78

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 1.4MHz

Mode	TX channel 26797	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.72	32.88	-59.03	-1.04	-60.08	-13	-47.08
2	136.19	30.88	-64.48	3.84	-60.64	-13	-47.64
3	289.97	30.30	-65.17	3.78	-61.38	-13	-48.38
4	347.46	30.77	-66.92	3.61	-63.31	-13	-50.31
5	469.86	31.46	-65.72	2.84	-62.88	-13	-49.88
6	736.18	25.83	-70.54	1.02	-69.51	-13	-56.51
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.61	26.18	-61.45	-4.91	-66.36	-13	-53.36
2	91.87	29.76	-62.04	-1.00	-63.05	-13	-50.05
3	130.28	24.62	-66.73	-1.23	-67.97	-13	-54.97
4	239.06	28.09	-67.27	3.82	-63.45	-13	-50.45
5	509.76	30.12	-65.27	2.81	-62.46	-13	-49.46
6	608.44	29.65	-65.04	1.78	-63.26	-13	-50.26

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.36	34.28	-57.63	-1.04	-58.68	-13	-45.68
2	135.73	31.84	-63.52	3.84	-59.68	-13	-46.68
3	290.02	29.57	-65.90	3.78	-62.11	-13	-49.11
4	346.43	30.28	-67.41	3.61	-63.80	-13	-50.80
5	469.74	31.23	-65.95	2.84	-63.11	-13	-50.11
6	736.38	25.24	-71.13	1.02	-70.10	-13	-57.10

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.61	26.87	-60.76	-4.91	-65.67	-13	-52.67
2	91.67	30.60	-61.20	-1.00	-62.21	-13	-49.21
3	130.49	24.47	-66.88	-1.23	-68.12	-13	-55.12
4	237.8	27.91	-67.45	3.82	-63.63	-13	-50.63
5	510.32	29.99	-65.40	2.81	-62.59	-13	-49.59
6	607.51	29.93	-64.76	1.78	-62.98	-13	-49.98

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27033	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.8	33.01	-58.90	-1.04	-59.95	-13	-46.95
2	135.68	30.50	-64.86	3.84	-61.02	-13	-48.02
3	289.68	29.67	-65.80	3.78	-62.01	-13	-49.01
4	347.84	31.20	-66.49	3.61	-62.88	-13	-49.88
5	470.69	31.75	-65.43	2.84	-62.59	-13	-49.59
6	736.65	25.48	-70.89	1.02	-69.86	-13	-56.86
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.78	26.74	-60.89	-4.91	-65.80	-13	-52.80
2	92.29	29.36	-62.44	-1.00	-63.45	-13	-50.45
3	128.85	24.42	-66.93	-1.23	-68.17	-13	-55.17
4	238.55	27.83	-67.53	3.82	-63.71	-13	-50.71
5	509.47	29.00	-66.39	2.81	-63.58	-13	-50.58
6	607.85	29.53	-65.16	1.78	-63.38	-13	-50.38

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 3MHz

Mode	TX channel 26805	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.33	32.84	-59.07	-1.04	-60.12	-13	-47.12
2	136.69	31.05	-64.31	3.84	-60.47	-13	-47.47
3	291	29.69	-65.78	3.78	-61.99	-13	-48.99
4	346.77	30.45	-67.24	3.61	-63.63	-13	-50.63
5	470.31	31.65	-65.53	2.84	-62.69	-13	-49.69
6	736.73	25.83	-70.54	1.02	-69.51	-13	-56.51
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.49	26.73	-60.90	-4.91	-65.81	-13	-52.81
2	93.61	29.42	-62.38	-1.00	-63.39	-13	-50.39
3	130.57	24.33	-67.02	-1.23	-68.26	-13	-55.26
4	238.79	28.45	-66.91	3.82	-63.09	-13	-50.09
5	510.17	30.22	-65.17	2.81	-62.36	-13	-49.36
6	607.91	29.36	-65.33	1.78	-63.55	-13	-50.55

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.77	33.12	-58.79	-1.04	-59.84	-13	-46.84
2	136.57	30.68	-64.68	3.84	-60.84	-13	-47.84
3	290.35	29.49	-65.98	3.78	-62.19	-13	-49.19
4	347.29	31.42	-66.27	3.61	-62.66	-13	-49.66
5	470.72	31.44	-65.74	2.84	-62.90	-13	-49.90
6	736.86	24.75	-71.62	1.02	-70.59	-13	-57.59

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.11	26.54	-61.09	-4.91	-66.00	-13	-53.00
2	93.04	30.44	-61.36	-1.00	-62.37	-13	-49.37
3	128.77	24.46	-66.89	-1.23	-68.13	-13	-55.13
4	238.21	27.62	-67.74	3.82	-63.92	-13	-50.92
5	508.82	30.22	-65.17	2.81	-62.36	-13	-49.36
6	608.18	30.12	-64.57	1.78	-62.79	-13	-49.79

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27025	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.48	33.53	-58.38	-1.04	-59.43	-13	-46.43
2	135.36	31.62	-63.74	3.84	-59.90	-13	-46.90
3	291.08	30.64	-64.83	3.78	-61.04	-13	-48.04
4	346.44	31.66	-66.03	3.61	-62.42	-13	-49.42
5	470.1	32.05	-65.13	2.84	-62.29	-13	-49.29
6	736.84	25.34	-71.03	1.02	-70.00	-13	-57.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.81	27.08	-60.55	-4.91	-65.46	-13	-52.46
2	93.55	30.09	-61.71	-1.00	-62.72	-13	-49.72
3	128.93	24.51	-66.84	-1.23	-68.08	-13	-55.08
4	238.34	28.35	-67.01	3.82	-63.19	-13	-50.19
5	509.47	29.02	-66.37	2.81	-63.56	-13	-50.56
6	608.28	29.37	-65.32	1.78	-63.54	-13	-50.54

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 5MHz

Mode	TX channel 26815	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.47	33.80	-58.11	-1.04	-59.16	-13	-46.16
2	136.71	31.26	-64.10	3.84	-60.26	-13	-47.26
3	291.17	29.18	-66.29	3.78	-62.50	-13	-49.50
4	348.36	31.07	-66.62	3.61	-63.01	-13	-50.01
5	470.21	32.55	-64.63	2.84	-61.79	-13	-48.79
6	737.09	25.37	-71.00	1.02	-69.97	-13	-56.97
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.83	26.49	-61.14	-4.91	-66.05	-13	-53.05
2	93.09	30.41	-61.39	-1.00	-62.40	-13	-49.40
3	129.86	25.25	-66.10	-1.23	-67.34	-13	-54.34
4	237.66	28.39	-66.97	3.82	-63.15	-13	-50.15
5	509.37	29.74	-65.65	2.81	-62.84	-13	-49.84
6	607.7	30.43	-64.26	1.78	-62.48	-13	-49.48

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.88	33.00	-58.91	-1.04	-59.96	-13	-46.96
2	136.55	31.74	-63.62	3.84	-59.78	-13	-46.78
3	290.21	29.45	-66.02	3.78	-62.23	-13	-49.23
4	346.76	30.77	-66.92	3.61	-63.31	-13	-50.31
5	471.56	31.86	-65.32	2.84	-62.48	-13	-49.48
6	735.68	25.78	-70.59	1.02	-69.56	-13	-56.56
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.82	26.59	-61.04	-4.91	-65.95	-13	-52.95
2	92.02	29.95	-61.85	-1.00	-62.86	-13	-49.86
3	130.08	24.48	-66.87	-1.23	-68.11	-13	-55.11
4	237.6	27.74	-67.62	3.82	-63.80	-13	-50.80
5	510.12	29.34	-66.05	2.81	-63.24	-13	-50.24
6	608.56	29.74	-64.95	1.78	-63.17	-13	-50.17

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27015	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.85	33.83	-58.08	-1.04	-59.13	-13	-46.13
2	136.61	31.38	-63.98	3.84	-60.14	-13	-47.14
3	289.49	29.63	-65.84	3.78	-62.05	-13	-49.05
4	347.91	31.20	-66.49	3.61	-62.88	-13	-49.88
5	470.44	31.31	-65.87	2.84	-63.03	-13	-50.03
6	736.46	24.48	-71.89	1.02	-70.86	-13	-57.86

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.12	26.56	-61.07	-4.91	-65.98	-13	-52.98
2	92.26	30.48	-61.32	-1.00	-62.33	-13	-49.33
3	129.87	25.49	-65.86	-1.23	-67.10	-13	-54.10
4	237.94	27.71	-67.65	3.82	-63.83	-13	-50.83
5	509.48	29.13	-66.26	2.81	-63.45	-13	-50.45
6	607.23	29.30	-65.39	1.78	-63.61	-13	-50.61

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 10MHz

Mode	TX channel 26840	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.73	34.15	-57.76	-1.04	-58.81	-13	-45.81
2	135.18	31.16	-64.20	3.84	-60.36	-13	-47.36
3	291.1	29.20	-66.27	3.78	-62.48	-13	-49.48
4	346.42	31.52	-66.17	3.61	-62.56	-13	-49.56
5	471	31.93	-65.25	2.84	-62.41	-13	-49.41
6	737.44	25.41	-70.96	1.02	-69.93	-13	-56.93
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.44	26.30	-61.33	-4.91	-66.24	-13	-53.24
2	92.89	30.56	-61.24	-1.00	-62.25	-13	-49.25
3	129.61	24.88	-66.47	-1.23	-67.71	-13	-54.71
4	239.53	28.92	-66.44	3.82	-62.62	-13	-49.62
5	510.2	29.92	-65.47	2.81	-62.66	-13	-49.66
6	608.61	30.10	-64.59	1.78	-62.81	-13	-49.81

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.49	33.27	-58.64	-1.04	-59.69	-13	-46.69
2	135.74	31.13	-64.23	3.84	-60.39	-13	-47.39
3	290.28	30.08	-65.39	3.78	-61.60	-13	-48.60
4	347.24	30.34	-67.35	3.61	-63.74	-13	-50.74
5	470.7	31.97	-65.21	2.84	-62.37	-13	-49.37
6	736.71	25.81	-70.56	1.02	-69.53	-13	-56.53
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.17	27.07	-60.56	-4.91	-65.47	-13	-52.47
2	93.21	29.43	-62.37	-1.00	-63.38	-13	-50.38
3	129.97	25.03	-66.32	-1.23	-67.56	-13	-54.56
4	239.37	28.81	-66.55	3.82	-62.73	-13	-49.73
5	509.64	29.10	-66.29	2.81	-63.48	-13	-50.48
6	607.1	30.43	-64.26	1.78	-62.48	-13	-49.48

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26990	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.82	33.44	-58.47	-1.04	-59.52	-13	-46.52
2	135.26	31.74	-63.62	3.84	-59.78	-13	-46.78
3	290.83	29.73	-65.74	3.78	-61.95	-13	-48.95
4	348.17	30.68	-67.01	3.61	-63.40	-13	-50.40
5	470.86	32.47	-64.71	2.84	-61.87	-13	-48.87
6	737.61	24.63	-71.74	1.02	-70.71	-13	-57.71
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.46	26.92	-60.71	-4.91	-65.62	-13	-52.62
2	92.9	29.48	-62.32	-1.00	-63.33	-13	-50.33
3	129.01	25.75	-65.60	-1.23	-66.84	-13	-53.84
4	239.09	27.98	-67.38	3.82	-63.56	-13	-50.56
5	509.41	29.45	-65.94	2.81	-63.13	-13	-50.13
6	607.57	30.35	-64.34	1.78	-62.56	-13	-49.56

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 15MHz

Mode	TX channel 26865	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	83.81	34.00	-57.91	-1.04	-58.96	-13	-45.96
2	135.96	31.19	-64.17	3.84	-60.33	-13	-47.33
3	290.99	29.28	-66.19	3.78	-62.40	-13	-49.40
4	347.15	31.28	-66.41	3.61	-62.80	-13	-49.80
5	469.75	32.45	-64.73	2.84	-61.89	-13	-48.89
6	736.78	25.22	-71.15	1.02	-70.12	-13	-57.12
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.79	27.01	-60.62	-4.91	-65.53	-13	-52.53
2	92.91	29.76	-62.04	-1.00	-63.05	-13	-50.05
3	129.68	25.64	-65.71	-1.23	-66.95	-13	-53.95
4	238.36	28.70	-66.66	3.82	-62.84	-13	-49.84
5	509.49	30.09	-65.30	2.81	-62.49	-13	-49.49
6	607.18	29.79	-64.90	1.78	-63.12	-13	-50.12

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	85.15	33.87	-58.04	-1.04	-59.09	-13	-46.09
2	135.76	31.06	-64.30	3.84	-60.46	-13	-47.46
3	291.1	29.81	-65.66	3.78	-61.87	-13	-48.87
4	348.27	30.63	-67.06	3.61	-63.45	-13	-50.45
5	470.33	32.36	-64.82	2.84	-61.98	-13	-48.98
6	737.06	25.77	-70.60	1.02	-69.57	-13	-56.57
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	65.88	26.92	-60.71	-4.91	-65.62	-13	-52.62
2	91.86	29.62	-62.18	-1.00	-63.19	-13	-50.19
3	130.09	24.82	-66.53	-1.23	-67.77	-13	-54.77
4	239.11	28.73	-66.63	3.82	-62.81	-13	-49.81
5	508.54	28.88	-66.51	2.81	-63.70	-13	-50.70
6	607.73	30.44	-64.25	1.78	-62.47	-13	-49.47

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26965	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	84.78	34.08	-57.83	-1.04	-58.88	-13	-45.88
2	136.33	31.34	-64.02	3.84	-60.18	-13	-47.18
3	290.08	30.63	-64.84	3.78	-61.05	-13	-48.05
4	348.04	30.48	-67.21	3.61	-63.60	-13	-50.60
5	469.72	31.57	-65.61	2.84	-62.77	-13	-49.77
6	737.09	24.65	-71.72	1.02	-70.69	-13	-57.69

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	66.13	27.18	-60.45	-4.91	-65.36	-13	-52.36
2	93.49	30.81	-60.99	-1.00	-62.00	-13	-49.00
3	128.85	25.24	-66.11	-1.23	-67.35	-13	-54.35
4	238.98	28.09	-67.27	3.82	-63.45	-13	-50.45
5	510.15	29.25	-66.14	2.81	-63.33	-13	-50.33
6	606.77	30.48	-64.21	1.78	-62.43	-13	-49.43

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

ABOVE 1GHz

WCDMA:

Mode	TX channel 4132	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1652.8	37.70	-65.03	6.27	-58.76	-13	-45.76
2	2479.2	42.59	-55.68	6.63	-49.05	-13	-36.05
3	3305.6	46.54	-55.95	7.97	-47.97	-13	-34.97
4	4132	48.24	-56.66	7.47	-49.19	-13	-36.19
5	4958.4	48.26	-55.91	7.00	-48.91	-13	-35.91
6	5784.8	50.1	-54.04	7.13	-46.91	-13	-33.91
7	6611.2	52.04	-51.63	5.71	-45.91	-13	-32.91
8	7437.6	51.17	-51.45	4.60	-46.85	-13	-33.85
9	8264	53.07	-49.42	4.17	-45.25	-13	-32.25
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1652.8	34.3	-68.43	6.27	-62.16	-13	-49.16
2	2479.2	45.3	-52.97	6.63	-46.34	-13	-33.34
3	3305.6	46.24	-56.25	7.97	-48.27	-13	-35.27
4	4132	46.9	-58.00	7.47	-50.53	-13	-37.53
5	4958.4	49.24	-54.93	7.00	-47.93	-13	-34.93
6	5784.8	50.25	-53.89	7.13	-46.76	-13	-33.76
7	6611.2	54.28	-49.39	5.71	-43.67	-13	-30.67
8	7437.6	51.02	-51.60	4.60	-47.00	-13	-34.00
9	8264	53.25	-49.24	4.17	-45.07	-13	-32.07

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 4182	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1672.8	37.49	-65.14	6.31	-58.83	-13	-45.83
2	2509.2	42.02	-56.50	6.66	-49.84	-13	-36.84
3	3345.6	46.24	-56.39	7.95	-48.45	-13	-35.45
4	4182	47.25	-57.59	7.44	-50.15	-13	-37.15
5	5018.4	48.95	-55.31	7.01	-48.30	-13	-35.30
6	5854.8	50.29	-53.85	7.02	-46.83	-13	-33.83
7	6691.2	52.5	-50.83	5.56	-45.27	-13	-32.27
8	7527.6	51.33	-51.29	4.52	-46.77	-13	-33.77
9	8364	53.4	-49.15	4.19	-44.96	-13	-31.96

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1672.8	34.3	-68.33	6.31	-62.02	-13	-49.02
2	2509.2	44.42	-54.10	6.66	-47.44	-13	-34.44
3	3345.6	46.57	-56.06	7.95	-48.12	-13	-35.12
4	4182	47.03	-57.81	7.44	-50.37	-13	-37.37
5	5018.4	48.39	-55.87	7.01	-48.86	-13	-35.86
6	5854.8	50.17	-53.97	7.02	-46.95	-13	-33.95
7	6691.2	55.17	-48.16	5.56	-42.60	-13	-29.60
8	7527.6	51.79	-50.83	4.52	-46.31	-13	-33.31
9	8364	54.08	-48.47	4.19	-44.28	-13	-31.28

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 4233	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693.2	37.59	-64.94	6.34	-58.59	-13	-45.59
2	2539.8	42.86	-55.91	6.69	-49.22	-13	-36.22
3	3386.4	45.79	-56.99	7.92	-49.07	-13	-36.07
4	4233	47.64	-57.15	7.42	-49.73	-13	-36.73
5	5079.6	47.37	-56.98	7.03	-49.95	-13	-36.95
6	5926.2	50.84	-53.30	6.89	-46.41	-13	-33.41
7	6772.8	52.91	-50.07	5.41	-44.67	-13	-31.67
8	7619.4	50.7	-51.92	4.44	-47.48	-13	-34.48
9	8466	53.08	-49.52	4.20	-45.32	-13	-32.32
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693.2	34.3	-68.23	6.34	-61.88	-13	-48.88
2	2539.8	44.76	-54.01	6.69	-47.32	-13	-34.32
3	3386.4	46.12	-56.66	7.92	-48.74	-13	-35.74
4	4233	47.87	-56.92	7.42	-49.50	-13	-36.50
5	5079.6	48.56	-55.79	7.03	-48.76	-13	-35.76
6	5926.2	50.61	-53.53	6.89	-46.64	-13	-33.64
7	6772.8	53.73	-49.25	5.41	-43.85	-13	-30.85
8	7619.4	50.27	-52.35	4.44	-47.91	-13	-34.91
9	8466	52.6	-50.00	4.20	-45.80	-13	-32.80

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 1.4MHz

Mode	TX channel 20407	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1649.4	35.80	-66.95	6.27	-60.68	-13	-47.68
2	2474.1	37.70	-60.53	6.62	-53.90	-13	-40.90
3	3298.8	39.30	-63.65	7.56	-56.09	-13	-43.09
4	4123.5	41.60	-63.30	7.47	-55.83	-13	-42.83
5	4948.2	42.30	-61.85	7.00	-54.86	-13	-41.86
6	5772.9	43.50	-60.64	7.15	-53.49	-13	-40.49
7	6597.6	45.50	-58.23	5.74	-52.49	-13	-39.49
8	7422.3	46.60	-56.02	4.61	-51.41	-13	-38.41
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1649.4	34.50	-68.25	6.27	-61.98	-13	-48.98
2	2474.1	36.20	-62.03	6.62	-55.40	-13	-42.40
3	3298.8	37.50	-65.45	7.56	-57.89	-13	-44.89
4	4123.5	40.20	-64.70	7.47	-57.23	-13	-44.23
5	4948.2	41.50	-62.65	7.00	-55.66	-13	-42.66
6	5772.9	43.40	-60.74	7.15	-53.59	-13	-40.59
7	6597.6	45.30	-58.43	5.74	-52.69	-13	-39.69
8	7422.3	46.70	-55.92	4.61	-51.31	-13	-38.31
9	8247	47.10	-55.52	4.16	-51.36	-13	-38.36

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	36.62	-66.01	6.31	-59.70	-13	-46.70
2	2509.5	38.59	-59.93	6.66	-53.27	-13	-40.27
3	3346	39.66	-62.98	7.95	-55.03	-13	-42.03
4	4182.5	41.20	-63.64	7.44	-56.20	-13	-43.20
5	5019	42.57	-61.69	7.01	-54.68	-13	-41.68
6	5855.5	42.53	-61.61	7.01	-54.60	-13	-41.60
7	6692	45.26	-58.07	5.56	-52.51	-13	-39.51
8	7528.5	46.91	-55.71	4.52	-51.19	-13	-38.19
9	8365	47.57	-54.98	4.19	-50.79	-13	-37.79
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	33.89	-68.74	6.31	-62.43	-13	-49.43
2	2509.5	36.76	-61.76	6.66	-55.10	-13	-42.10
3	3346	36.88	-65.76	7.95	-57.81	-13	-44.81
4	4182.5	39.27	-65.57	7.44	-58.13	-13	-45.13
5	5019	40.81	-63.45	7.01	-56.44	-13	-43.44
6	5855.5	43.93	-60.21	7.01	-53.20	-13	-40.20
7	6692	44.54	-58.79	5.56	-53.23	-13	-40.23
8	7528.5	45.91	-56.71	4.52	-52.19	-13	-39.19
9	8365	47.35	-55.20	4.19	-51.01	-13	-38.01

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20643	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1696.6	35.14	-67.37	6.35	-61.02	-13	-48.02
2	2544.9	37.71	-61.10	6.69	-54.41	-13	-41.41
3	3393.2	38.79	-64.02	7.92	-56.10	-13	-43.10
4	4241.5	42.11	-62.67	7.42	-55.26	-13	-42.26
5	5089.8	43.03	-61.33	7.03	-54.31	-13	-41.31
6	5938.1	43.24	-60.90	6.87	-54.03	-13	-41.03
7	6786.4	46.32	-55.44	5.15	-50.29	-13	-37.29
8	7634.7	47.06	-55.56	4.43	-51.13	-13	-38.13
9	8483	47.57	-55.04	4.21	-50.83	-13	-37.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1696.6	34.72	-67.79	6.35	-61.44	-13	-48.44
2	2544.9	35.74	-63.07	6.69	-56.38	-13	-43.38
3	3393.2	37.77	-65.04	7.92	-57.12	-13	-44.12
4	4241.5	40.88	-63.90	7.42	-56.49	-13	-43.49
5	5089.8	42.20	-62.16	7.03	-55.14	-13	-42.14
6	5938.1	42.76	-61.38	6.87	-54.51	-13	-41.51
7	6786.4	45.83	-55.93	5.15	-50.78	-13	-37.78
8	7634.7	46.71	-55.91	4.43	-51.48	-13	-38.48
9	8483	47.58	-55.03	4.21	-50.82	-13	-37.82

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 3MHz

Mode	TX channel 20415	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1651	35.36	-67.38	6.27	-61.11	-13	-48.11
2	2476.5	37.98	-60.26	6.63	-53.64	-13	-40.64
3	3302	39.00	-63.96	7.56	-56.39	-13	-43.39
4	4127.5	41.86	-63.04	7.47	-55.57	-13	-42.57
5	4953	43.01	-61.15	7.00	-54.15	-13	-41.15
6	5778.5	43.80	-60.71	6.93	-53.79	-13	-40.79
7	6604	44.87	-58.83	5.73	-53.10	-13	-40.10
8	7429.5	45.95	-56.67	4.61	-52.06	-13	-39.06
9	8255	47.57	-55.05	4.16	-50.89	-13	-37.89
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1651	35.33	-67.41	6.27	-61.14	-13	-48.14
2	2476.5	35.61	-62.63	6.63	-56.01	-13	-43.01
3	3302	37.06	-65.90	7.56	-58.33	-13	-45.33
4	4127.5	39.22	-65.68	7.47	-58.21	-13	-45.21
5	4953	40.61	-63.55	7.00	-56.55	-13	-43.55
6	5778.5	43.60	-60.91	6.93	-53.99	-13	-40.99
7	6604	44.59	-59.11	5.73	-53.38	-13	-40.38
8	7429.5	47.19	-55.43	4.61	-50.82	-13	-37.82
9	8255	46.85	-55.77	4.16	-51.61	-13	-38.61

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	36.32	-66.31	6.31	-60.00	-13	-47.00
2	2509.5	38.02	-60.50	6.66	-53.84	-13	-40.84
3	3346	40.35	-62.29	7.95	-54.34	-13	-41.34
4	4182.5	41.58	-63.26	7.44	-55.82	-13	-42.82
5	5019	43.57	-60.69	7.01	-53.68	-13	-40.68
6	5855.5	42.34	-61.80	7.01	-54.79	-13	-41.79
7	6692	44.90	-58.43	5.56	-52.87	-13	-39.87
8	7528.5	47.52	-55.10	4.52	-50.58	-13	-37.58
9	8365	47.57	-54.98	4.19	-50.79	-13	-37.79
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	32.91	-69.72	6.31	-63.41	-13	-50.41
2	2509.5	37.44	-61.08	6.66	-54.42	-13	-41.42
3	3346	37.16	-65.48	7.95	-57.53	-13	-44.53
4	4182.5	39.27	-65.57	7.44	-58.13	-13	-45.13
5	5019	40.33	-63.93	7.01	-56.92	-13	-43.92
6	5855.5	43.89	-60.25	7.01	-53.24	-13	-40.24
7	6692	45.41	-57.92	5.56	-52.36	-13	-39.36
8	7528.5	45.97	-56.65	4.52	-52.13	-13	-39.13
9	8365	47.53	-55.02	4.19	-50.83	-13	-37.83

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20635	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1695	34.60	-67.92	6.35	-61.57	-13	-48.57
2	2542.5	37.75	-61.04	6.69	-54.35	-13	-41.35
3	3390	39.32	-63.48	7.92	-55.56	-13	-42.56
4	4237.5	41.19	-63.60	7.42	-56.18	-13	-43.18
5	5085	43.61	-60.71	7.02	-53.69	-13	-40.69
6	5932.5	42.73	-61.41	6.88	-54.53	-13	-41.53
7	6780	45.48	-56.28	5.16	-51.12	-13	-38.12
8	7627.5	46.06	-56.56	4.43	-52.13	-13	-39.13
9	8475	47.57	-55.04	4.20	-50.83	-13	-37.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1695	34.27	-68.25	6.35	-61.90	-13	-48.90
2	2542.5	36.54	-62.25	6.69	-55.56	-13	-42.56
3	3390	38.43	-64.37	7.92	-56.45	-13	-43.45
4	4237.5	41.53	-63.26	7.42	-55.84	-13	-42.84
5	5085	42.09	-62.23	7.02	-55.21	-13	-42.21
6	5932.5	42.38	-61.76	6.88	-54.88	-13	-41.88
7	6780	45.38	-56.38	5.16	-51.22	-13	-38.22
8	7627.5	45.71	-56.91	4.43	-52.48	-13	-39.48
9	8475	48.53	-54.08	4.20	-49.87	-13	-36.87

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 5MHz

Mode	TX channel 20425	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1653	36.21	-66.52	6.27	-60.25	-13	-47.25
2	2479.5	39.86	-58.41	6.63	-51.78	-13	-38.78
3	3306	45.80	-56.69	7.97	-48.72	-13	-35.72
4	4132.5	47.41	-57.48	7.47	-50.02	-13	-37.02
5	4959	48.64	-55.53	7.00	-48.53	-13	-35.53
6	5785.5	48.30	-56.20	6.92	-49.28	-13	-36.28
7	6612	48.65	-55.02	5.71	-49.30	-13	-36.30
8	7438.5	48.91	-53.71	4.60	-49.11	-13	-36.11
9	8265	47.57	-55.05	4.17	-50.88	-13	-37.88
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1653	35.26	-67.47	6.27	-61.20	-13	-48.20
2	2479.5	35.43	-62.84	6.63	-56.21	-13	-43.21
3	3306	36.07	-66.42	7.97	-58.45	-13	-45.45
4	4132.5	38.59	-66.30	7.47	-58.84	-13	-45.84
5	4959	39.77	-64.40	7.00	-57.40	-13	-44.40
6	5785.5	44.23	-60.27	6.92	-53.35	-13	-40.35
7	6612	44.93	-58.74	5.71	-53.02	-13	-40.02
8	7438.5	47.76	-54.86	4.60	-50.26	-13	-37.26
9	8265	45.93	-56.69	4.17	-52.52	-13	-39.52

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	36.21	-66.42	6.31	-60.11	-13	-47.11
2	2509.5	39.86	-58.66	6.66	-52.00	-13	-39.00
3	3346	45.80	-56.84	7.95	-48.89	-13	-35.89
4	4182.5	47.41	-57.43	7.44	-49.99	-13	-36.99
5	5019	48.64	-55.62	7.01	-48.61	-13	-35.61
6	5855.5	48.30	-55.84	7.01	-48.83	-13	-35.83
7	6692	48.65	-54.68	5.56	-49.12	-13	-36.12
8	7528.5	48.91	-53.71	4.52	-49.19	-13	-36.19
9	8365	47.57	-54.98	4.19	-50.79	-13	-37.79
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	32.03	-70.60	6.31	-64.29	-13	-51.29
2	2509.5	37.79	-60.73	6.66	-54.07	-13	-41.07
3	3346	36.83	-65.81	7.95	-57.86	-13	-44.86
4	4182.5	38.45	-66.39	7.44	-58.95	-13	-45.95
5	5019	39.51	-64.75	7.01	-57.74	-13	-44.74
6	5855.5	44.69	-59.45	7.01	-52.44	-13	-39.44
7	6692	44.84	-58.49	5.56	-52.93	-13	-39.93
8	7528.5	46.64	-55.98	4.52	-51.46	-13	-38.46
9	8365	48.36	-54.19	4.19	-50.00	-13	-37.00

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20625	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693	35.06	-67.46	6.35	-61.11	-13	-48.11
2	2539.5	37.93	-60.86	6.69	-54.17	-13	-41.17
3	3386	40.18	-62.60	7.92	-54.68	-13	-41.68
4	4232.5	40.97	-63.82	7.42	-56.40	-13	-43.40
5	5079	42.72	-61.63	7.03	-54.60	-13	-41.60
6	5925.5	43.36	-60.78	6.90	-53.88	-13	-40.88
7	6772	45.01	-56.74	5.16	-51.57	-13	-38.57
8	7618.5	45.09	-57.53	4.44	-53.09	-13	-40.09
9	8465	47.57	-55.03	4.20	-50.83	-13	-37.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693	34.17	-68.35	6.35	-62.00	-13	-49.00
2	2539.5	37.29	-61.50	6.69	-54.81	-13	-41.81
3	3386	38.37	-64.41	7.92	-56.49	-13	-43.49
4	4232.5	41.58	-63.21	7.42	-55.79	-13	-42.79
5	5079	41.87	-62.48	7.03	-55.45	-13	-42.45
6	5925.5	41.99	-62.15	6.90	-55.25	-13	-42.25
7	6772	44.88	-56.87	5.16	-51.70	-13	-38.70
8	7618.5	44.83	-57.79	4.44	-53.35	-13	-40.35
9	8465	48.03	-54.57	4.20	-50.37	-13	-37.37

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5: 10MHz

Mode	TX channel 20450	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1658	36.21	-66.52	6.27	-60.25	-13	-47.25
2	2487	39.86	-58.47	6.64	-51.84	-13	-38.84
3	3316	45.80	-56.73	7.97	-48.76	-13	-35.76
4	4145	47.41	-57.47	7.46	-50.01	-13	-37.01
5	4974	48.64	-55.55	7.00	-48.55	-13	-35.55
6	5803	48.30	-56.17	6.91	-49.26	-13	-36.26
7	6632	48.65	-54.93	5.68	-49.26	-13	-36.26
8	7461	48.91	-53.71	4.58	-49.13	-13	-36.13
9	8290	47.57	-55.05	4.17	-50.88	-13	-37.88
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1658	34.56	-68.17	6.27	-61.90	-13	-48.90
2	2487	34.43	-63.90	6.64	-57.27	-13	-44.27
3	3316	35.45	-67.08	7.97	-59.11	-13	-46.11
4	4145	39.03	-65.85	7.46	-58.39	-13	-45.39
5	4974	40.01	-64.18	7.00	-57.18	-13	-44.18
6	5803	44.99	-59.48	6.91	-52.57	-13	-39.57
7	6632	44.03	-59.55	5.68	-53.88	-13	-40.88
8	7461	48.28	-54.34	4.58	-49.76	-13	-36.76
9	8290	45.28	-57.34	4.17	-53.17	-13	-40.17

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	36.21	-66.42	6.31	-60.11	-13	-47.11
2	2509.5	39.86	-58.66	6.66	-52.00	-13	-39.00
3	3346	45.80	-56.84	7.95	-48.89	-13	-35.89
4	4182.5	47.41	-57.43	7.44	-49.99	-13	-36.99
5	5019	48.64	-55.62	7.01	-48.61	-13	-35.61
6	5855.5	48.30	-55.84	7.01	-48.83	-13	-35.83
7	6692	48.65	-54.68	5.56	-49.12	-13	-36.12
8	7528.5	48.91	-53.71	4.52	-49.19	-13	-36.19
9	8365	47.57	-54.98	4.19	-50.79	-13	-37.79
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	31.06	-71.57	6.31	-65.26	-13	-52.26
2	2509.5	37.74	-60.78	6.66	-54.12	-13	-41.12
3	3346	37.58	-65.06	7.95	-57.11	-13	-44.11
4	4182.5	39.11	-65.73	7.44	-58.29	-13	-45.29
5	5019	40.14	-64.12	7.01	-57.11	-13	-44.11
6	5855.5	45.66	-58.48	7.01	-51.47	-13	-38.47
7	6692	45.69	-57.64	5.56	-52.08	-13	-39.08
8	7528.5	46.72	-55.90	4.52	-51.38	-13	-38.38
9	8365	47.37	-55.18	4.19	-50.99	-13	-37.99

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20600	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1688	36.21	-66.34	6.34	-60.01	-13	-47.01
2	2532	39.86	-58.85	6.68	-52.17	-13	-39.17
3	3376	45.80	-56.95	7.93	-49.02	-13	-36.02
4	4220	47.41	-57.40	7.43	-49.97	-13	-36.97
5	5064	48.64	-55.69	7.02	-48.66	-13	-35.66
6	5908	48.30	-55.84	6.93	-48.91	-13	-35.91
7	6752	48.65	-53.07	5.18	-47.89	-13	-34.89
8	7596	48.91	-53.71	4.46	-49.25	-13	-36.25
9	8440	47.57	-55.02	4.20	-50.82	-13	-37.82
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1688	34.40	-68.15	6.34	-61.82	-13	-48.82
2	2532	37.39	-61.32	6.68	-54.64	-13	-41.64
3	3376	39.23	-63.52	7.93	-55.59	-13	-42.59
4	4220	41.60	-63.21	7.43	-55.78	-13	-42.78
5	5064	41.27	-63.06	7.02	-56.03	-13	-43.03
6	5908	42.88	-61.26	6.93	-54.33	-13	-41.33
7	6752	45.32	-56.40	5.18	-51.22	-13	-38.22
8	7596	45.05	-57.57	4.46	-53.11	-13	-40.11
9	8440	47.31	-55.28	4.20	-51.08	-13	-38.08

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE CA_5C (5MHz+10MHz)

Mode	TX channel 20528+20600	Frequency Range	Above 1000 MHz
------	------------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673.6	39.30	-63.33	6.31	-57.02	-13	-44.02
2	1688	39.40	-63.15	6.34	-56.82	-13	-43.82
3	2510.4	45.20	-53.33	6.66	-46.67	-13	-33.67
4	2532	45.10	-53.61	6.68	-46.93	-13	-33.93
5	3347.2	47.80	-55.21	7.63	-47.58	-13	-34.58
6	3376	47.90	-55.15	7.67	-47.48	-13	-34.48
7	4184	48.50	-56.34	7.44	-48.90	-13	-35.90
8	4220	48.70	-56.11	7.43	-48.68	-13	-35.68
9	5020.8	50.20	-54.06	7.01	-47.05	-13	-34.05
10	5064	50.50	-53.83	7.02	-46.80	-13	-33.80
11	5857.6	50.60	-53.78	6.87	-46.91	-13	-33.91
12	5908	50.70	-53.59	6.83	-46.76	-13	-33.76
13	6694.4	50.80	-52.52	5.56	-46.96	-13	-33.96
14	6752	50.90	-52.17	5.45	-46.73	-13	-33.73
15	7531.2	51.40	-51.22	4.52	-46.70	-13	-33.70
16	7596	51.80	-50.82	4.46	-46.36	-13	-33.36

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673.6	39.20	-63.43	6.31	-57.12	-13	-44.12
2	1688	39.50	-63.05	6.34	-56.72	-13	-43.72
3	2510.4	45.40	-53.13	6.66	-46.47	-13	-33.47
4	2532	45.60	-53.11	6.68	-46.43	-13	-33.43
5	3347.2	48.10	-54.91	7.63	-47.28	-13	-34.28
6	3376	48.30	-54.75	7.67	-47.08	-13	-34.08
7	4184	48.80	-56.04	7.44	-48.60	-13	-35.60
8	4220	48.90	-55.91	7.43	-48.48	-13	-35.48
9	5020.8	50.50	-53.76	7.01	-46.75	-13	-33.75
10	5064	50.70	-53.63	7.02	-46.60	-13	-33.60
12	5857.6	52.60	-50.46	5.56	-44.91	-13	-31.91
13	5908	52.90	-50.01	5.45	-44.56	-13	-31.56
14	6694.4	53.50	-48.78	4.52	-44.26	-13	-31.26
15	6752	53.80	-48.29	4.46	-43.83	-13	-30.83
16	8440	54.60	-47.69	4.18	-43.50	-13	-30.50

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 1.4MHz

Mode	TX channel 26797	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1649.4	33.73	-69.02	6.27	-62.75	-13	-49.75
2	2474.1	41.45	-56.78	6.62	-50.15	-13	-37.15
3	3298.8	46.06	-56.89	7.56	-49.33	-13	-36.33
4	4123.5	47.12	-57.78	7.47	-50.31	-13	-37.31
5	4948.2	47.43	-56.72	7.00	-49.73	-13	-36.73
6	5772.9	48.17	-55.97	7.15	-48.82	-13	-35.82
7	6597.6	48.52	-55.21	5.74	-49.47	-13	-36.47
8	7422.3	50.28	-52.34	4.61	-47.73	-13	-34.73
9	8247	47.50	-55.12	4.16	-50.96	-13	-37.96
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1649.4	33.96	-68.79	6.27	-62.52	-13	-49.52
2	2474.1	38.28	-59.95	6.62	-53.32	-13	-40.32
3	3298.8	36.84	-66.11	7.56	-58.55	-13	-45.55
4	4123.5	41.14	-63.76	7.47	-56.29	-13	-43.29
5	4948.2	41.45	-62.70	7.00	-55.71	-13	-42.71
6	5772.9	42.24	-61.90	7.15	-54.75	-13	-41.75
7	6597.6	46.09	-57.64	5.74	-51.90	-13	-38.90
8	7422.3	48.49	-54.13	4.61	-49.52	-13	-36.52
9	8247	47.78	-54.84	4.16	-50.68	-13	-37.68

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	36.79	-65.84	6.31	-59.53	-13	-46.53
2	2509.5	40.61	-57.91	6.66	-51.25	-13	-38.25
3	3346	46.16	-56.48	7.95	-48.53	-13	-35.53
4	4182.5	48.74	-56.10	7.44	-48.66	-13	-35.66
5	5019	48.74	-55.52	7.01	-48.51	-13	-35.51
6	5855.5	48.23	-55.91	7.01	-48.90	-13	-35.90
7	6692	49.11	-54.22	5.56	-48.66	-13	-35.66
8	7528.5	48.39	-54.23	4.52	-49.71	-13	-36.71
9	8365	48.11	-54.44	4.19	-50.25	-13	-37.25
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	34.27	-68.36	6.31	-62.05	-13	-49.05
2	2509.5	37.54	-60.98	6.66	-54.32	-13	-41.32
3	3346	37.32	-65.32	7.95	-57.37	-13	-44.37
4	4182.5	40.42	-64.42	7.44	-56.98	-13	-43.98
5	5019	40.57	-63.69	7.01	-56.68	-13	-43.68
6	5855.5	42.55	-61.59	7.01	-54.58	-13	-41.58
7	6692	45.22	-58.11	5.56	-52.55	-13	-39.55
8	7528.5	47.85	-54.77	4.52	-50.25	-13	-37.25
9	8365	47.12	-55.43	4.19	-51.24	-13	-38.24

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27033	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1696.6	35.06	-67.45	6.35	-61.10	-13	-48.10
2	2544.9	36.49	-62.32	6.69	-55.63	-13	-42.63
3	3393.2	37.66	-65.15	7.92	-57.23	-13	-44.23
4	4241.5	39.93	-61.68	4.18	-57.51	-13	-44.51
5	5089.8	40.75	-61.98	-5.18	-67.16	-13	-54.16
6	5938.1	43.08	-57.24	3.57	-53.67	-13	-40.67
7	6786.4	45.15	-52.20	3.70	-48.50	-13	-35.50
8	7634.7	47.69	-49.66	3.70	-45.96	-13	-32.96
9	8483	46.75	-55.86	4.21	-51.65	-13	-38.65
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1696.6	36.24	-66.27	6.35	-59.92	-13	-46.92
2	2544.9	40.20	-58.61	6.69	-51.92	-13	-38.92
3	3393.2	46.74	-56.07	7.92	-48.15	-13	-35.15
4	4241.5	48.61	-53.00	4.18	-48.83	-13	-35.83
5	5089.8	48.66	-54.07	-5.18	-59.25	-13	-46.25
6	5938.1	46.89	-53.43	3.57	-49.86	-13	-36.86
7	6786.4	48.99	-48.36	3.70	-44.66	-13	-31.66
8	7634.7	48.31	-49.04	3.70	-45.34	-13	-32.34
9	8483	47.59	-55.02	4.21	-50.81	-13	-37.81

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 3MHz

Mode	TX channel 26805	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1651	34.36	-68.39	6.27	-62.12	-13	-49.12
2	2476.5	40.64	-57.59	6.62	-50.96	-13	-37.96
3	3302	45.41	-57.54	7.56	-49.98	-13	-36.98
4	4127.5	47.56	-57.34	7.47	-49.87	-13	-36.87
5	4953	48.20	-55.95	7.00	-48.96	-13	-35.96
6	5778.5	47.31	-57.21	6.93	-50.28	-13	-37.28
7	6604	49.32	-54.41	5.74	-48.67	-13	-35.67
8	7429.5	49.72	-52.90	4.61	-48.29	-13	-35.29
9	8255	48.44	-54.18	2.66	-51.52	-13	-38.52
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1651	34.78	-67.97	6.27	-61.70	-13	-48.70
2	2476.5	37.05	-61.18	6.62	-54.55	-13	-41.55
3	3302	38.09	-64.86	7.56	-57.30	-13	-44.30
4	4127.5	40.39	-64.51	7.47	-57.04	-13	-44.04
5	4953	41.73	-62.42	7.00	-55.43	-13	-42.43
6	5778.5	43.45	-61.07	6.93	-54.14	-13	-41.14
7	6604	45.16	-58.57	5.74	-52.83	-13	-39.83
8	7429.5	46.98	-55.64	4.61	-51.03	-13	-38.03
9	8255	46.34	-56.28	2.66	-53.62	-13	-40.62

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	34.43	-62.08	9.04	-53.05	-13	-40.05
2	2509.5	39.73	-70.27	9.21	-61.06	-13	-48.06
3	3346	44.41	-58.21	8.10	-50.11	-13	-37.11
4	4182.5	47.13	-68.00	5.16	-62.83	-13	-49.83
5	5019	48.57	-54.18	-5.28	-59.46	-13	-46.46
6	5855.5	47.13	-64.70	2.90	-61.81	-13	-48.81
7	6692	50.14	-60.00	-8.52	-68.52	-13	-55.52
8	7528.5	50.41	-46.94	3.70	-43.24	-13	-30.24
9	8365	47.49	-49.86	3.70	-46.16	-13	-33.16
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	35.53	-60.98	9.04	-51.95	-13	-38.95
2	2509.5	36.48	-73.52	9.21	-64.31	-13	-51.31
3	3346	38.43	-64.19	8.10	-56.09	-13	-43.09
4	4182.5	39.60	-75.53	5.16	-70.36	-13	-57.36
5	5019	41.25	-61.50	-5.28	-66.78	-13	-53.78
6	5855.5	43.57	-68.26	2.90	-65.37	-13	-52.37
7	6692	44.48	-65.66	-8.52	-74.18	-13	-61.18
8	7528.5	47.62	-49.73	3.70	-46.03	-13	-33.03
9	8365	45.85	-51.50	3.70	-47.80	-13	-34.80

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27025	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1695	34.86	-67.66	6.35	-61.31	-13	-48.31
2	2542.5	41.56	-57.23	6.69	-50.54	-13	-37.54
3	3390	46.20	-56.60	7.92	-48.68	-13	-35.68
4	4237.5	48.30	-56.49	7.42	-49.07	-13	-36.07
5	5085	47.39	-56.93	7.02	-49.91	-13	-36.91
6	5932.5	46.85	-57.29	6.88	-50.41	-13	-37.41
7	6780	49.35	-52.41	5.16	-47.25	-13	-34.25
8	7627.5	48.94	-53.68	4.43	-49.25	-13	-36.25
9	8475	49.22	-53.39	4.20	-49.18	-13	-36.18
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1695	34.09	-68.43	6.35	-62.08	-13	-49.08
2	2542.5	36.02	-62.77	6.69	-56.08	-13	-43.08
3	3390	37.51	-65.29	7.92	-57.37	-13	-44.37
4	4237.5	39.03	-65.76	7.42	-58.34	-13	-45.34
5	5085	40.48	-63.84	7.02	-56.82	-13	-43.82
6	5932.5	43.11	-61.03	6.88	-54.15	-13	-41.15
7	6780	45.31	-56.45	5.16	-51.29	-13	-38.29
8	7627.5	47.37	-55.25	4.43	-50.82	-13	-37.82
9	8475	46.47	-56.14	4.20	-51.93	-13	-38.93

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 5MHz

Mode	TX channel 26815	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1653	34.24	-68.49	6.27	-62.22	-13	-49.22
2	2479.5	40.24	-58.03	6.63	-51.40	-13	-38.40
3	3306	46.14	-56.35	7.97	-48.38	-13	-35.38
4	4132.5	47.92	-56.97	7.47	-49.51	-13	-36.51
5	4959	48.79	-55.38	7.00	-48.38	-13	-35.38
6	5785.5	47.52	-56.98	6.92	-50.06	-13	-37.06
7	6612	49.69	-53.98	5.71	-48.26	-13	-35.26
8	7438.5	49.39	-53.23	4.60	-48.63	-13	-35.63
9	8265	48.81	-53.81	4.17	-49.64	-13	-36.64
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1653	35.76	-66.97	6.27	-60.70	-13	-47.70
2	2479.5	36.19	-62.08	6.63	-55.45	-13	-42.45
3	3306	36.73	-65.76	7.97	-57.79	-13	-44.79
4	4132.5	39.46	-65.43	7.47	-57.97	-13	-44.97
5	4959	40.10	-64.07	7.00	-57.07	-13	-44.07
6	5785.5	43.42	-61.08	6.92	-54.16	-13	-41.16
7	6612	44.20	-59.47	5.71	-53.75	-13	-40.75
8	7438.5	47.48	-55.14	4.60	-50.54	-13	-37.54
9	8265	46.42	-56.20	4.17	-52.03	-13	-39.03

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	35.63	-67.00	6.31	-60.69	-13	-47.69
2	2509.5	41.47	-57.05	6.66	-50.39	-13	-37.39
3	3346	45.95	-56.69	7.95	-48.74	-13	-35.74
4	4182.5	46.01	-58.83	7.44	-51.39	-13	-38.39
5	5019	50.22	-54.04	7.01	-47.03	-13	-34.03
6	5855.5	48.97	-55.17	7.01	-48.16	-13	-35.16
7	6692	49.02	-54.31	5.56	-48.75	-13	-35.75
8	7528.5	50.92	-51.70	4.52	-47.18	-13	-34.18
9	8365	47.33	-55.22	4.19	-51.03	-13	-38.03
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	34.91	-67.72	6.31	-61.41	-13	-48.41
2	2509.5	36.41	-62.11	6.66	-55.45	-13	-42.45
3	3346	37.40	-65.24	7.95	-57.29	-13	-44.29
4	4182.5	40.37	-64.47	7.44	-57.03	-13	-44.03
5	5019	40.78	-63.48	7.01	-56.47	-13	-43.47
6	5855.5	43.57	-60.57	7.01	-53.56	-13	-40.56
7	6692	45.69	-57.64	5.56	-52.08	-13	-39.08
8	7528.5	46.96	-55.66	4.52	-51.14	-13	-38.14
9	8365	47.34	-55.21	4.19	-51.02	-13	-38.02

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 27015	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693	34.89	-67.63	6.35	-61.28	-13	-48.28
2	2539.5	41.57	-57.22	6.69	-50.53	-13	-37.53
3	3386	45.77	-57.01	7.92	-49.09	-13	-36.09
4	4232.5	48.33	-56.46	7.42	-49.04	-13	-36.04
5	5079	49.19	-55.16	7.03	-48.13	-13	-35.13
6	5925.5	46.80	-57.34	6.90	-50.44	-13	-37.44
7	6772	48.75	-53.00	5.16	-47.83	-13	-34.83
8	7618.5	48.80	-53.82	4.44	-49.38	-13	-36.38
9	8465	47.78	-54.82	4.20	-50.62	-13	-37.62
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1693	34.62	-67.90	6.35	-61.55	-13	-48.55
2	2539.5	37.43	-61.36	6.69	-54.67	-13	-41.67
3	3386	38.29	-64.49	7.92	-56.57	-13	-43.57
4	4232.5	40.51	-64.28	7.42	-56.86	-13	-43.86
5	5079	40.64	-63.71	7.03	-56.68	-13	-43.68
6	5925.5	42.26	-61.88	6.90	-54.98	-13	-41.98
7	6772	45.10	-56.65	5.16	-51.48	-13	-38.48
8	7618.5	47.10	-55.52	4.44	-51.08	-13	-38.08
9	8465	46.40	-56.20	4.20	-52.00	-13	-39.00

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 10MHz

Mode	TX channel 26840	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1658	33.55	-69.15	6.28	-62.87	-13	-49.87
2	2487	41.07	-57.26	6.64	-50.63	-13	-37.63
3	3316	44.60	-58.38	7.58	-50.79	-13	-37.79
4	4145	46.59	-58.29	7.46	-50.83	-13	-37.83
5	4974	47.45	-56.74	7.00	-49.74	-13	-36.74
6	5803	46.58	-57.89	6.91	-50.98	-13	-37.98
7	6632	50.25	-53.33	5.68	-47.66	-13	-34.66
8	7461	49.08	-53.54	4.58	-48.96	-13	-35.96
9	8290	47.88	-54.63	4.18	-50.45	-13	-37.45
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1658	32.64	-70.06	6.28	-63.78	-13	-50.78
2	2487	35.34	-62.99	6.64	-56.36	-13	-43.36
3	3316	37.59	-65.39	7.58	-57.80	-13	-44.80
4	4145	38.53	-66.35	7.46	-58.89	-13	-45.89
5	4974	39.39	-64.80	7.00	-57.80	-13	-44.80
6	5803	41.79	-62.68	6.91	-55.77	-13	-42.77
7	6632	43.69	-59.89	5.68	-54.22	-13	-41.22
8	7461	46.71	-55.91	4.58	-51.33	-13	-38.33
9	8290	47.79	-54.72	4.18	-50.54	-13	-37.54

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	33.52	-69.11	6.31	-62.80	-13	-49.80
2	2509.5	41.07	-57.45	6.66	-50.79	-13	-37.79
3	3346	45.43	-57.21	7.95	-49.26	-13	-36.26
4	4182.5	46.80	-58.04	7.44	-50.60	-13	-37.60
5	5019	47.51	-56.75	7.01	-49.74	-13	-36.74
6	5855.5	46.72	-57.42	7.01	-50.41	-13	-37.41
7	6692	48.51	-54.82	5.56	-49.26	-13	-36.26
8	7528.5	49.49	-53.13	4.52	-48.61	-13	-35.61
9	8365	48.87	-53.68	4.19	-49.49	-13	-36.49
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	34.69	-67.94	6.31	-61.63	-13	-48.63
2	2509.5	36.32	-62.20	6.66	-55.54	-13	-42.54
3	3346	37.90	-64.74	7.95	-56.79	-13	-43.79
4	4182.5	41.15	-63.69	7.44	-56.25	-13	-43.25
5	5019	41.52	-62.74	7.01	-55.73	-13	-42.73
6	5855.5	44.43	-59.71	7.01	-52.70	-13	-39.70
7	6692	45.85	-57.48	5.56	-51.92	-13	-38.92
8	7528.5	47.94	-54.68	4.52	-50.16	-13	-37.16
9	8365	48.23	-54.32	4.19	-50.13	-13	-37.13

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26990	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1688	33.37	-69.18	6.34	-62.85	-13	-49.85
2	2532	41.30	-57.41	6.68	-50.73	-13	-37.73
3	3376	45.85	-56.90	7.93	-48.97	-13	-35.97
4	4220	47.60	-57.21	7.43	-49.78	-13	-36.78
5	5064	48.51	-55.82	7.02	-48.79	-13	-35.79
6	5908	47.48	-56.66	6.93	-49.73	-13	-36.73
7	6752	48.53	-53.19	5.18	-48.01	-13	-35.01
8	7596	49.96	-52.66	4.46	-48.20	-13	-35.20
9	8440	48.69	-53.90	4.20	-49.70	-13	-36.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1688	34.36	-68.19	6.34	-61.86	-13	-48.86
2	2532	38.18	-60.53	6.68	-53.85	-13	-40.85
3	3376	37.59	-65.16	7.93	-57.23	-13	-44.23
4	4220	40.50	-64.31	7.43	-56.88	-13	-43.88
5	5064	39.71	-64.62	7.02	-57.59	-13	-44.59
6	5908	43.21	-60.93	6.93	-54.00	-13	-41.00
7	6752	45.94	-55.78	5.18	-50.60	-13	-37.60
8	7596	47.11	-55.51	4.46	-51.05	-13	-38.05
9	8440	46.82	-55.77	4.20	-51.57	-13	-38.57

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 26: 15MHz

Mode	TX channel 26865	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1663	34.73	-67.97	6.28	-61.69	-13	-48.69
2	2494.5	41.25	-57.08	6.64	-50.45	-13	-37.45
3	3326	45.88	-57.10	7.58	-49.51	-13	-36.51
4	4157.5	48.03	-56.85	7.46	-49.39	-13	-36.39
5	4989	47.79	-56.40	7.00	-49.40	-13	-36.40
6	5820.5	47.41	-57.06	6.91	-50.15	-13	-37.15
7	6652	49.72	-53.86	5.68	-48.19	-13	-35.19
8	7483.5	50.27	-52.35	4.58	-47.77	-13	-34.77
9	8315	48.76	-53.75	4.18	-49.57	-13	-36.57
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1663	33.82	-68.88	6.28	-62.60	-13	-49.60
2	2494.5	38.01	-60.32	6.64	-53.69	-13	-40.69
3	3326	36.46	-66.52	7.58	-58.93	-13	-45.93
4	4157.5	41.37	-63.51	7.46	-56.05	-13	-43.05
5	4989	39.58	-64.61	7.00	-57.61	-13	-44.61
6	5820.5	42.37	-62.10	6.91	-55.19	-13	-42.19
7	6652	45.15	-58.43	5.68	-52.76	-13	-39.76
8	7483.5	47.75	-54.87	4.58	-50.29	-13	-37.29
9	8315	46.00	-56.51	4.18	-52.33	-13	-39.33

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26915	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	35.35	-67.20	6.34	-60.87	-13	-47.87
2	2509.5	39.72	-58.99	6.68	-52.31	-13	-39.31
3	3346	46.31	-56.44	7.93	-48.51	-13	-35.51
4	4182.5	47.55	-57.26	7.43	-49.83	-13	-36.83
5	5019	47.48	-56.85	7.02	-49.82	-13	-36.82
6	5855.5	48.07	-56.07	6.93	-49.14	-13	-36.14
7	6692	48.44	-53.28	5.18	-48.10	-13	-35.10
8	7528.5	48.89	-53.73	4.46	-49.27	-13	-36.27
9	8365	47.56	-55.03	4.20	-50.83	-13	-37.83
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1673	35.31	-67.24	6.34	-60.91	-13	-47.91
2	2509.5	37.71	-61.00	6.68	-54.32	-13	-41.32
3	3346	37.74	-65.01	7.93	-57.08	-13	-44.08
4	4182.5	41.18	-63.63	7.43	-56.20	-13	-43.20
5	5019	40.60	-63.73	7.02	-56.70	-13	-43.70
6	5855.5	43.86	-60.28	6.93	-53.35	-13	-40.35
7	6692	46.14	-55.58	5.18	-50.40	-13	-37.40
8	7528.5	46.90	-55.72	4.46	-51.26	-13	-38.26
9	8365	46.14	-56.45	4.20	-52.25	-13	-39.25

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 26965	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1683	35.20	-67.50	6.28	-61.22	-13	-48.22
2	2524.5	40.39	-57.94	6.64	-51.31	-13	-38.31
3	3366	44.70	-58.28	7.58	-50.69	-13	-37.69
4	4207.5	46.66	-58.22	7.46	-50.76	-13	-37.76
5	5049	48.99	-55.20	7.00	-48.20	-13	-35.20
6	5890.5	46.44	-58.03	6.91	-51.12	-13	-38.12
7	6732	49.61	-53.97	5.68	-48.30	-13	-35.30
8	7573.5	50.42	-52.20	4.58	-47.62	-13	-34.62
9	8415	49.08	-53.43	4.18	-49.25	-13	-36.25
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1683	34.80	-67.90	6.28	-61.62	-13	-48.62
2	2524.5	38.34	-59.99	6.64	-53.36	-13	-40.36
3	3366	36.75	-66.23	7.58	-58.64	-13	-45.64
4	4207.5	40.14	-64.74	7.46	-57.28	-13	-44.28
5	5049	40.09	-64.10	7.00	-57.10	-13	-44.10
6	5890.5	42.26	-62.21	6.91	-55.30	-13	-42.30
7	6732	46.71	-56.87	5.68	-51.20	-13	-38.20
8	7573.5	47.10	-55.52	4.58	-50.94	-13	-37.94
9	8415	46.04	-56.47	4.18	-52.29	-13	-39.29

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---